



RSF INTERNATIONAL TRADING INNOVATION





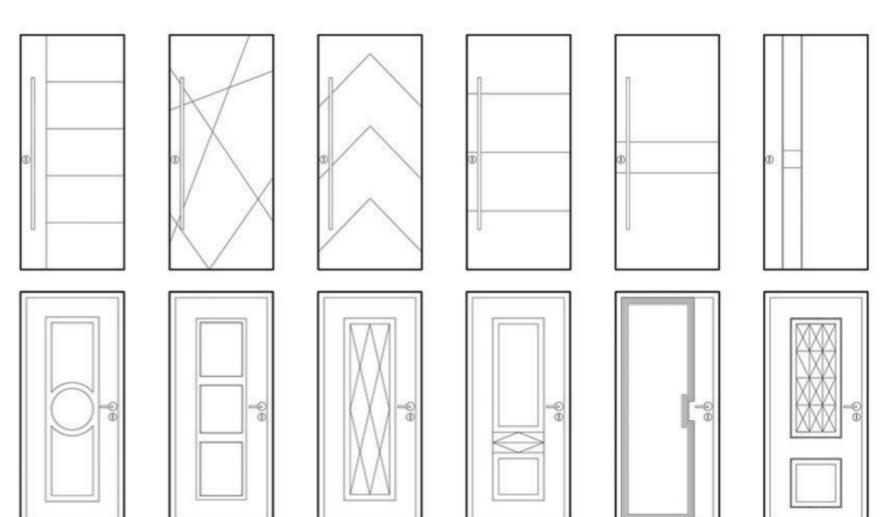

OEM&ODM

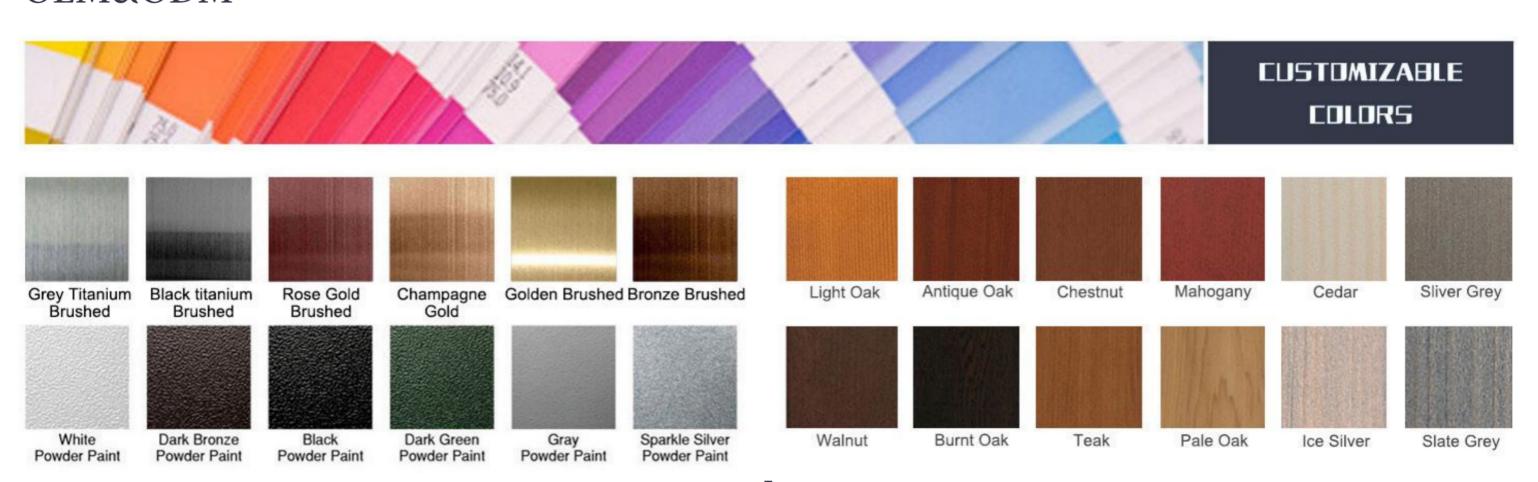


















RSF Trading Innovation & Builder Solutions

Wooden fire doors structure

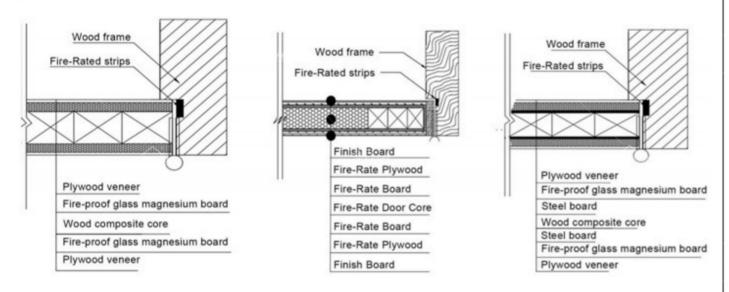

Type A	Type B	Type C
Wood door core	Perlite door core	UL standard door core

Technical Data

	30~60min Wooden	90~120min Wooden
Thickness	50mm	55mm
Max Width Single Door	1100mm	1100mm
Max Height Door Leaf	3060mm	3060mm
Fire-Rate Standard	UL10b & 10c, BS476-part : 22, BS-EN-1634-1&3	
STC	36db~65db	
Sound-Rate Standard	ASTM-E90	

	30~60min Steel	90~120min Steel
Thickness	45mm	50mm
Max Width Single Door	1220mm	1220mm
Max Height Door Leaf	3000mm	3000mm
Standard	UL10b & 10c	BS476-part :22

Functional customization

Can be customized according to customer's need









STRUCTURE SHOW




VENEER FIRE&SOUND PROOF MATERIALS FIREPROOF DOOR CORE FIRE&SOUND PROOF MATERIALS









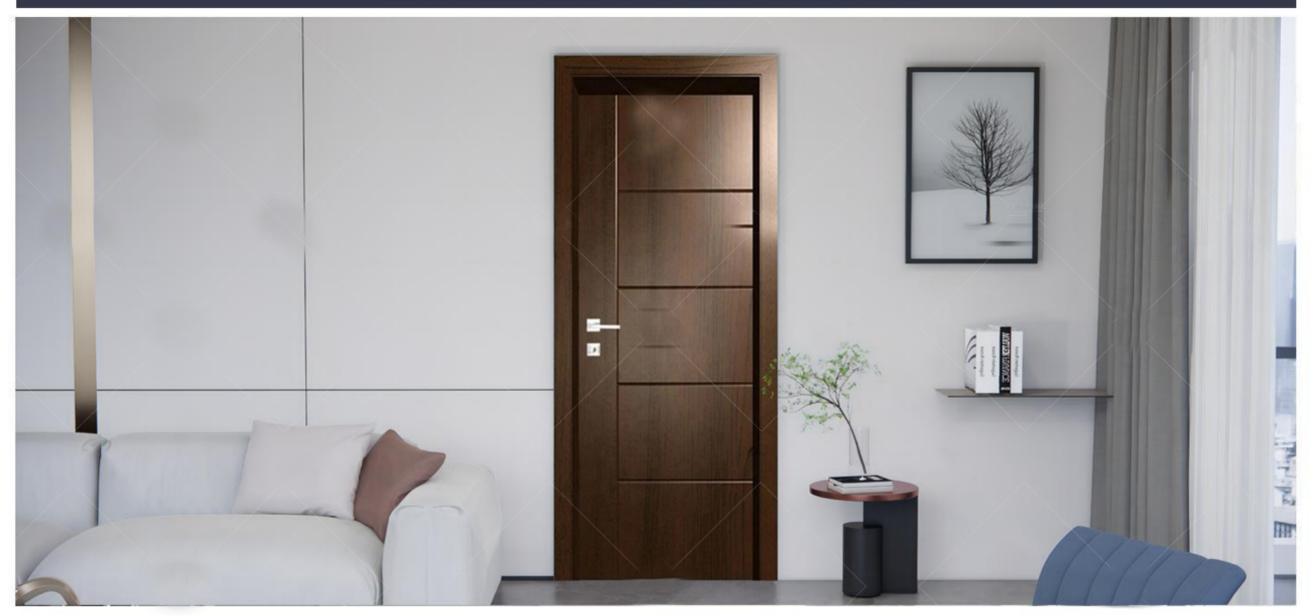












IND-05

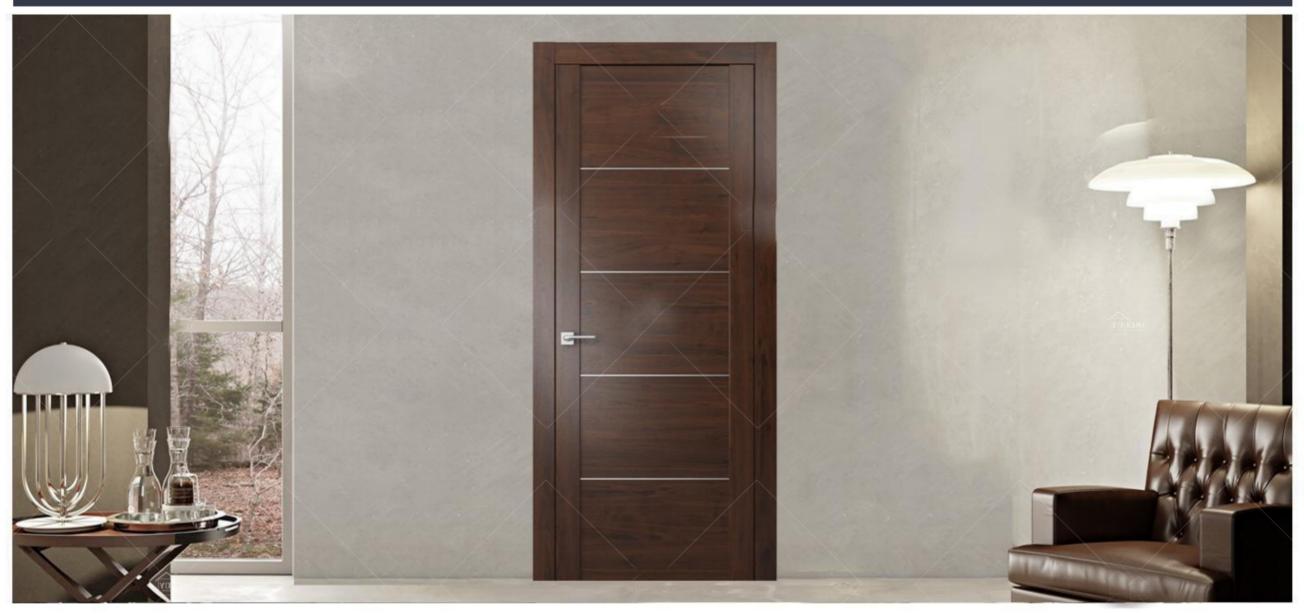











IAD-05









IFD-02




IFD-03



IFD-04



IFD-05

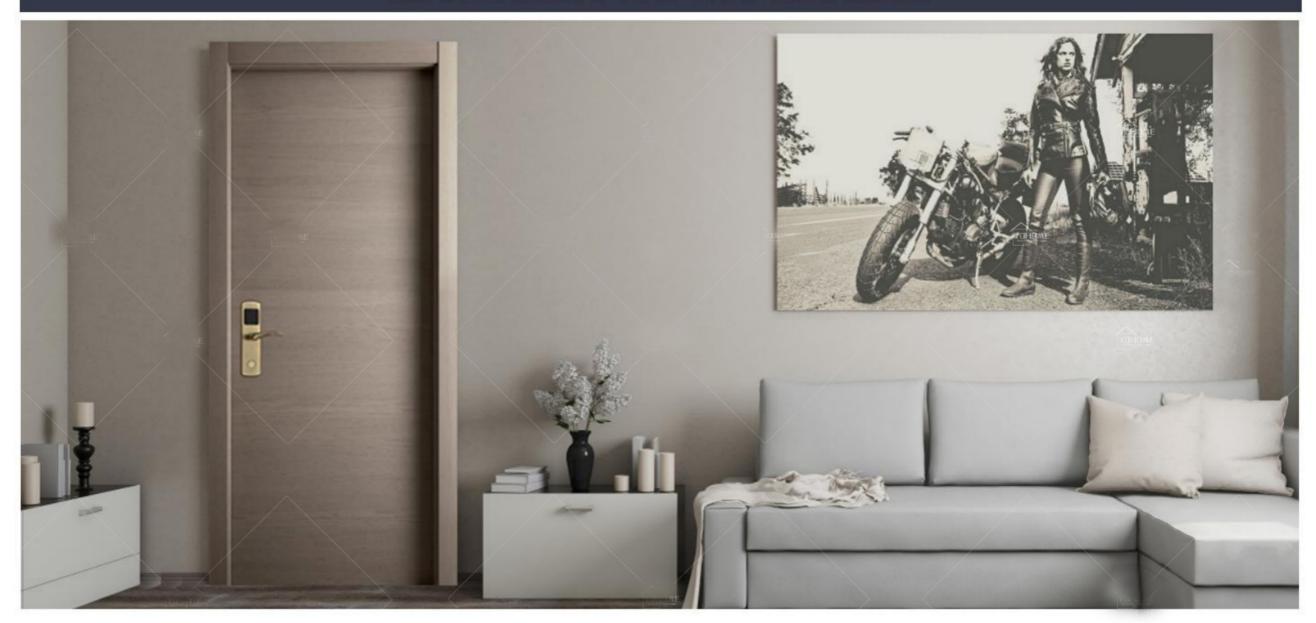







IFD-07



IFD-08




IFD-09



IFD-10









IDD-02



IDD-03



IDD-04



IDD-05









IHD-02



IHD-03



IHD-04



IHD-05















ILD-05













IGD-05



IRD-01



IRD-04



IRD-02



IRD-05



IRD-03



IRD-06




IBD-01



IBD-04



IBD-02

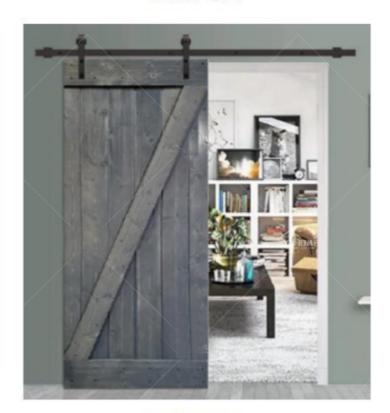

IBD-05



IBD-03



IBD-06



IPD-01



IPD-04



IPD-02



IPD-05




IPD-03




IPD-06



ISD-01

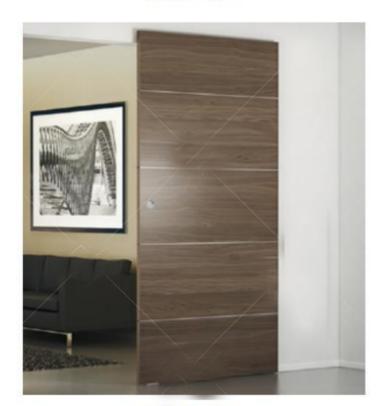


ISD-04

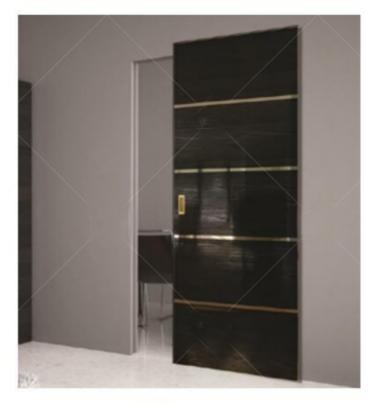

ISD-02



ISD-05

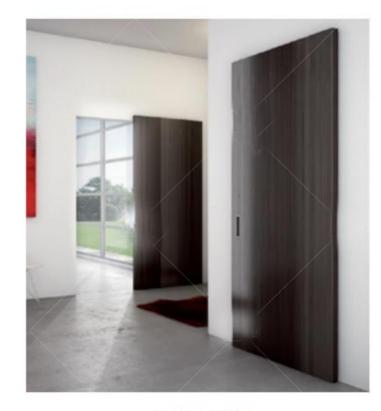

ISD-03



ISD-06

















Project cases

