




2023

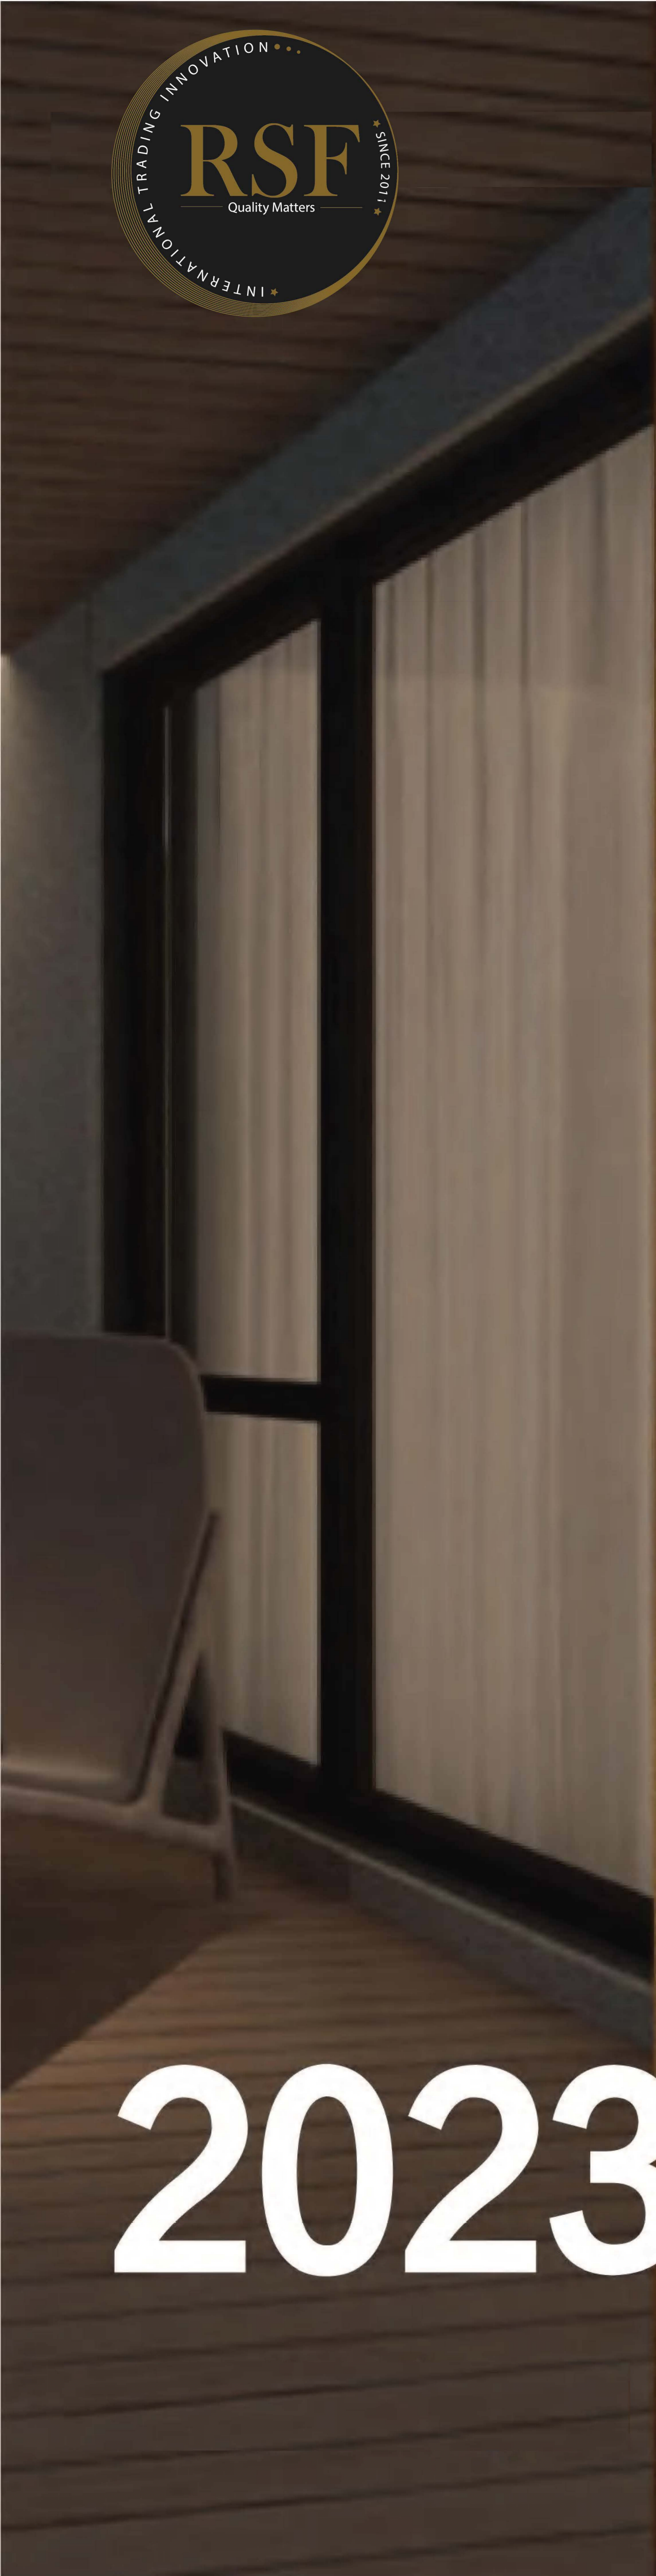

CONTENT


LED Ceramic Bulb

P1-6



LED Classic Bulb

P7-22

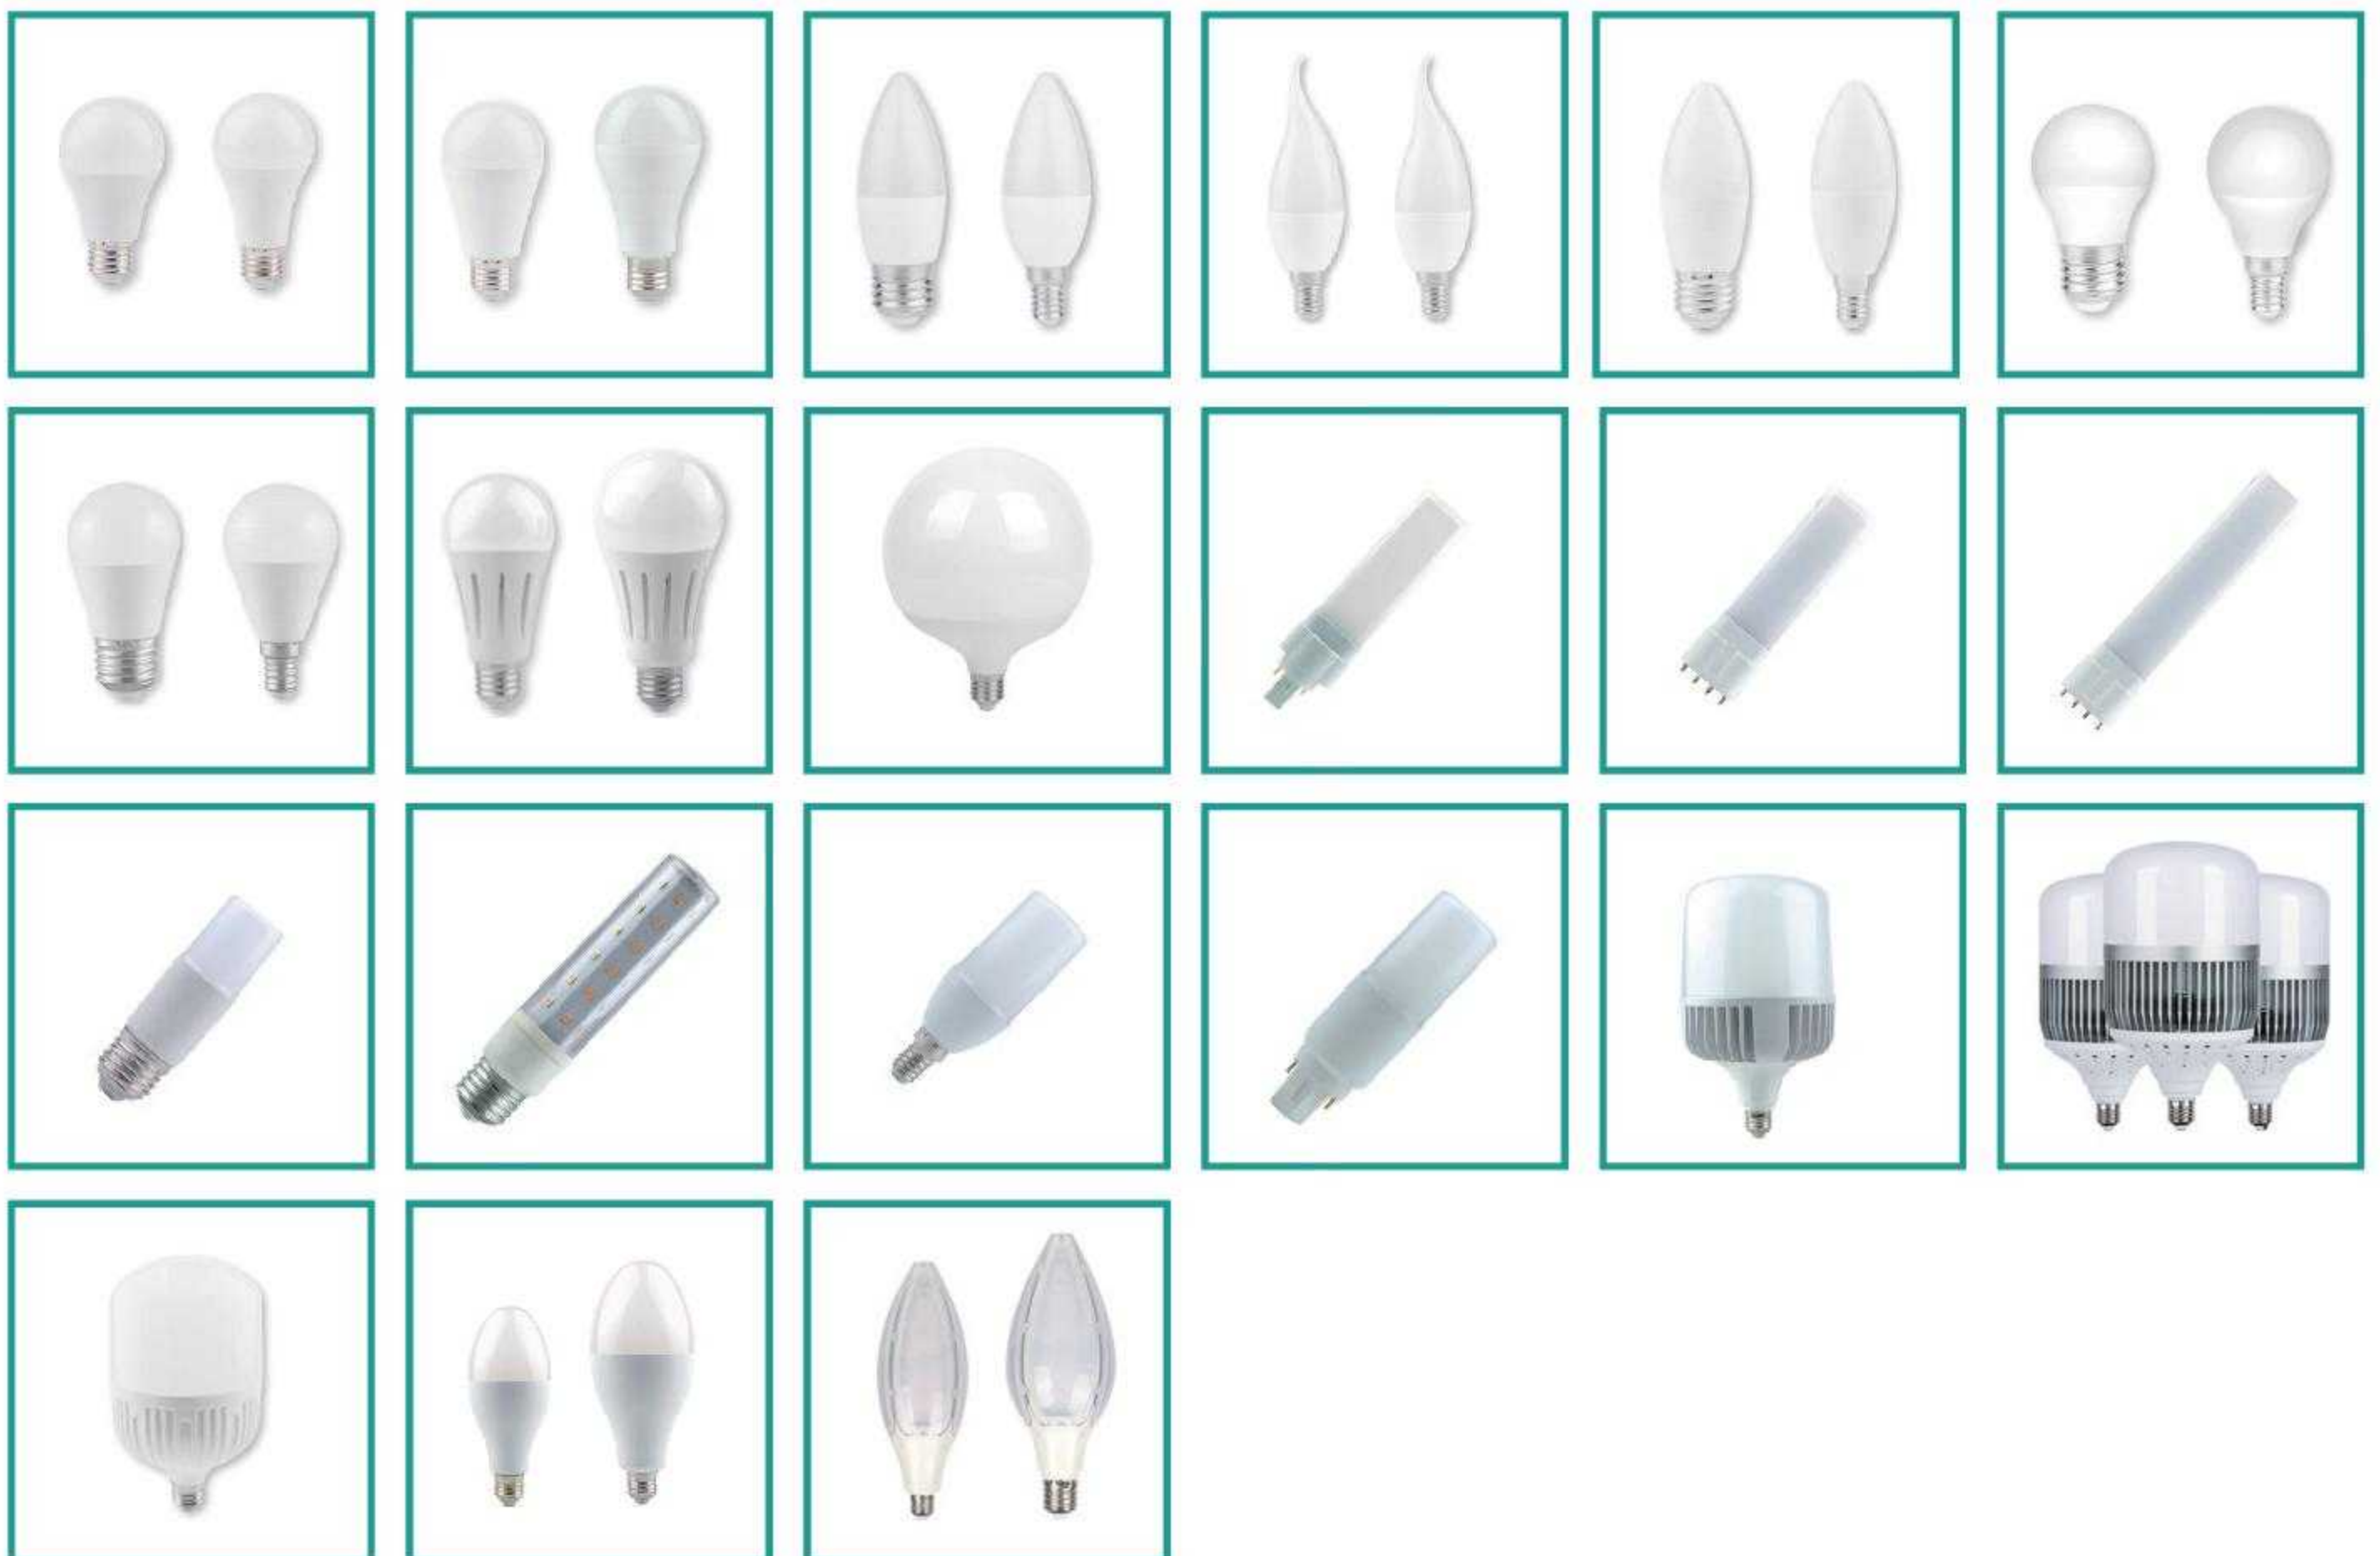

LED Decorative Bulb

P23-29



LED Spotlight

P30-44



G4
G9

P45-49



CONTENT

Ceiling Light



P50-57



TRI-Proof Light



P58-74



LED Flood Light




P75-88



Smart LED Light(Out)



P83-114

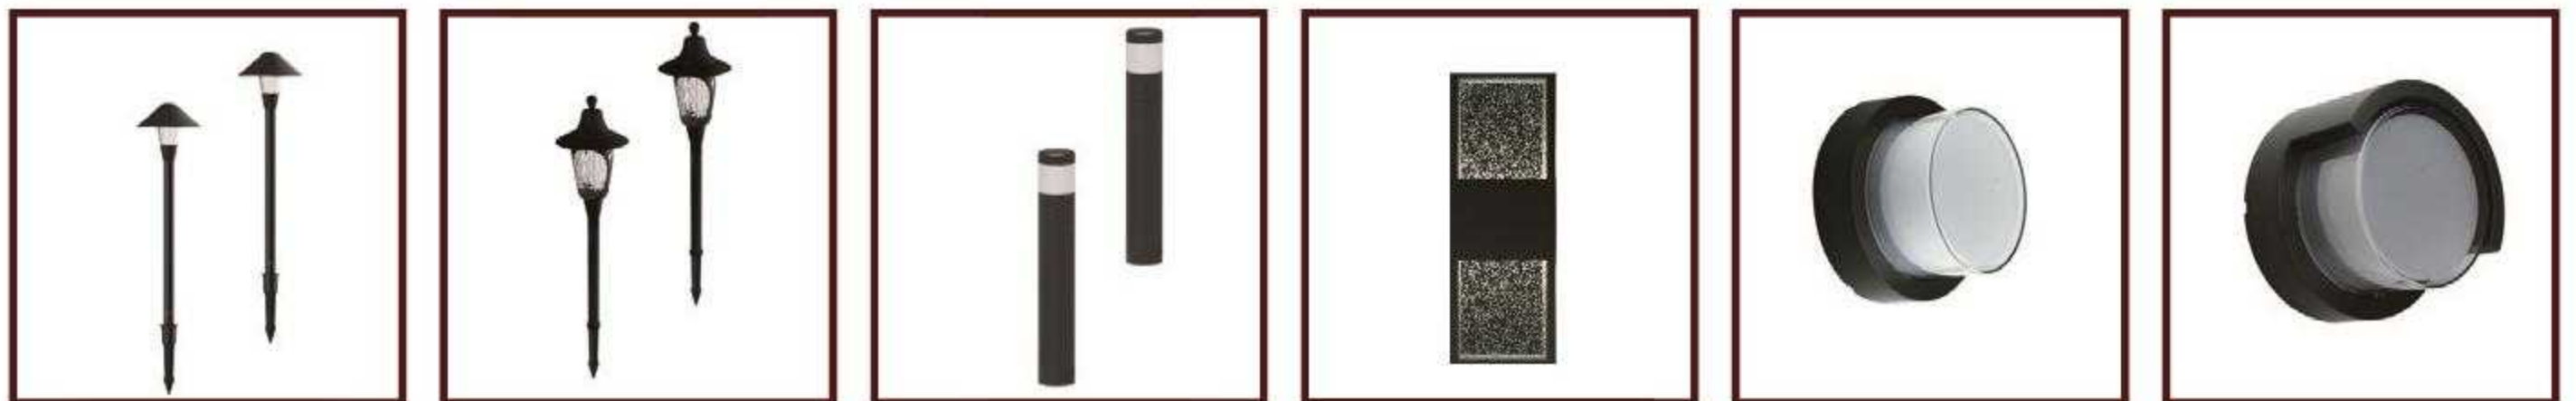

Smart LED Light(In)




P112-120

2023

LED Ceramic Bulb

Environmental protection, energy saving.

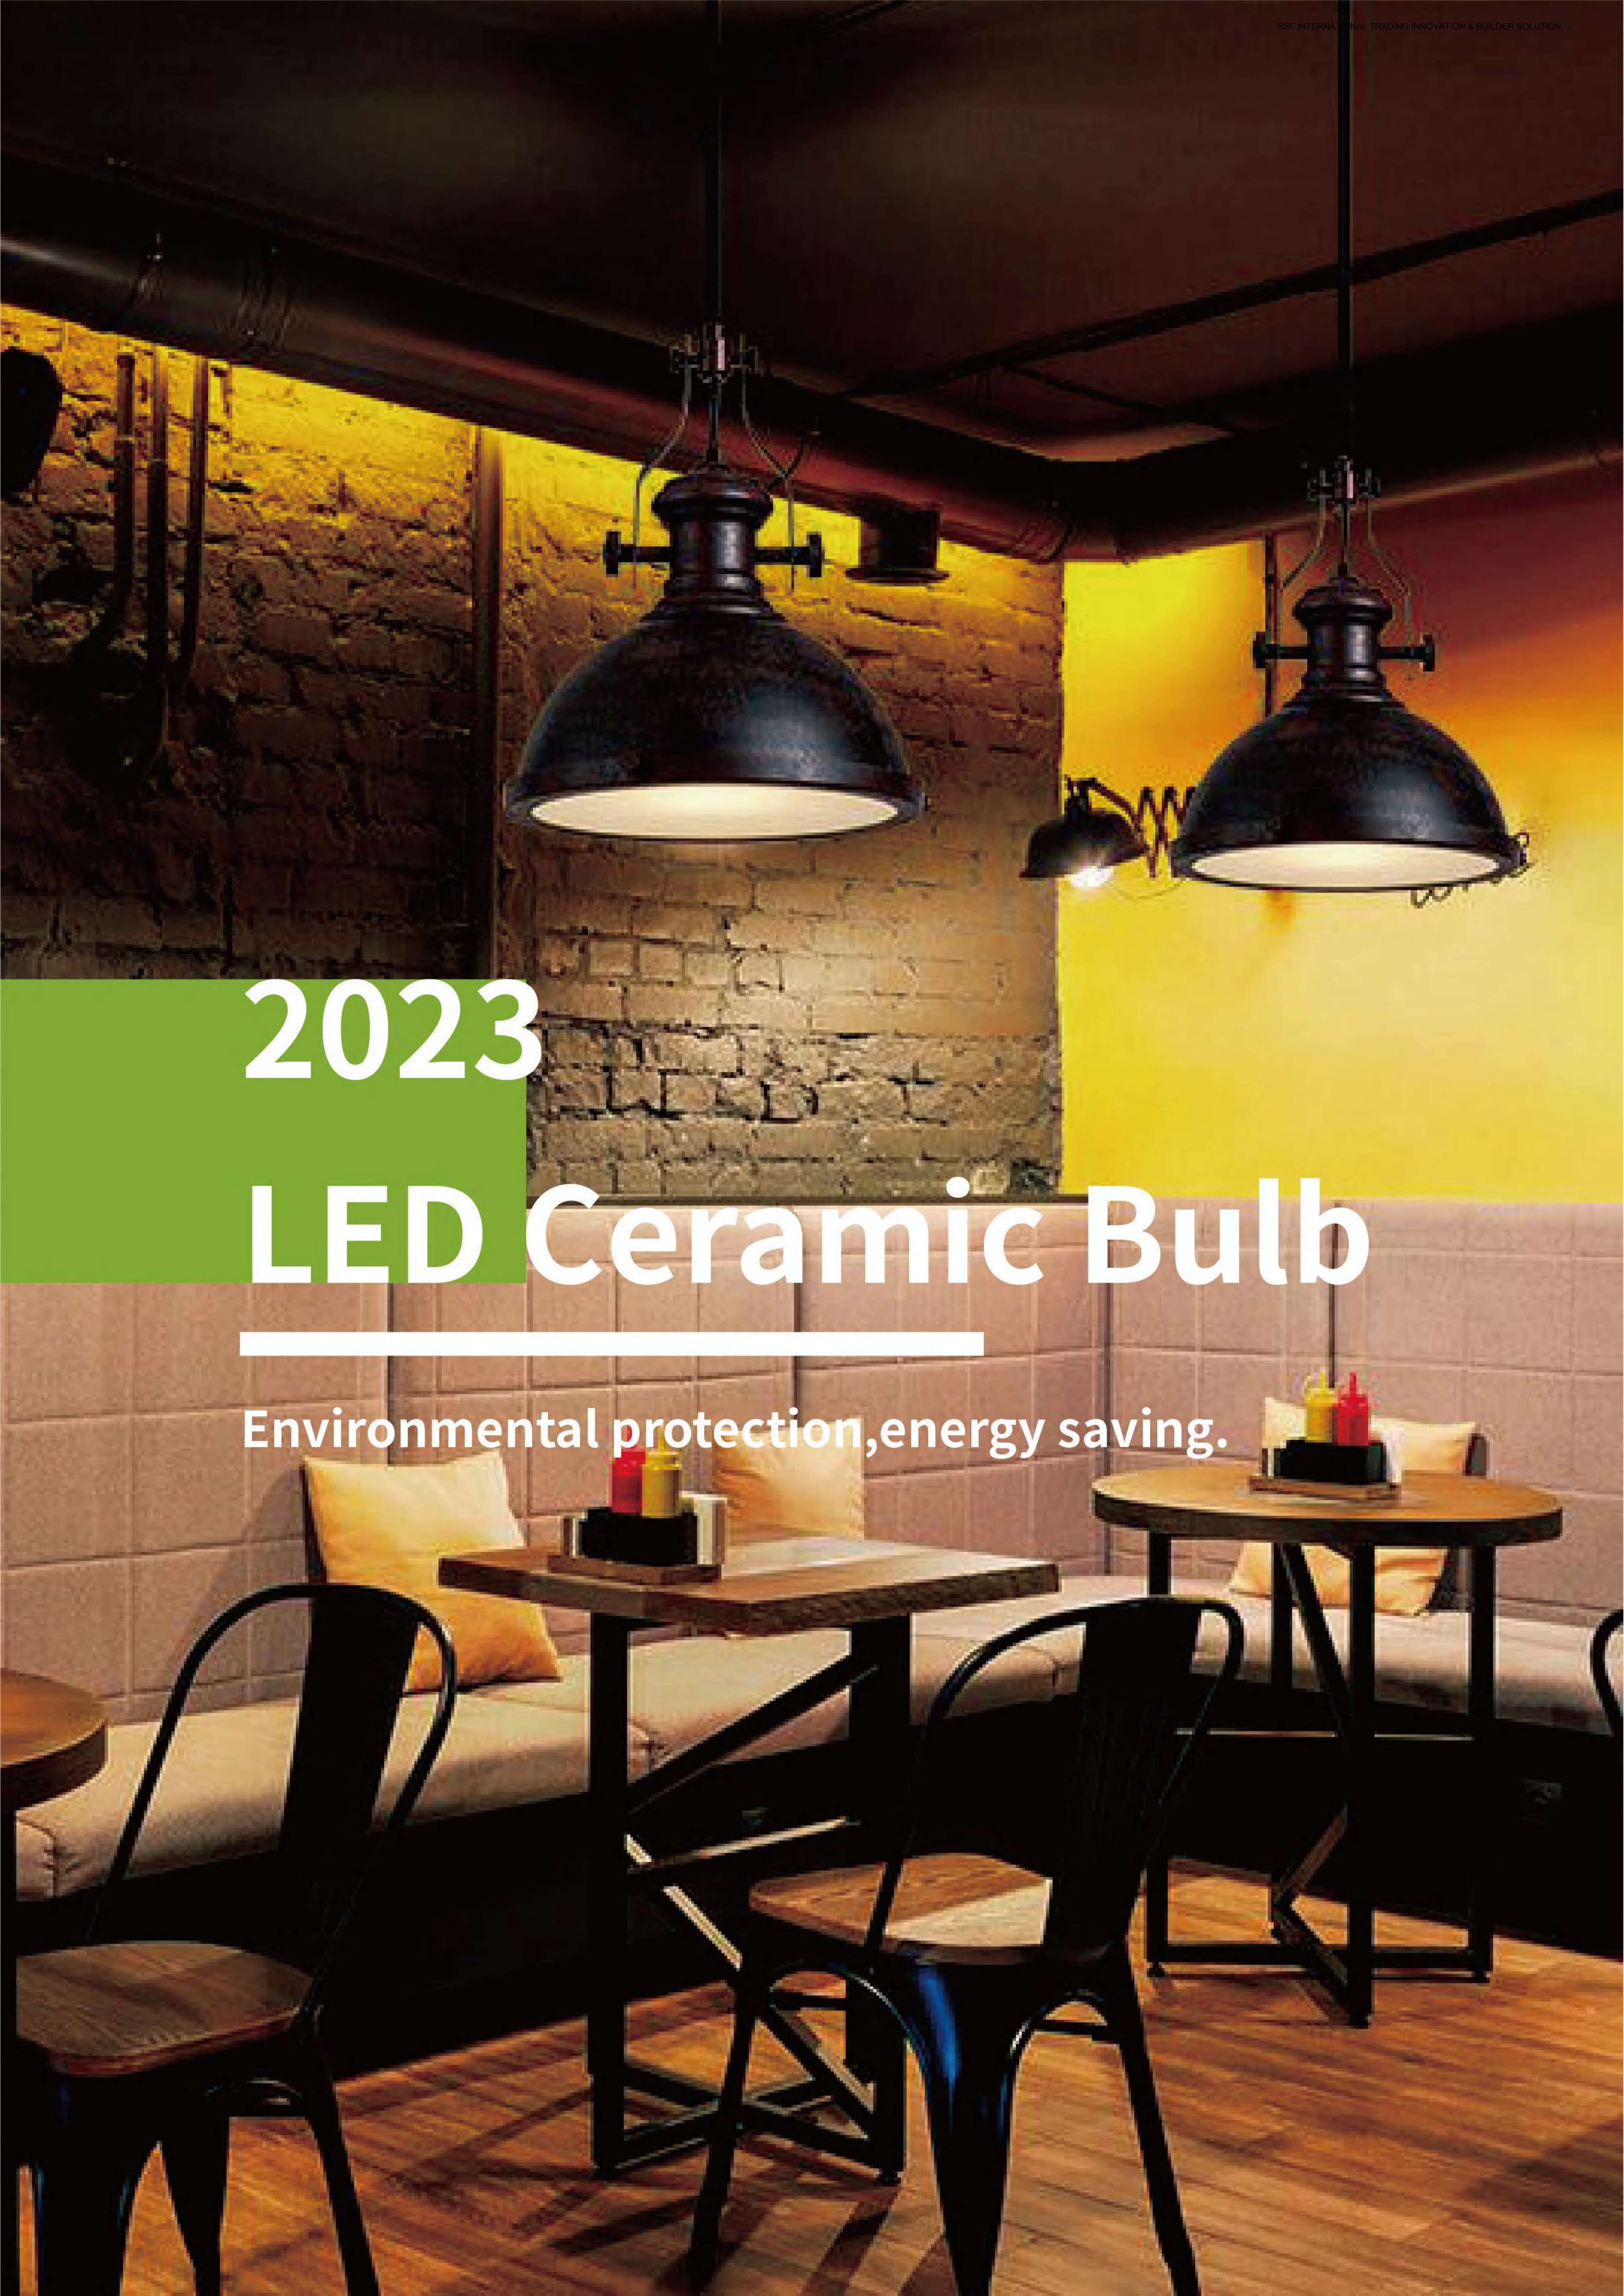

LED Ceramic Bulb

Ceramic+PC



3000K 4000K 6500K



ErP **RoHS** **SAA** **BSCI**

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	30,000H
-----------------	--	------------------------------	--	--	----------------

Model	Code	Wattage	EQ-Watts	Lumen	Base	Size(mm)	Beam angle
G45	SY-C011	7W	58W	700LM	E27	φ 45*H84	160°
G45	SY-C012	8W	65W	800LM	E27	φ 45*H84	160°
G45	SY-C013	9W	70W	900LM	E27	φ 45*H84	160°
G45	SY-C014	7W	58W	700LM	E14	φ 45*H89	160°
G45	SY-C015	8W	65W	800LM	E14	φ 45*H89	160°
G45	SY-C016	9W	70W	900LM	E14	φ 45*H89	160°
C37	SY-C017	7W	58W	700LM	E27/E14	φ 37*H109	160°
C37	SY-C018	8W	65W	800LM	E27/E14	φ 37*H109	160°
C37	SY-C019	9W	70W	900LM	E27/E14	φ 37*H109	160°
C37L	SY-C020	7W	58W	700LM	E27/E14	φ 37*H138	160°
C37L	SY-C021	8W	65W	800LM	E27/E14	φ 37*H138	160°
C37L	SY-C022	9W	70W	900LM	E27/E14	φ 37*H138	160°



Ceramic+PC



3000K 4000K 6500K



Application

- Decorative--Living room, Kitchen, Bedroom, etc.
- Operating temperature:-20°C~40°C
- Not for emergency or exit lights

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	SY-C23	10W	90W	1200LM	Φ 60*H109	200°
A60	SY-C24	12W	105W	1440LM	Φ 60*H111	200°
A65	SY-C25	15W	135W	1800LM	Φ 65*H119	200°
A70	SY-C26	18W	160W	2160LM	Φ 70*H135	200°
A80	SY-C27	22W	195W	2640LM	Φ 80*H153	200°
A95	SY-C28	25W	220W	3000LM	Φ 95*H175	200°



Ceramic+PC



120lm/w

3000K 4000K 6500K



ErP RoHS SAA BSCI

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	35,000H
----------	--------------------	----------------	----------------------------	---	---------

Application

- Decorative--Living room, Kitchen, Bedroom, etc.
- Operating temperature:-20°C~40°C
- Not for emergency or exit lights

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G50	SY-C29	8W	75W	960LM	φ 50*H85	220°
G55	SY-C30	10W	90W	1200LM	φ 55*H92	220°
G60	SY-C31	12W	105W	1440LM	φ 60*H96	220°
G125	SY-C32	35W	310W	4200LM	φ 125*H175	220°


LED Ceramic Bulb

**Ceramic+PC cover/
Ceramic with lens**



LED SMD

COB

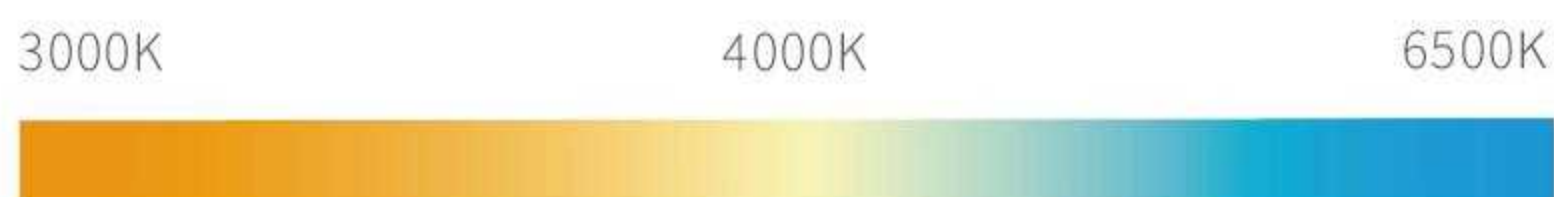

DIMMABLE

Ra > 80
Ra > 90

80~150
LM/W

PF>0.5
PF>0.7
PF>0.9


Voltage
AC100~240V
AC220~240V
AC170~250V

30,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
GU10	SY-TC01	7W	58W	700LM	Φ 50*H56	120°
GU10	SY-TC02	8W	65W	800LM	Φ 50*H56	120°
GU10	SY-TC03	9W	70W	900LM	Φ 50*H56	120°
GU10	SY-TC04	7W	58W	700LM	Φ 50*H56	38°/60°/120°
GU10	SY-TC05	8W	65W	800LM	Φ 50*H56	38°/60°/120°
GU10	SY-TC06	9W	70W	900LM	Φ 50*H56	38°/60°/120°
MR16	SY-TC07	7W	58W	700LM	Φ 50*H50	120°
MR16	SY-TC08	8W	65W	800LM	Φ 50*H50	120°
MR16	SY-TC09	9W	70W	900LM	Φ 50*H50	120°
MR16	SY-TC10	7W	58W	700LM	Φ 50*H50	38°/60°/120°
MR16	SY-TC11	8W	65W	800LM	Φ 50*H50	38°/60°/120°
MR16	SY-TC12	9W	70W	900LM	Φ 50*H50	38°/60°/120°

LED Ceramic Bulb

Ceramic with lens

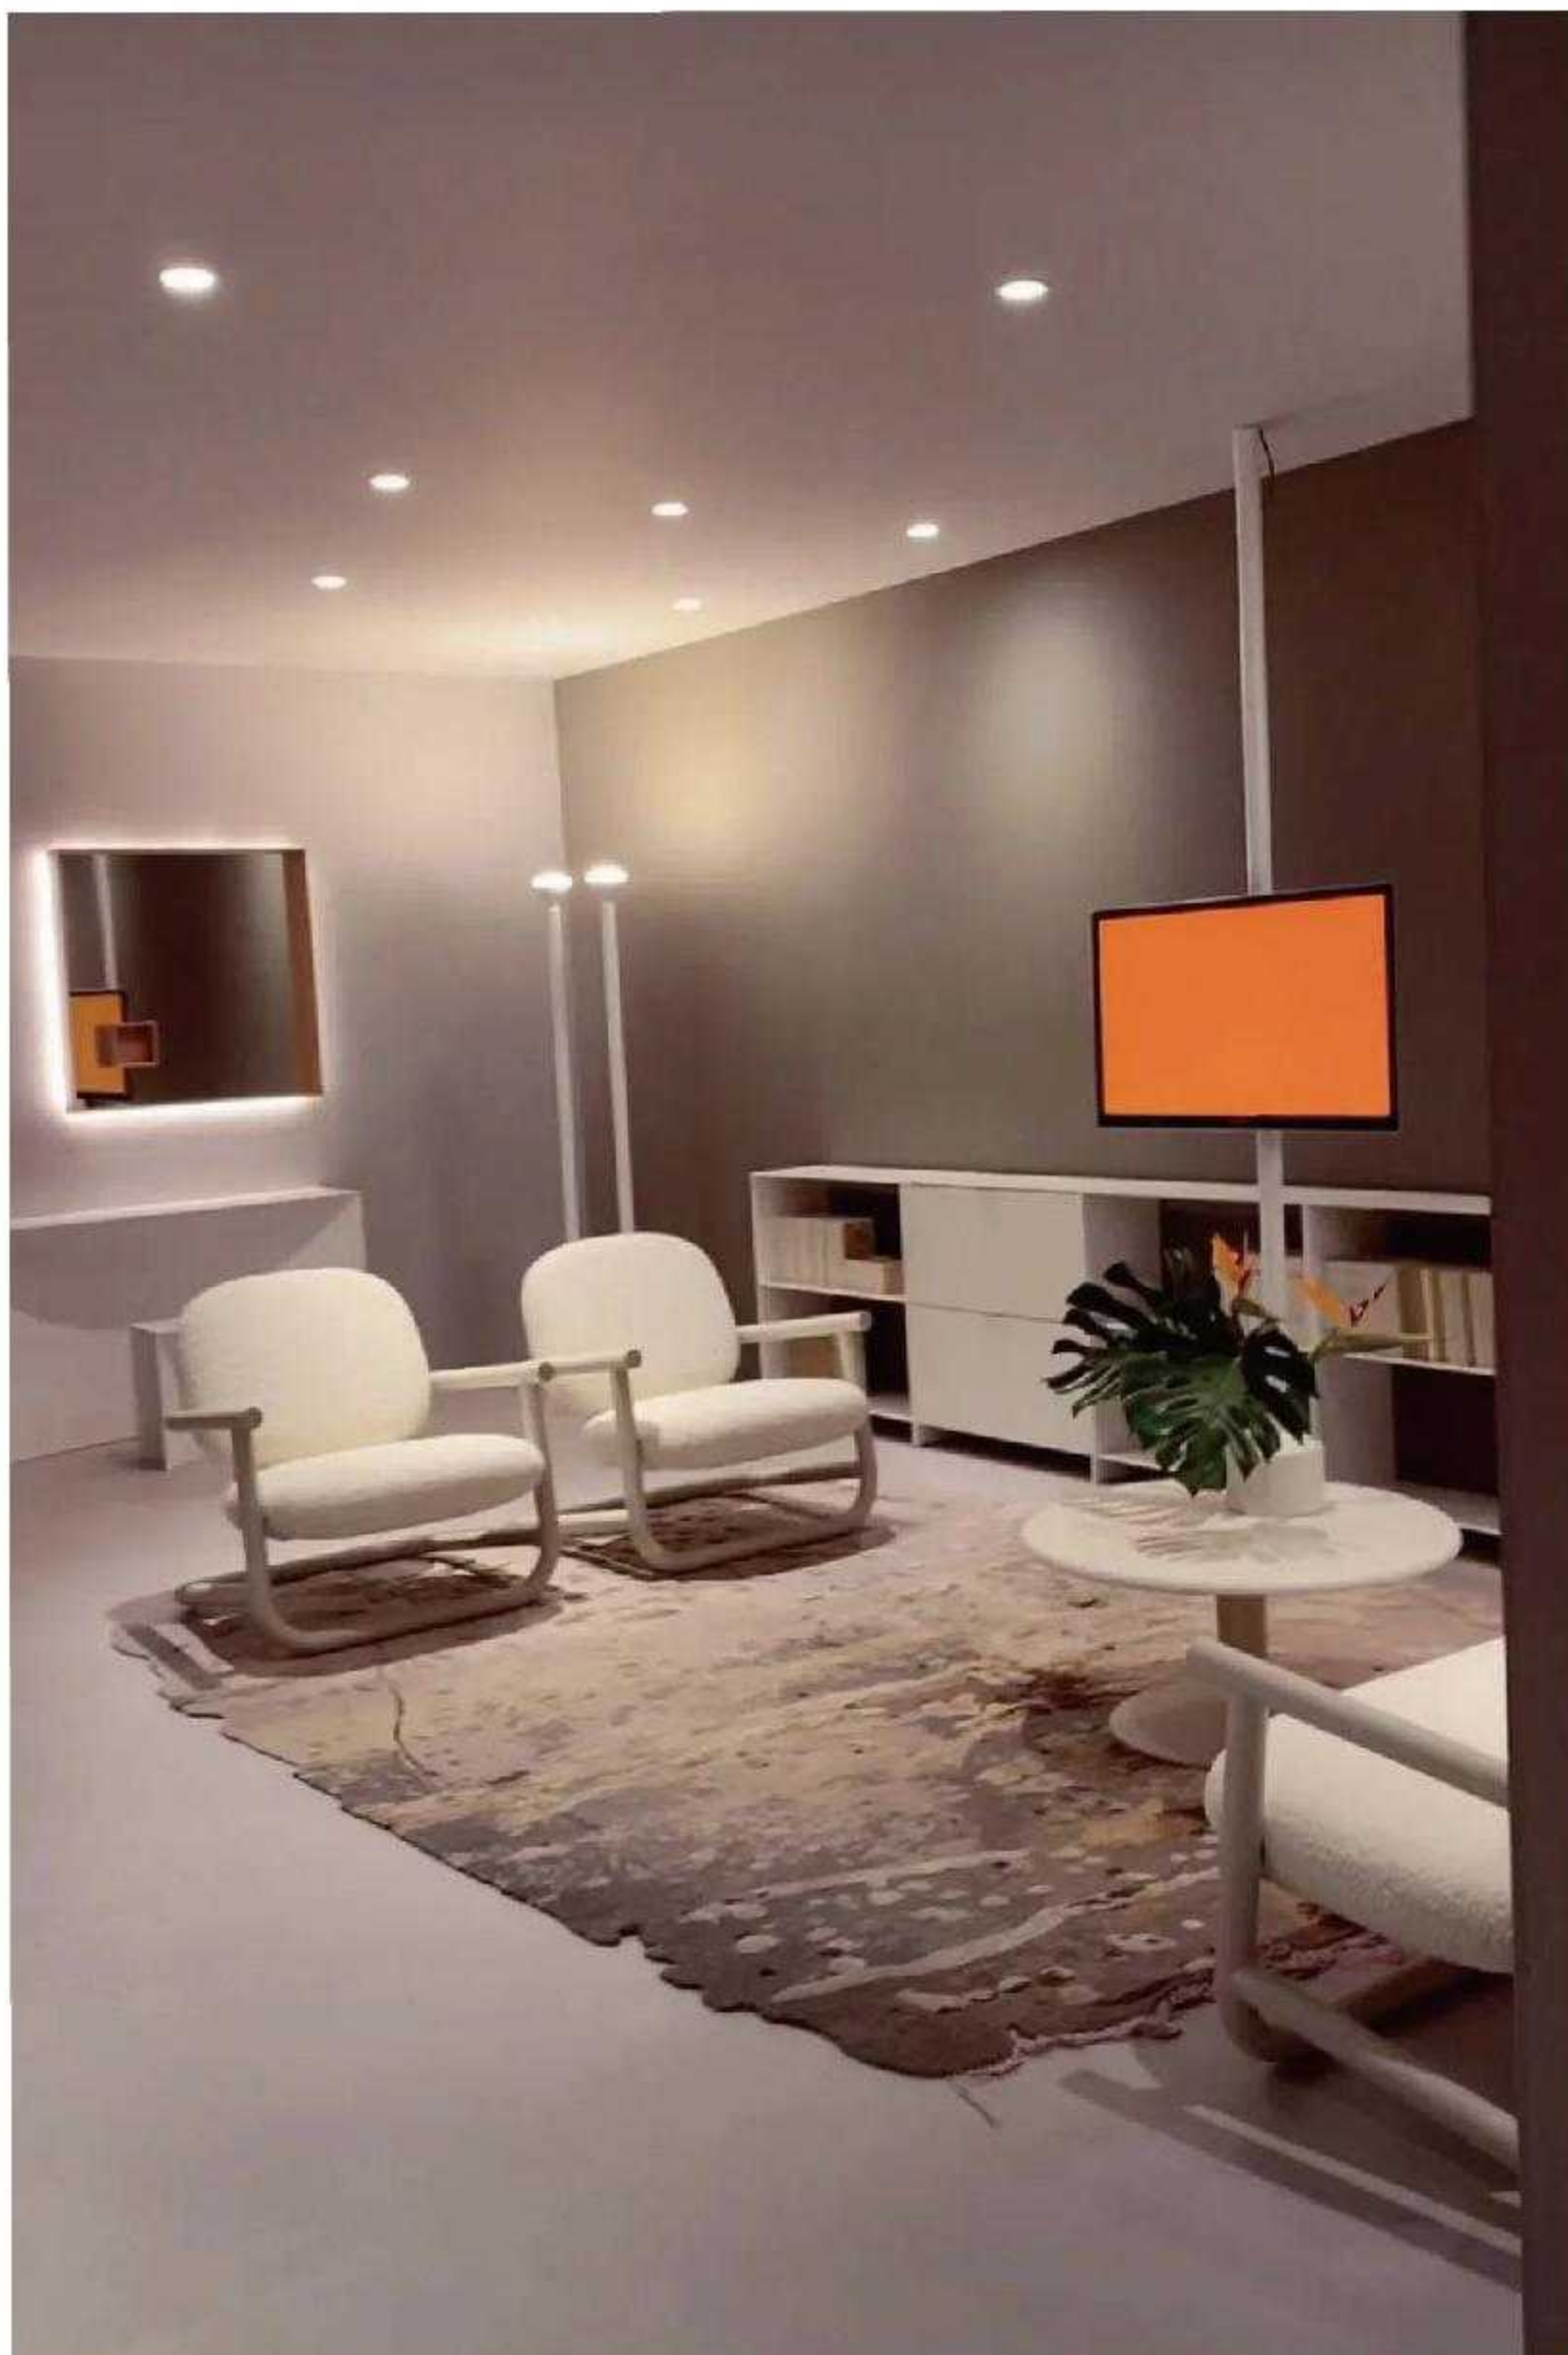

3000K 4000K 6500K



DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	CCT 2700K 4100K 6000K	Voltage AC100-240V AC220-240V AC170-250V	25,000H	Voltage AC100-240V AC220-240V AC170-250V	30,000H
----------	--------------------	----------------	----------------------------	--------------------------------	---	---------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
GU11	SY-MN01	3W	25W	240Lm	SMD	φ 35*H50	38°
MR11	SY-MN02	3W	25W	240Lm	SMD	φ 35*H35	38°
GU11	SY-MN03	3W	25W	240Lm	COB	φ 35*H50	38°
MR11	SY-MN04	3W	25W	240Lm	COB	φ 35*H35	38°



Ceramic+PC/ Ceramic with lens



SY-CM01/SY-CM02



SY-CM03



SY-CM04

3000K 4000K 6500K



Ra > 80
Ra > 90

80~150
LM/W

PF>0.5
PF>0.7
PF>0.9

Voltage
AC100~240V
AC220~240V
AC170~250V



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
LED insert	SY-CM01	5W	40W	450LM	φ 50*H25	120°
LED insert	SY-CM02	7W	50W	630LM	φ 50*H25	120°
LED insert	SY-CM03	5W	37W	400LM	φ 50*H20	38°/ 60°
LED insert	SY-CM04	7W	48W	560LM	φ 50*H20	38°/ 60°
LED insert	SY-CM05	5W	40W	450LM	φ 50*H26	38°/ 60°
LED insert	SY-CM06	7W	50W	630LM	φ 50*H26	38°/ 60°

2023

LED Classic Bulb

Environmental protection, energy saving.

LED Classic Bulb

Plastic+Alu.



3000K

4000K

6500K



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A50	SY-A030	5W	40W	400LM	Φ50*H93	200°
A55	SY-A031	7W	50W	600LM	Φ55*H104	200°
A60	SY-A032	7W	50W	600LM	Φ60*H108	200°
A60	SY-A033	9W	60W	820LM	Φ60*H109	200°
A60	SY-A034	10W	65W	935LM	Φ60*H109	200°
A60	SY-A035	12W	70W	1155LM	Φ60*H118	200°
A60	SY-A036	15W	85W	1490LM	Φ60*H121	200°
A60	SY-A037	17W	100W	1700LM	Φ60*H126	200°
A65	SY-A038	12W	70W	1155LM	Φ65*H124	200°
A65	SY-A039	15W	85W	1490LM	Φ65*H124	200°
A67	SY-A040	18W	100W	1820LM	Φ67*H134	180°
A70	SY-A041	15W	85W	1490LM	Φ70*H122	200°
A70	SY-A042	18W	100W	1820LM	Φ70*H122	200°
A80	SY-A043	18W	100W	1820LM	Φ80*H143	200°
A95	SY-A044	20W	120W	2050LM	Φ95*H152	200°
A110	SY-A045	28W	155W	2950LM	Φ110*H203	200°
A120	SY-A046	35W	200W	3750LM	Φ120*H235	200°
A140	SY-A047	45W	250W	4850LM	Φ140*H252	200°
A160	SY-A048	55W	300W	5950LM	Φ160*H278	200°



Plastic+Alu.




3000K 4000K 6500K

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-S016	3W	25W	240LM	Φ 37*H99	160°
C37	SY-S017	4W	30W	320LM	Φ 37*H99	160°
C37	SY-S018	5W	35W	400LM	Φ 37*H99	160°
C37	SY-S019	6W	40W	490LM	Φ 37*H99	160°
C37	SY-S020	7W	45W	600LM	Φ 37*H106	160°
C37	SY-S021	8W	50W	710LM	Φ 37*H110	160°
C37	SY-S023	9W	60W	820LM	Φ 37*H110	160°

LED Classic Bulb

Plastic/Plastic+Alu.

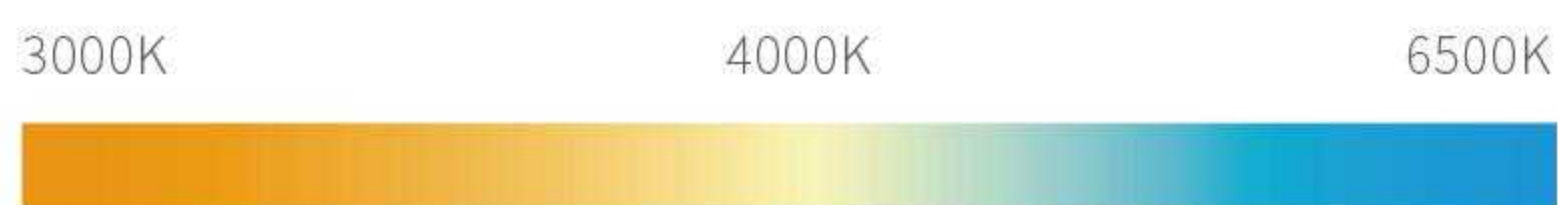


Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-S010	3W	25W	240LM	Φ45*H78	160°
G45	SY-S011	4W	30W	320LM	Φ45*H78	160°
G45	SY-S012	5W	35W	400LM	Φ45*H78	160°
G45	SY-S013	6W	40W	490LM	Φ45*H78	160°
G45	SY-S014	7W	45W	600LM	Φ45*H89	160°
G45	SY-S015	8W	50W	710LM	Φ45*H87	160°
G45	SY-S022	9W	60W	820LM	Φ45*H87	160°

LED Classic Bulb

3 Years Warranty

Plastic+Alu.

120lm/w

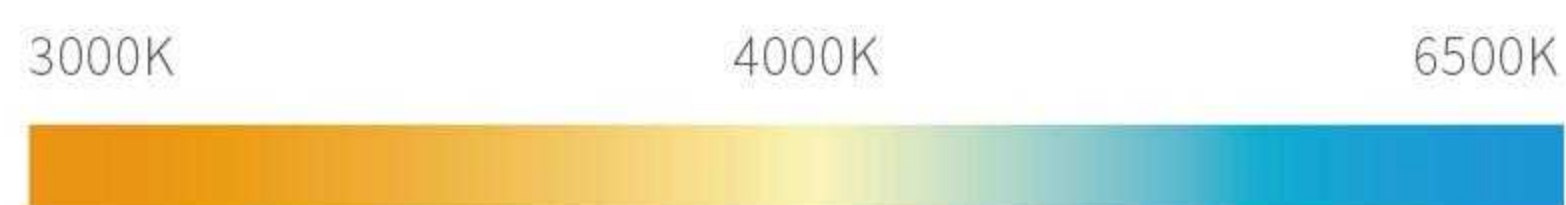

- 

DIMMABLE
- Ra > 80**
Ra > 90
- 80~150**
LM/W
- PF>0.5**
PF>0.7
PF>0.9
- Voltage**
AC100~240V
AC220~240V
AC170~250V
- 

35,000H



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-HL01	5W	50W	600LM	Φ37*H99	160°
G45	SY-HL02	5W	50W	600LM	Φ45*H78	160°
A60	SY-HL03	5W	50W	600LM	Φ60*H108	200°
A60	SY-HL04	6.5W	55W	780LM	Φ60*H108	200°
A60	SY-HL05	9.5W	70W	1140LM	Φ60*H110	200°
A60	SY-HL06	12W	80W	1440LM	Φ60*H118	200°
A60	SY-HL07	15W	100W	1800LM	Φ60*H118	200°
A65	SY-HL08	15W	100W	1800LM	Φ65*H134	200°

LED Classic Bulb

5 Years Warranty

Plastic+Alu.

140lm/w

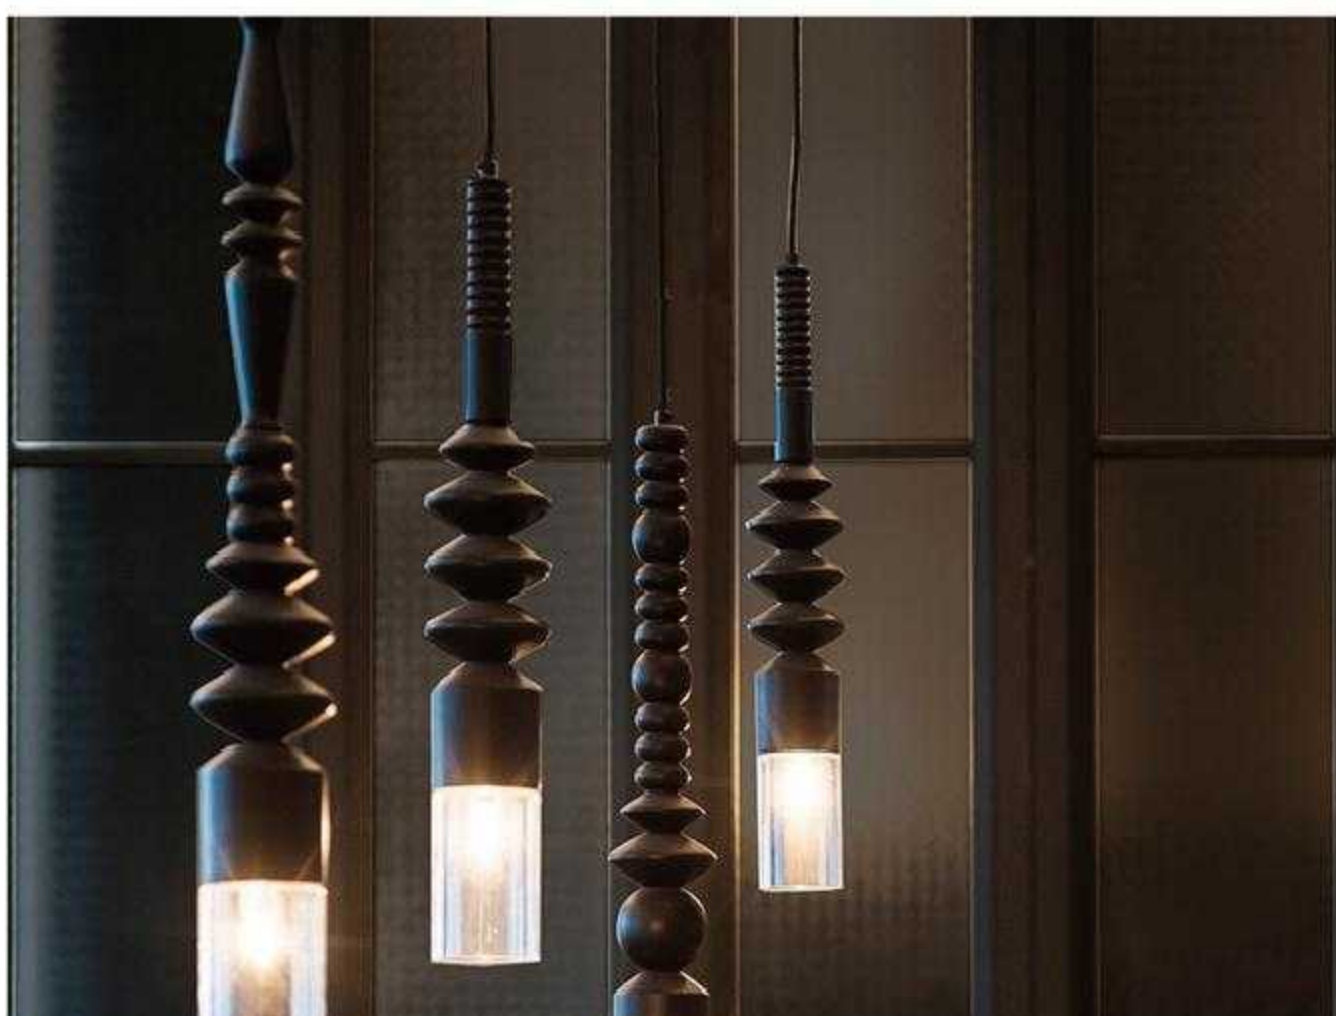

-  DIMMABLE
- Ra > 80**
Ra > 90
- 80~150**
LM/W
- PF>0.5**
PF>0.7
PF>0.9
- Voltage**
AC100~240V
AC220~240V
AC170~250V
-  40,000H



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-HL11	5W	55W	700LM	Φ 37*H106	160°
G45	SY-HL12	5W	55W	700LM	Φ 45*H89	160°
A60	SY-HL13	5W	55W	700LM	Φ 60*H108	200°
A60	SY-HL14	6.5W	65W	910LM	Φ 60*H110	200°
A60	SY-HL15	9.5W	75W	1330LM	Φ 60*H118	200°
A60	SY-HL16	12W	90W	1680LM	Φ 60*H118	200°
A60	SY-HL17	15W	140W	2100LM	Φ 60*H118	200°
A65	SY-HL18	15W	140W	2100LM	Φ 65*H134	200°

LED Classic Bulb

5 Years Warranty

Plastic+Alu.

160lm/w

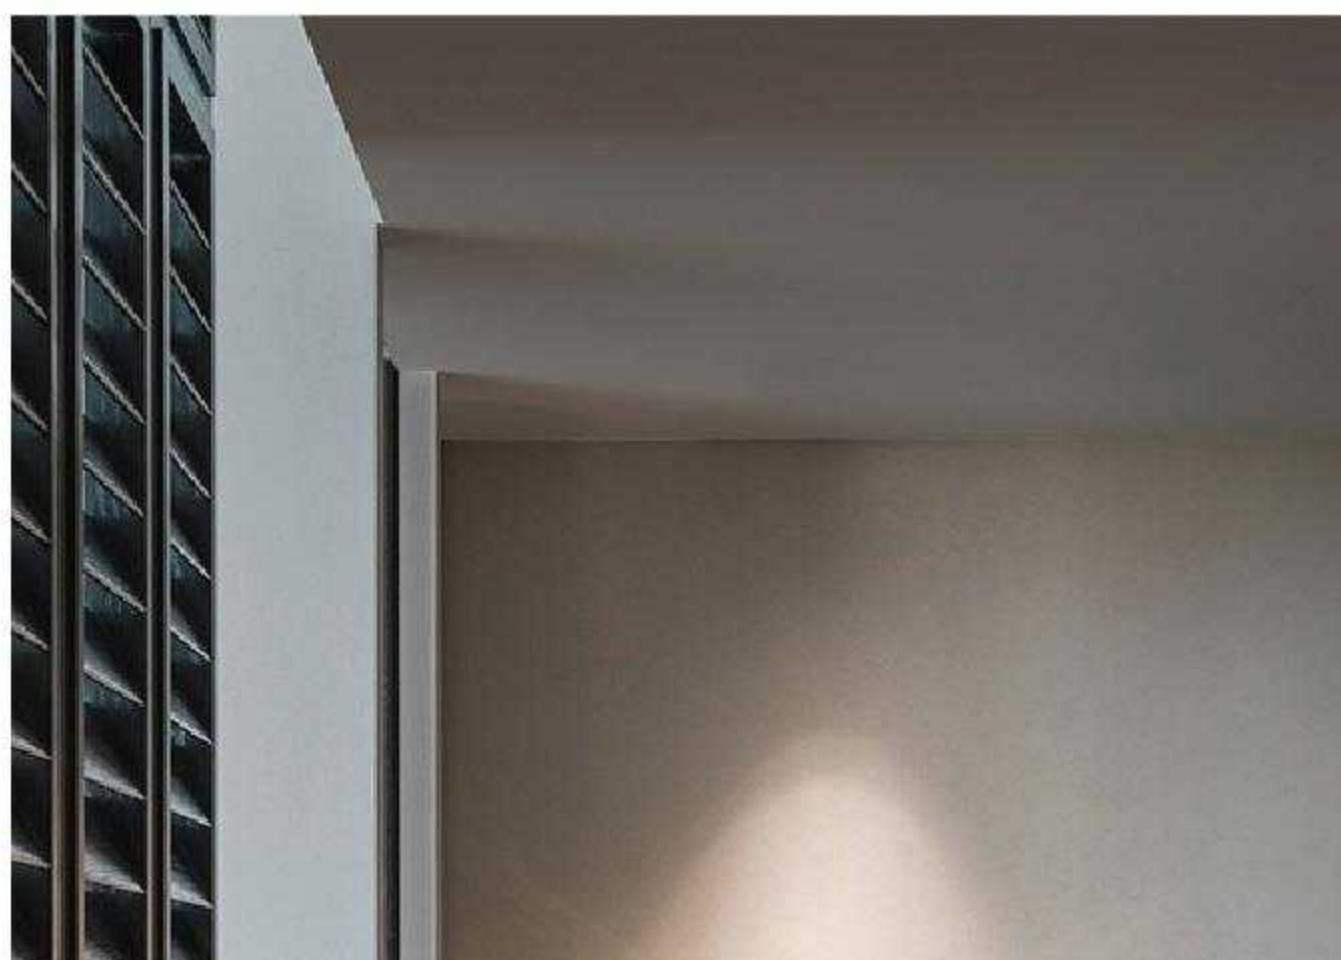



DIMMABLE

Ra > 80
Ra > 90

80~150
LM/W

PF>0.5
PF>0.7
PF>0.9

Voltage
AC100~240V
AC220~240V
AC170~250V




45,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-HL21	5W	60W	800LM	Φ 37*H106	160°
G45	SY-HL22	5W	60W	800LM	Φ 45*H89	160°
A60	SY-HL23	5W	60W	800LM	Φ 60*H108	200°
A60	SY-HL24	6.5W	70W	1040LM	Φ 60*H110	200°
A60	SY-HL25	9.5W	90W	1520LM	Φ 60*H118	200°
A60	SY-HL26	12W	110W	1920LM	Φ 60*H118	200°
A60	SY-HL27	15W	180W	2400LM	Φ 60*H118	200°
A65	SY-HL28	15W	180W	2400LM	Φ 65*H134	200°



Plastic+Die-casting Alu.

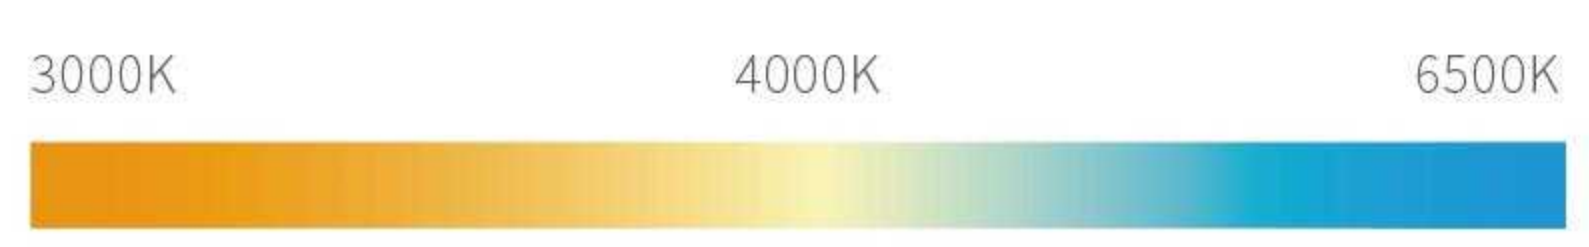


- 
DIMMABLE
- Ra > 80**
Ra > 90
- 80~150**
LM/W
- PF>0.5**
PF>0.7
PF>0.9
- Voltage**
AC100~240V
AC220~240V
AC170~250V
- 
25,000H


Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	SY-A060	17W	125W	1900LM	Φ 60*H127	200°
A70	SY-A061	20W	140W	2100LM	Φ 70*H145	200°
A80	SY-A062	24W	190W	2500LM	Φ 80*H161	200°

LED Classic Bulb


Plastic+Alu.

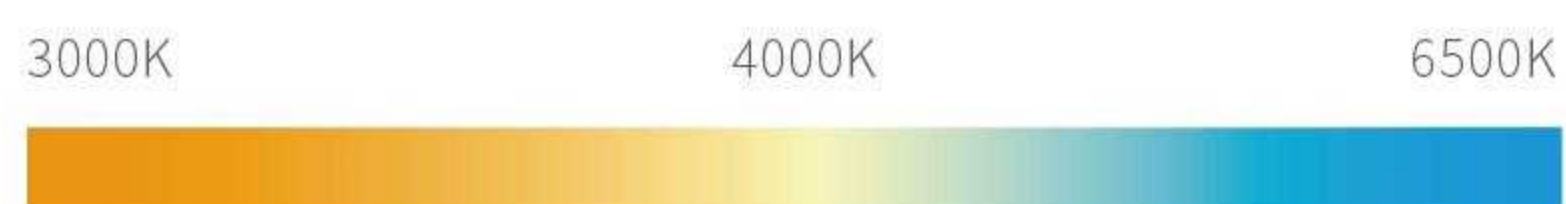


Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G50	SY-G021	5W	40W	500LM	φ 50*H78	270°
G55	SY-G022	6W	50W	600LM	φ 55*H80	270°
G60	SY-G023	7W	55W	700LM	φ 60*H96	270°
G80	SY-G024	12W	70W	1200LM	φ 80*H118	270°
G95	SY-G025	15W	85W	1500LM	φ 95*H139	270°
G120	SY-G026	18W	100W	1800LM	φ 120*H160	270°
G150	SY-G027	24W	150W	2400LM	φ 150*H190	270°

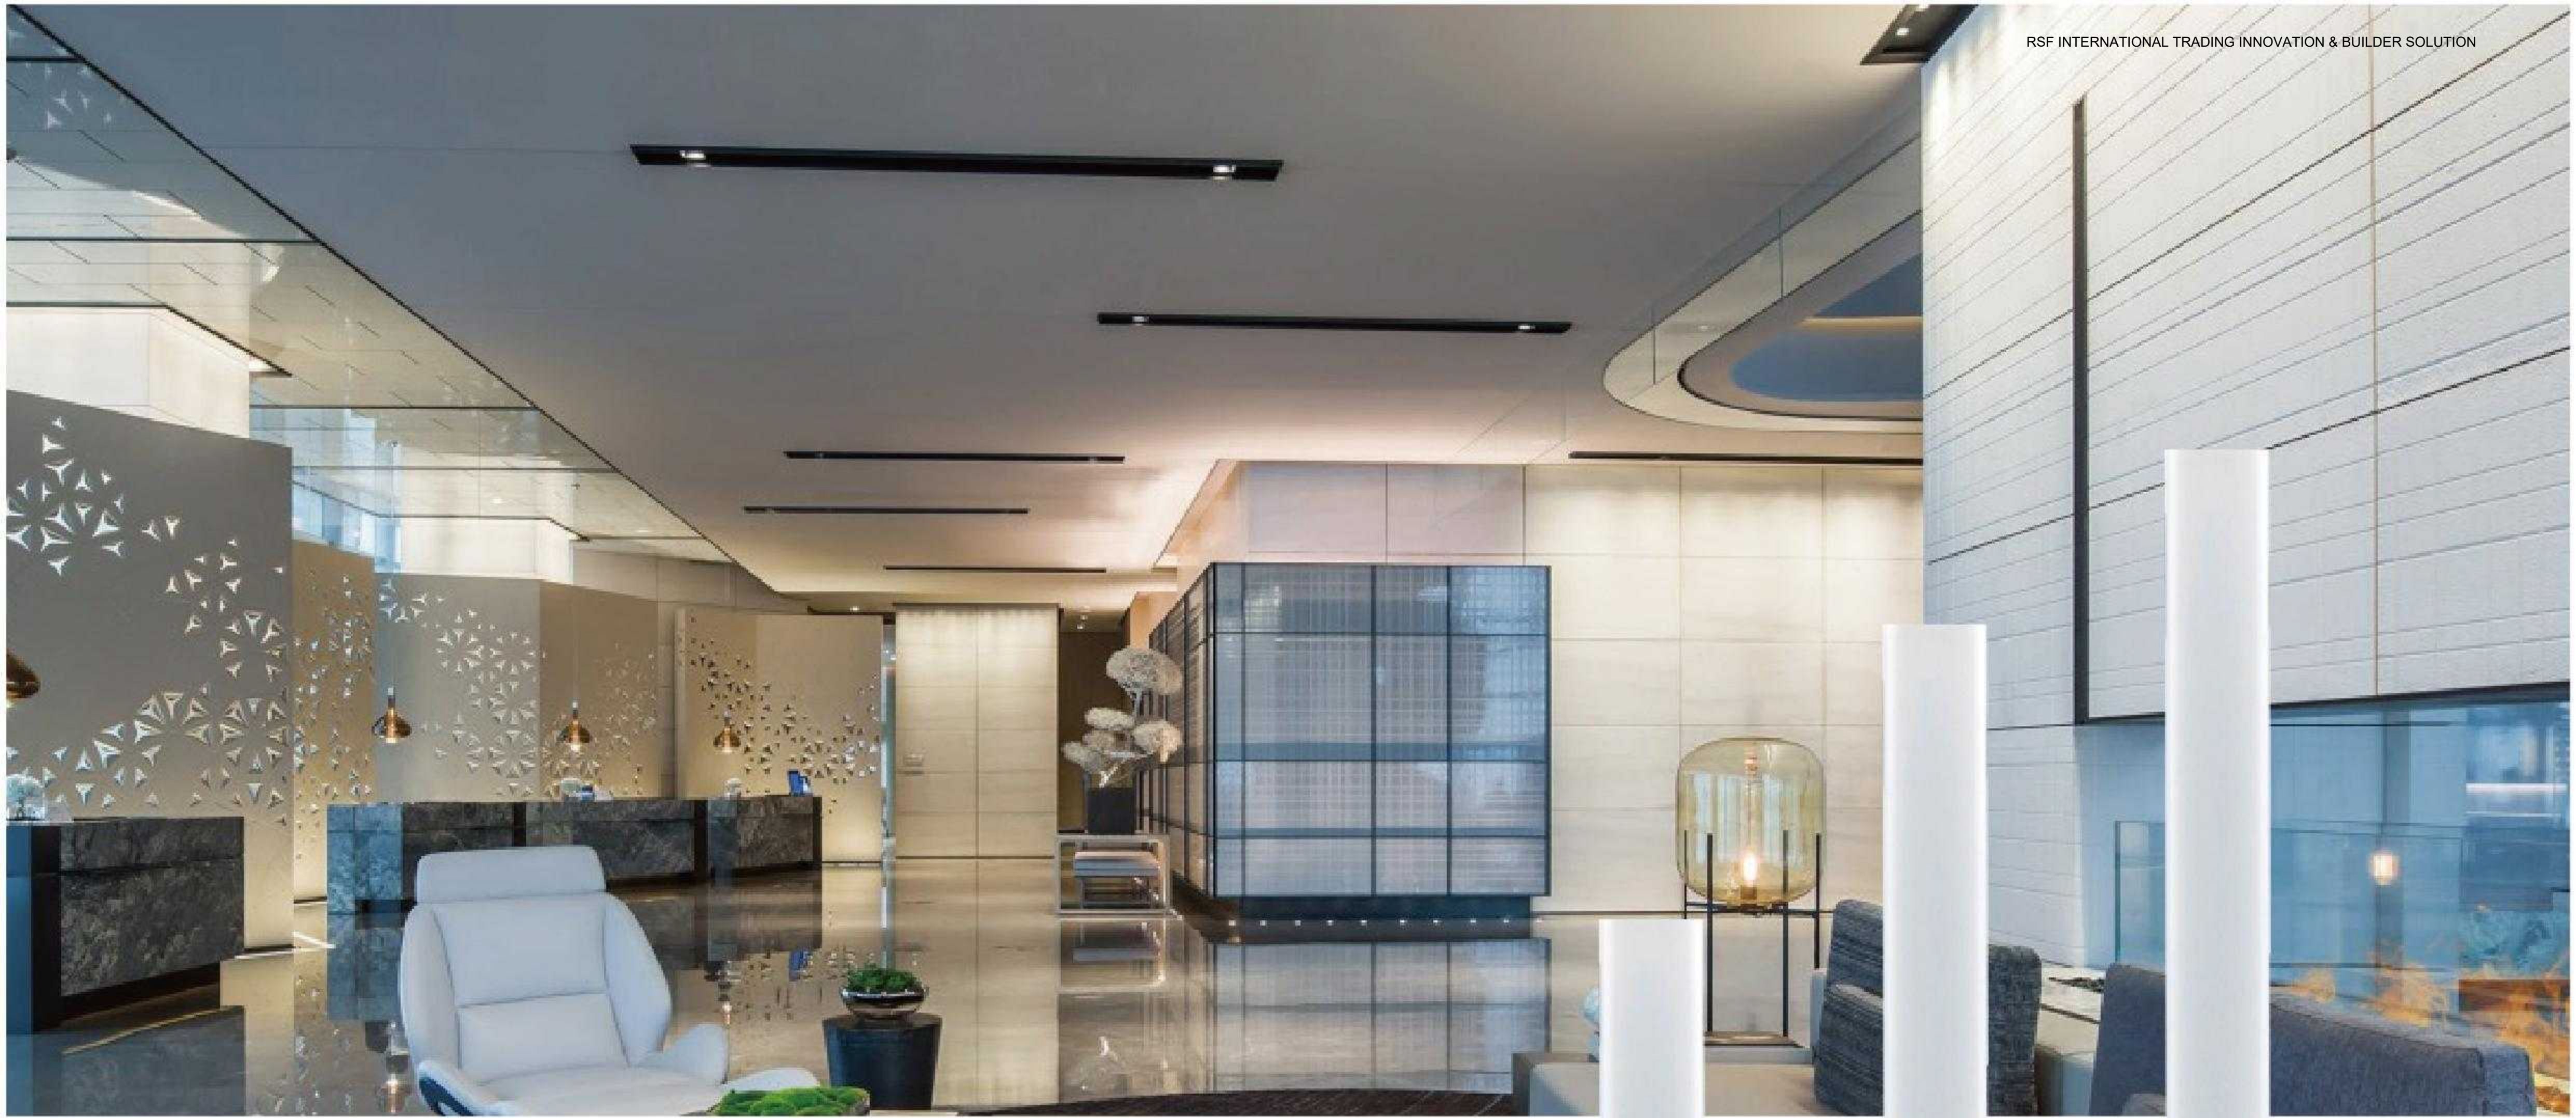

Plastic+Alu.

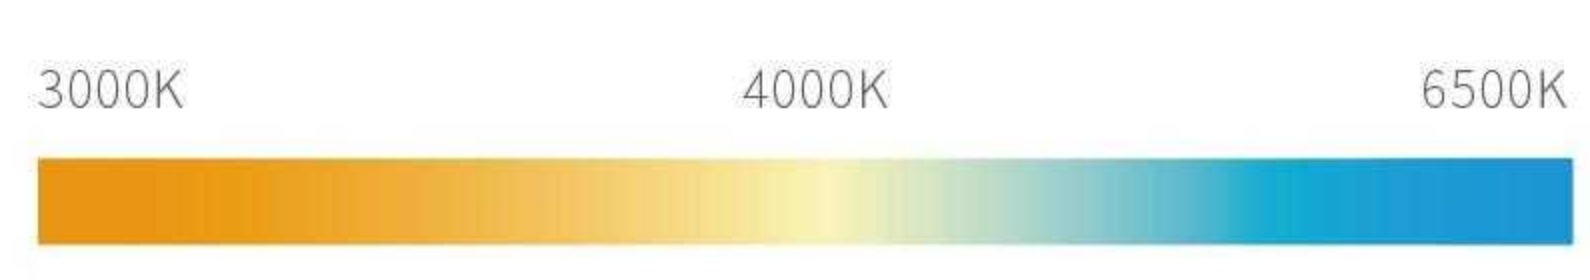


- DIMMABLE
- Ra > 80
Ra > 90
- 80~150 LM/W
- PF>0.5
PF>0.7
PF>0.9
- Voltage
AC100~240V
AC220~240V
AC170~250V
- 25,000H

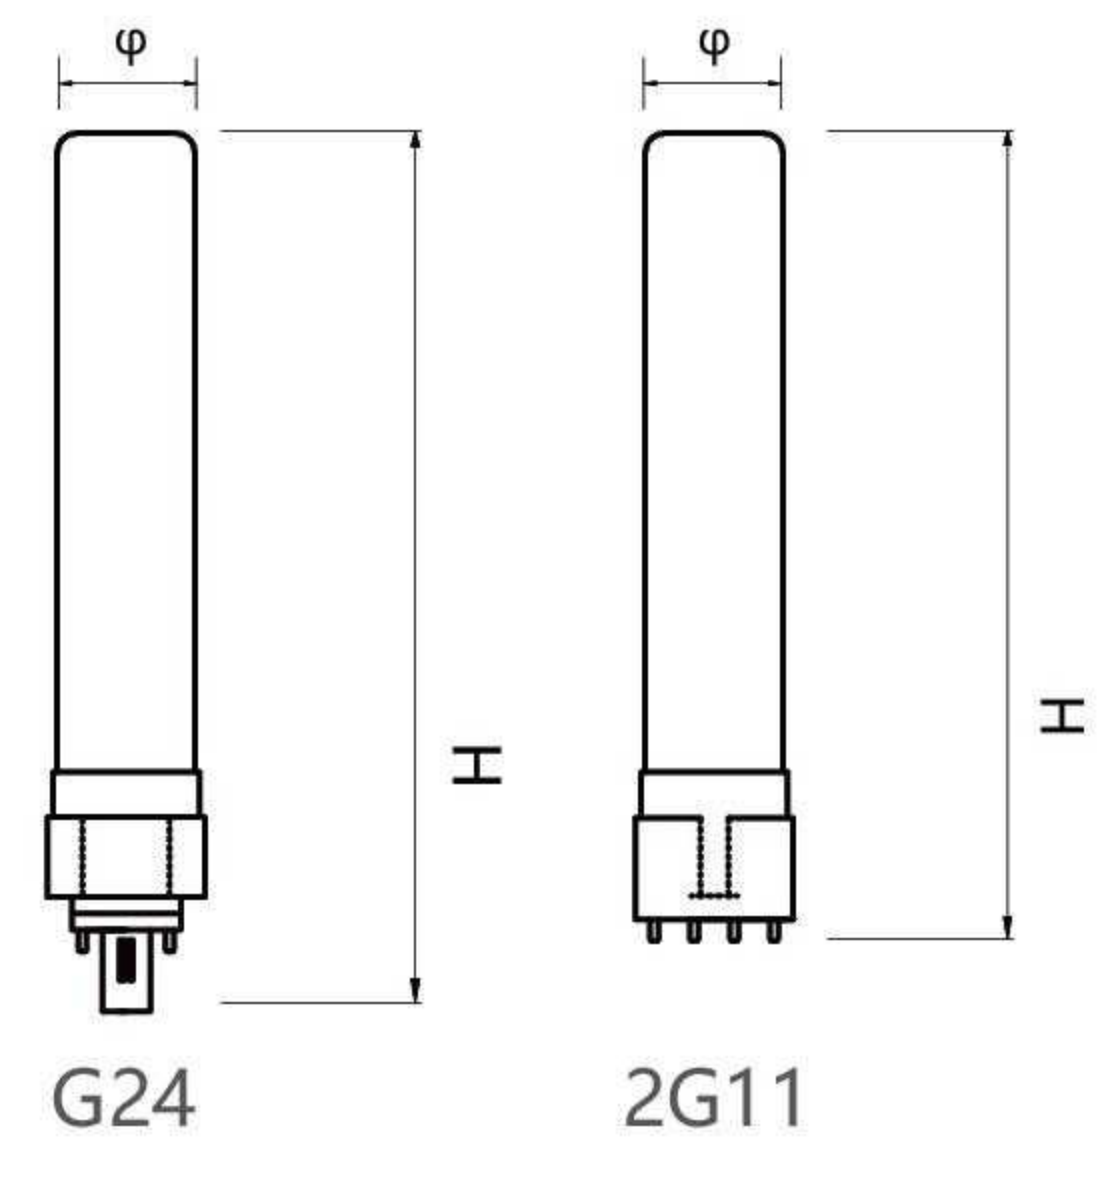

Code	Wattage	Lumen	G24 Size(mm)	Beam Angle	2G11 Size(mm)
SY-TG01	5W	400LM	L44*W34*H177	120°	L44*W24*H160
SY-TG02	8W	710LM	L44*W34*H246	120°	L44*W24*H229
SY-TG03	12W	1155LM	L44*W34*H342	120°	L44*W24*H325
SY-TG04	15W	1490LM	L44*W34*H427	120°	L44*W24*H410
SY-TG05	20W	2050LM	L44*W34*H547	120°	L44*W24*H530
SY-TG06	24W	2490LM	L44*W34*H618	120°	L44*W24*H600

LED Classic light

Plastic+Alu.



Product Features


- High efficiency and long lifetime
- Eco-friendly, no mercury, noradiation
- Not for emergency or exit lights



Model	Code	Wattage	Base	Lumen	Size(mm)	Beam Angle
T30	SY-ST01	6W	E27	490LM	Φ 30*H100	160°
T30	SY-ST02	4W	E27	320LM	Φ 30*H143	160°
T30	SY-ST03	4W	E27	320LM	Φ 30*H143	160°
T36	SY-ST04	6W	E14	490LM	Φ 36*H106	160°
T36	SY-ST05	8W	E27	710LM	Φ 36*H122	160°
T36	SY-ST06	8W	G24	710LM	Φ 36*H120	160°
T42	SY-ST07	9W	E14	820LM	Φ 42*H110	160°
T42	SY-ST08	9W	E27	820LM	Φ 42*H110	160°
T45	SY-ST09	12W	E27	1155LM	Φ 45*H138	160°
T45	SY-ST10	12W	G24	1155LM	Φ 45*H137	160°
T50	SY-ST11	15W	E27	1490LM	Φ 50*H146	160°

LED Classic Bulb

Die-casting Alu.+PC

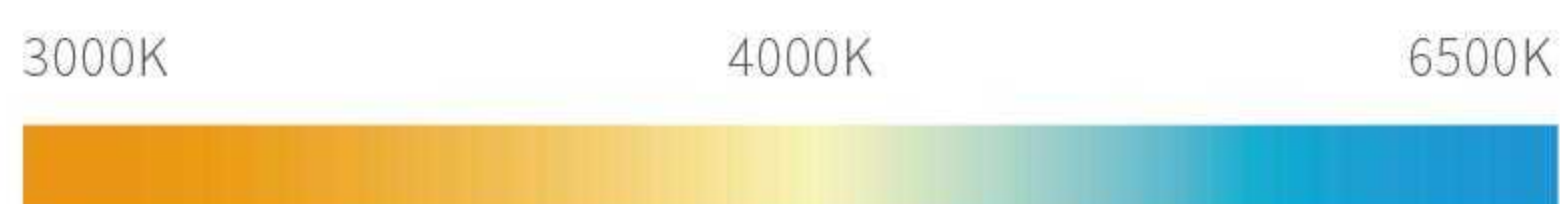

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
T80	SY-HP21	20W	140W	2050LM	Φ80*H150	270°
T100	SY-HP22	30W	160W	3150LM	Φ 100*H185	270°
T120	SY-HP23	40W	220W	4250LM	Φ 120*H210	270°
T120	SY-HP24	50W	280W	5350LM	Φ 120*H230	270°
T140	SY-HP25	60W	350W	6450LM	Φ 140*H230	270°
T140	SY-HP26	70W	450W	7550LM	Φ 140*H242	270°
T150	SY-HP27	75W	500W	8100LM	Φ 150*H260	270°
T160	SY-HP28	100W	650W	10800LM	Φ 160*H288	270°

LED Classic Bulb

Plastic+Alu.



3000K 4000K 6500K



ErP RoHS SAA BSCI

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~260V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Product Features

- High efficiency and long lifetime
- Eco-friendly, no mercury, no radiation
- Not for emergency or exit lights

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
T110	SY-HP35	50W	280W	5350LM	Φ110*H212	270°
T130	SY-HP36	80W	550W	8600LM	Φ130*H252	270°
T150	SY-HP37	100W	650W	10800LM	Φ150*H282	270°
T170	SY-HP38	150W	950W	16300LM	Φ170*H315	270°



Plastic+Alu.



3000K 4000K 6500K



Ra > 80
Ra > 90

80~150
LM/W

PF>0.5
PF>0.7
PF>0.9

Voltage
AC100~240V
AC220~240V
AC170~250V


25,000H



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
T50	SY-HP09	6W	50W	540LM	Φ50*H98	270°
T60	SY-HP10	12W	65W	1155LM	Φ60*H118	270°
T70	SY-HP11	15W	85W	1490LM	Φ70*H129	270°
T80	SY-HP12	20W	140W	2050LM	Φ80*H148	270°
T100	SY-HP13	30W	160W	3150LM	Φ100*H177	270°
T120	SY-HP14	40W	220W	4250LM	Φ120*H206	270°
T140	SY-HP15	50W	280W	5350LM	Φ140*H236	270°
T160	SY-HP16	60W	350W	6450LM	Φ160*H265	270°
T160L	SY-HP17	70W	450W	7550LM	Φ160*H276	270°



Plastic+Alu.



Model	Code	Wattage	Lumen	Size(mm)	Beam Angle
E65	SY-BM11	18W	1800LM	Φ 65*153	160 °
E90	SY-BM12	30W	3000LM	Φ 90*205	160 °
E105	SY-BM13	40W	4000LM	Φ 105*236	160 °
E120	SY-BM14	50W	5000LM	Φ 120*280	160 °



Plastic+Alu.



3000K 4000K 6500K



Ra > 80
Ra > 90

80~150
LM/W

PF>0.5
PF>0.7
PF>0.9

Voltage
AC100~240V
AC220~240V
AC170~260V



Product Features

- High efficiency and long lifetime
- Eco-friendly, no mercury, no radiation
- Not for emergency or exit lights

Model	Code	Wattage	Lumen	Size(mm)	Beam Angle
Corn87	SY-BM01	36W	3600LM	Φ 87*235	360 °
Corn94	SY-BM02	54W	5400LM	Φ 94*280	360 °
Corn121	SY-BM03	70W	7000LM	Φ 121*306	360 °

2023

LED Decorative Bulb

Environmental protection, energy saving.

LED Decorative Bulb

Glass



3000K 4000K 6500K



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-F11	2W	21W	200LM	Φ45*75	360°
G45	SY-F12	4W	40W	400LM	Φ45*75	360°
C35/C35L	SY-F13	2W	21W	200LM	Φ35*97/115	360°
C35/C35L	SY-F14	4W	40W	400LM	Φ35*97/115	360°
A60	SY-F15	6W	60W	600LM	Φ60*108	360°
A60	SY-F16	8W	80W	800LM	Φ60*108	360°
ST64	SY-F17	8W	80W	800LM	Φ64*142	360°
G80	SY-F18	10W	100W	1000LM	Φ80*120	360°
G95	SY-F19	10W	100W	1000LM	Φ95*135	360°
G125	SY-F20	10W	100W	1000LM	Φ125*175	360°

LED Decorative Bulb


Glass



3000K 4000K 6500K




Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-FG11	2W	21W	200LM	Φ45*75	360°
G45	SY-FG12	4W	40W	400LM	Φ45*75	360°
C35/C35L	SY-FG13	2W	21W	200LM	Φ35*97/115	360°
C35/C35L	SY-FG14	4W	40W	400LM	Φ35*97/115	360°
A60	SY-FG15	6W	60W	600LM	Φ60*108	360°
A60	SY-FG16	8W	80W	800LM	Φ60*108	360°
ST64	SY-FG17	8W	80W	800LM	Φ64*142	360°
G80	SY-FG18	10W	100W	1000LM	Φ80*120	360°
G95	SY-FG19	10W	100W	1000LM	Φ95*135	360°
G125	SY-FG20	10W	100W	1000LM	Φ125*175	360°

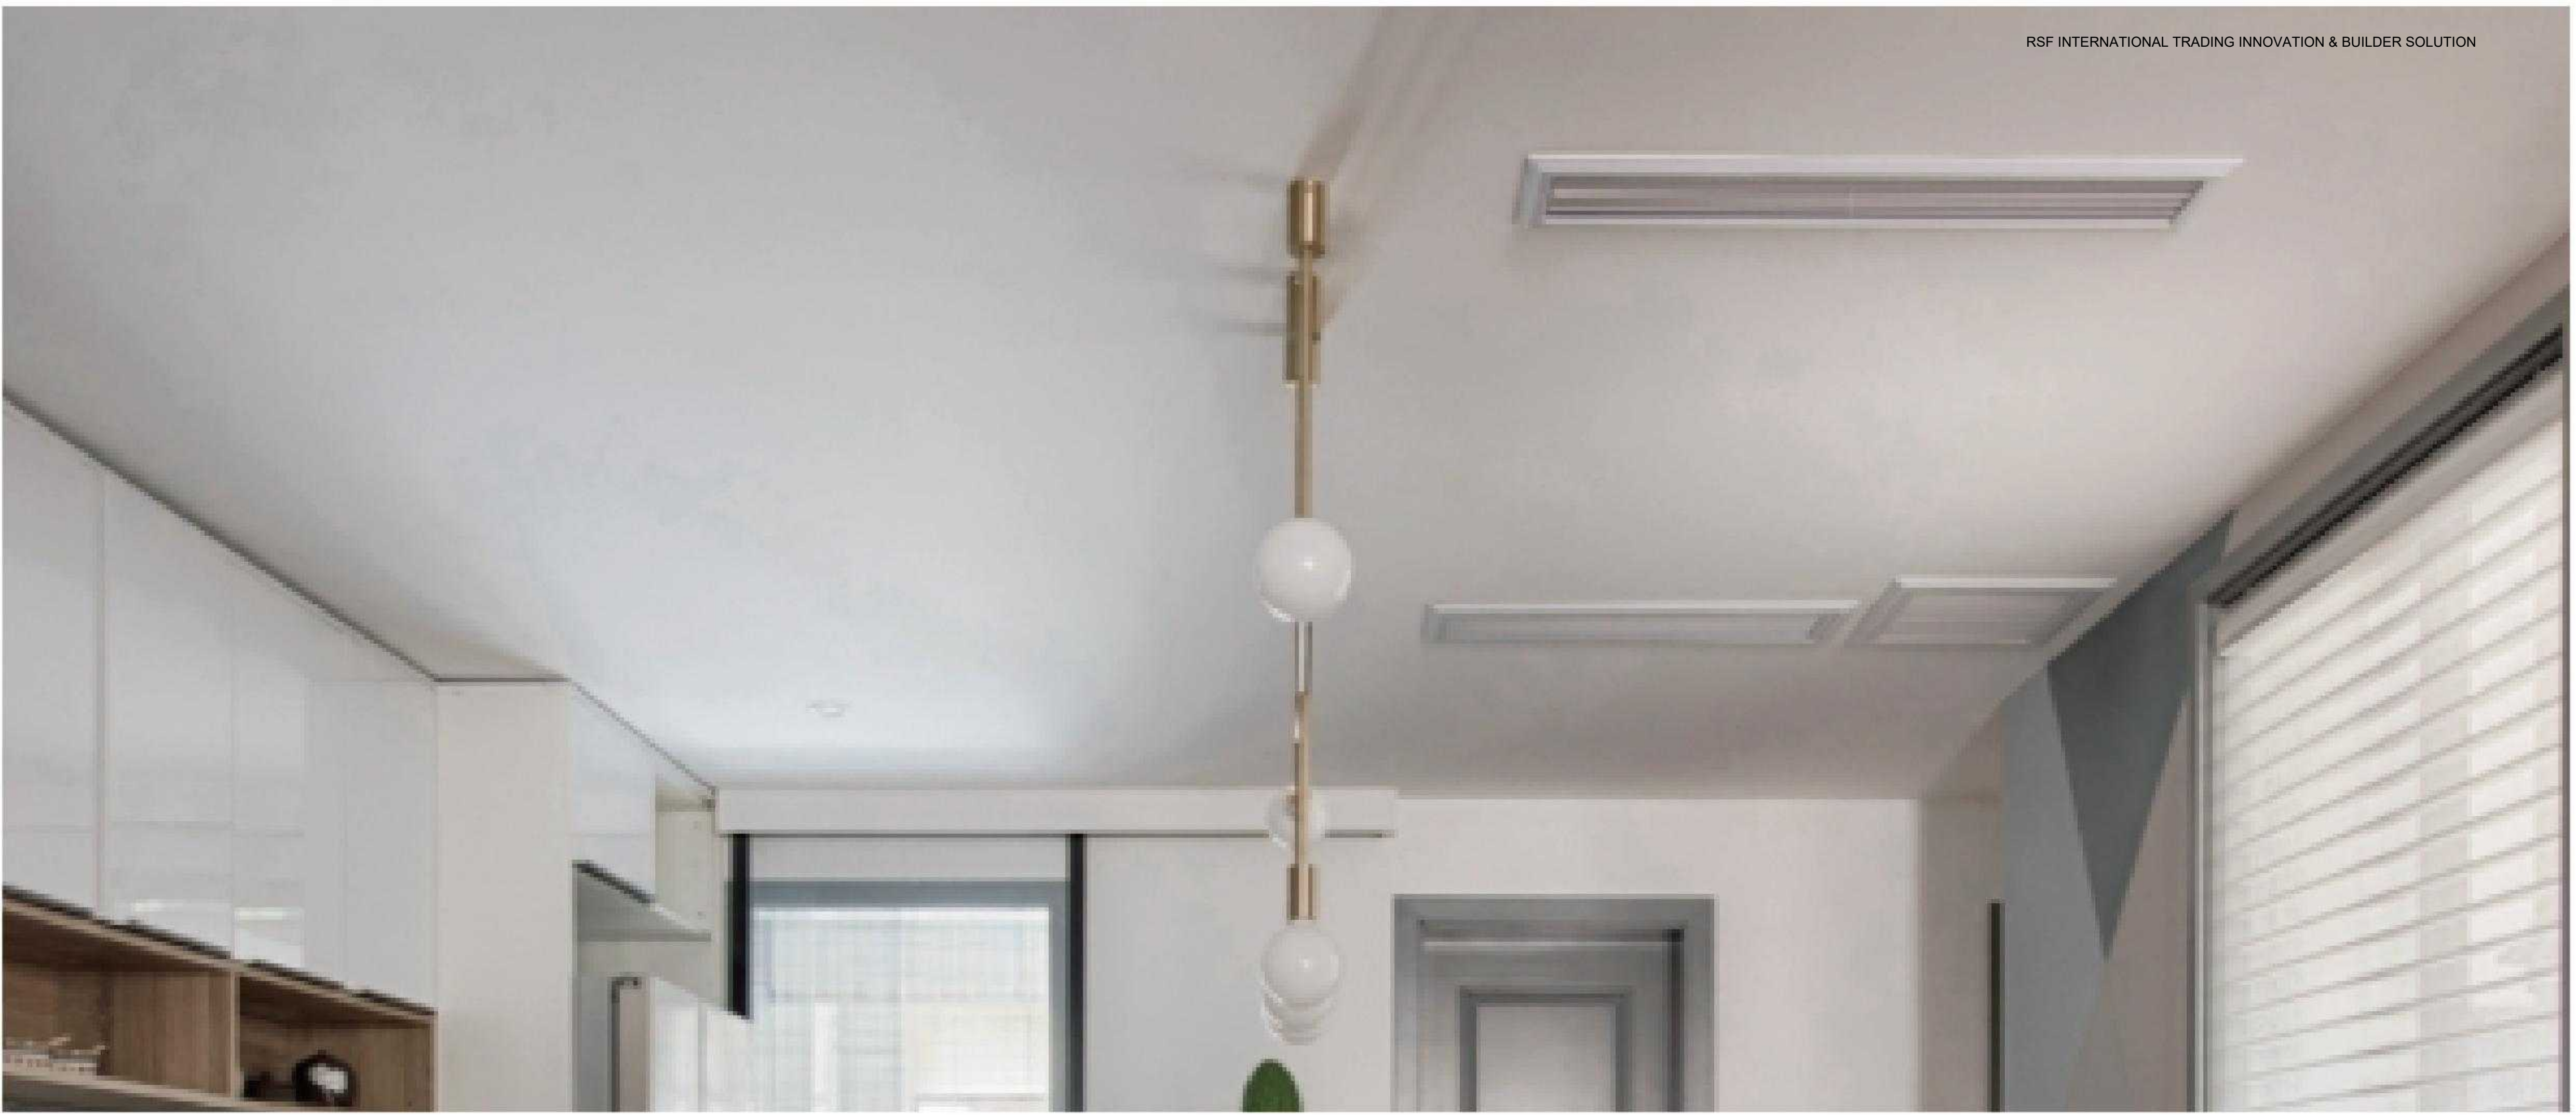

Glass



3000K 4000K 6500K



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-B011	2W	21W	200LM	Φ 45*75	360°
G45	SY-B012	4W	40W	400LM	Φ 45*75	360°
C35/C35L	SY-B013	2W	21W	200LM	Φ 35*97/115	360°
C35/C35L	SY-B014	4W	40W	400LM	Φ 35*97/115	360°
A60	SY-B015	6W	60W	600LM	Φ 60*108	360°
A60	SY-B016	8W	80W	800LM	Φ 60*108	360°



Glass



3000K 4000K 6500K



ErP RoHS SAA BSCI

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	SYF-A60	4W	40W	320LM	Φ 60*108	360 °
ST64	SYS-ST64	4W	40W	320LM	Φ 64*142	360 °
G95	SYS-G95	4W	40W	320LM	Φ 95*135	360 °

LED Colorful Bulb





A60



G45

Plastic+Alu.

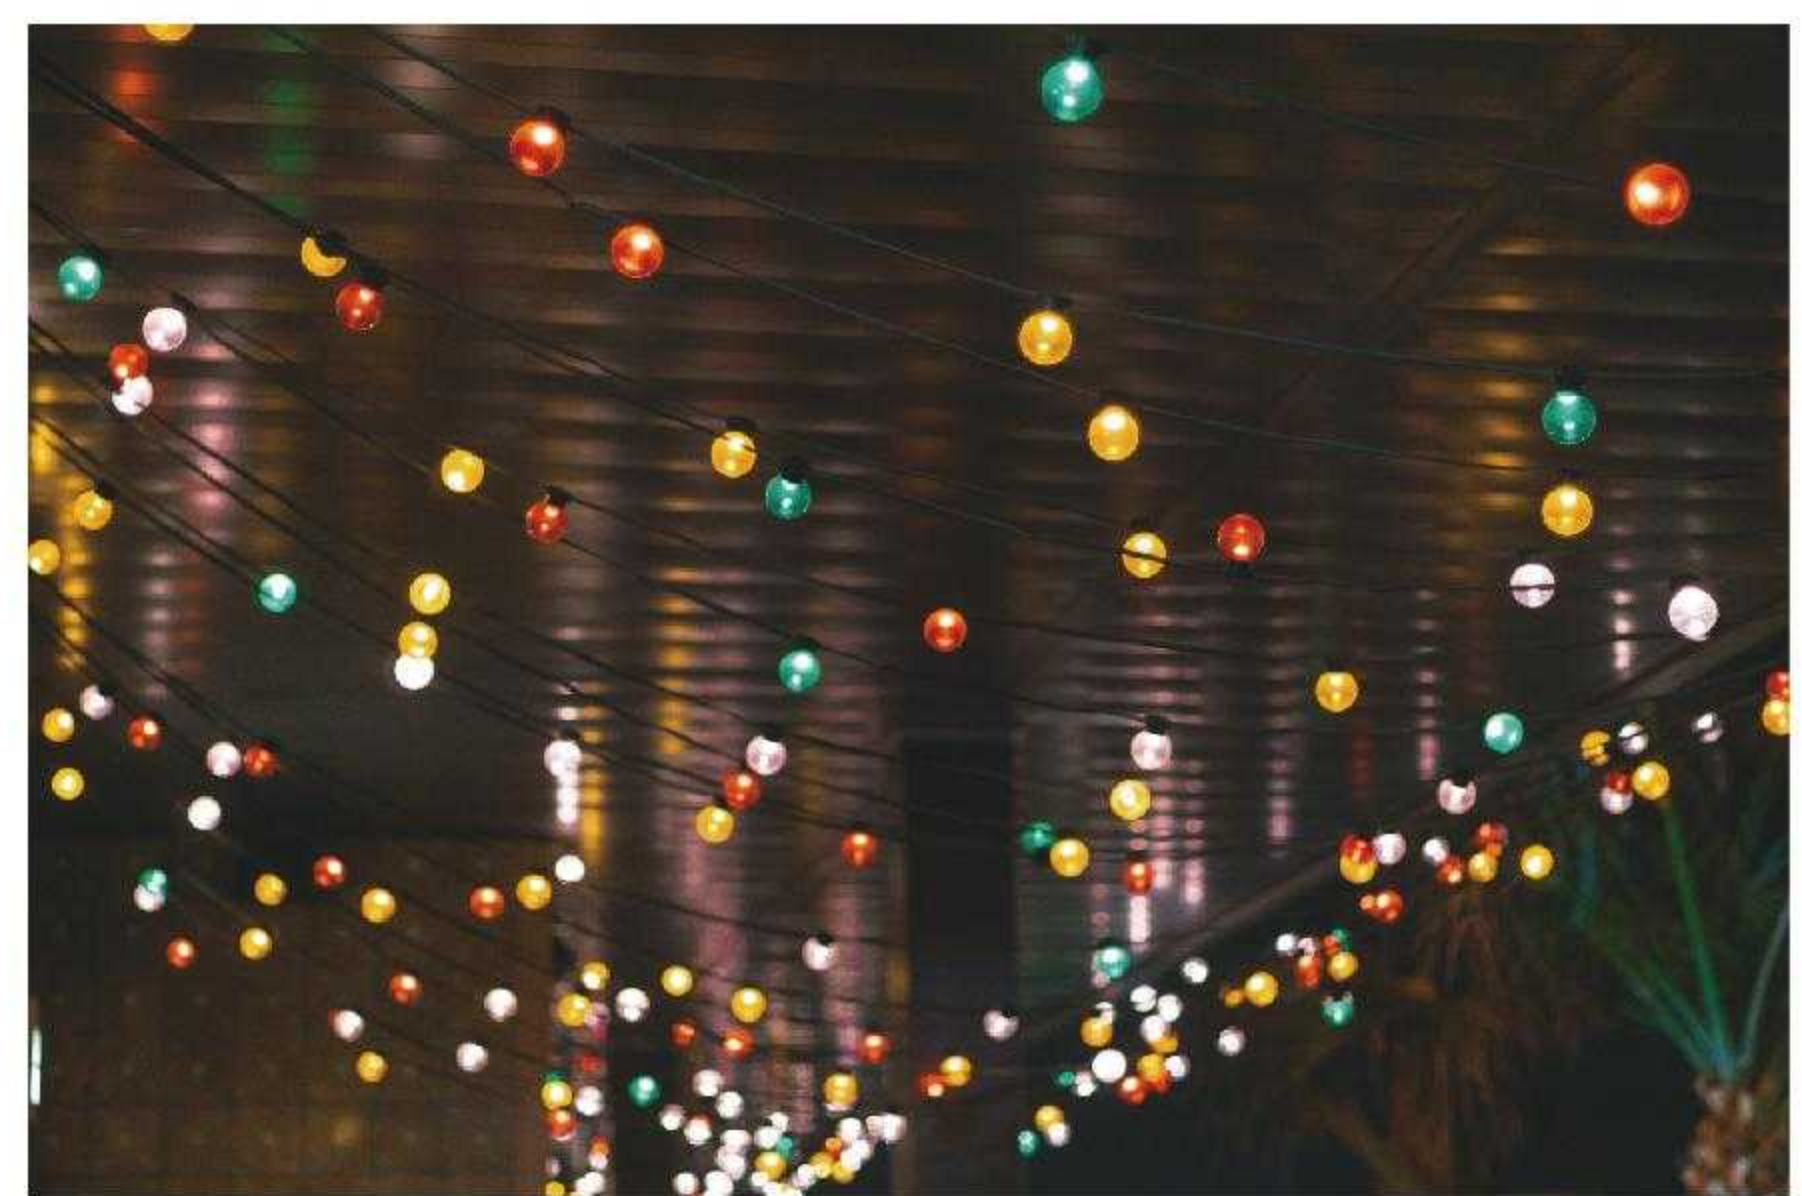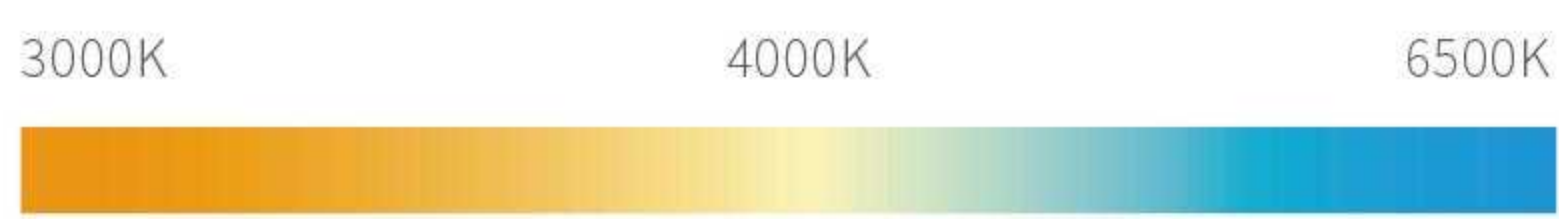

ErP RoHS SAA BSCI

DIMMABLE
 Ra > 80
Ra > 90
 80~150 LM/W
 PF>0.5
PF>0.7
PF>0.9
 Voltage
AC100~240V
AC220~240V
AC170~250V
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	A60-B22-1W	1W	10W	55LM	Φ60*103	360°
G45	G45-E27-1W	1W	10W	55LM	Φ45*69	360°


LED Ceiling Bulb



Plastic

Product Features

- High efficiency and long lifetime
- Eco-friendly, no mercury, noradiation
- Not for emergency or exit lights

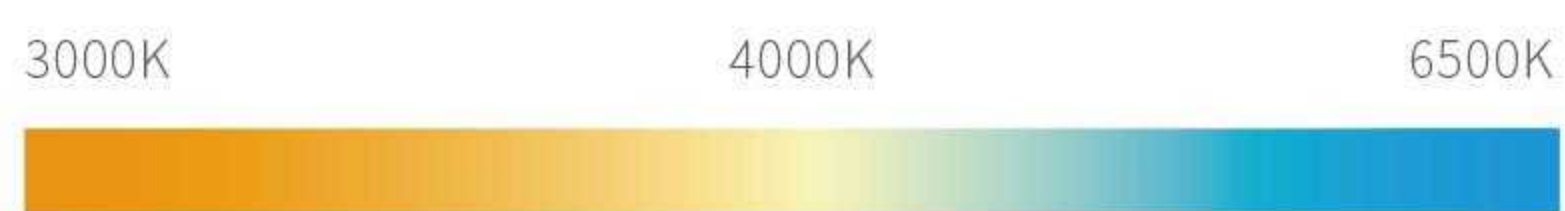

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~260V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
R150	SYUFO-01	18W	100W	1820LM	Φ 150*96	120°
R220	SYUFO-02	24W	135W	2490LM	Φ 220*121	120°
R260	SYUFO-03	36W	240W	3650LM	Φ 260*123	120°

2023

LED Spotlight

Environmental protection, energy saving.

LED Spotlight



R39



R50



R63



R80

Plastic+Alu.

Application

- Decorative--Living room, Kitchen, Bedroom, etc.
- Operating temperature:-20°C~40°C
- Not for emergency or exit lights



3000K 4000K 6500K



DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
R39	SY-R011	3W	25W	240LM	Φ 39*68	120 °
R50	SY-R012	5W	35W	400LM	Φ 50*85	120 °
R63	SY-R013	8W	50W	640LM	Φ 63*101	120 °
R80	SY-R014	9W	55W	720LM	Φ 80*112	120 °

LED Spotlight

Plastic+Alu.

3000K 4000K 6500K



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P021	8W	60W	720LM	Φ 63*H82	12°/24°/38°
PAR30	SY-P022	12W	80W	1080LM	Φ 95*H95	12°/24°/38°
PAR38	SY-P023	16W	110W	1440LM	Φ 120*H128	12°/24°/38°

Plastic+Alu.

3000K 4000K 6500K



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P021	8W	60W	720LM	Φ 63*H82	12°/24°/38°
PAR30	SY-P022	12W	80W	1080LM	Φ 95*H95	12°/24°/38°
PAR38	SY-P023	16W	110W	1440LM	Φ 120*H128	12°/24°/38°

LED Spotlight

Plastic+Alu.



3000K 4000K 6500K



ErP RoHS SAA BSCI

DIMMABLE Ra > 80 Ra > 90 80~150 LM/W PF>0.5 PF>0.7 PF>0.9 Voltage AC100~240V AC220~240V AC170~250V 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P041	8W	60W	720LM	Φ 63*H82	110°
PAR30	SY-P042	12W	80W	1080LM	Φ 95*H95	110°
PAR38	SY-P043	16W	110W	1440LM	Φ 120*H128	110°

Plastic+Alu.



3000K 4000K 6500K



ErP RoHS SAA BSCI

DIMMABLE Ra > 80 Ra > 90 80~150 LM/W PF>0.5 PF>0.7 PF>0.9 Voltage AC100~240V AC220~240V AC170~250V 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
BR20	SY-BR11	8W	60W	720LM	Φ 63*H98	120°
BR30	SY-BR12	12W	80W	1080LM	Φ 95*H131	120°
BR38	SY-BR13	16W	110W	1440LM	Φ 120*H152	120°

LED Spotlight

Plastic+Alu.



3000K 4000K 6500K



ErP RoHS SAA BSCI

DIMMABLE Ra > 80
Ra > 90 80~150
LM/W PF>0.5
PF>0.7
PF>0.9 Voltage
AC100~240V
AC220~240V
AC170~250V 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P021	8W	60W	720LM	Φ 63*H82	12°/24°/38°
PAR30	SY-P022	12W	80W	1080LM	Φ 95*H95	12°/24°/38°
PAR38	SY-P023	16W	110W	1440LM	Φ 120*H128	12°/24°/38°

Plastic+Alu.



3000K 4000K 6500K




ErP RoHS SAA BSCI

DIMMABLE Ra > 80
Ra > 90 80~150
LM/W PF>0.5
PF>0.7
PF>0.9 Voltage
AC100~240V
AC220~240V
AC170~250V 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P011	8W	60W	720LM	Φ 63*H82	38°
PAR30	SY-P012	12W	80W	1080LM	Φ 95*H95	38°
PAR38	SY-P013	16W	110W	1440LM	Φ 120*H128	38°



Ceramic with lens
Plastic with lens

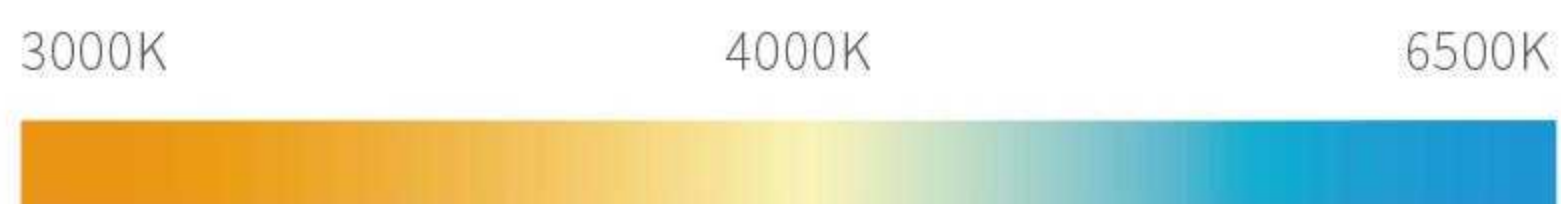

ErP RoHS SAA BSCI

DIMMABLE
 Ra > 80
 Ra > 90
 80~150 LM/W
 PF>0.5
 PF>0.7
 PF>0.9
 Voltage AC100~240V AC220~240V AC170~250V
 25,000H




COB

Model	Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
GU10	SY-GS01	6W	58W	480LM	COB	φ 50*H56	12/24°
GU10	SY-GS02	7W	65W	700LM	COB	φ 50*H56	12/24°
GU10	SY-GS03	8W	70W	800LM	COB	φ 50*H56	12/24°

LED Spotlight

Alu.+PC cover

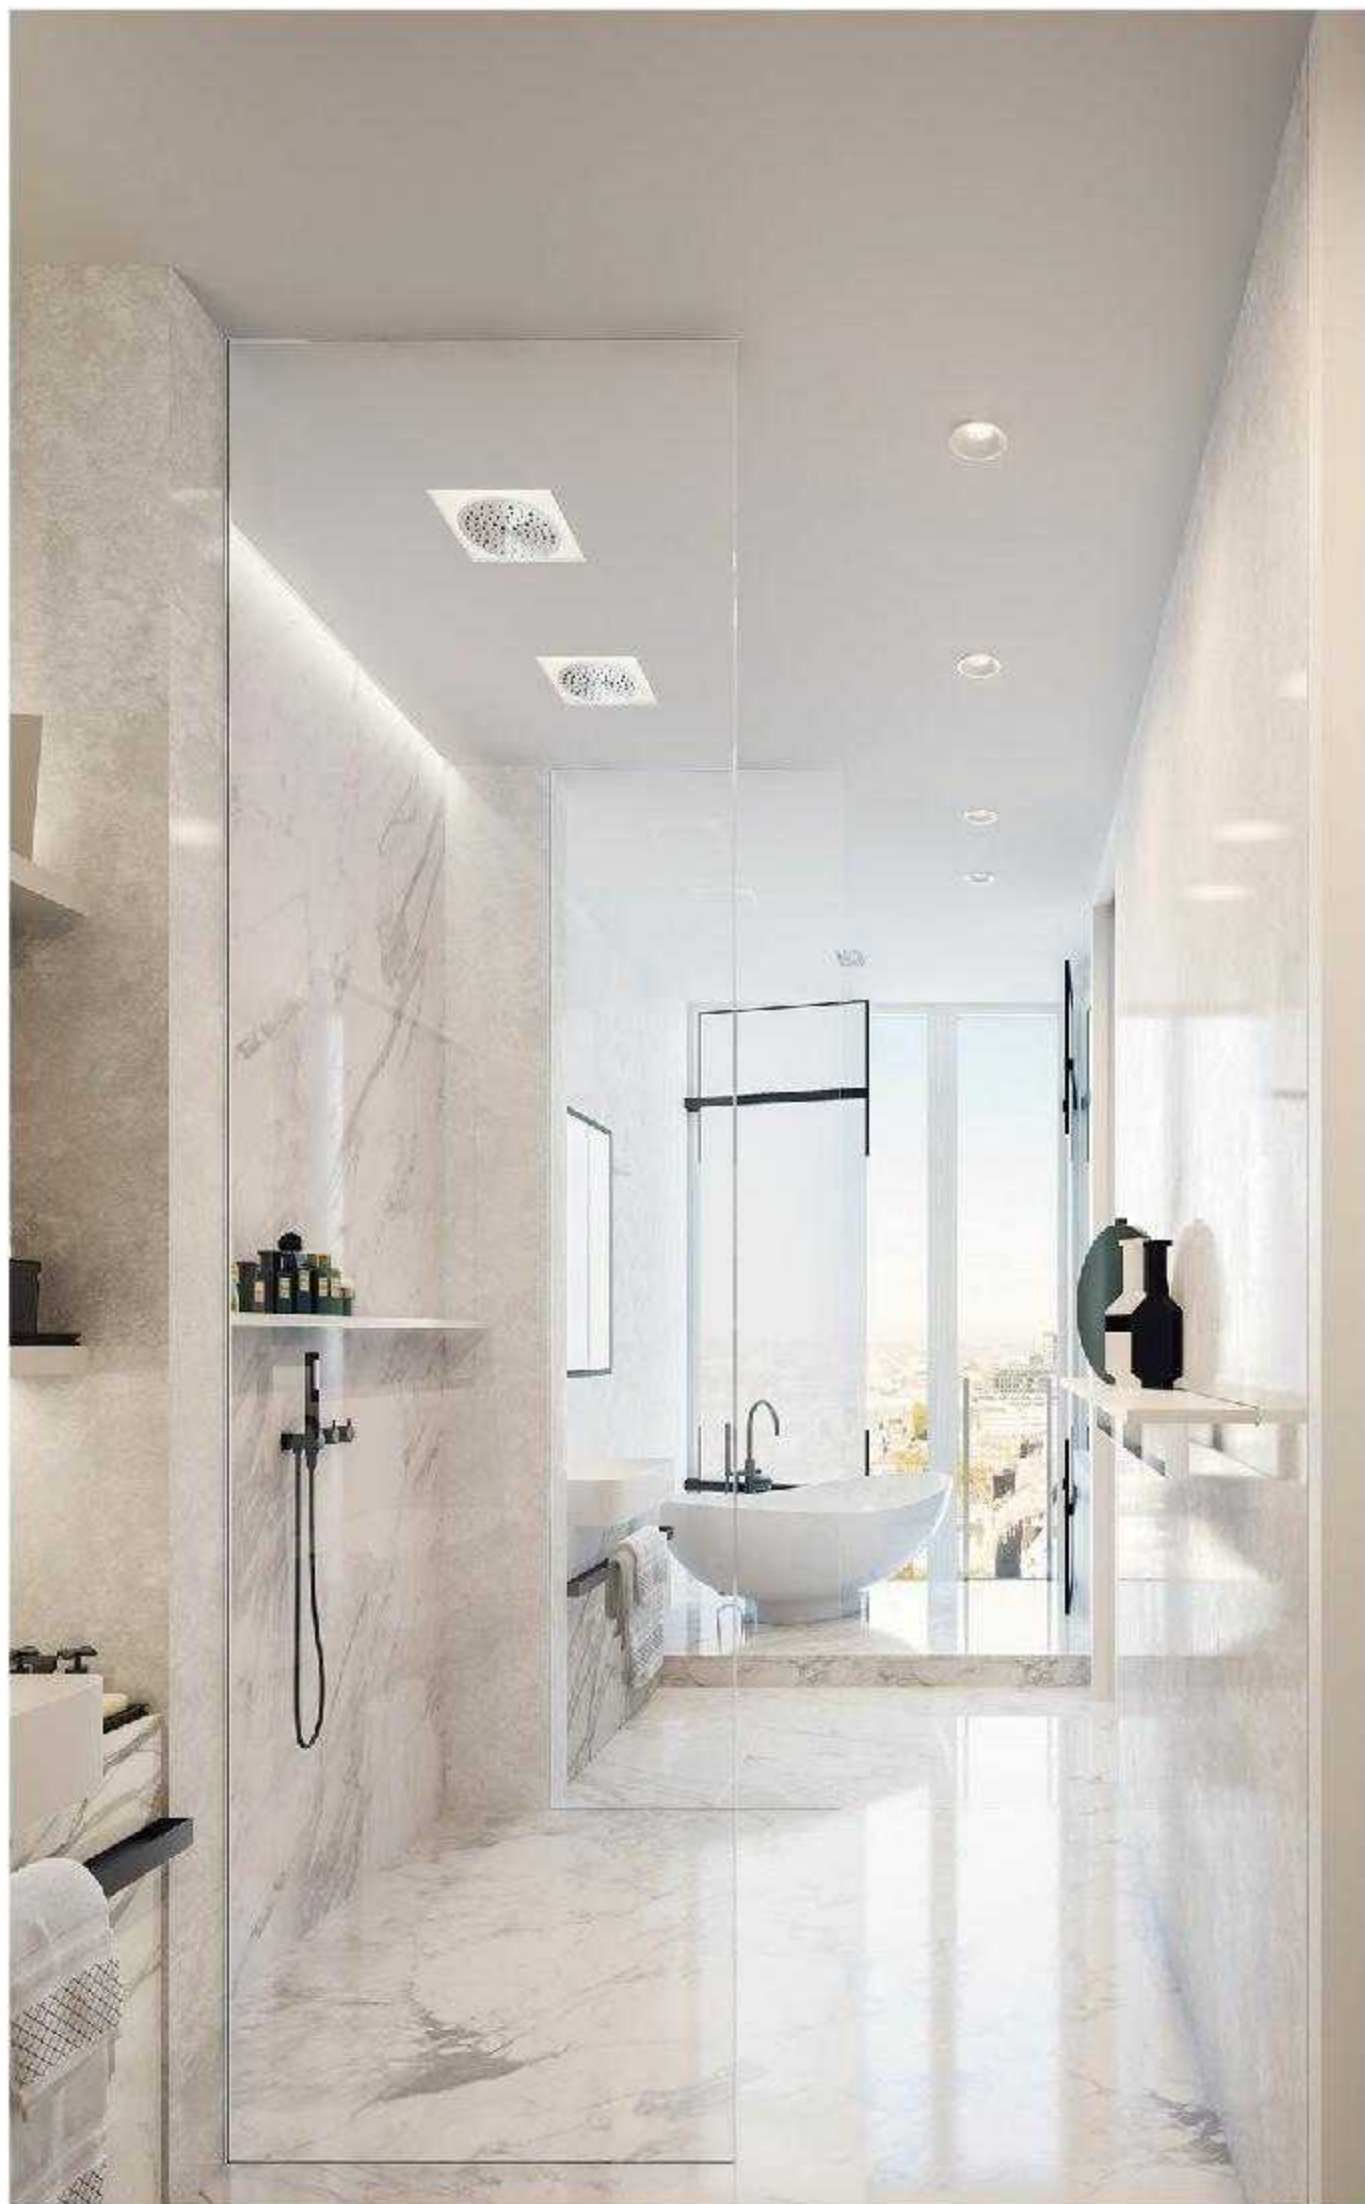


3000K 4000K 6500K




Model	Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
GU10	SY-YT01	5W	40W	450LM	SMD	Φ 50*H56	120°
GU10	SY-YT02	6W	45W	540LM	SMD	Φ 50*H56	120°
GU10	SY-YT03	7W	55W	630LM	SMD	Φ 50*H56	120°
GU10	SY-YT04	5W	40W	450LM	SMD	Φ 50*H56	24°/38°/ 60°
GU10	SY-YT05	6W	45W	540LM	SMD	Φ 50*H56	24°/38°/ 60°
GU10	SY-YT06	7W	55W	630LM	SMD	Φ 50*H56	24°/38 / 60
MR16	SY-YT07	5W	40W	450LM	SMD	Φ 50*H50	120°
MR16	SY-YT08	6W	45W	540LM	SMD	Φ 50*H50	120°
MR16	SY-YT09	7W	55W	630LM	SMD	Φ 50*H50	120°
MR16	SY-YT10	5W	40W	450LM	SMD	Φ 50*H50	24°/38°/ 60°
MR16	SY-YT11	6W	45W	540LM	SMD	Φ 50*H50	24°/38°/ 60°
MR16	SY-YT12	7W	55W	630LM	SMD	Φ 50*H50	24°/38°/60°

LED Spotlight


**Die-casting Alu./
Plastic+Alu.**

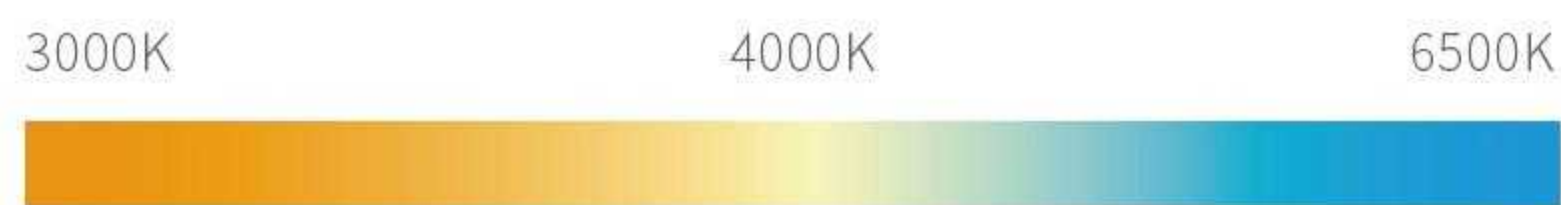

Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
SY-FL01	5W	37W	400LM	SMD	Φ 50*H56	120°
SY-FL02	6W	43W	480LM	SMD	Φ 50*H56	120°
SY-FL03	7W	50W	560LM	SMD	Φ 50*H56	120°
SY-FL04	8W	55W	640LM	SMD	Φ 50*H56	120°
SY-FL05	5W	40W	450LM	COB	Φ 50*H56	38°/60°/120°
SY-FL06	6W	47W	540LM	COB	Φ 50*H56	38°/60°/120°
SY-FL07	7W	53W	630LM	COB	Φ 50*H56	38°/60°/120°
SY-FL08	8W	60W	720LM	COB	Φ 50*H56	38°/60°/120°
SY-GS01	5W	37W	400LM	SMD	Φ 50*H56	120°
SY-GS02	6W	43W	480LM	SMD	Φ 50*H56	120°
SY-GS03	7W	50W	560LM	SMD	Φ 50*H56	120°

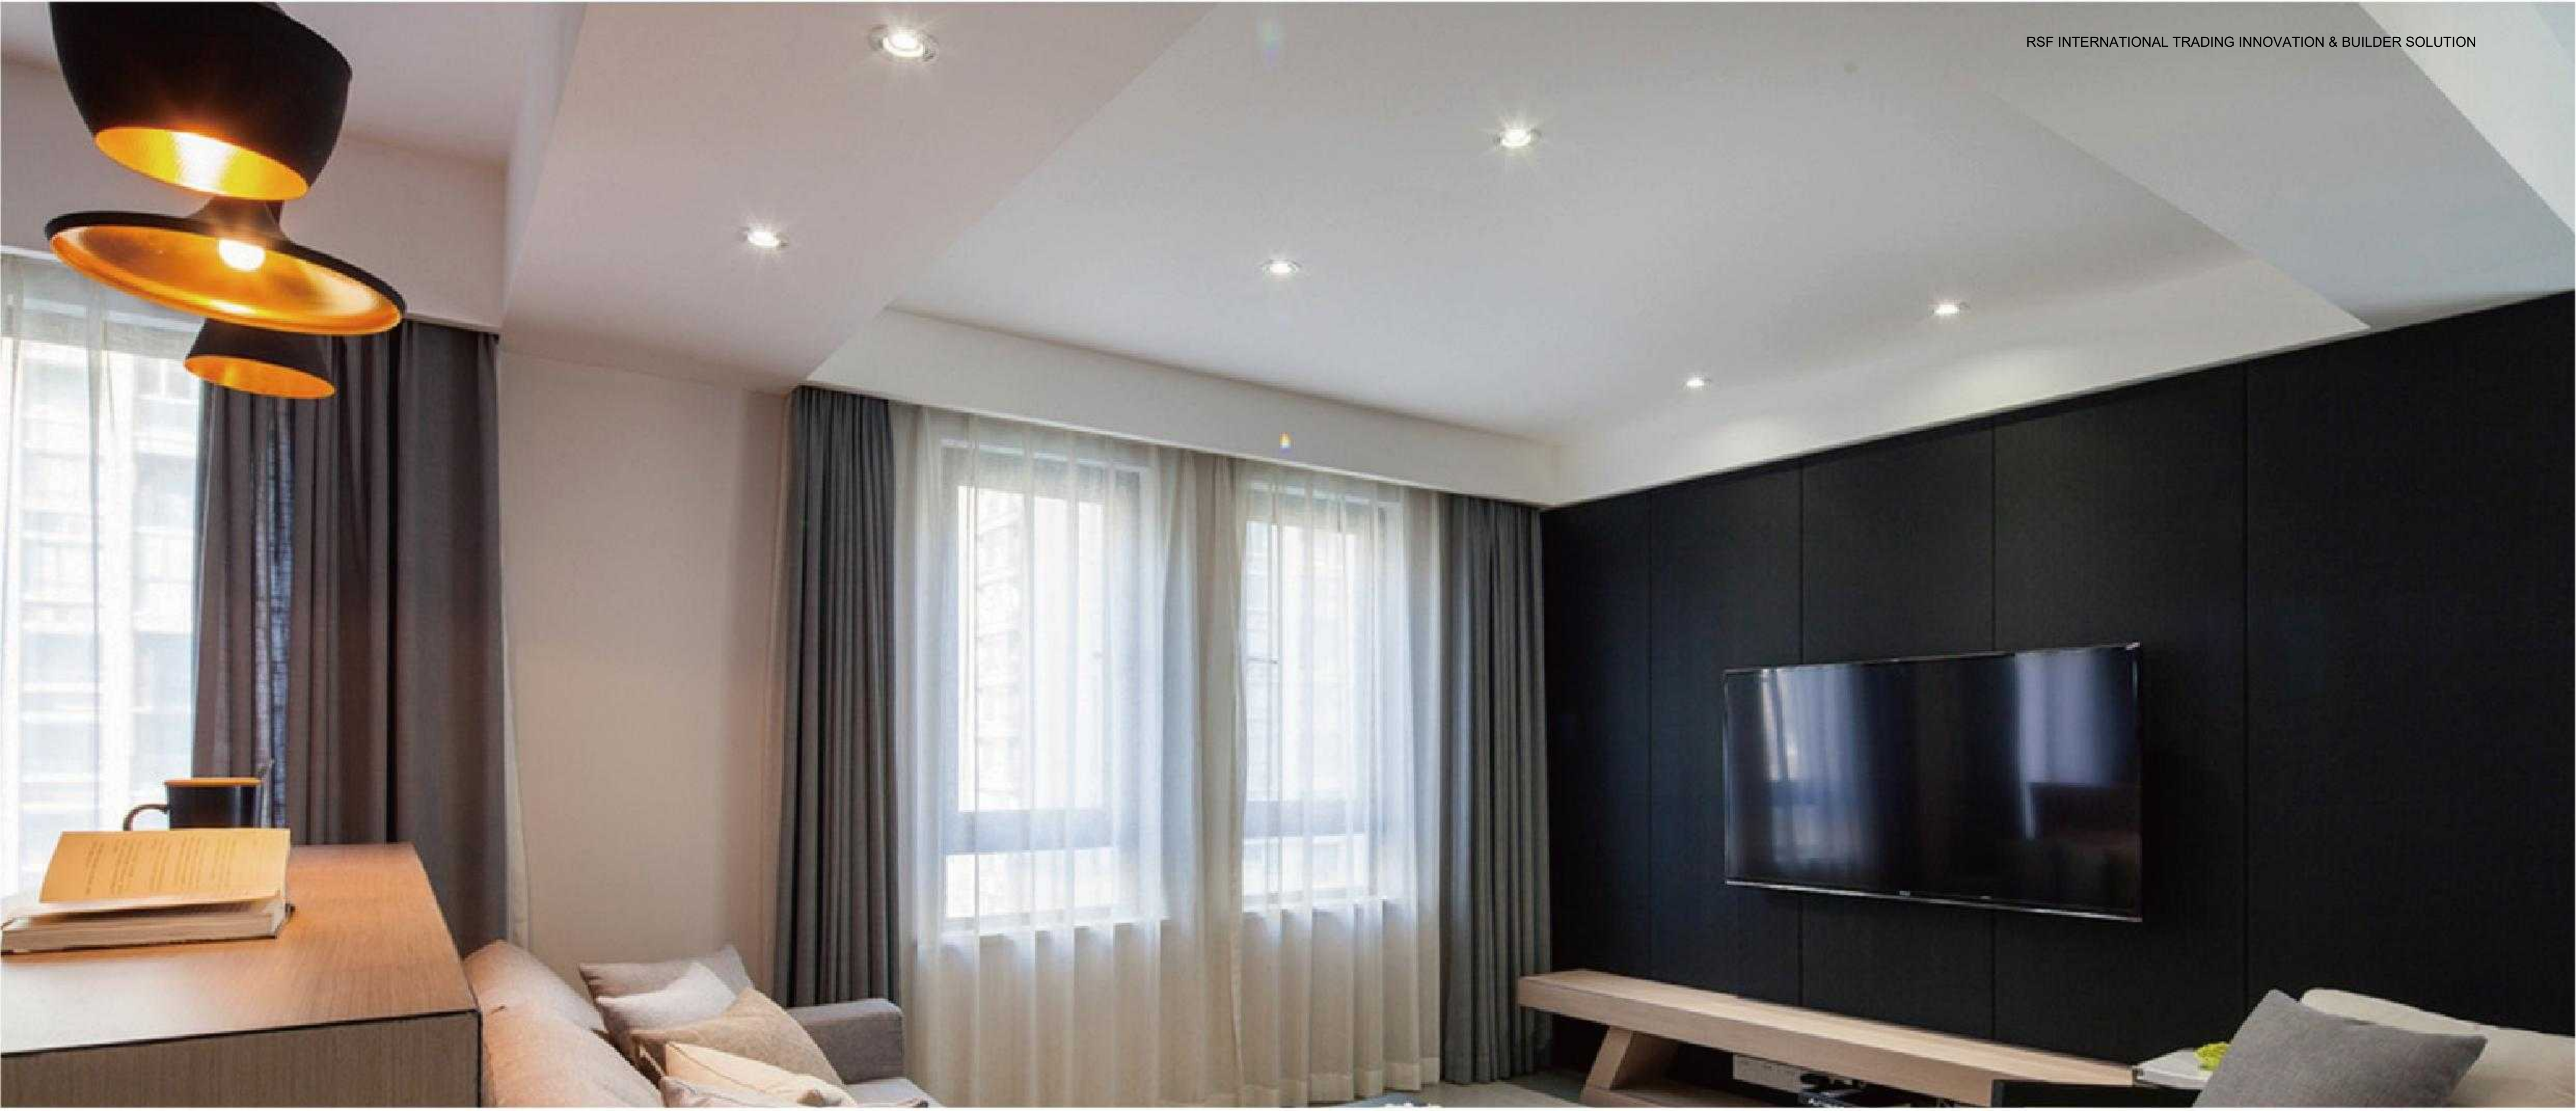

Die-casting Alu.

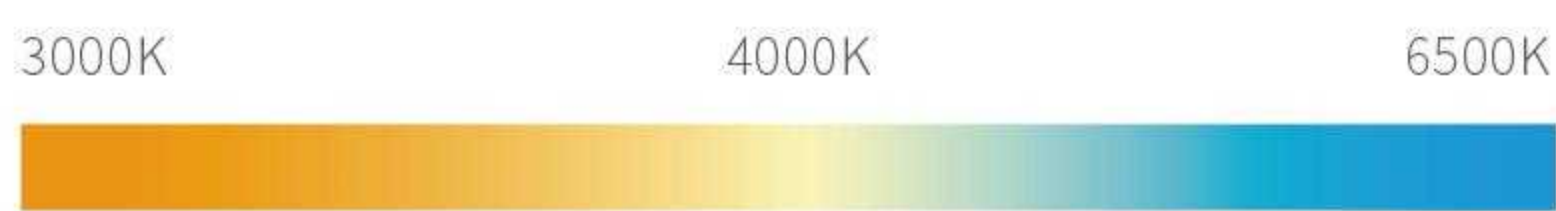







 DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100-240V AC220-240V AC170-250V	 25,000H
--	--------------------	----------------	----------------------------	---	--

Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
SY-FH01	7W	53W	630LM	COB	GU10	φ 50*H57	38°/60°
SY-FH02	7W	53W	630LM	COB	MR16	φ 50*H50	38°/60°
SY-FH03	7W	53W	630LM	COB	GU10	φ 50*H57	38°/60°
SY-FH04	7W	53W	630LM	COB	MR16	φ 50*H50	38°/60°



Glass

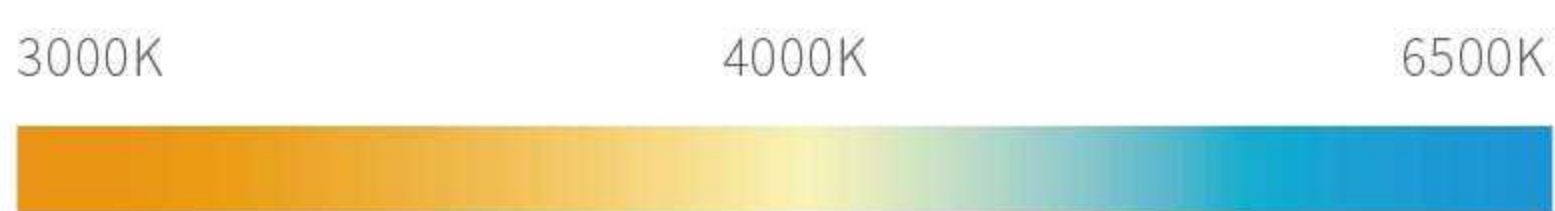

ErP RoHS SAA BSCI

DIMMABLE
Ra > 80
Ra > 90
80~150 LM/W
PF>0.5
PF>0.7
PF>0.9
Voltage
AC100~240V
AC220~240V
AC170~250V
25,000H



Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
SY-BL01	3W	25W	240LM	COB	φ 50*H57	38°/60°/120°
SY-BL02	4W	30W	320LM	SMD	φ 50*H57	120°
SY-BL03	5W	37W	400LM	SMD	φ 50*H57	120°

LED Spotlight

Glass/Plastic



3000K 4000K 6500K



Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
SY-MN011	2W	15W	160Lm	SMD	MR11	φ 35*H35	38°
SY-MN012	2W	15W	160Lm	SMD	GU10	φ 35*H50	38°
SY-MN013	2W	15W	160Lm	SMD	MR11	φ 35*H35	38°
SY-MN014	2W	15W	160Lm	SMD	GU10	φ 35*H50	38°



**Plastic+Alu./
Die-casting Alu.**



3000K 4000K 6500K




DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~260V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen(Φuse)	LED	Base	Size(mm)	Beam Angle
AR111	SY-AR030	8W	48W	850LM	COB	GU10	Φ 111*H65	12°/24°/40°
AR111	SY-AR031	12W	85W	1100LM	COB	GU10	Φ 111*H65	12°/24°/40°
AR111	SY-AR032	15W	100W	1350LM	COB	GU10	Φ 111*H65	12°/24°/40°

LED Spotlight

Plastic+Alu.

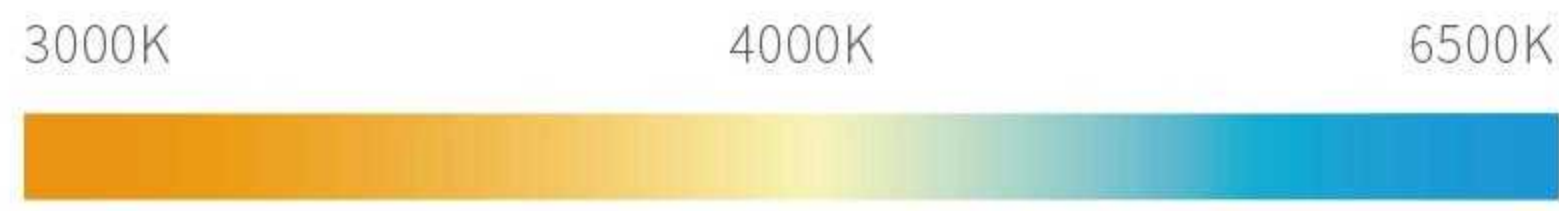


ErP RoHS SAA BSCI

DIMMABLE
 Ra > 80
 Ra > 90
 80~150 LM/W
 PF>0.5
 PF>0.7
 PF>0.9
 Voltage
 AC100-240V
 AC220-240V
 AC170-250V
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
AR111	SY-AR013	12W	80W	1080LM	SMD	G53	φ 111*H65	36°
AR111	SY-AR014	15W	100W	1350LM	SMD	G53	φ 111*H65	36°


Plastic+Alu.

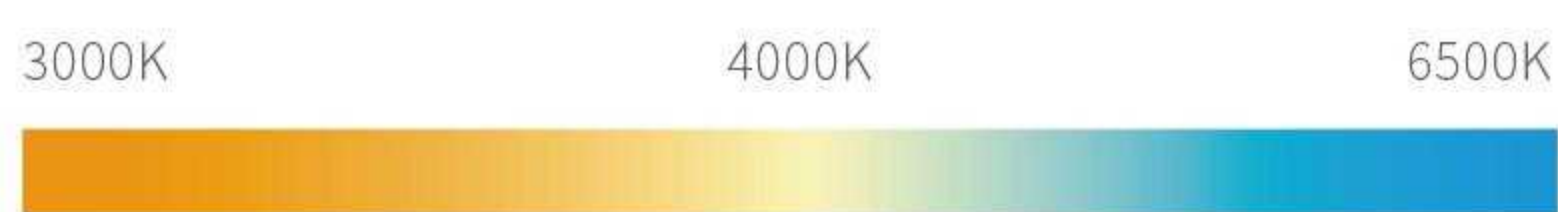

ErP RoHS SAA BSCI

DIMMABLE
 Ra > 80
 Ra > 90
 80~150 LM/W
 PF>0.5
 PF>0.7
 PF>0.9
 Voltage
 AC100-240V
 AC220-240V
 AC170-250V
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
AR111	SY-AR011	12W	80W	1080LM	SMD	GU10	φ 111*H65	36°
AR111	SY-AR012	15W	100W	1350LM	SMD	GU10	φ 111*H65	36°
AR111	SY-AR021	12W	80W	1080LM	COB	GU10	φ 111*H65	36°
AR111	SY-AR022	15W	100W	1350LM	COB	GU10	φ 111*H65	36°

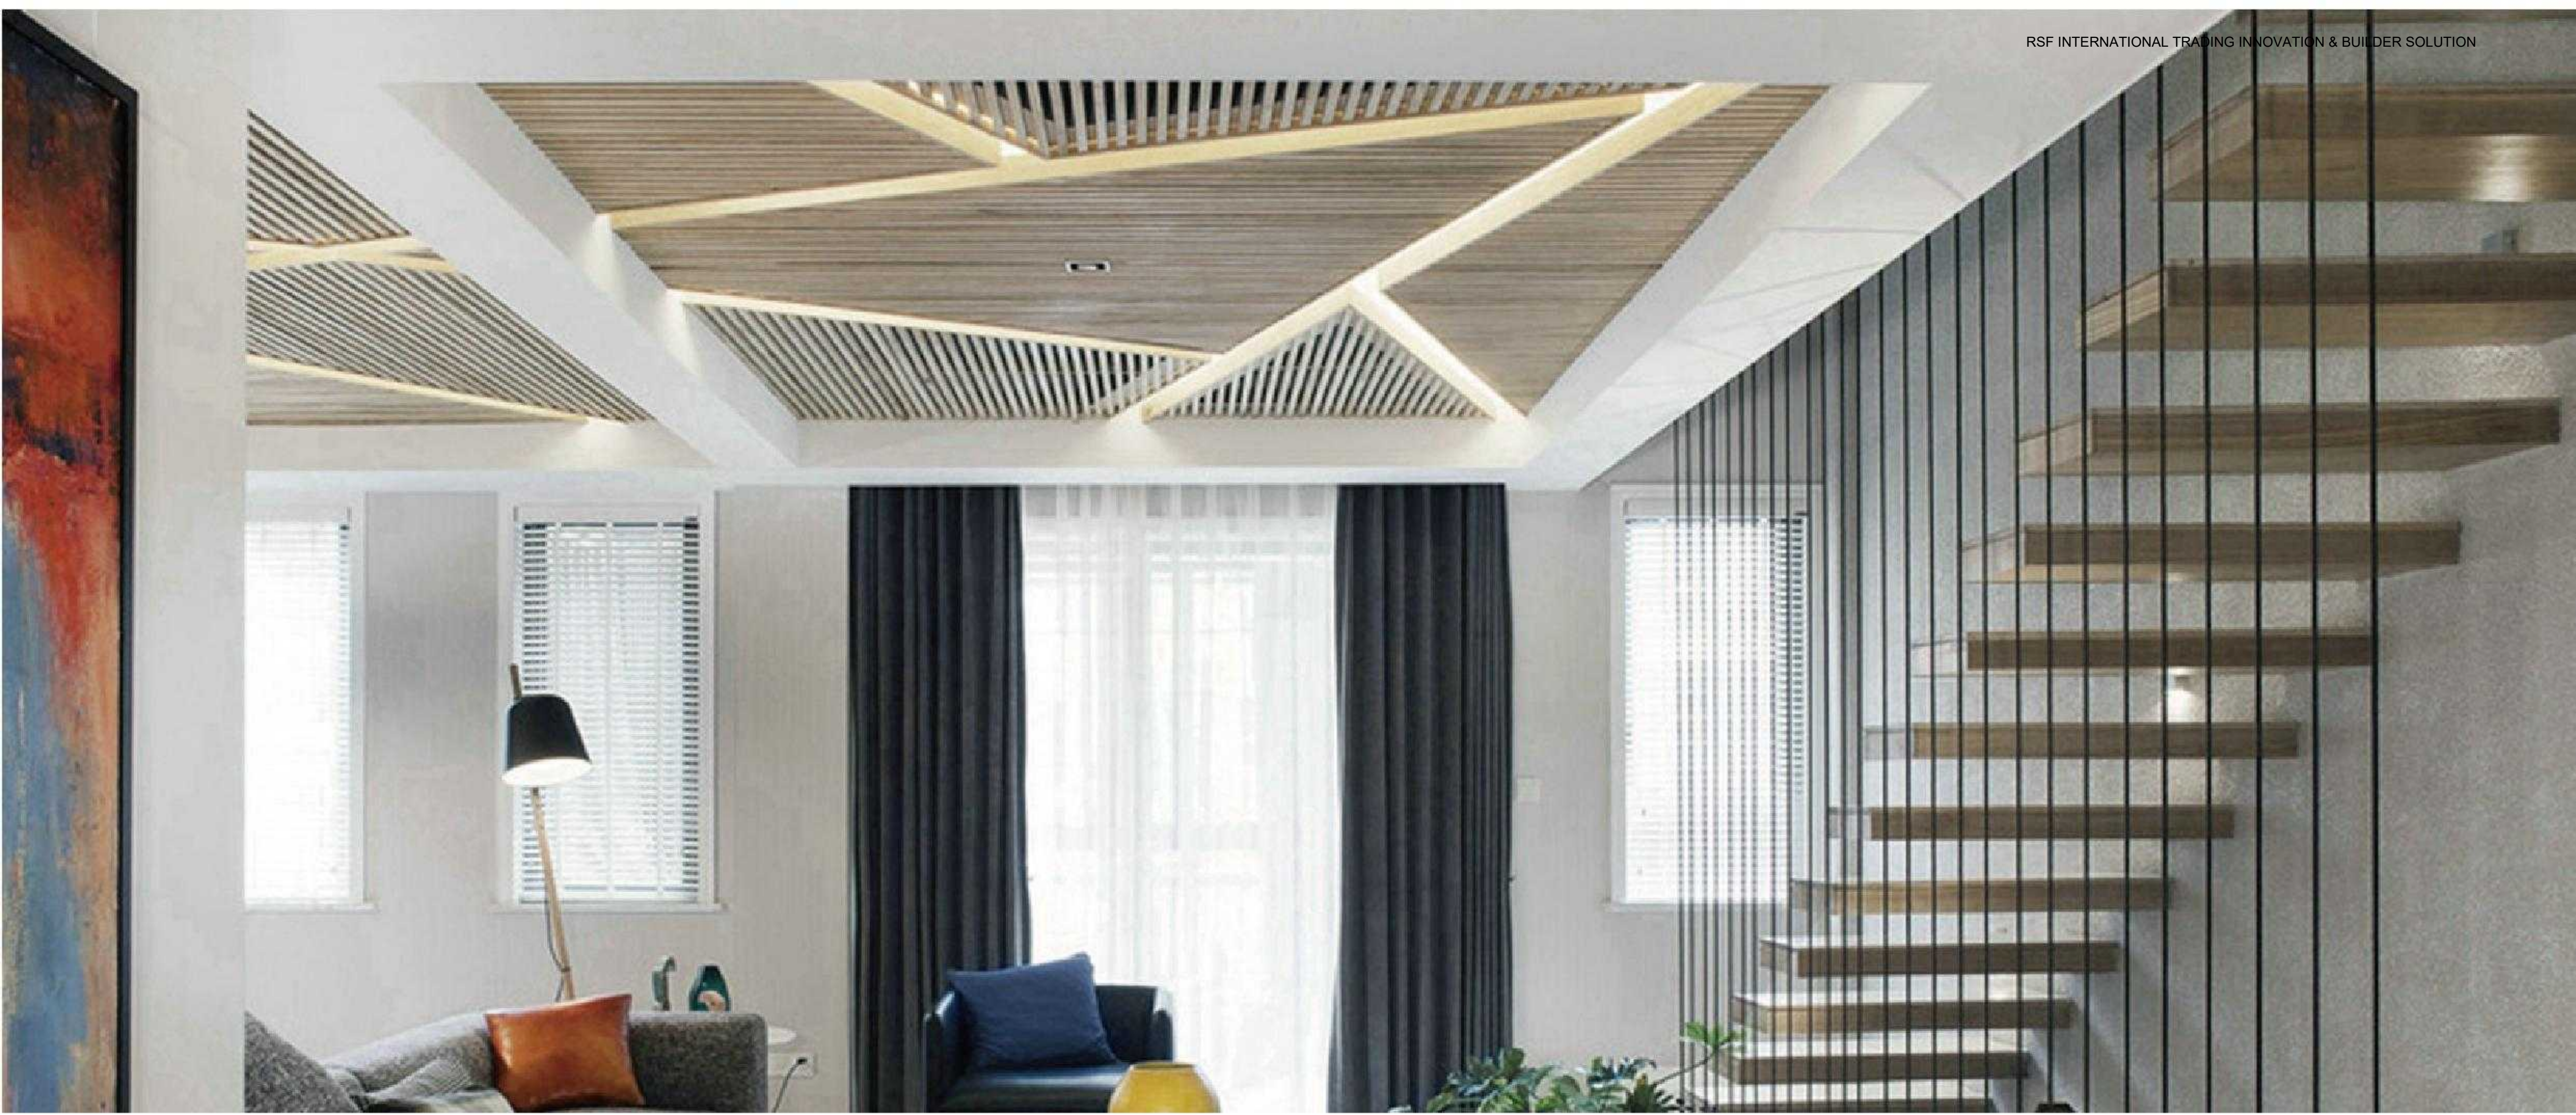

**Plastic/
Die-casting Alu.**



GX53

3000K 4000K 6500K



ErP RoHS SAA BSCI








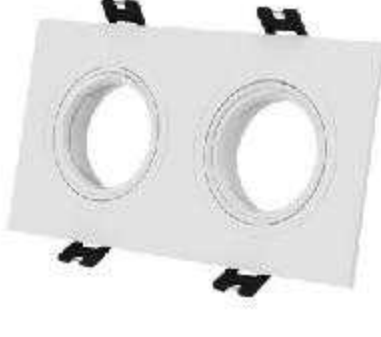









































Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
GX53	SY-CG001	4W	30W	320LM	Φ 74*24	120°
GX53	SY-CG002	6W	40W	480LM	Φ 74*24	120°
GX53	SY-CG003	9W	60W	720LM	Φ 74*24	120°
GX53	SY-CG004	10W	60W	800LM	Φ 74*24	120°
GX53	SY-CG005	12W	75W	960LM	Φ 74*24	120°

List of accessories



2023

G4 G9

Environmental protection, energy saving.




Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size		
1	G9-P-005	3W	350lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
	G9-P-006	3.4W	400lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
	G9-P-007	3.5W	410lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
2	G9-P-009	4W	470lm	0.4	G9	Ra > 80	220-240V	19x56mm	
	G9-P-010	4.8W	550lm	0.4	G9	Ra > 80	220-240V	19x56mm	
3	G9-P-011	4.8W	638lm	0.4	G9	Ra > 80	220-240V	19x56mm	
4	G9-P-012	3.3W	410lm	0.4	G9	Ra > 80	220-240V	19x59mm	
5	G9-P-013	3.8W	470lm	0.4	G9	Ra > 80	220-240V	19x59mm	




Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size		
6	G9-P-001	3.5W	320lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
7	G9-P-002	3W	350lm	0.4	G9	Ra > 80	220-240V	16x50mm	
	G9-DIM-001	3W	300lm	0.4	G9	Ra > 80	220-240V	16x50mm	
8	G9-P-014	3.5W	400lm	0.4	G9	Ra > 80	220-240V	17x53mm	
	G9-DIM-004	3.5W	400lm	0.4	G9	Ra > 80	220-240V	17x53mm	
9	G9-P-015	5.5W	600lm	0.4	G9	Ra > 80	220-240V	19x60mm	
	G9-DIM-005	4W	450lm	0.4	G9	Ra > 80	220-240V	19x60mm	
10	G9-P-016	6.5W	700lm	0.4	G9	Ra > 80	220-240V	23x66mm	
	G9-DIM-006	5W	550lm	0.4	G9	Ra > 80	220-240V	23x66mm	



Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size	
11	G9-G-001	2W	200lm	0.4	G9	Ra > 80	220-240V	13.3x50mm
12	G9-G-002	4W	470lm	0.4	G9	Ra > 80	220-240V	14.5x60mm
13	G9-G-003	4.5W	550lm	0.4	G9	Ra > 80	220-240V	14.5x60mm
14	G9-P-004	2.5W	200lm	0.4	G9	Ra > 80	220-240V	16x48mm
15	G9-P-017	2W	220lm	0.4	G9	Ra > 80	220-240V	15.5x44.5mm

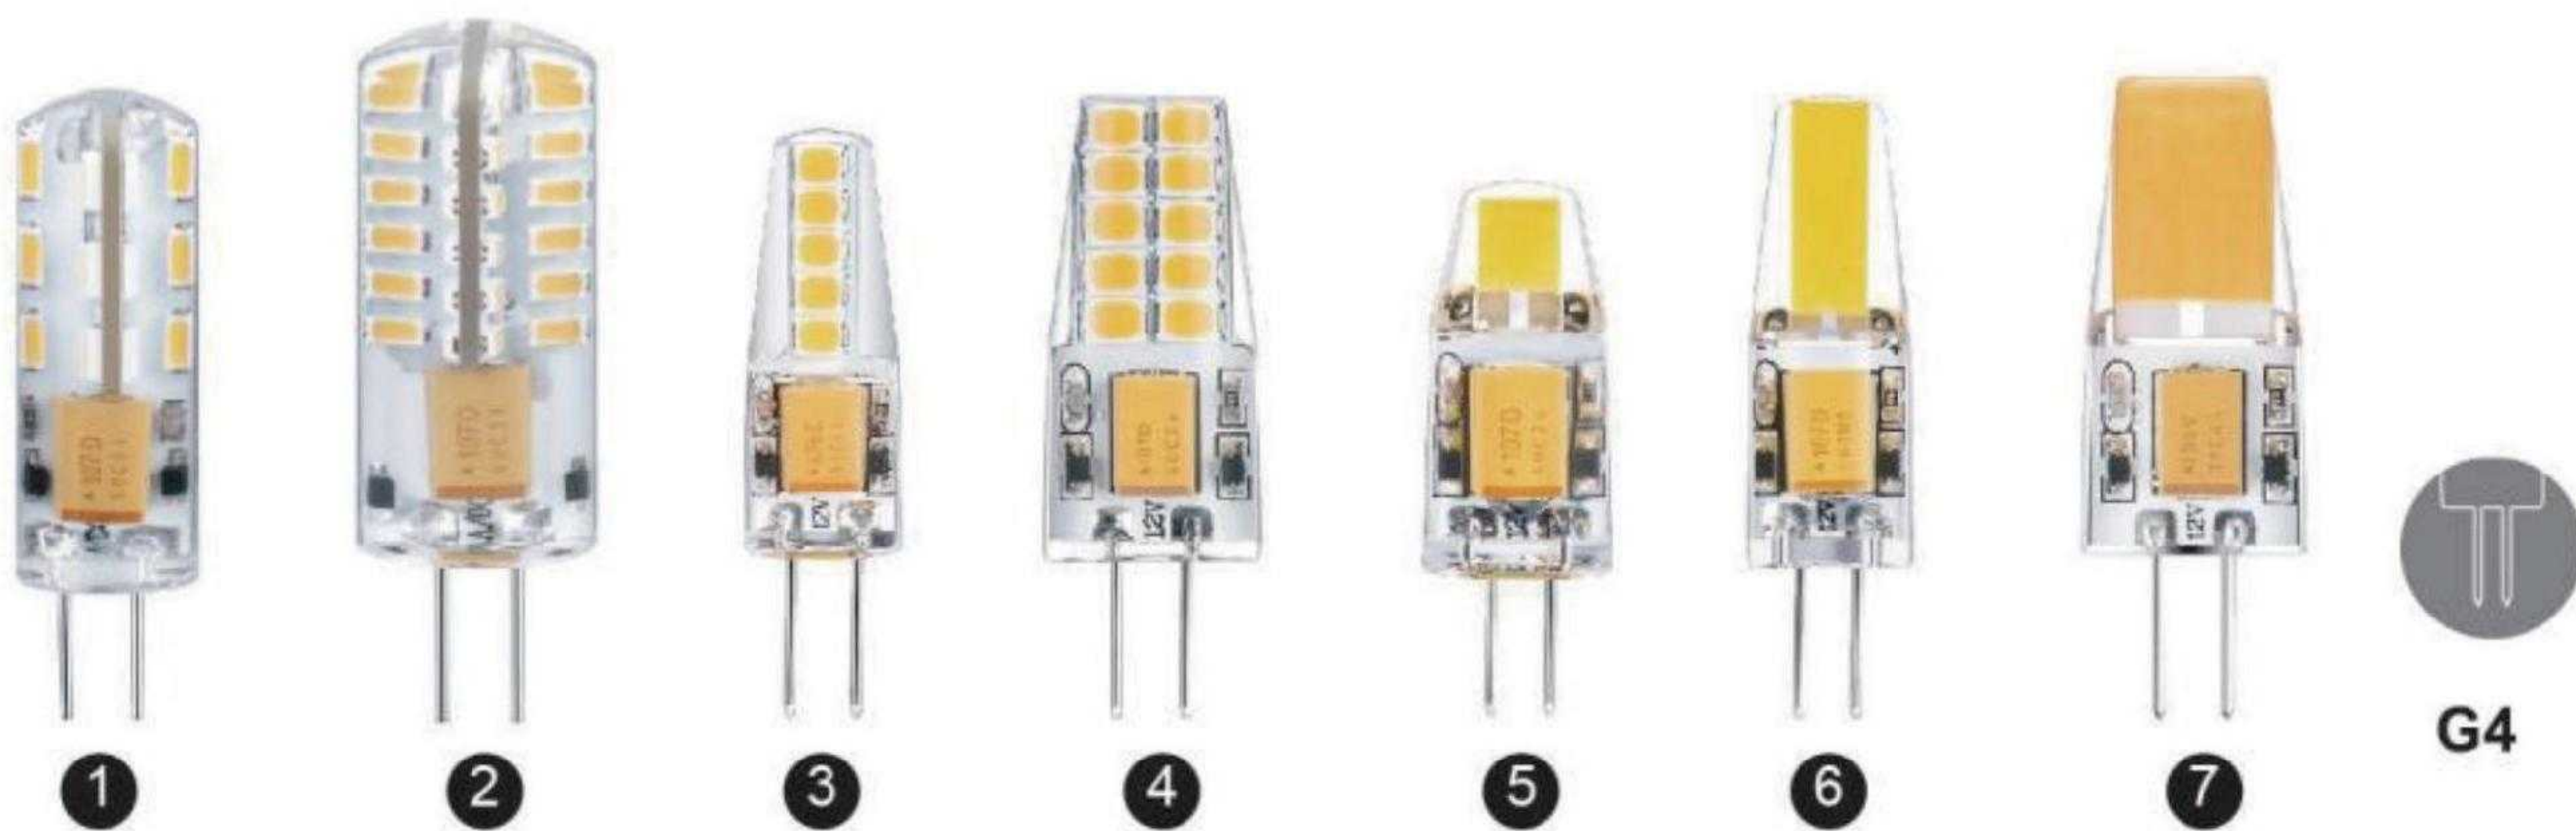

Item No.	Watt	Lumen	PF(AC)	Base	CRI	Voltage	Size	
1	G4-S-001	1.2W	100lm	0.7	G4	Ra > 80	AC/DC12V	10x36mm
2	G4-S-002	1.8W	150lm	0.7	G4	Ra > 80	AC/DC12V	13x36mm
3	G4-S-003	2W	200lm	0.7	G4	Ra > 80	AC/DC12V	10.5x37mm
4	G4-S-004	2.5W	250lm	0.7	G4	Ra > 80	AC/DC12V	12.5x37mm
5	G4-S-0705	1.2W	90lm	0.7	G4	Ra > 80	AC/DC12V	9.6x30.5mm
6	G4-S-1505	1.5W	150lm	0.7	G4	Ra > 80	AC/DC12V	9.6x37mm
7	G4-S-1508	2.5W	250lm	0.7	G4	Ra > 80	AC/DC12V	12.5x37.5mm

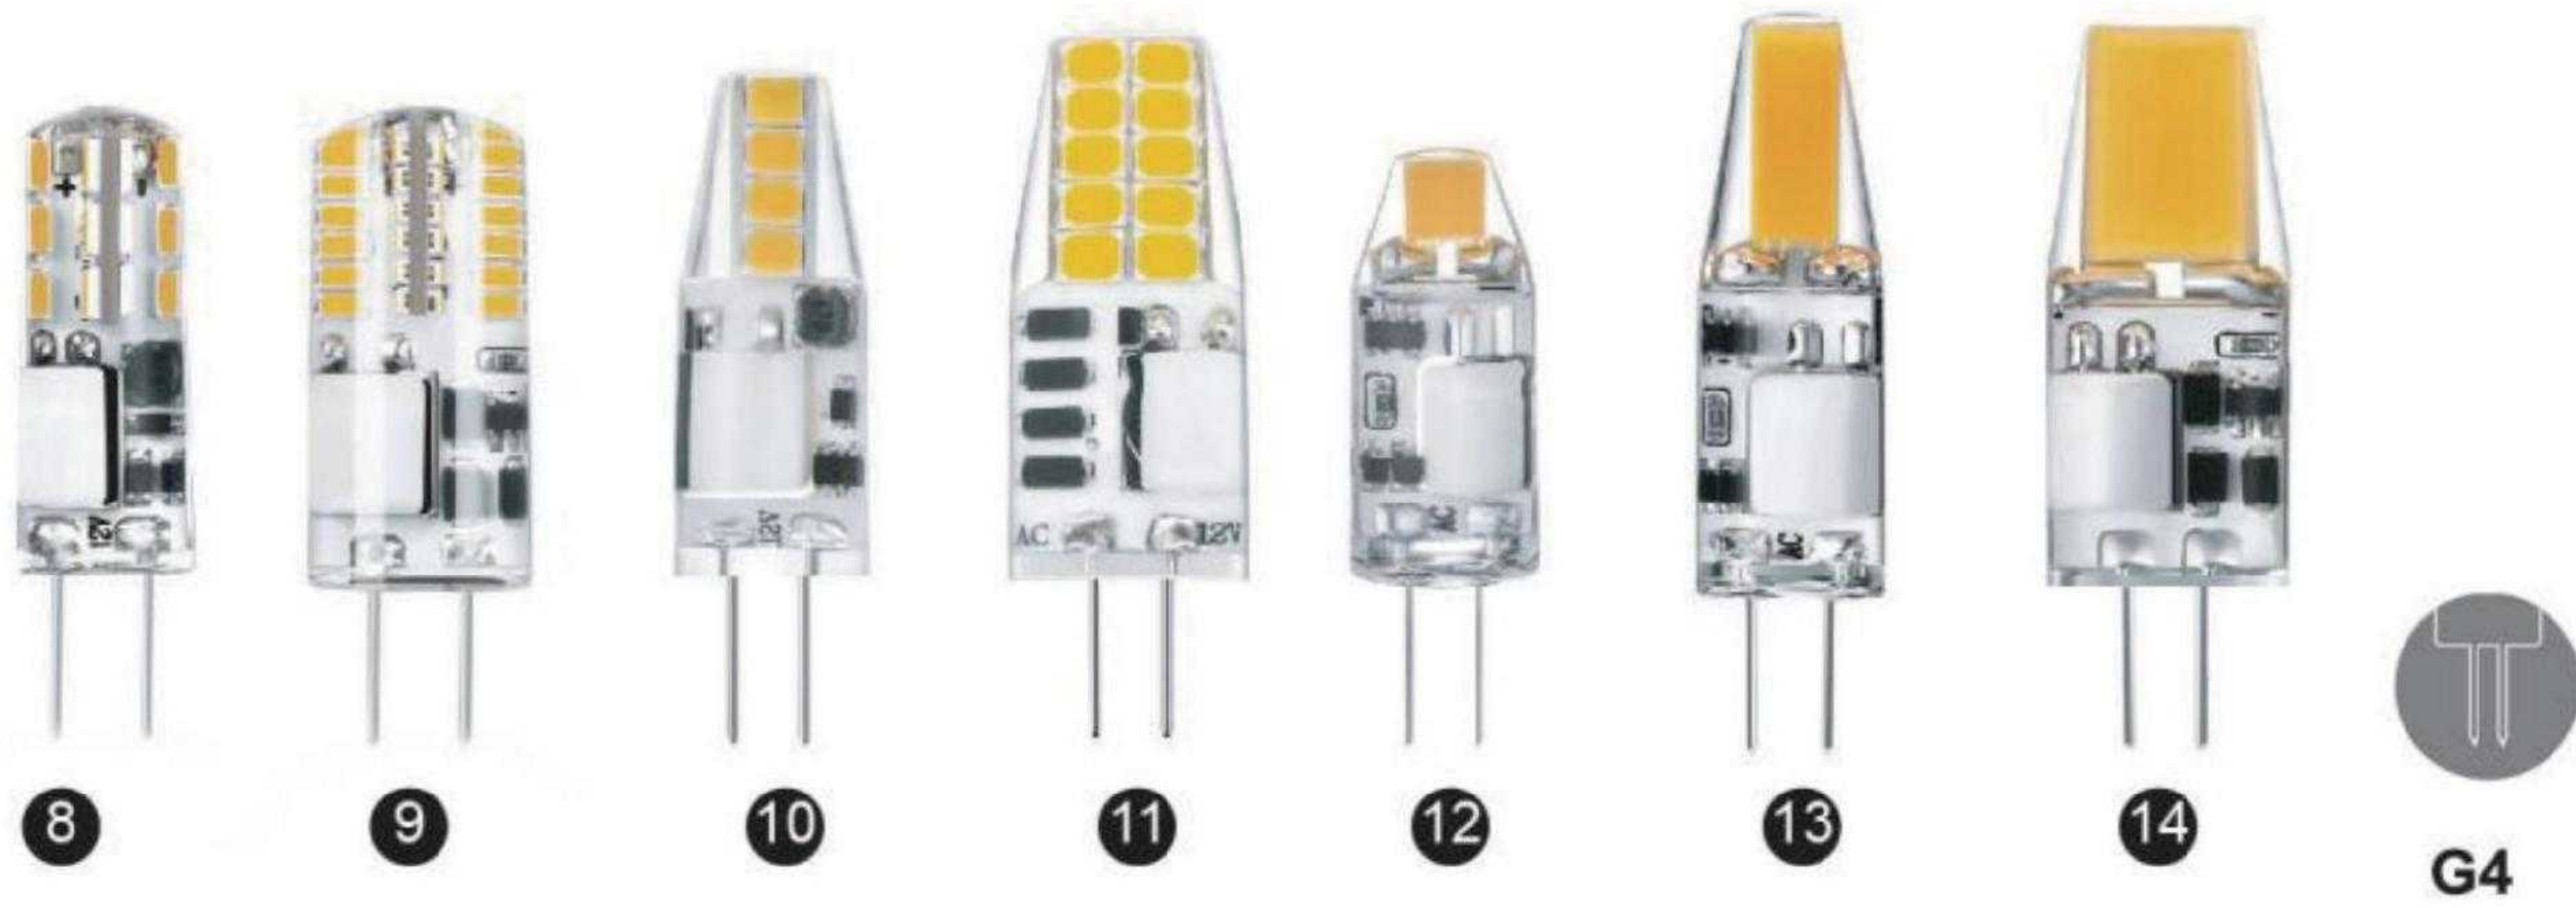

Item No.	Watt	Lumen	PF(AC)	Base	CRI	Voltage	Size		
8	G4-S-001C	1.1W	90lm	0.7	G4	Ra > 80	AC/DC12V	10x36mm	
9	G4-S-002C	1.8W	150lm	0.7	G4	Ra > 80	AC/DC12V	13x36mm	
10	G4-S-008C	1.5W	150lm	0.7	G4	Ra > 80	AC/DC12V	11x38mm	
11	G4-S-009C	2W	200lm	0.7	G4	Ra > 80	AC/DC12V	13.5x41.3mm	
12	G4-S-0705C	1.2W	100lm	0.7	G4	Ra > 80	AC/DC12V	11x34mm	
13	G4-S-1505C	1.5W	150lm	0.7	G4	Ra > 80	AC/DC12V	11x41.3mm	
14	G4-S-1508C	2W	220lm	0.7	G4	Ra > 80	AC/DC12V	13.5x41.3mm	



Item No.	Watt	Lumen	PF(AC)	Base	CRI	Voltage	Size		
15	G4-P-001	1W	85lm	0.7	G4	Ra > 80	AC/DC12V	11x33mm	
16	G4-P-007	1.2W	110lm	0.7	G4	Ra > 80	AC/DC12V	12x32mm	
17	G4-P-008	1.8W	150lm	0.7	G4	Ra > 80	AC/DC12V	16x44mm	
18	G4-P-009	1.3W	130lm	0.7	G4	Ra > 80	AC/DC12V	12x39mm	
19	G4-P-003	3W	350lm	0.7	G4	Ra > 80	AC/DC12V	16x44mm	



Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-C1-5W	5W	550lm	0.5	Ra > 80	220-240V	15x78mm
R7S-C1-9W	9W	1000lm	0.5	Ra > 80	220-240V	15x118mm

Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-A2-5.5W	5.5W	550lm	0.5	Ra > 80	220-240V	23x78mm
R7S-A2-10W	10W	1055lm	0.5	Ra > 80	220-240V	23x118mm



Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-A1-7W	7W	806lm	0.5	Ra > 80	175-250V	29x78mm
R7S-A1-8W	8W	1055lm	0.5	Ra > 80	175-250V	29x78mm

R7S-A1-9W	9W	1055lm	0.5	Ra > 80	175-250V	29x118mm
R7S-A1-14W	14W	1521lm	0.5	Ra > 80	175-250V	29x118mm
R7S-A1-16W	16W	2100lm	0.5	Ra > 80	175-250V	29x118mm

R7S-A1-D-8W	8W	1055lm	0.5	Ra > 80	220-240V	29x78mm
R7S-A1-D-12W	12W	1521lm	0.5	Ra > 80	220-240V	29x118mm
R7S-A1-D-16W	16W	2100lm	0.5	Ra > 80	220-240V	29x118mm



Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-G1-4W	4W	470lm	0.7	Ra > 80	220-240V	13.3x78mm
R7S-G1-7W	7W	806lm	0.7	Ra > 80	220-240V	13.3x118mm
R7S-G1-8W	8W	1055lm	0.7	Ra > 80	220-240V	13.3x118mm



E14



1



2



3



4



5



6

Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size
----------	------	-------	----	------	-----	---------	------

1	E14-P-001	3W	350lm	0.4	E14	Ra > 80	220-240V	16x50mm	
2	E14-P-002	3W	320lm	0.4	E14	Ra > 80	100-265V	15.5x51mm	
3	E14-P-003	5W	470lm	0.4	E14	Ra > 80	220-240V	18.3x68mm	
4	E14-P-007	1.7W	130lm	0.4	E14	Ra > 80	220-240V	18x52mm	
5	E14-P-008	1.8W	180lm	0.4	E14	Ra > 80	220-240V	25x59mm	
6	E14-G-001	1.7W	130lm	0.4	E14	Ra > 80	220-240V	23x50mm	

2023

Ceiling Light


Environmental protection, energy saving.

IP65 Ceiling Light

IP65 Ceiling Light




STYCLR01-SYCLR03C

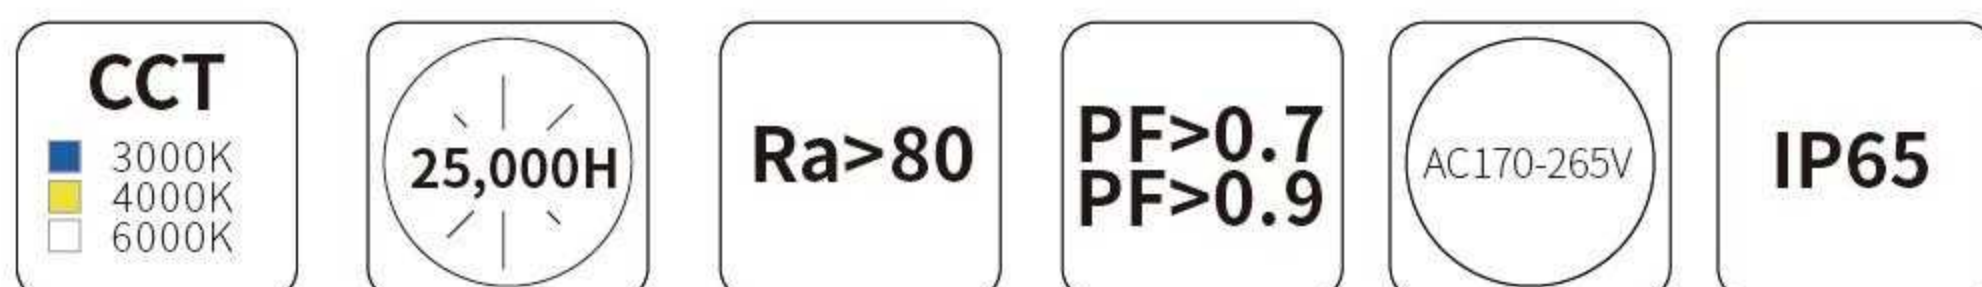

Code	Watt	Luminous Flux	Beagm Angle	Size (mm)	IP	Material
SYCLR01	18W	1620lm		Φ 230*H60		
SYCLR03	36W	3300lm		Φ 320*H65		
SYCLR01S	18W	1620lm		Φ 230*H60		
SYCLR03S	36W	3300lm		Φ 320*H65		
SYCLR013C	18W	1620lm	120°	Φ 230*H60	65	Plastic
SYCLR033C	36W	3300lm		Φ 320*H65		
SYCLR01C	18W	1620lm		Φ 230*H60		
SYCLR03C	36W	3300lm		Φ 320*H65		


IP65 Ceiling Light

Multi color available

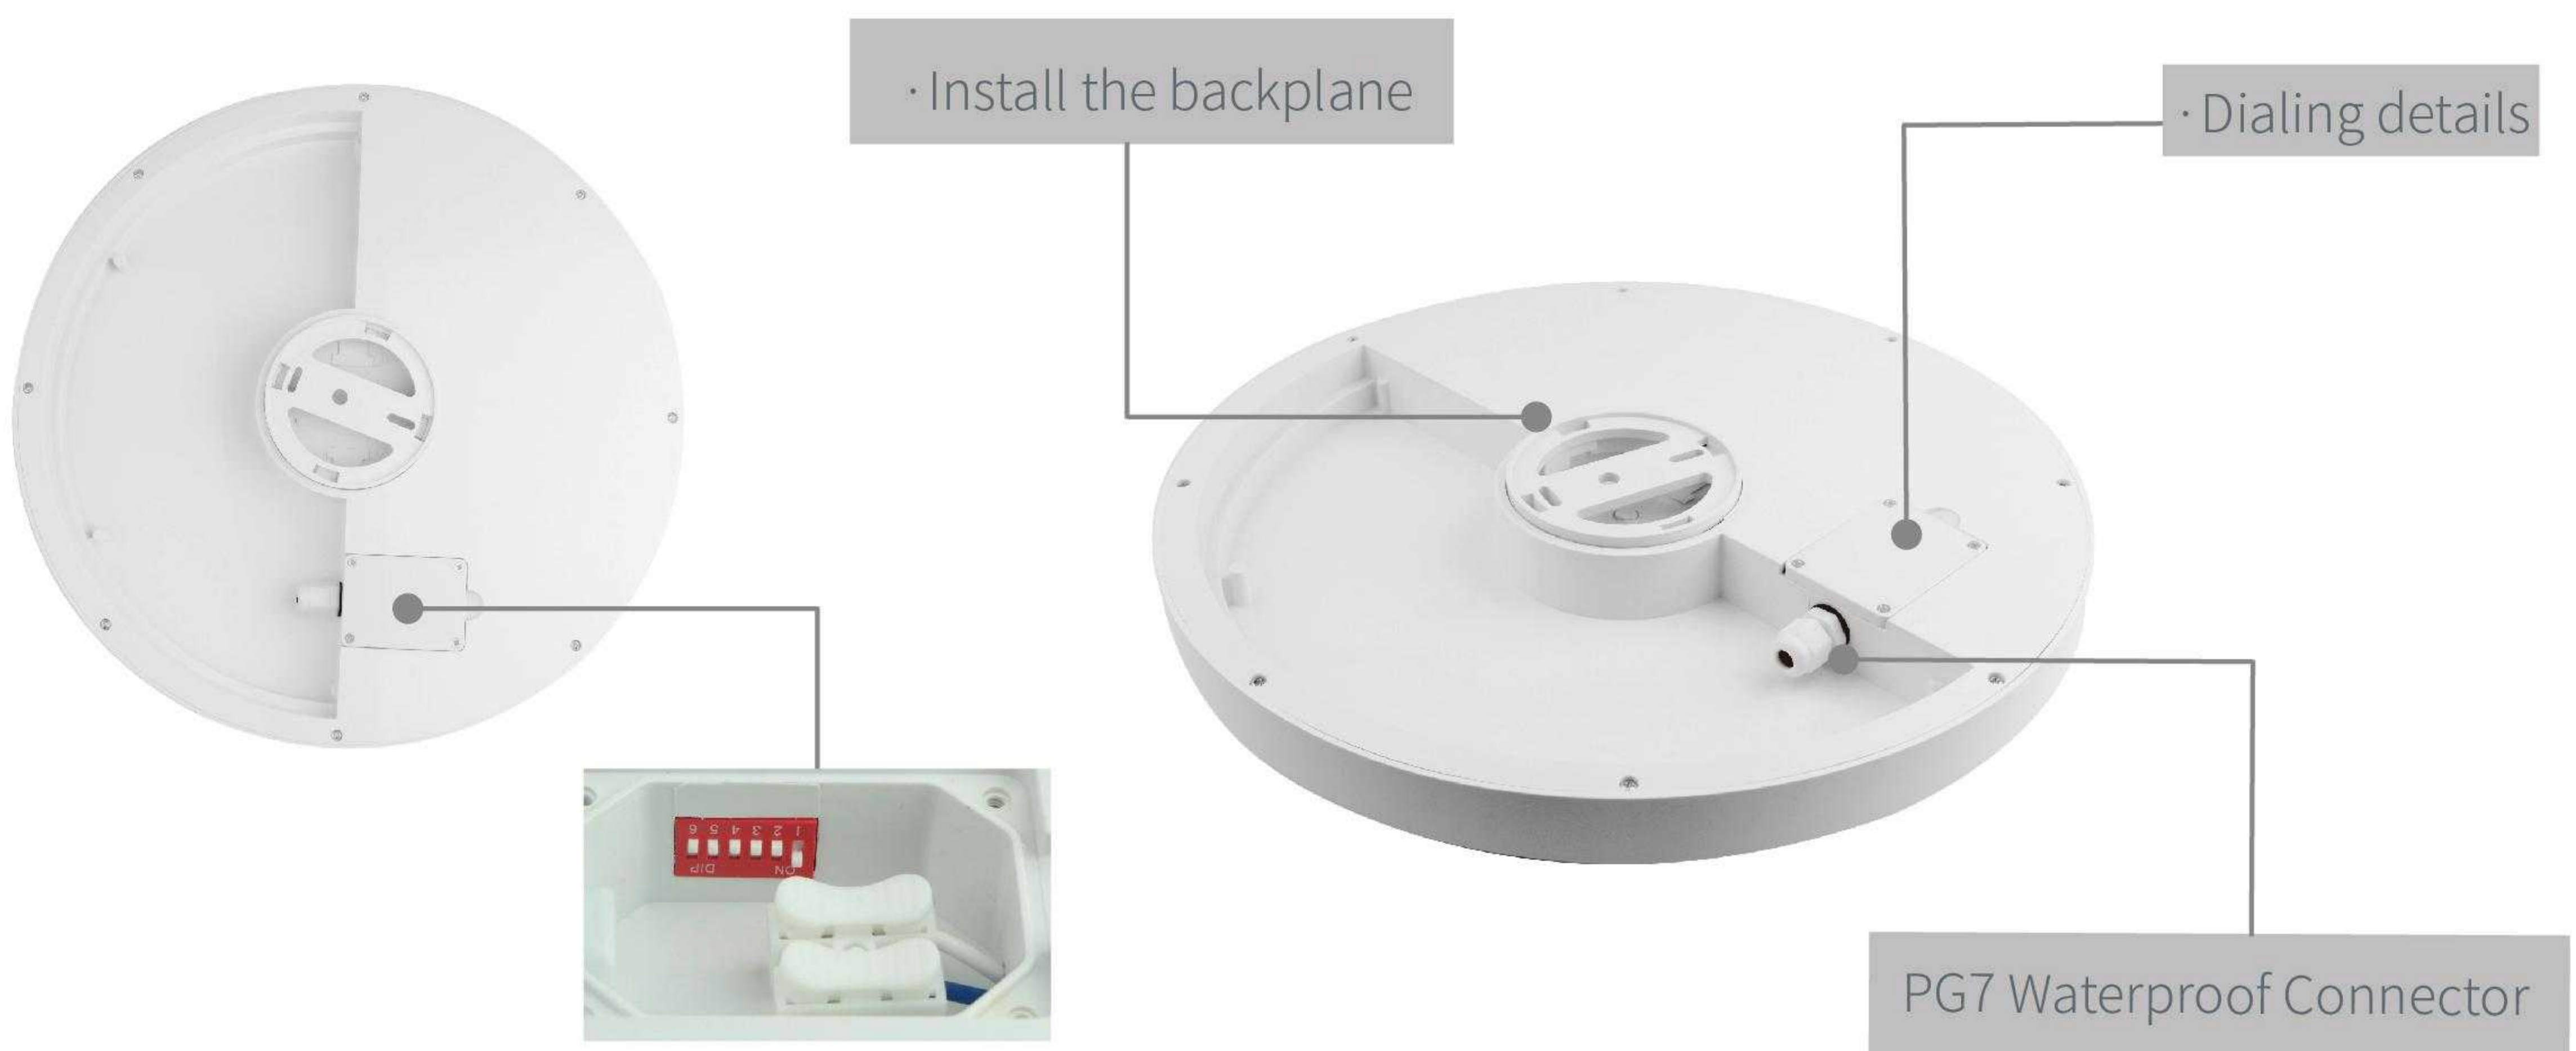


Three versions available

3-step CCT change

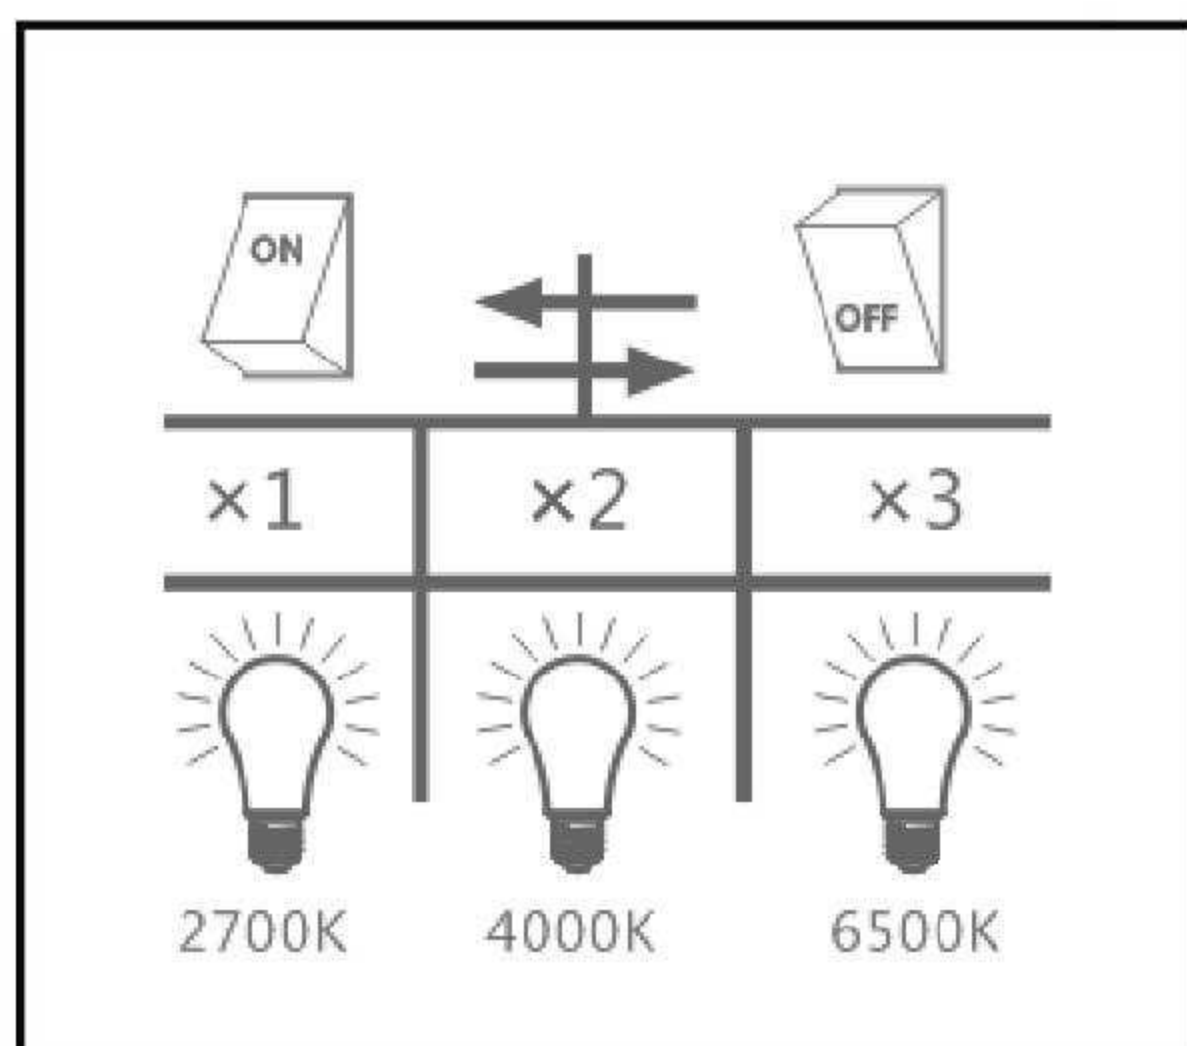


Version A

CCT Switch change

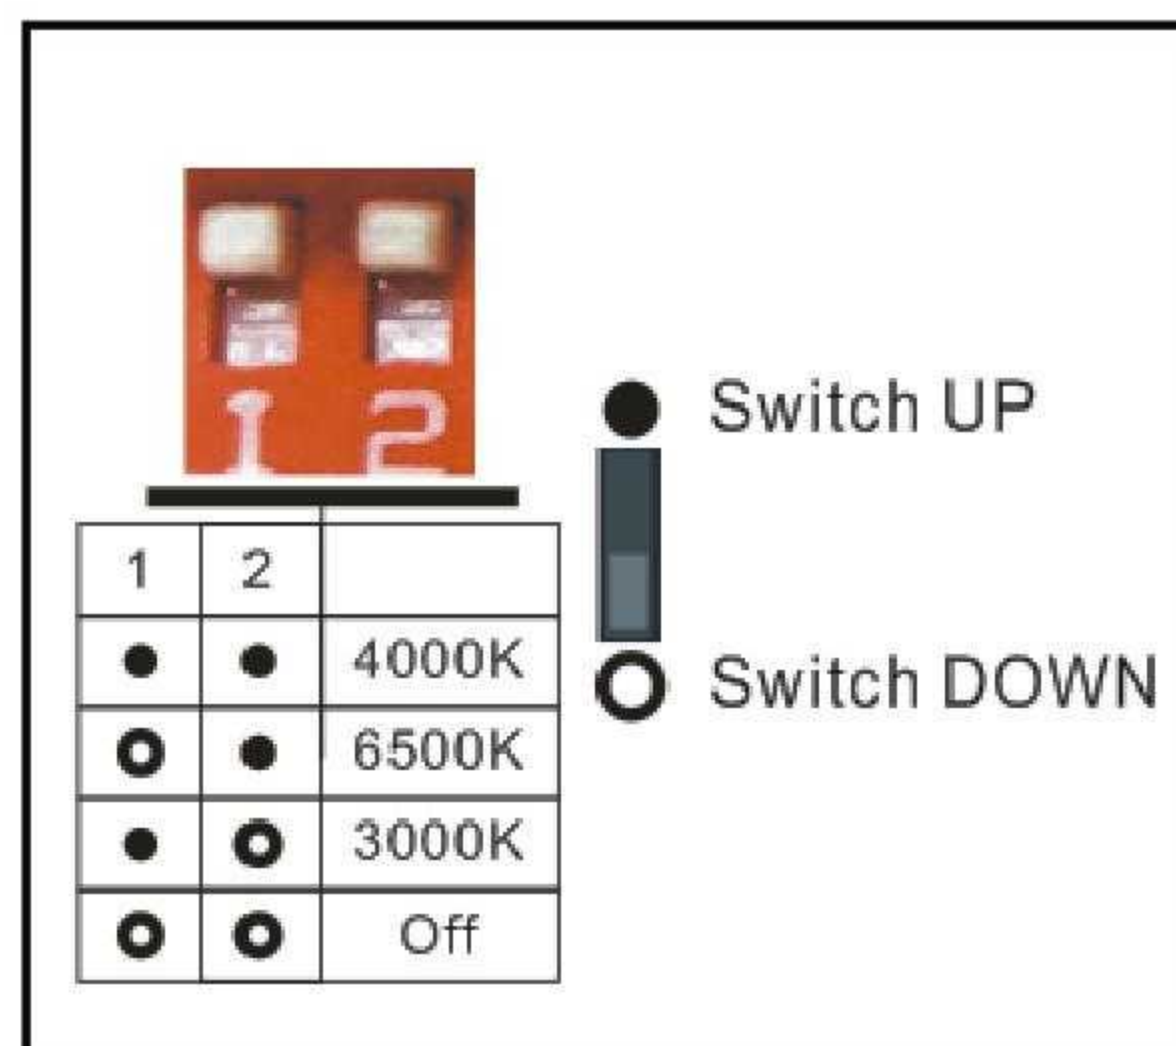

Version B


Microwave sensor

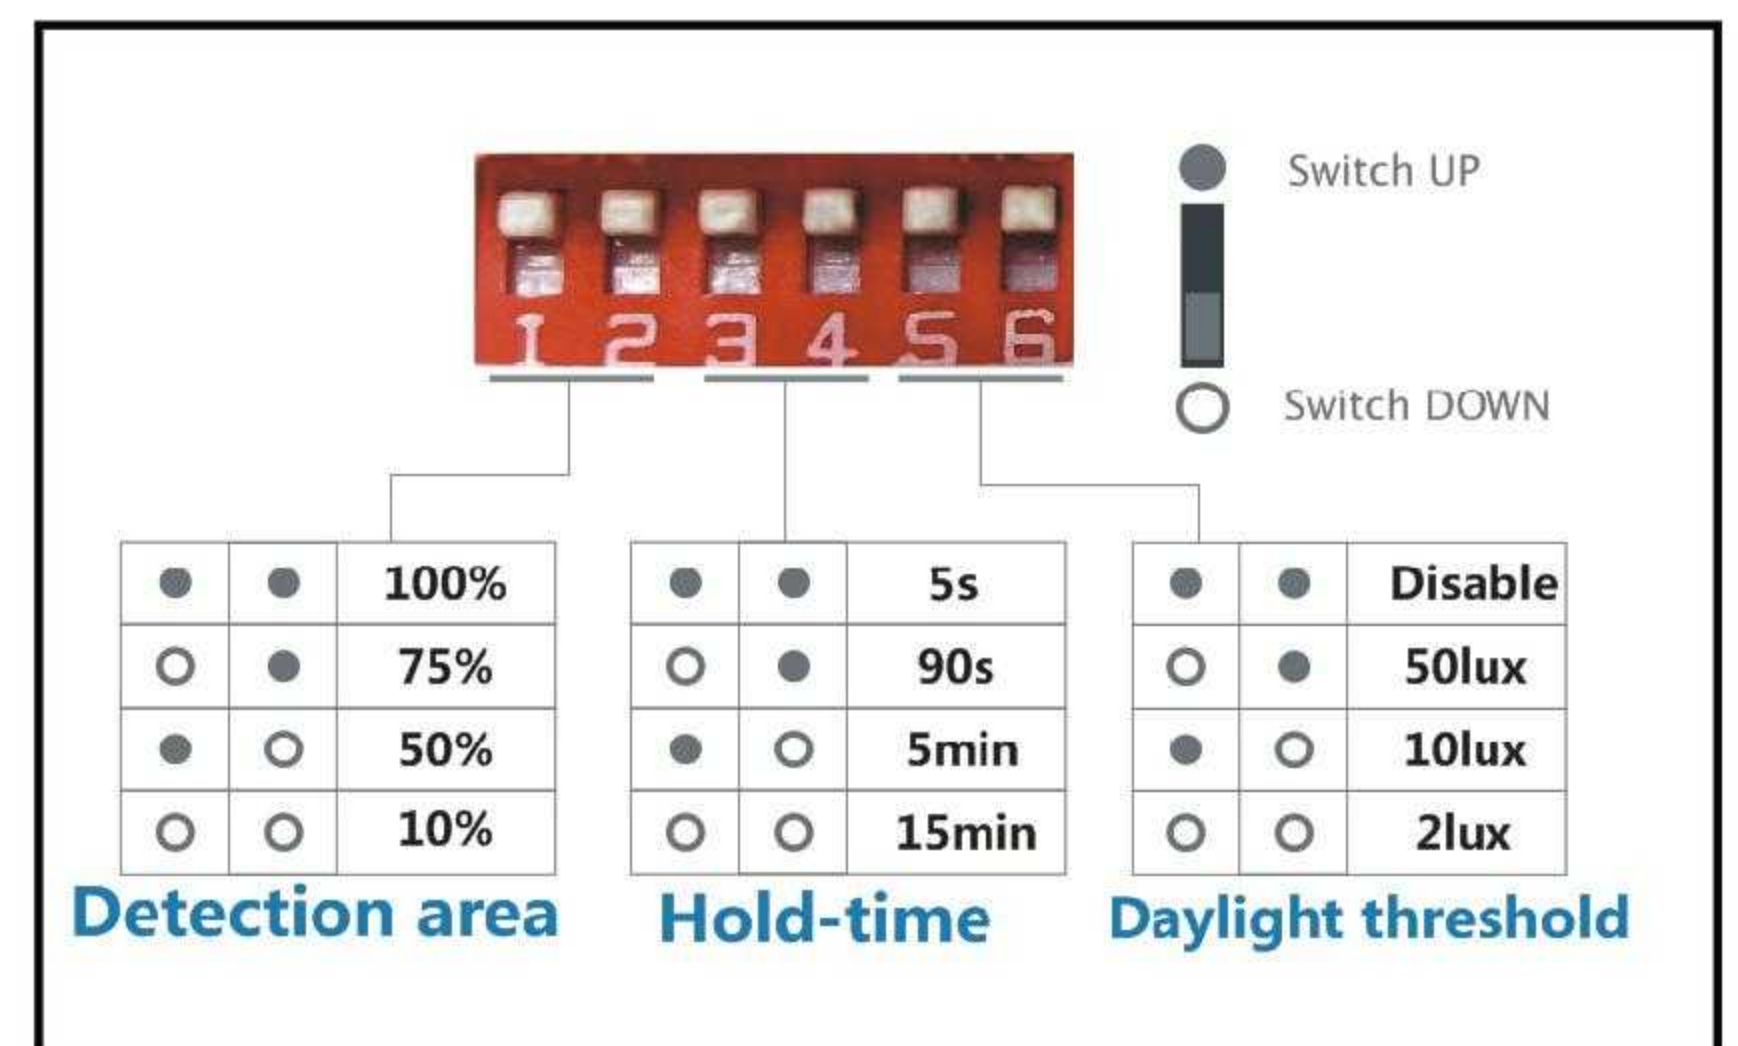

Version C


IP54 Ceiling Light

Detail analysis

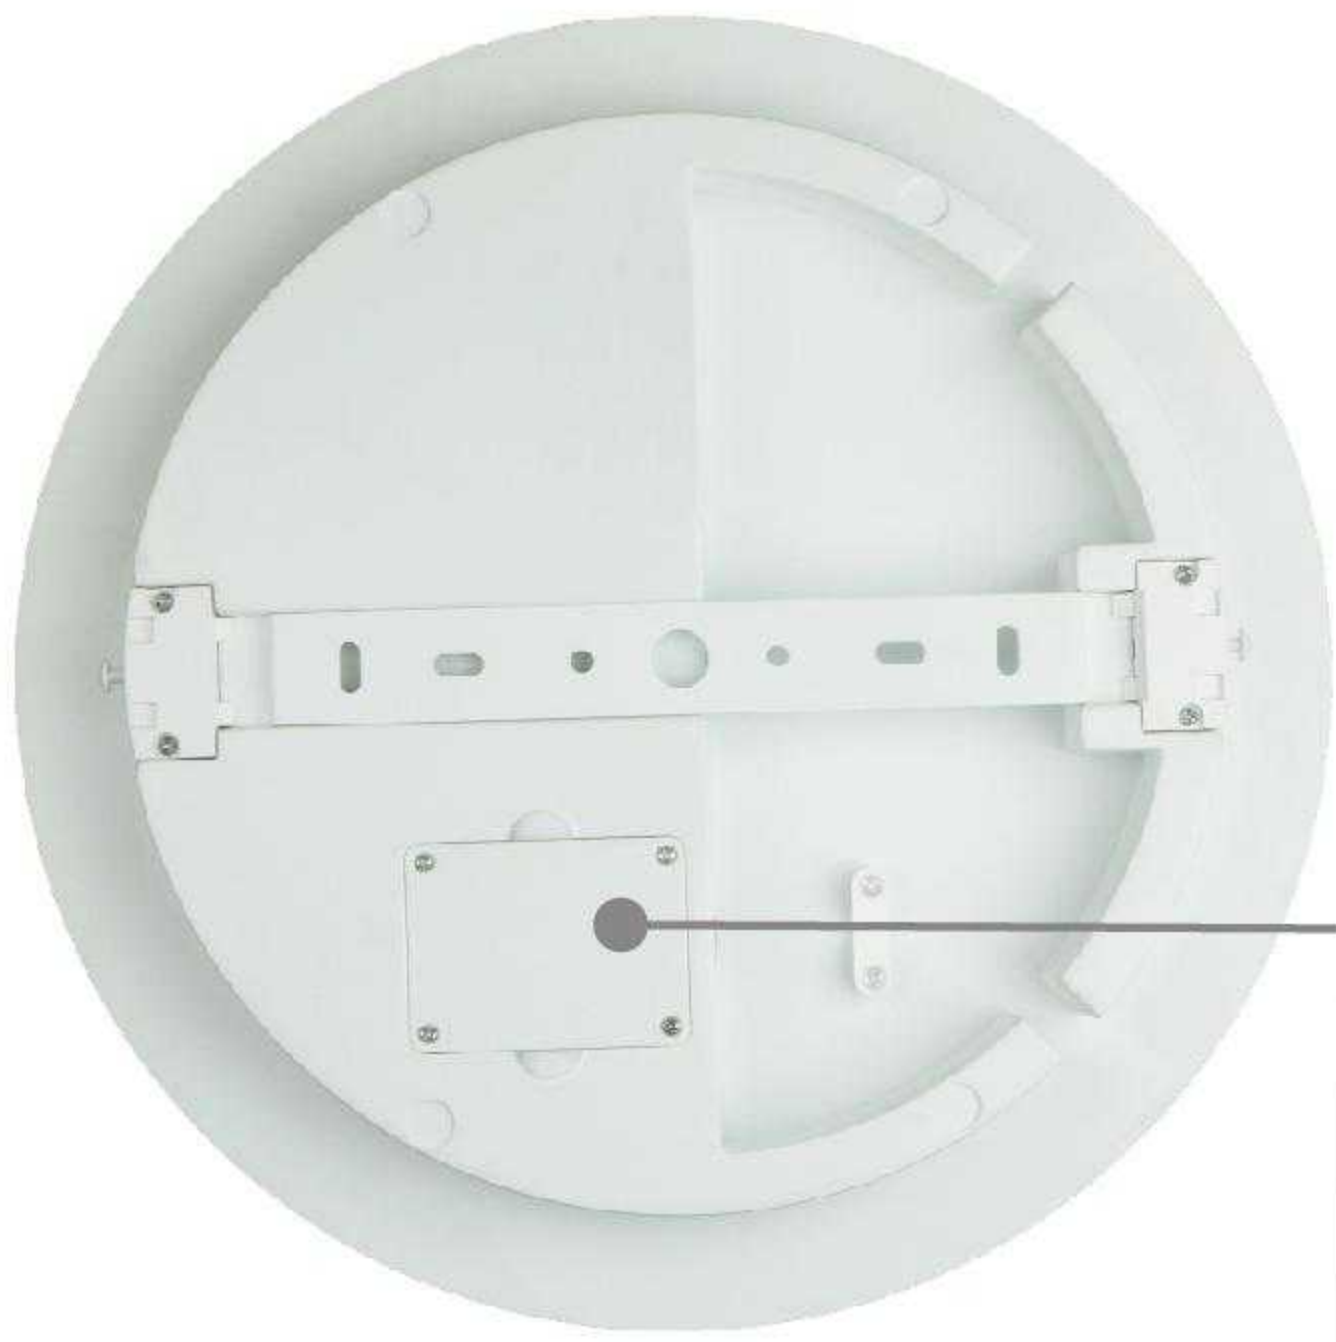

· details

Easy installation

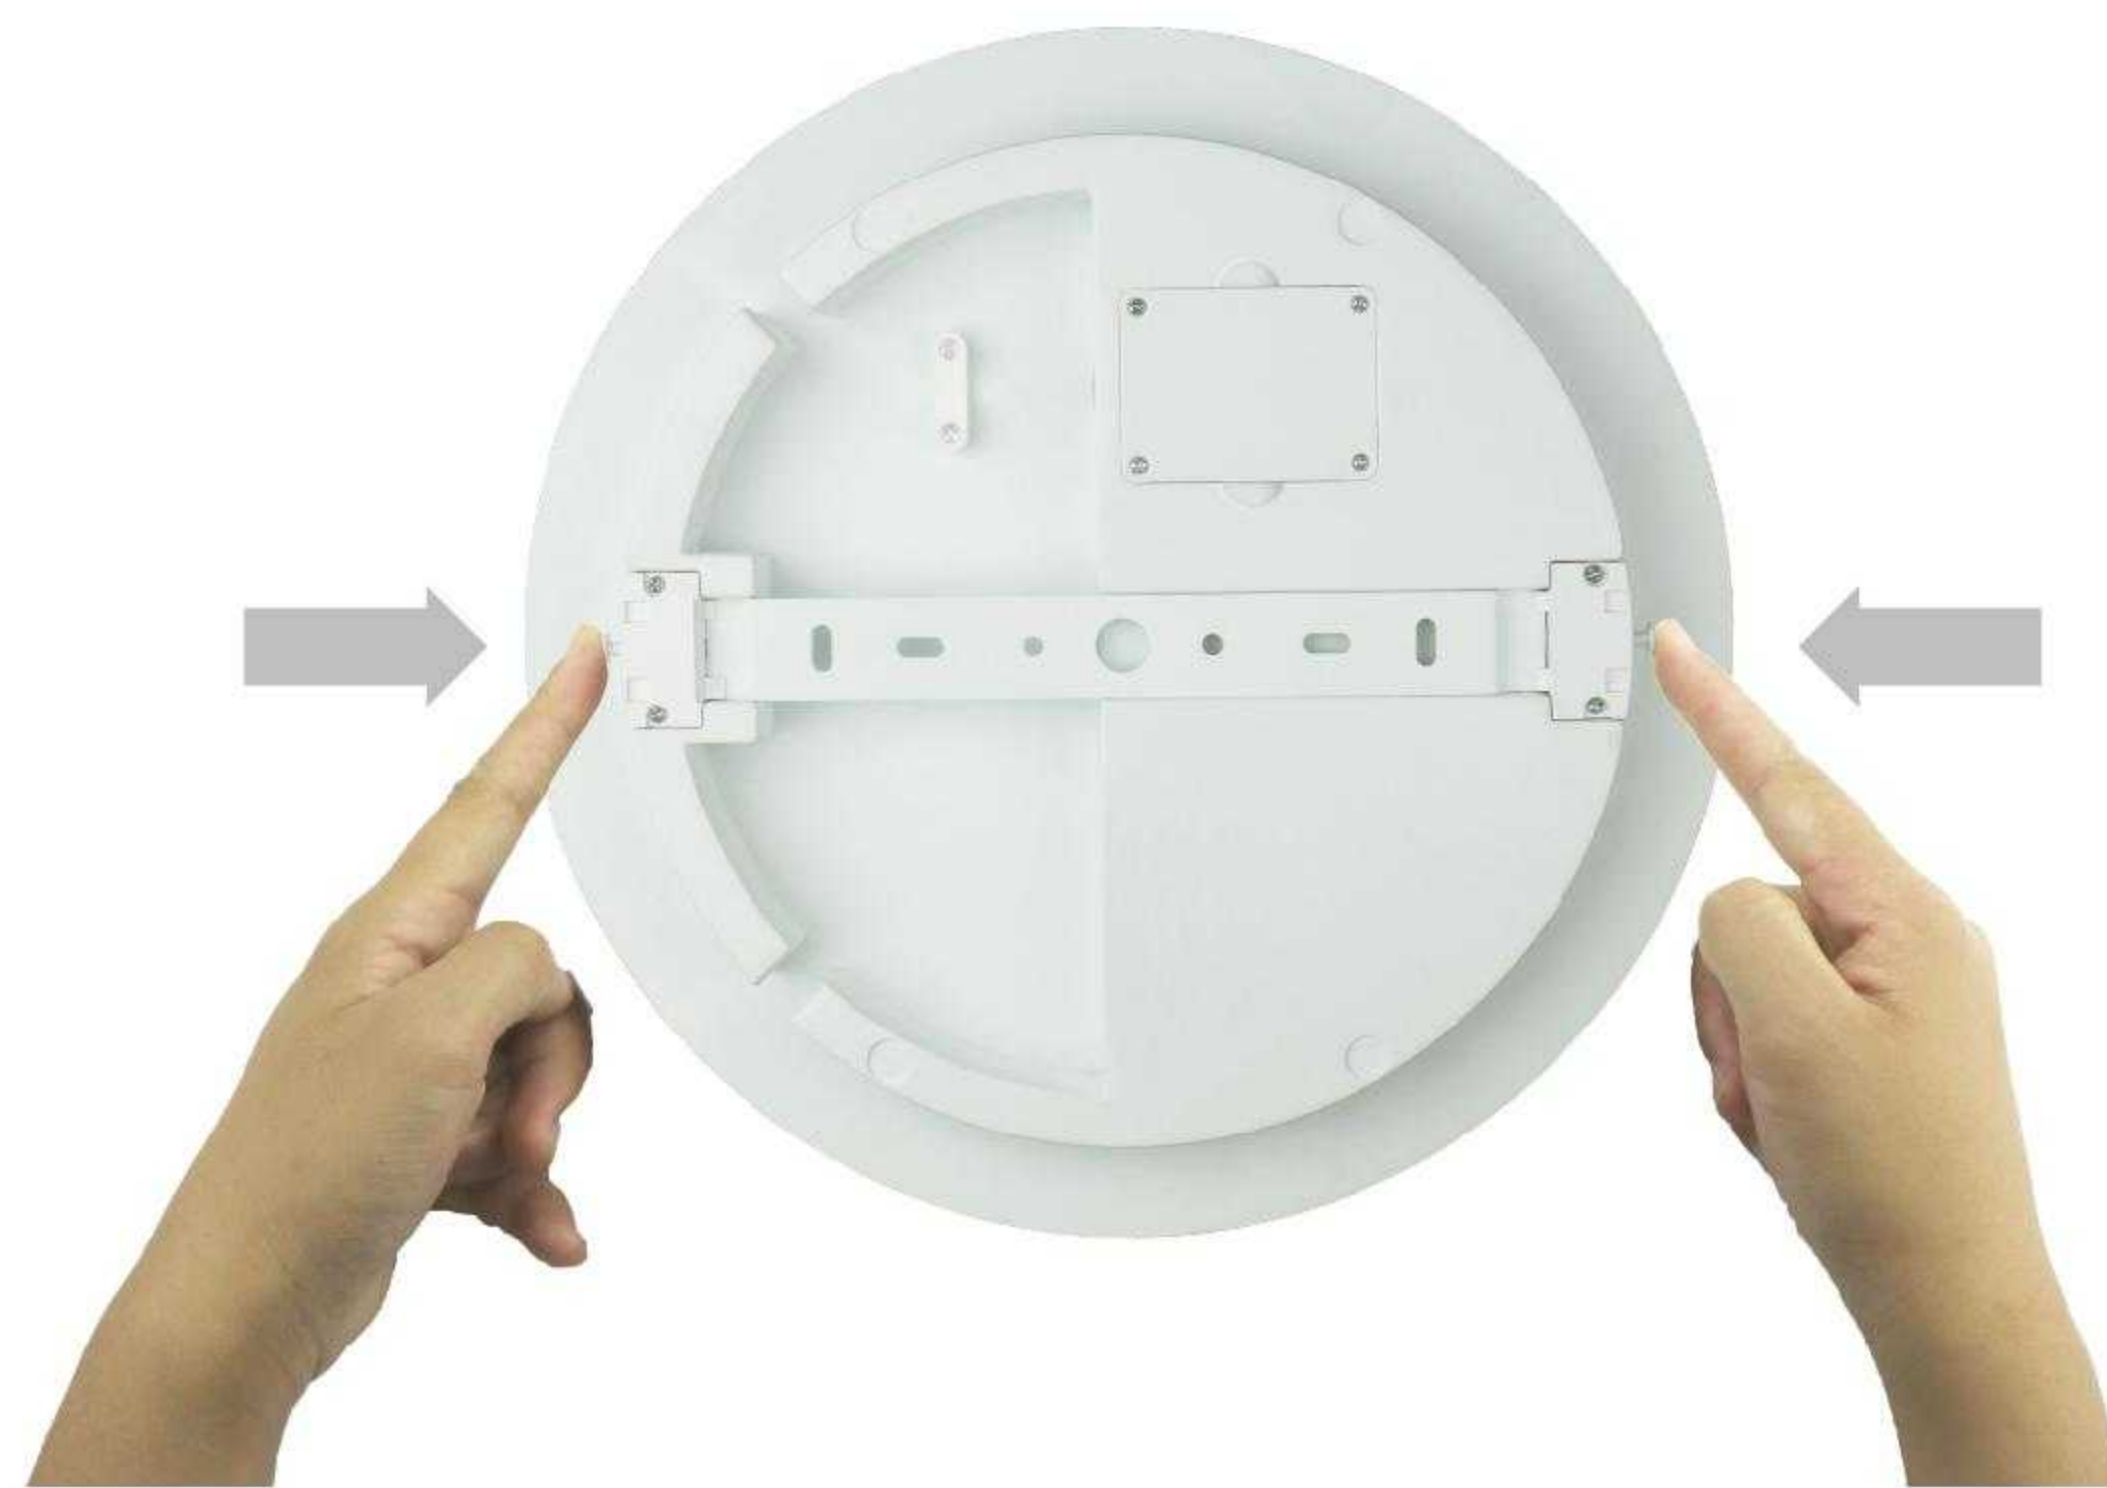

Step1

Step2

Step3




IP54 Ceiling Light

LED Ceiling Light




SYBH(01)-SYBH CCT(03)

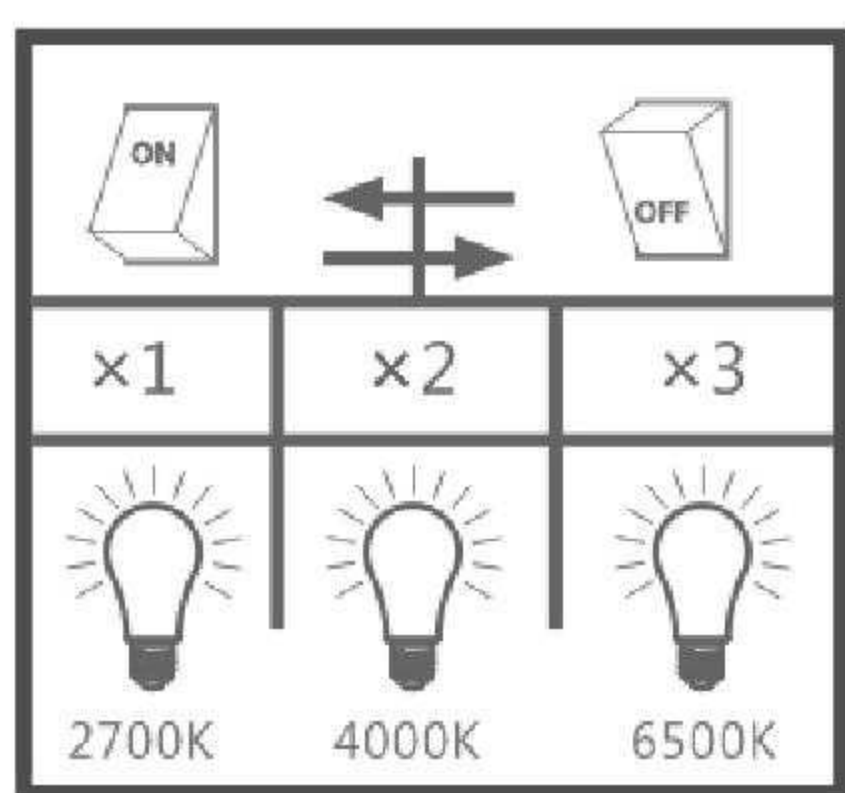

CCT CONTROL

· Install the backplane

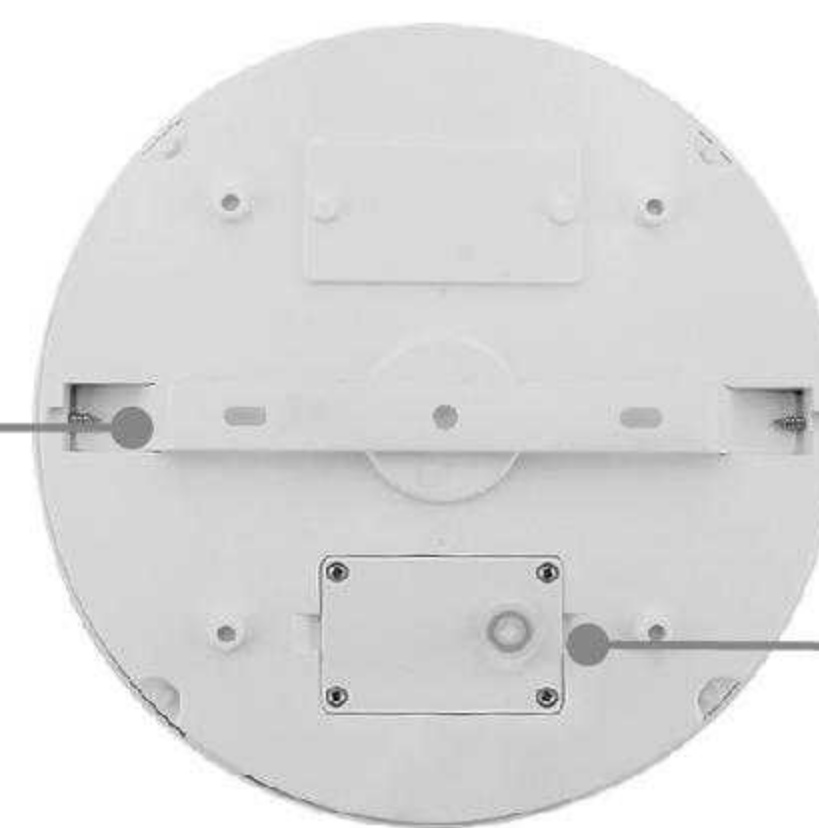

· Waterproof

CCT 3000K 4000K 6000K	25,000H	Ra>80	PF>0.7 PF>0.9	AC170-265V	IP65
---------------------------------------	----------------	-----------------	--------------------------------------	-------------------	-------------


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
Circular 12W	SYBH-01	12W	1332lm	120°	φ 180*H65		
Circular 18W	SYBH-02	18W	1998lm		φ 220*H65	65	Plastic
Circular 24W	SYBH-03	24W	2712lm		φ 280*H65		
Stepless adjusted 12W	SYBH CCT-01	12W	1332lm		φ 180*H65		
Stepless adjusted 18W	SYBH CCT-02	18W	1998lm		φ 220*H65	65	Plastic
Stepless adjusted 24W	SYBH CCT-03	24W	2712lm		φ 280*H65		



LED Ceiling Light



SYBHET(01)-SYBHER(03)

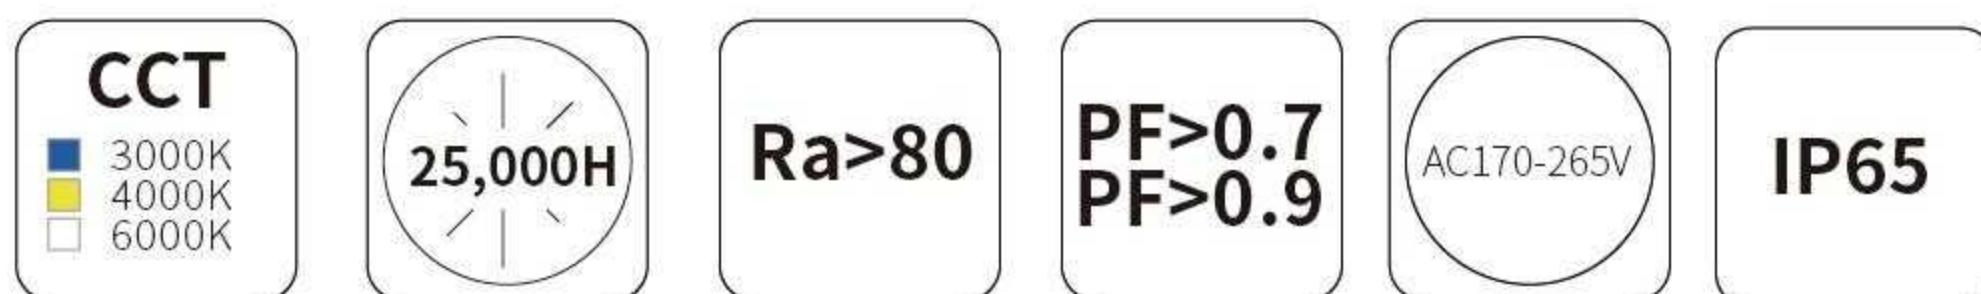


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
Ellipse 8W	SYBHET-01	8W	640lm	120°	L155*W80*H55	65	Plastic
Ellipse 12W	SYBHET-02	12W	960lm		L174*W87*55		
Ellipse 15W	SYBHET-03	15W	1200lm		L198*W98*H55		
Circular 8W	SYBHER-01	8W	640lm		φ 140*H55		
Circular 12W	SYBHER-02	12W	960lm		φ 155*H55		
Circular 15W	SYBHER-03	15W	1200lm		φ 174*H55		

CCT Down Light

CCT Down Light



SYDLR6CCT~SYDLS12CCT

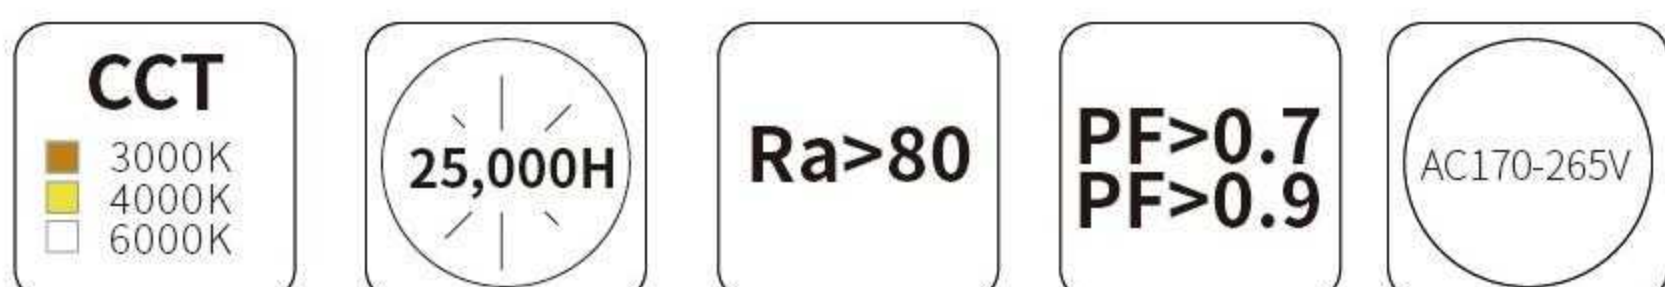


Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
SYDLR5CCT	5W	400LM		Φ90*H52mm		
SYDLR7CCT	7W	560LM				
SYDLR9CCT	9W	720LM		Φ115*H53mm		
SYDLR12CCT	12W	1000LM	30°		/	PC
SYDLS5CCT	5W	400LM		Φ90*H52mm		
SYDLS7CCT	7W	560LM				
SYDLS9CCT	9W	720LM		Φ115*H53mm		
SYDLS12CCT	12W	1000LM				

ICCT Down Light



SYDLRB5CCT~SYDLSB12CCT

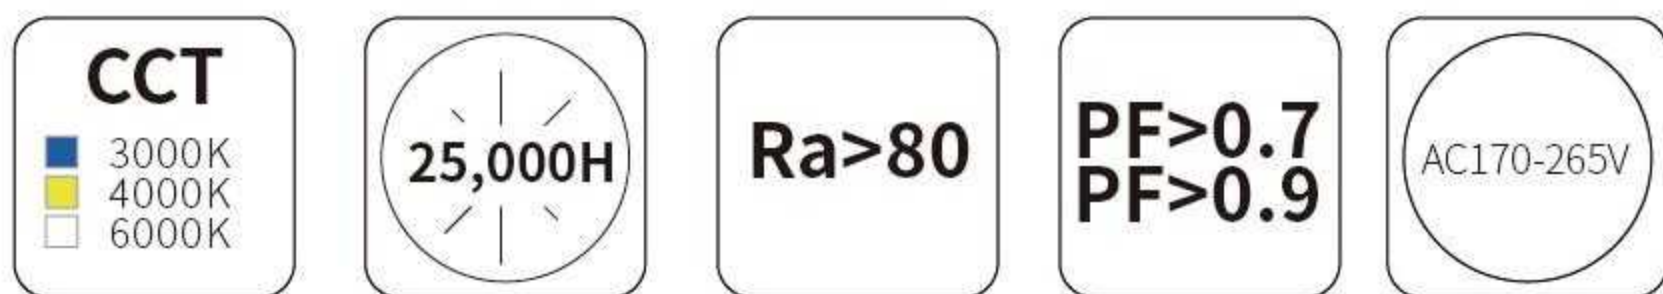

Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
SYDLRB5CCT	5W	400LM	30°	Φ90*H52mm	/	PC
SYDLRB7CCT	7W	560LM				
SYDLRB9CCT	9W	720LM				
SYDLRB12CCT	12W	1000LM				
SYDLSB5CCT	5W	400LM				
SYDLSB7CCT	7W	560LM				
SYDLSB9CCT	9W	720LM				
SYDLSB12CCT	12W	1000LM				

Detail analysis



2023

TRI-Proof Light

Environmental protection, energy saving.

Tri-Proof Light

4028 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W



CCT

- 3000K
- 4000K
- 6000K

25,000H

Ra>80

PF>0.7
PF>0.9

AC170-265V


IP65

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
4028	SY-4028-A-06	18W	2160LM	120°	>80	L660*W43*H31	PC
	SY-4028-B-06						
	SY-4028-C-06						
	SY-4028-A-12	36W	4320LM			L1260*W43*H31	
	SY-4028-B-12						
	SY-4028-C-12						
	SY-4028-A-15	45W	5400LM			L1560*W43*H31	
	SY-4028-B-15						
	SY-4028-C-15						

Tri-Proof Light

5532 Tri-Proof Light


OPTIONS: 120LM/W 140LM/W

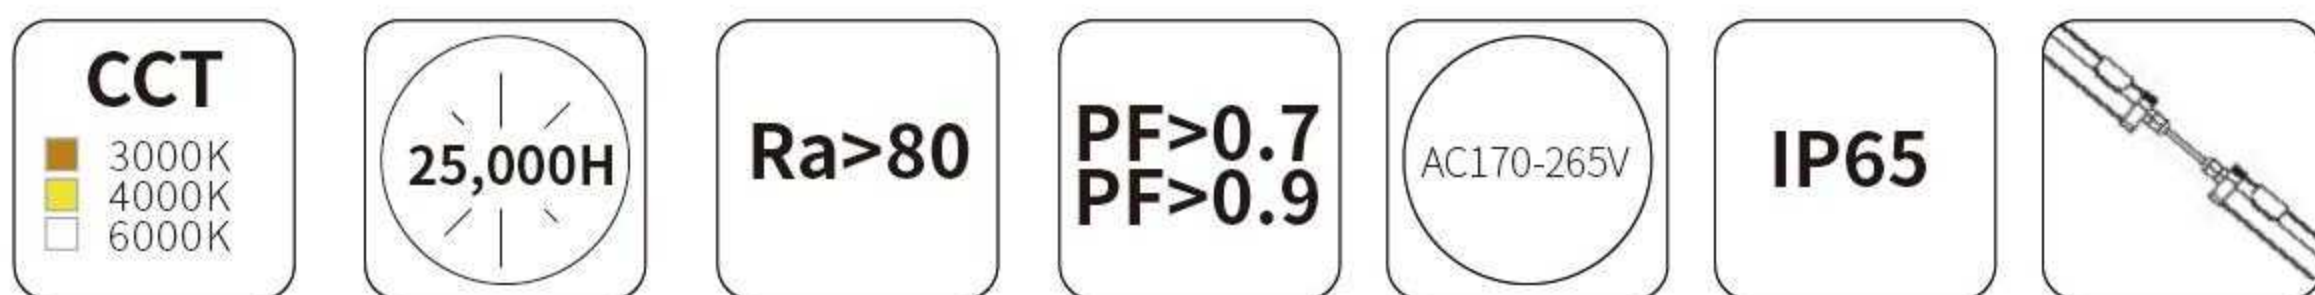

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
5532	SY-5532-A-06	18W	2160LM	120°	>80	L650*W58*H36	PC
	SY-5532-B-06						
	SY-5532-C-06						
	SY-5532-A-12	36W	4320LM			L1250*W58*H36	
	SY-5532-B-12						
	SY-5532-C-12						
	SY-5532-A-15	45W	5400LM			L1550*W58*H36	
	SY-5532-B-15						
SY-5532-C-15							

7233 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

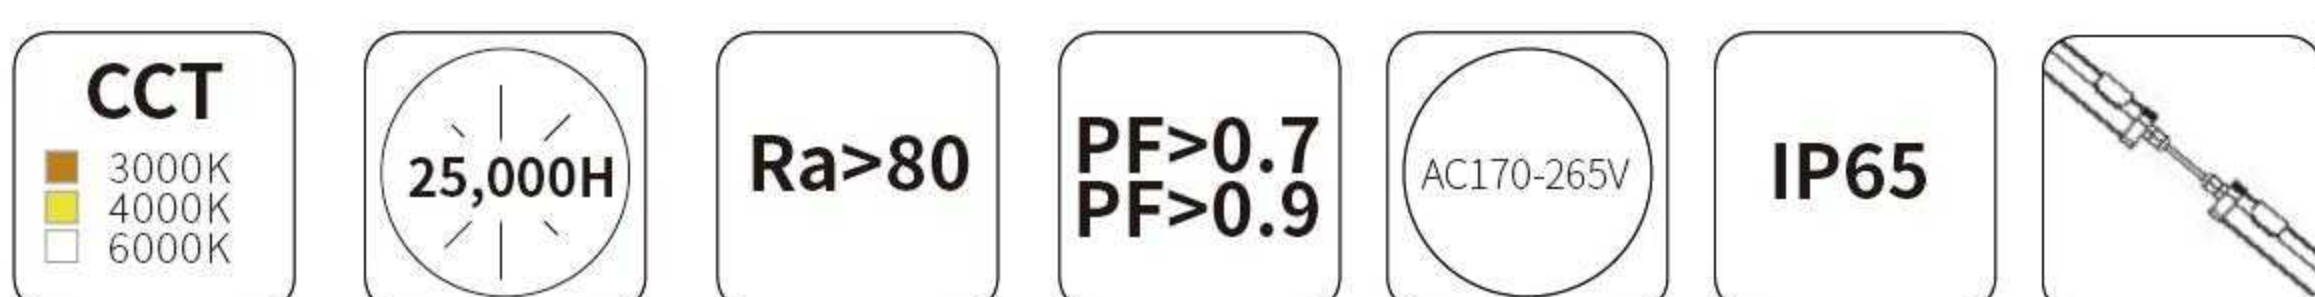

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
7233	SY-7233-A-06-20W	20W	2400LM	120°	>80	L665*W75*H35mm	PC
	SY-7233-B-06-20W						
	SY-7233-C-06-20W						
	SY-7233-A-12-40W	40W	4800LM			L1265*W75*H35mm	
	SY-7233-B-12-40W						
	SY-7233-C-12-40W						
	SY-7233-A-15-50W	50W	6000LM			L1565*W75*H35mm	
	SY-7233-B-15-50W						
SY-7233-C-15-50W							


Tri-Proof Light

8348L Tri-Proof Light

OPTIONS: 120LM/W 140LM/W 160LM/W



HOT!
160LM/W

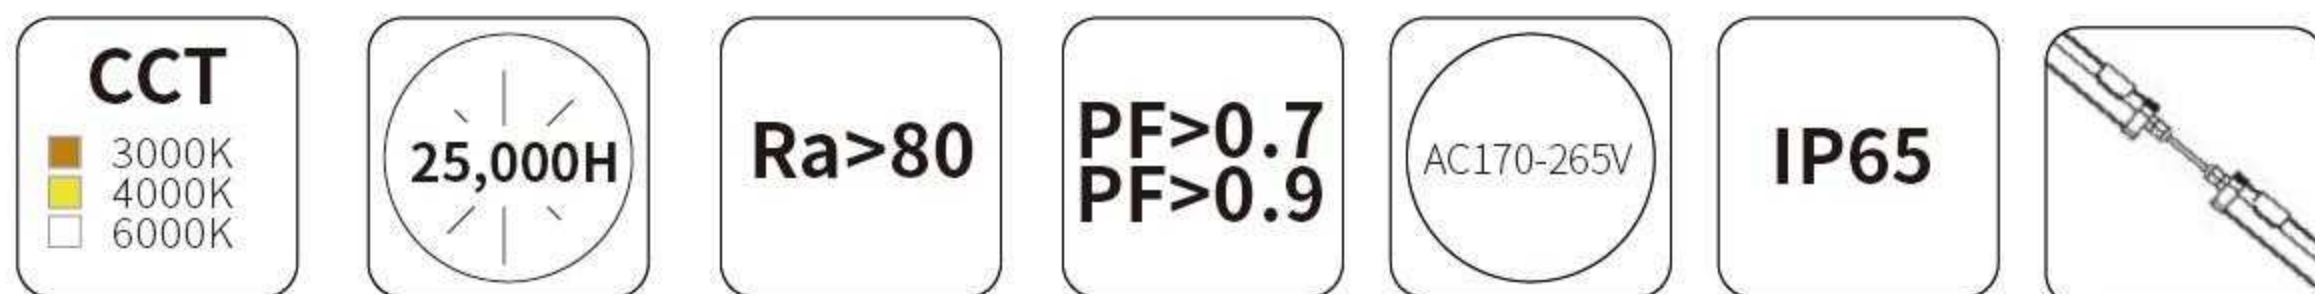


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348L	SY-8348L-A-06-30W	30W	3600LM	120°	>80	L610*W83*H48mm	PC
	SY-8348L-A-06-40W	40W	4800LM				
	SY-8348L-A-12-60W	60W	7200LM			L1210*W83*H48mm	
	SY-8348L-A-12-70W	70W	8400LM				
	SY-8348L-A-15-80W	80W	9600LM			L1510*W83*H48mm	
	SY-8348L-A-15-90W	90W	10800LM				
	SY-8348L-B-06-30W	30W	3600LM			L640*W83*H48mm	
	SY-8348L-B-06-40W	40W	4800LM				
	SY-8348L-B-12-60W	60W	7200LM			L1240*W83*H48mm	
	SY-8348L-B-12-70W	70W	8400LM				
	SY-8348L-B-15-80W	80W	9600LM			L1540*W83*H48mm	
	SY-8348L-B-15-90W	90W	10800LM				
	SY-8348L-C-06-30W	30W	3600LM			L680*W83*H48mm	
	SY-8348L-C-06-40W	40W	4800LM				
	SY-8348L-C-12-60W	60W	7200LM			L1280*W83*H48mm	
	SY-8348L-C-12-70W	70W	8400LM				
	SY-8348L-C-15-80W	80W	9600LM			L1580*W83*H48mm	
	SY-8348L-C-15-90W	90W	10800LM				

Tri-Proof Light


8348W Tri-Proof Light

OPTIONS: 120LM/W 140LM/W 160LM/W



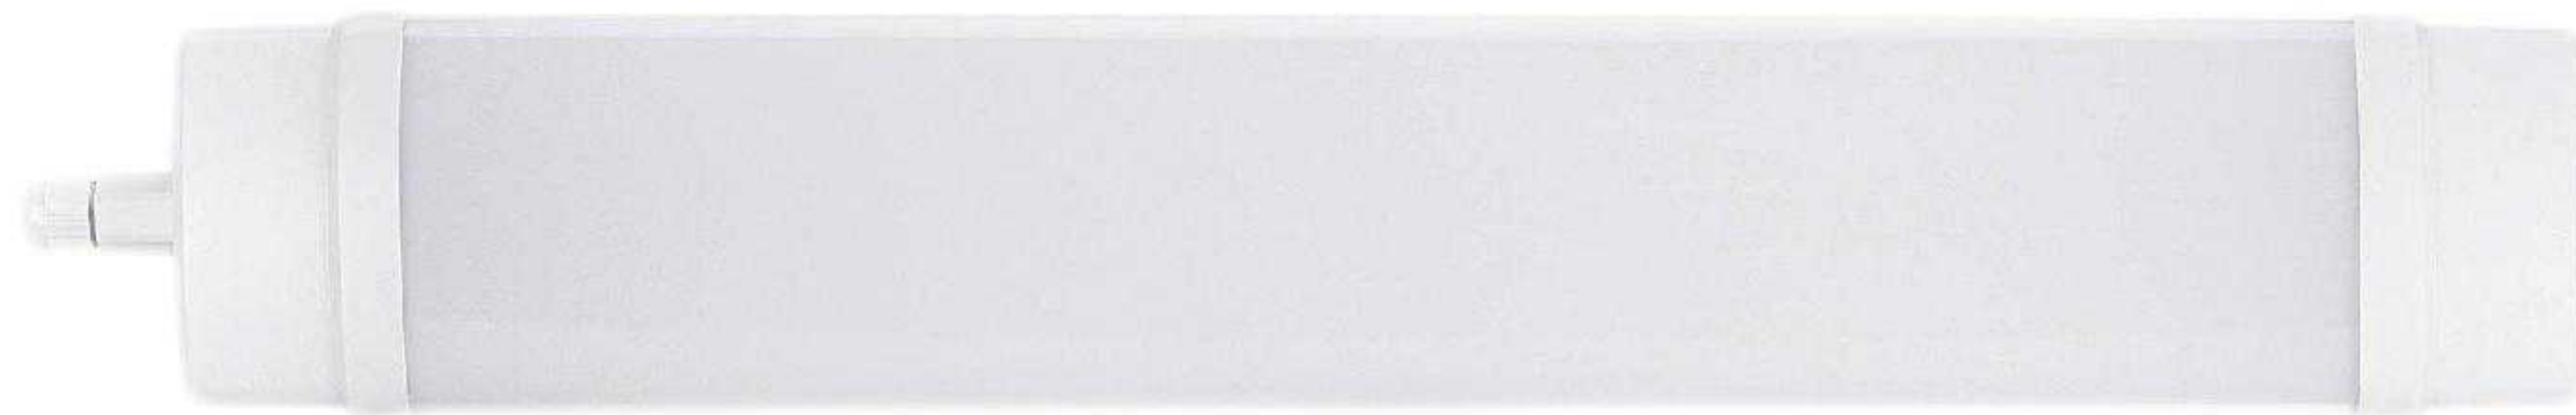


B

HOT!
160LM/W

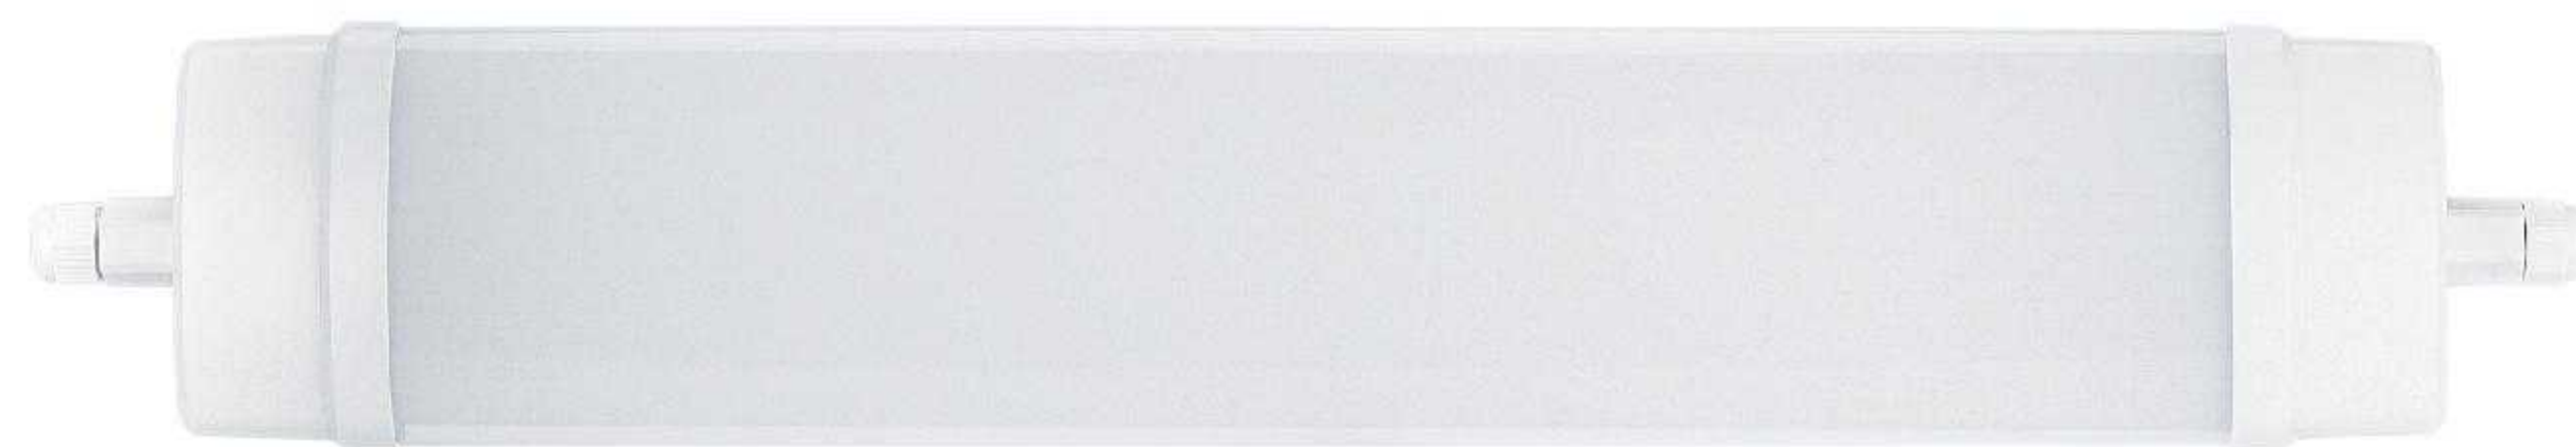

C


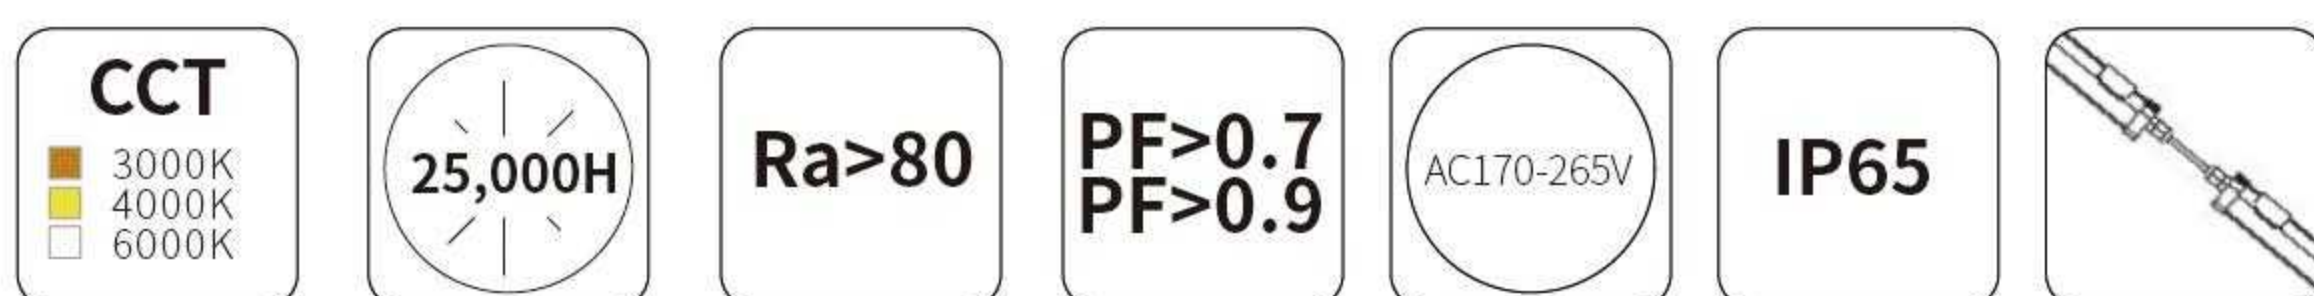
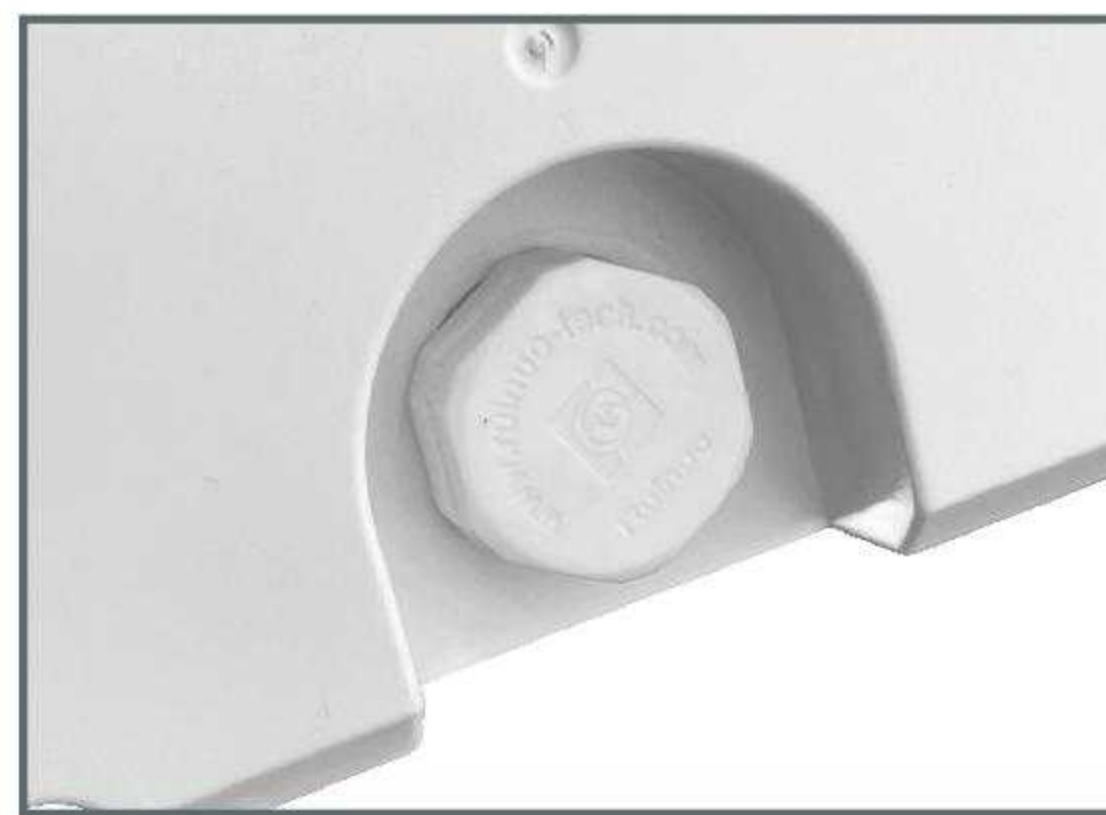
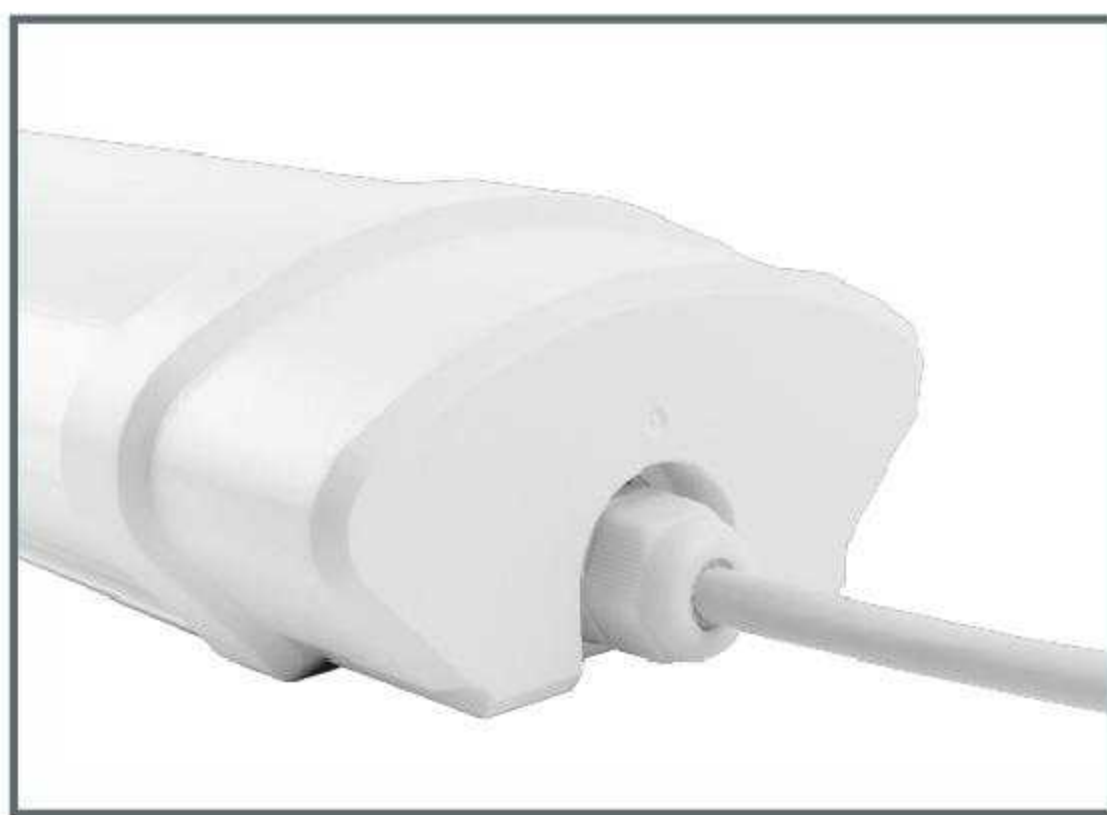


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348W	SY-8348W-A-12-60W	60W	7200LM	120°	>80	L1210*W116*H60mm	PC
	SY-8348W-A-12-70W	70W	8400LM				
	SY-8348W-A-12-80W	80W	9600LM				
	SY-8348W-A-15-90W	90W	10800LM			L1510*W116*H60mm	
	SY-8348W-A-15-100W	100W	12000LM				
	SY-8348W-B-12-60W	60W	7200LM				
	SY-8348W-B-12-70W	70W	8400LM			L1240*W116*H60mm	
	SY-8348W-B-12-80W	80W	9600LM				
	SY-8348W-B-15-90W	90W	10800LM				
	SY-8348W-B-15-100W	100W	12000LM			L1540*W116*H60mm	
	SY-8348W-C-12-60W	60W	7200LM				
	SY-8348W-C-12-70W	70W	8400LM				
	SY-8348W-C-12-80W	80W	9600LM				
	SY-8348W-C-15-90W	90W	10800LM				
SY-8348W-C-15-100W	100W	12000LM	L1580*W116*H60mm				

Tri-Proof Light

8377 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

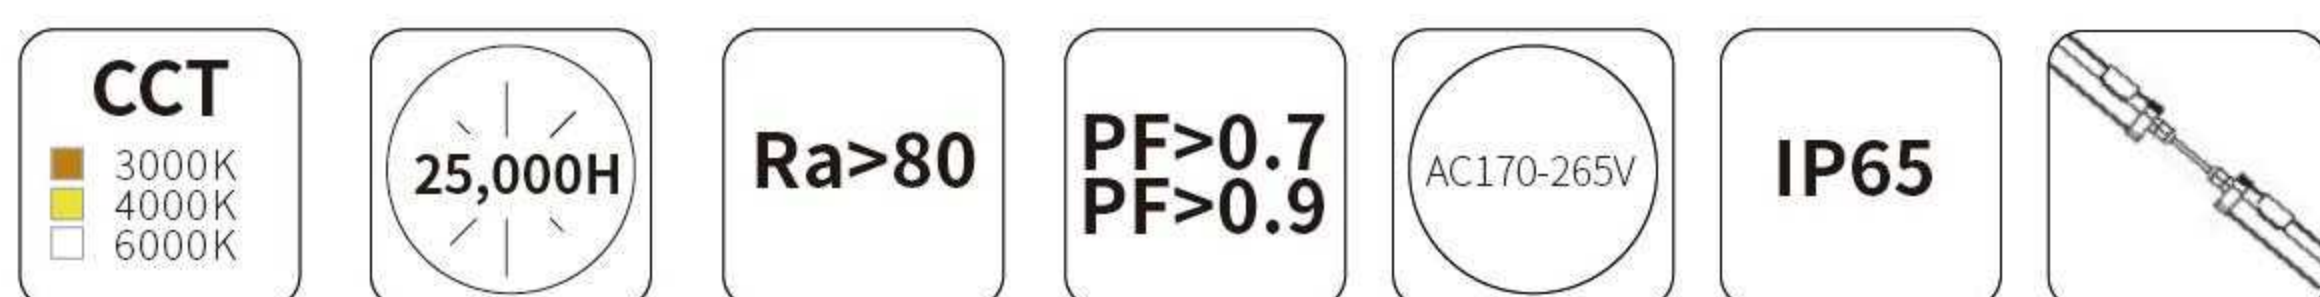
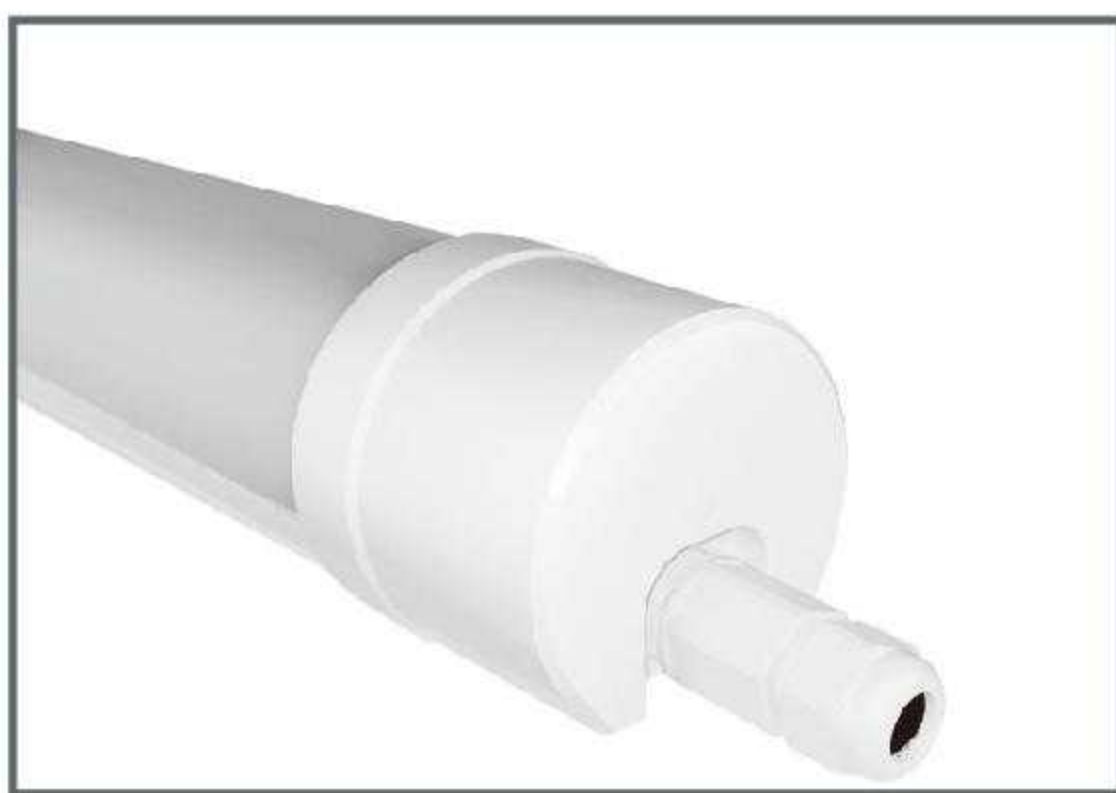
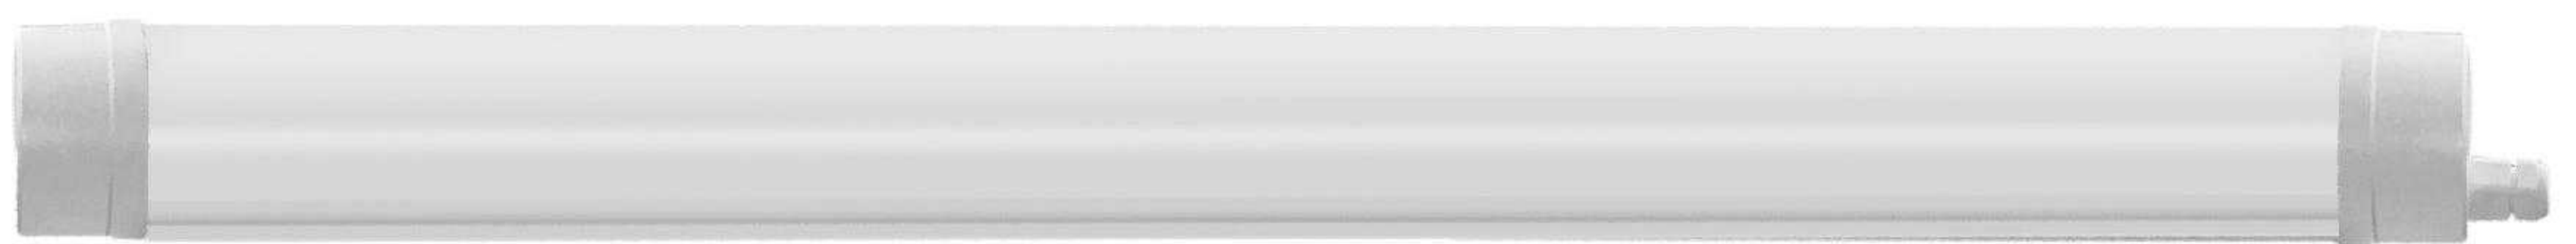
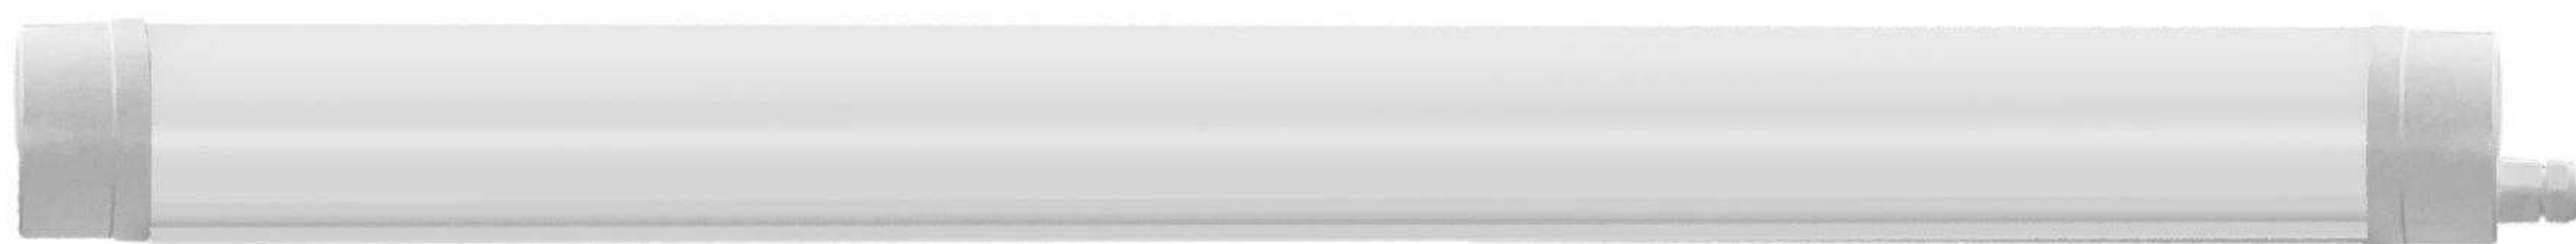


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8377	SY-8377-A-12-40W	40W	4800LM	180°	>80	L1215*W83*H77mm	PC
	SY-8377-A-12-60W	60W	7200LM				
	SY-8377-A-15-70W	70W	8400LM			L1515*W83*H77mm	
	SY-8377-B-12-40W	40W	4800LM			L1215*W83*H77mm	
	SY-8377-B-12-60W	60W	7200LM			L1515*W83*H77mm	
	SY-8377-B-15-70W	70W	8400LM			L1515*W83*H77mm	
	SY-8377-C-12-40W	40W	4800LM			L1215*W83*H77mm	
	SY-8377-C-12-60W	60W	7200LM			L1515*W83*H77mm	
	SY-8377-C-15-70W	70W	8400LM	L1515*W83*H77mm			

Tri-Proof Light

8970 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

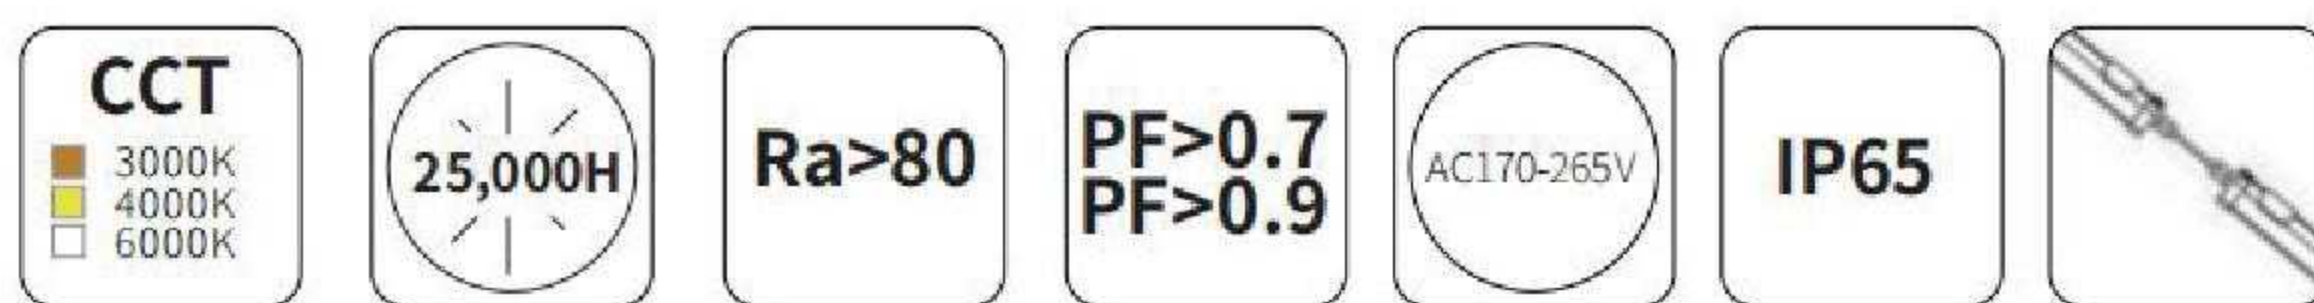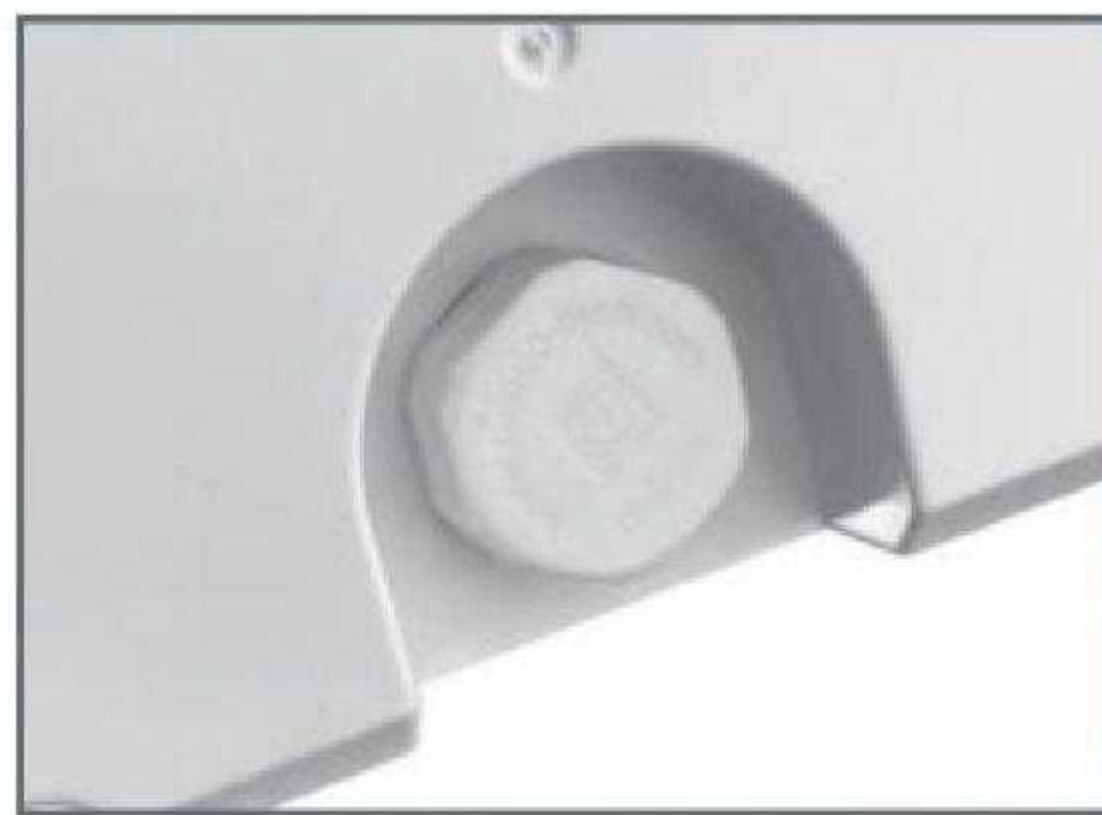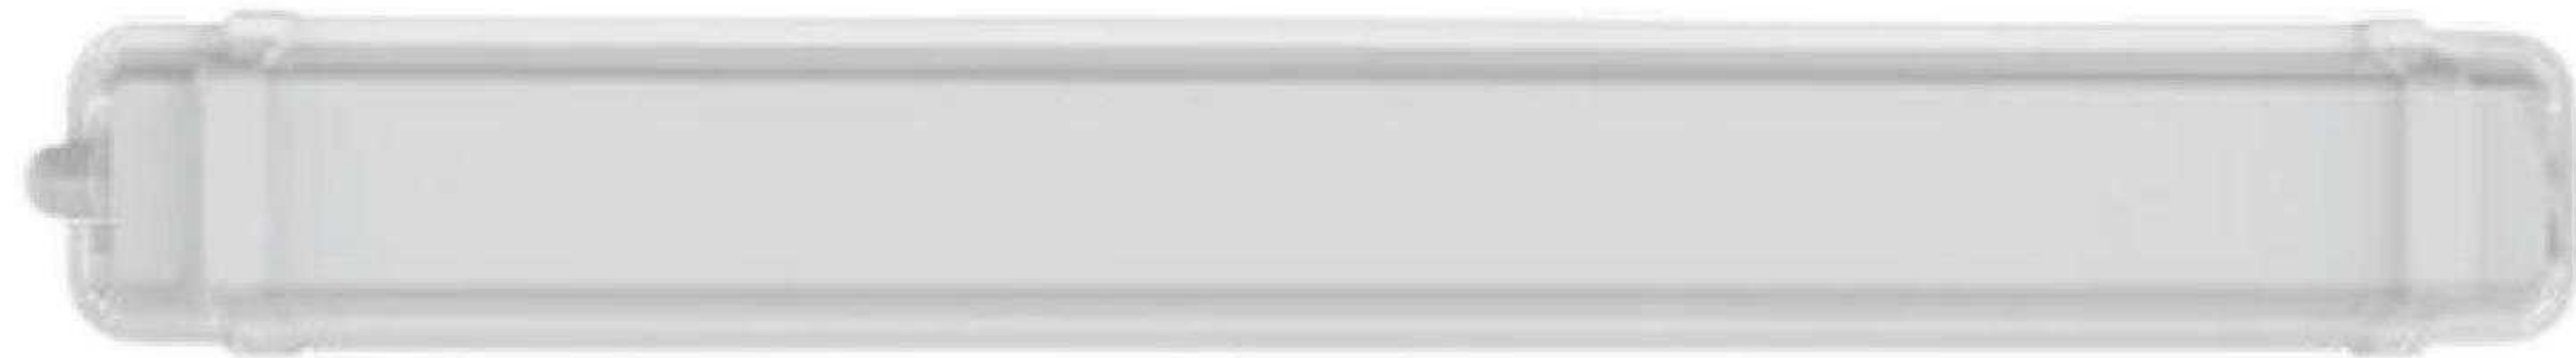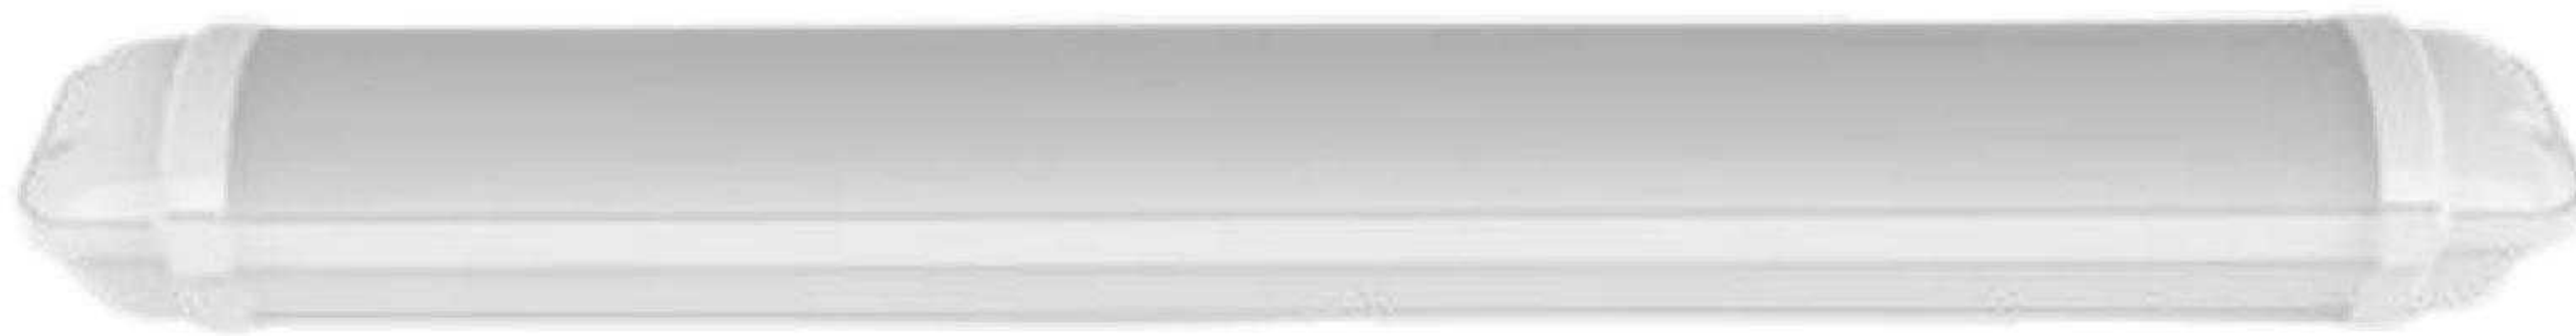


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
	SY-8970-A-06-40W						
	SY-8970-B-06-40W	40W	4800LM			L660*W89*H70mm	
	SY-8970-C-06-40W						
	SY-8970-A-12-80W						
8970	SY-8970-B-12-80W	80W	9600LM	120°	>80	L1270*W89*H70mm	PC
	SY-8970-C-12-80W						
	SY-8970-A-15-100W						
	SY-8970-B-15-100W	100W	12000LM			L1570*W89*H70mm	
	SY-8970-C-15-100W						

Tri-Proof Light

1645 Tri-Proof Light


OPTIONS: 120LM/W 140LM/W

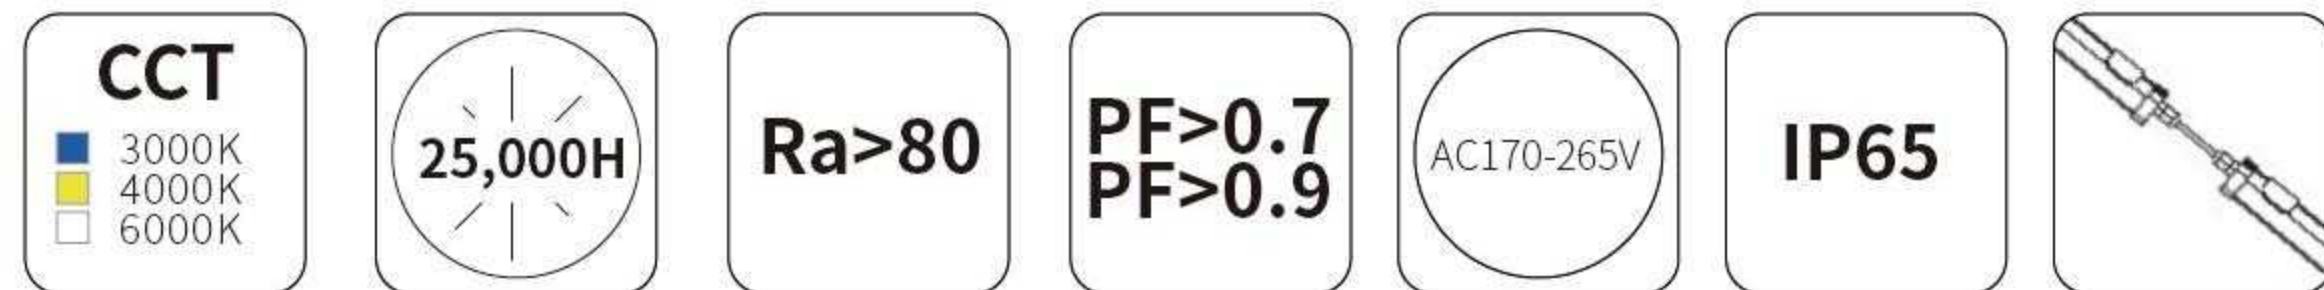

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
1645	SY-1645-A-12	70W	8400LM	120°	>80	L1210*W119*H48mm	PC
	SY-1645-A-15	90W	10800LM			L1510*W119*H48mm	
	SY-1645-B-12	70W	8400LM			L1210*W119*H48mm	
	SY-1645-B-15	90W	10800LM			L1510*W119*H48mm	
	SY-1645-C-12	70W	8400LM			L1210*W119*H48mm	
	SY-1645-C-15	90W	10800LM			L1510*W119*H48mm	

8348S Tri-Proof Light

OPTIONS: 120LM/W 140LM/W


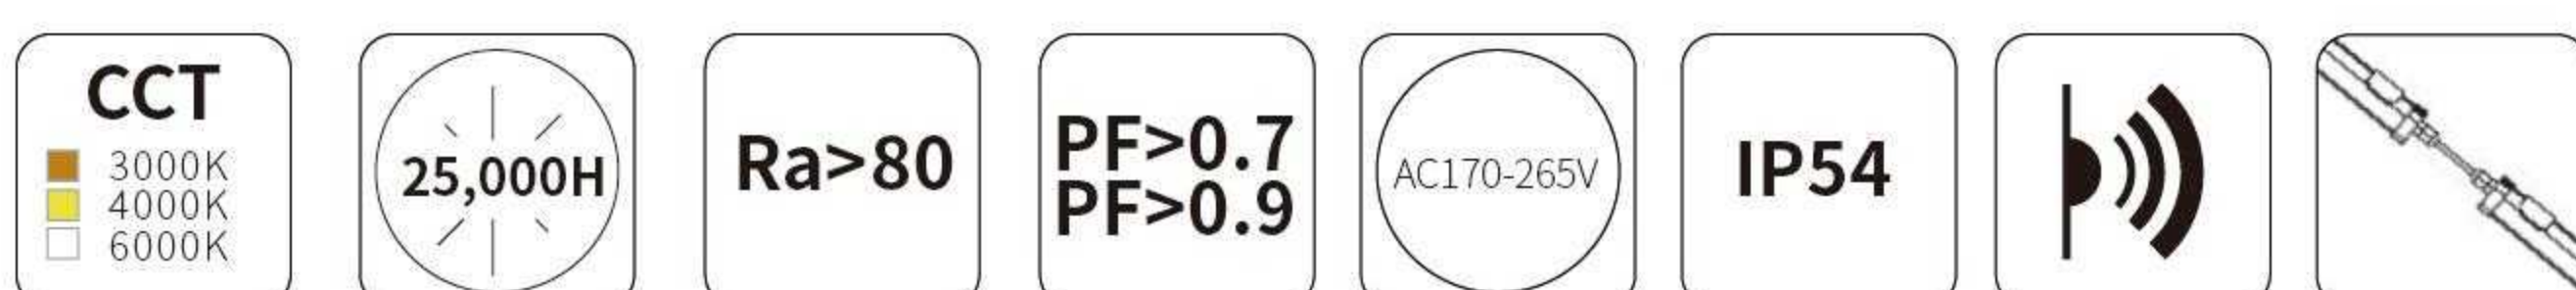


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348S	SY-8348S-A-06-18W	18W	2160LM	120°	>80	L610*W83*H60mm	PC
	SY-8348S-A-12-24W	24W	2880LM			L1210*W83*H60mm	
	SY-8348S-A-12-36W	36W	4320LM			L1210*W83*H60mm	
	SY-8348S-B-06-18W	18W	2160LM			L640*W83*H60mm	
	SY-8348S-B-12-24W	24W	2880LM			L1240*W83*H60mm	
	SY-8348S-B-12-36W	36W	4320LM			L1240*W83*H60mm	
	SY-8348S-C-06-18W	18W	2160LM			L680*W83*H60mm	
	SY-8348S-C-12-24W	24W	2880LM			L1280*W83*H60mm	
	SY-8348S-C-12-36W	36W	4320LM			L1280*W83*H60mm	

Tri-Proof Light

5933 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

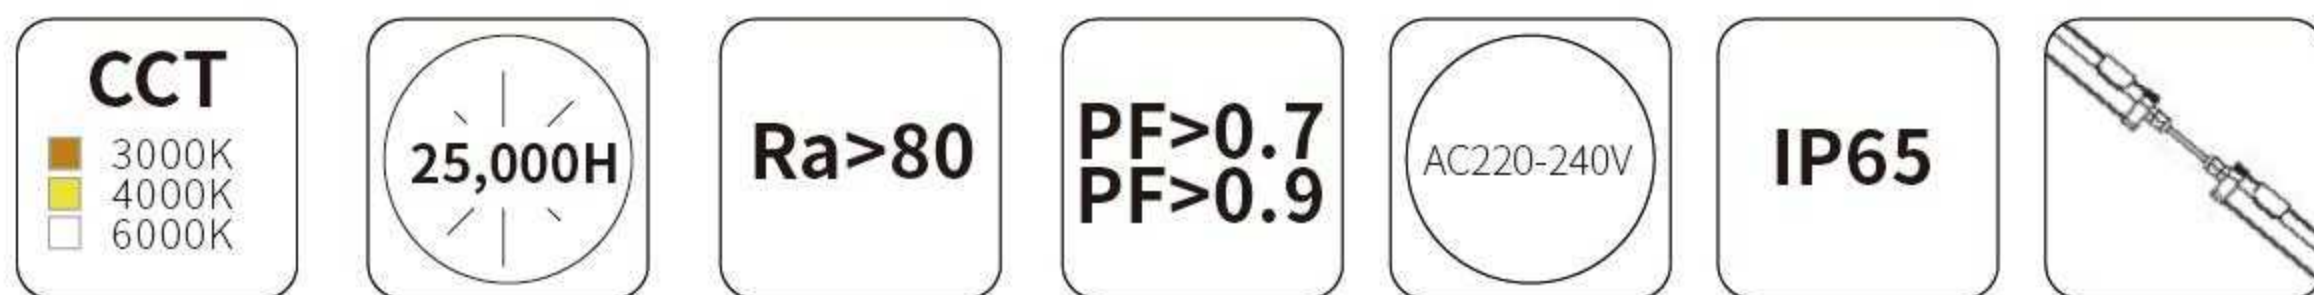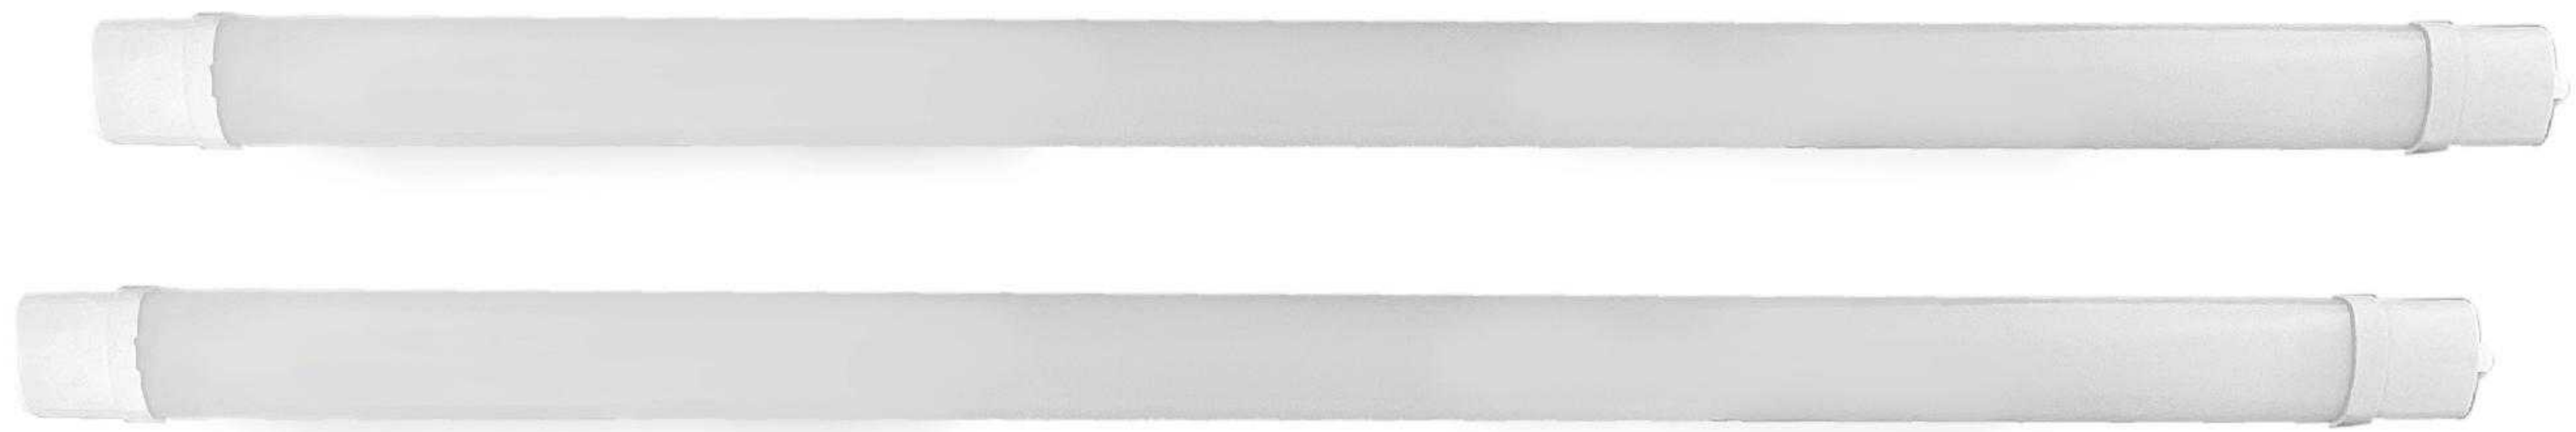

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
5933	SY-5933-A-12	36W	4320LM	120°	>80	L1230*W59*H33	PC
	SY-5933-B-12						
	SY-5933-C-12						
	SY-5933-A-12	60W	7200LM			L1230*W59*H33	
	SY-5933-B-12						
	SY-5933-C-12						
	SY-5933-A-15	70W	8400LM			L1530*W59*H33	
	SY-5933-B-15						
	SY-5933-C-15						

Tri-Proof Light

5863 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W



CCT

- 3000K
- 4000K
- 6000K

25,000H

Ra>80

PF>0.7
PF>0.9

AC170-265V





IP54

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
5863	SY-5863 -A-12-60W CCT	60W	7200LM	120°	>80	L1225*W58*H63mm	PC
	SY-5863 -A-12-70W CCT	70W	8400LM			L1225*W58*H63mm	
	SY-5863 -A-15-70W CCT	70W	8400LM			L1525*W58*H63mm	
	SY-5863 -A-15-80W CCT	80W	9600LM			L1525*W58*H63mm	
	SY-5863 -A-15-90W CCT	90W	10800LM			L1525*W58*H63mm	

Tri-Proof Light

8348M Tri-Proof Light




OPTIONS: 120LM/W 140LM/W 160LM/W

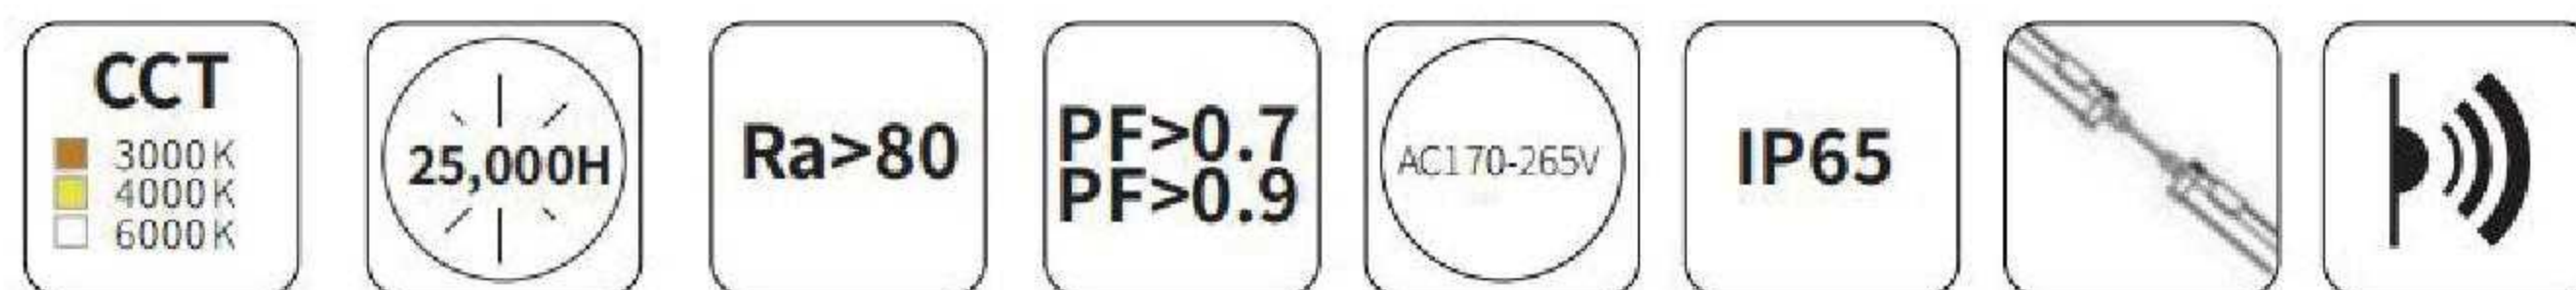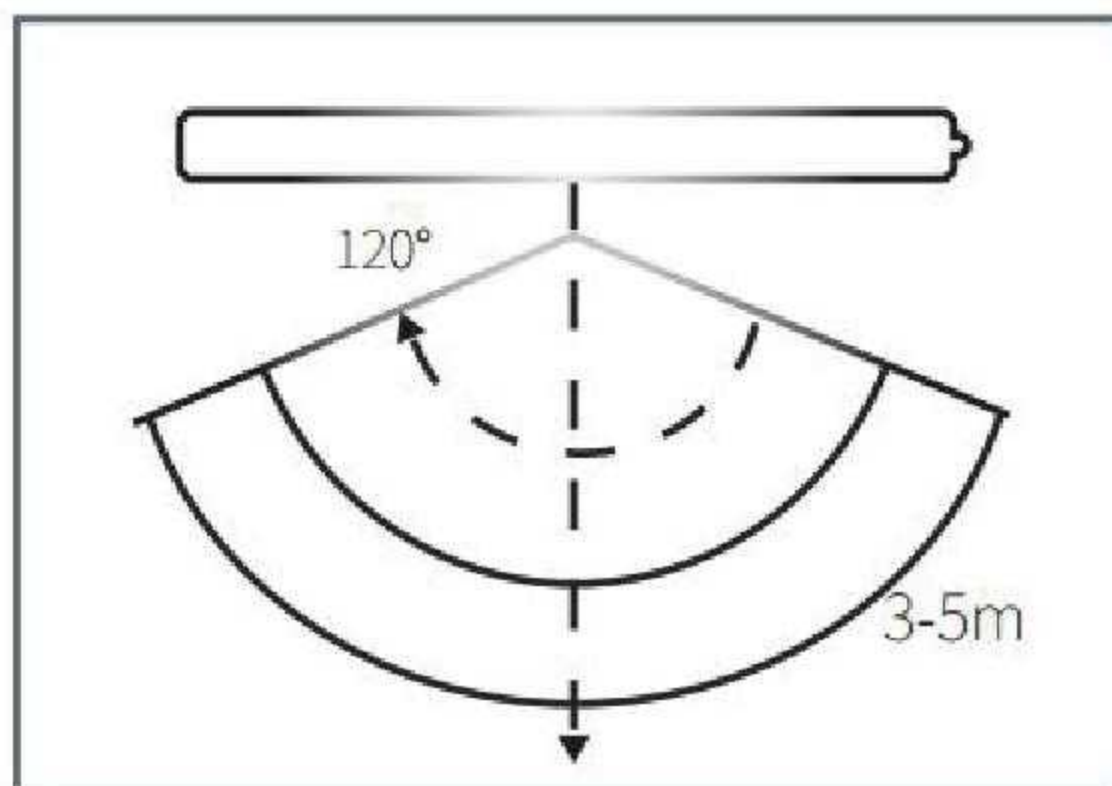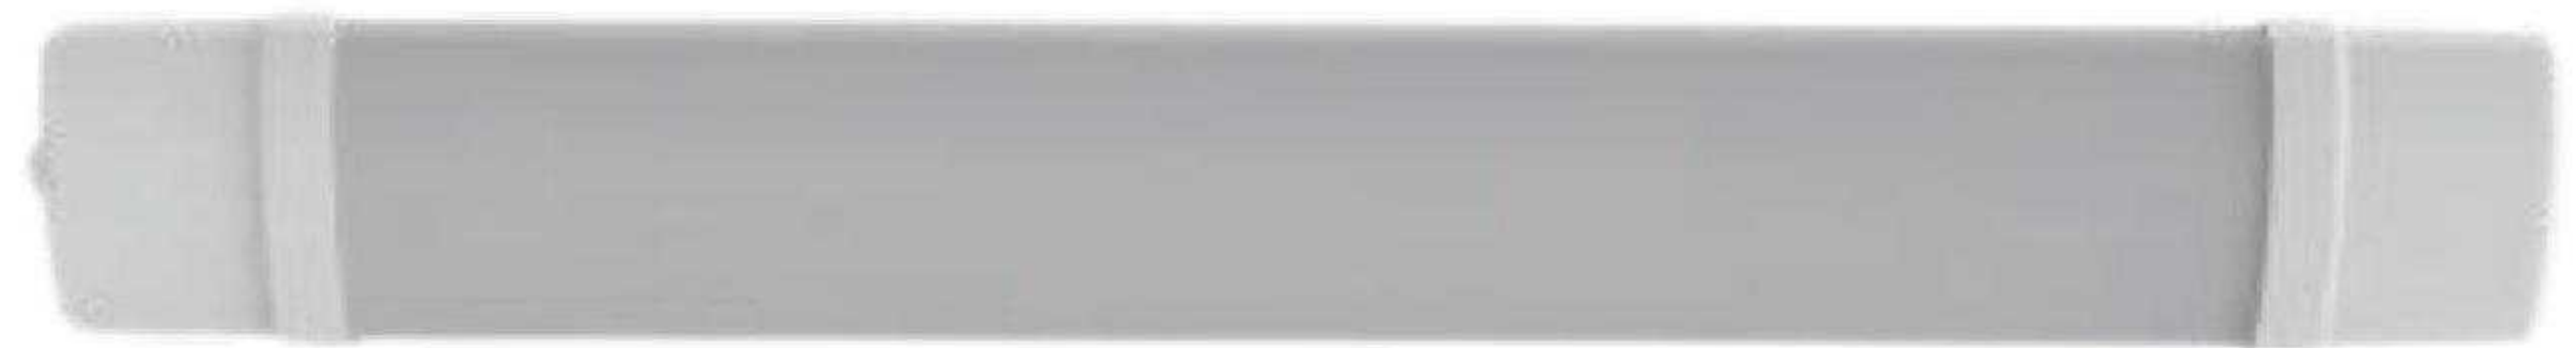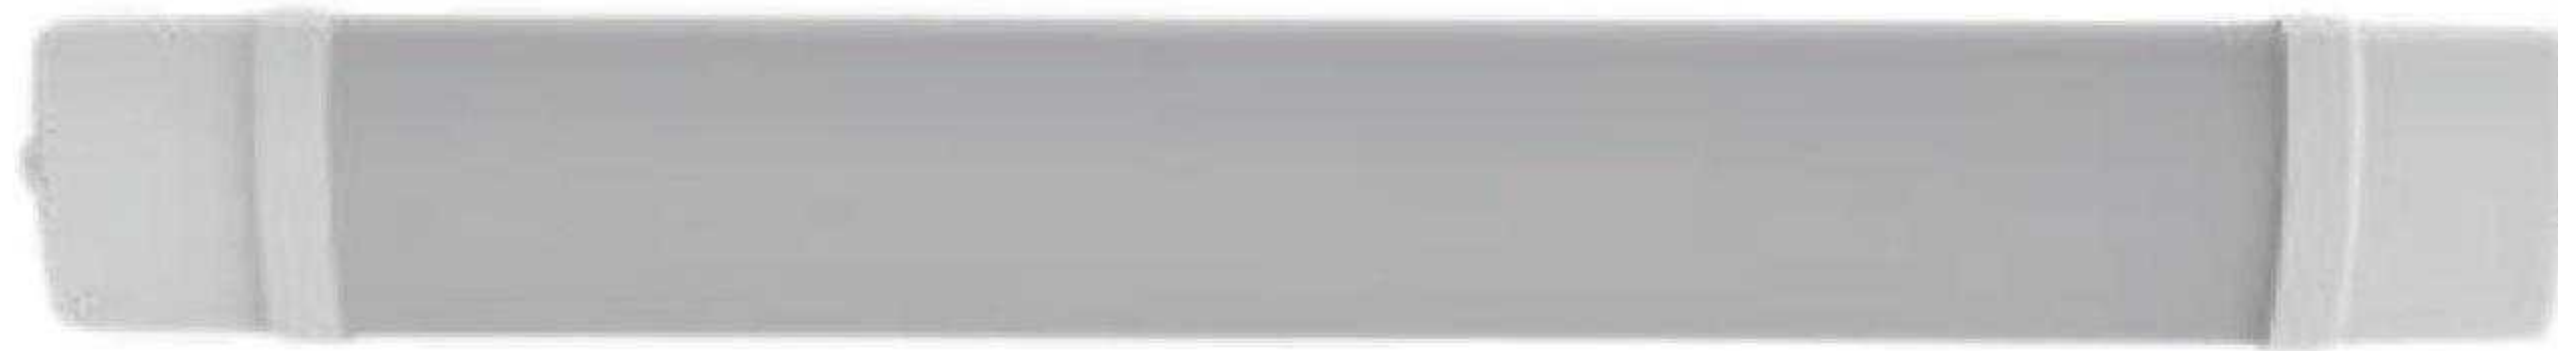

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348M	SY-8348M-A-06-18W	18W	2160LM	120°	>80	L610*W83*H48mm	PC
	SY-8348M-A-06-24W	24W	2640LM			L610*W83*H48mm	
	SY-8348M-A-12-36W	36W	4320LM			L610*W83*H48mm	
	SY-8348M-A-12-45W	45W	4950LM			L1210*W83*H48mm	
	SY-8348M-B-06-18W	18W	2160LM			L1210*W83*H48mm	
	SY-8348M-B-06-24W	24W	2640LM			L640*W83*H48mm	
	SY-8348M-B-12-36W	36W	4320LM			L640*W83*H48mm	
	SY-8348M-B-12-45W	45W	4950LM			L1240*W83*H48mm	
	SY-8348M-C-06-18W	18W	2160LM			L1240*W83*H48mm	
	SY-8348M-C-06-24W	24W	2640LM			L680*W83*H48mm	
	SY-8348M-C-12-36W	36W	4320LM			L680*W83*H48mm	
	SY-8348M-C-12-36W	36W	4320LM			L1280*W83*H48mm	
	SY-8348M-C-12-45W	45W	4950LM			L1280*W83*H48mm	

Tri-Proof Light




APPLICATION areas

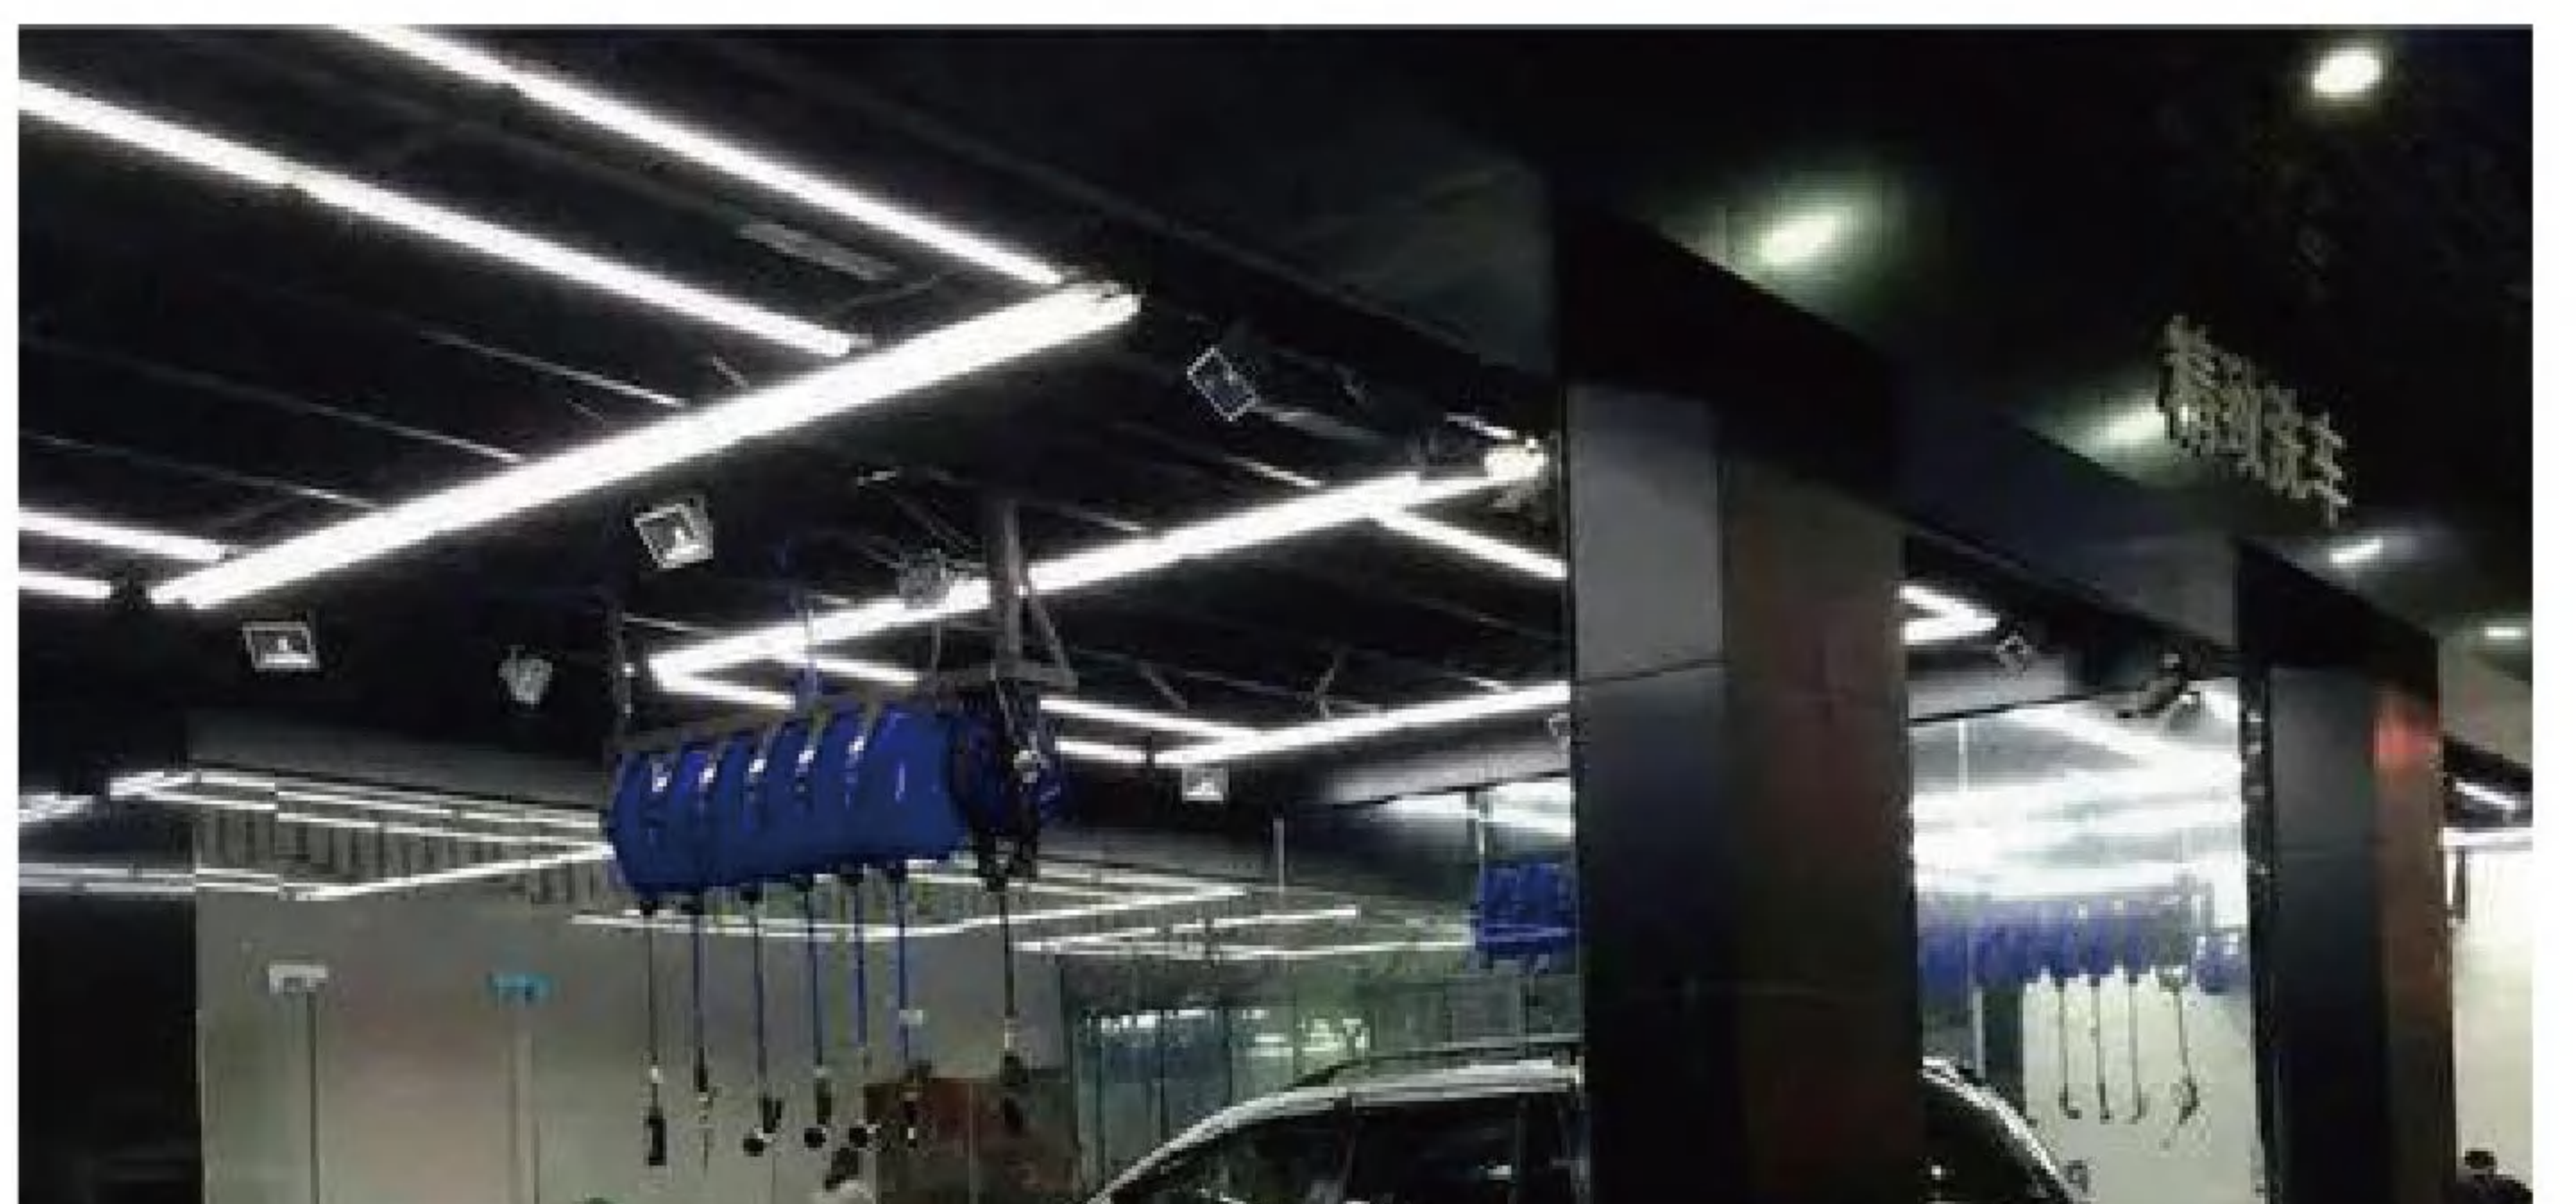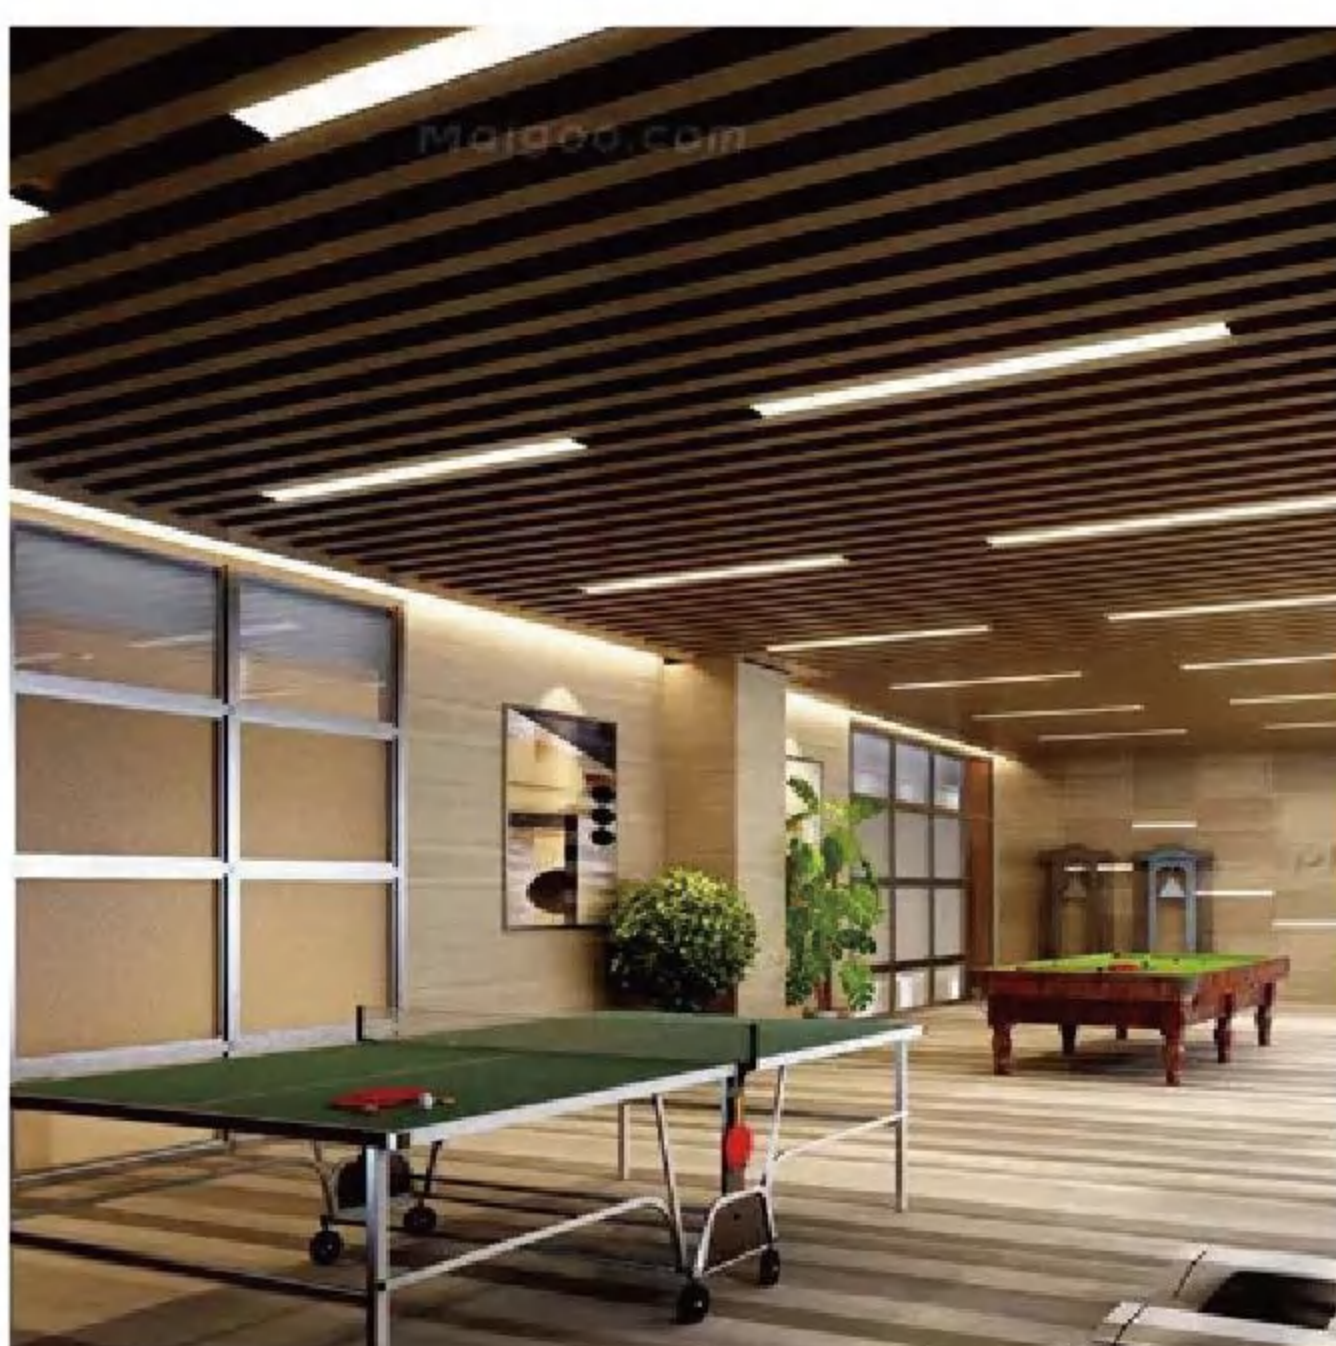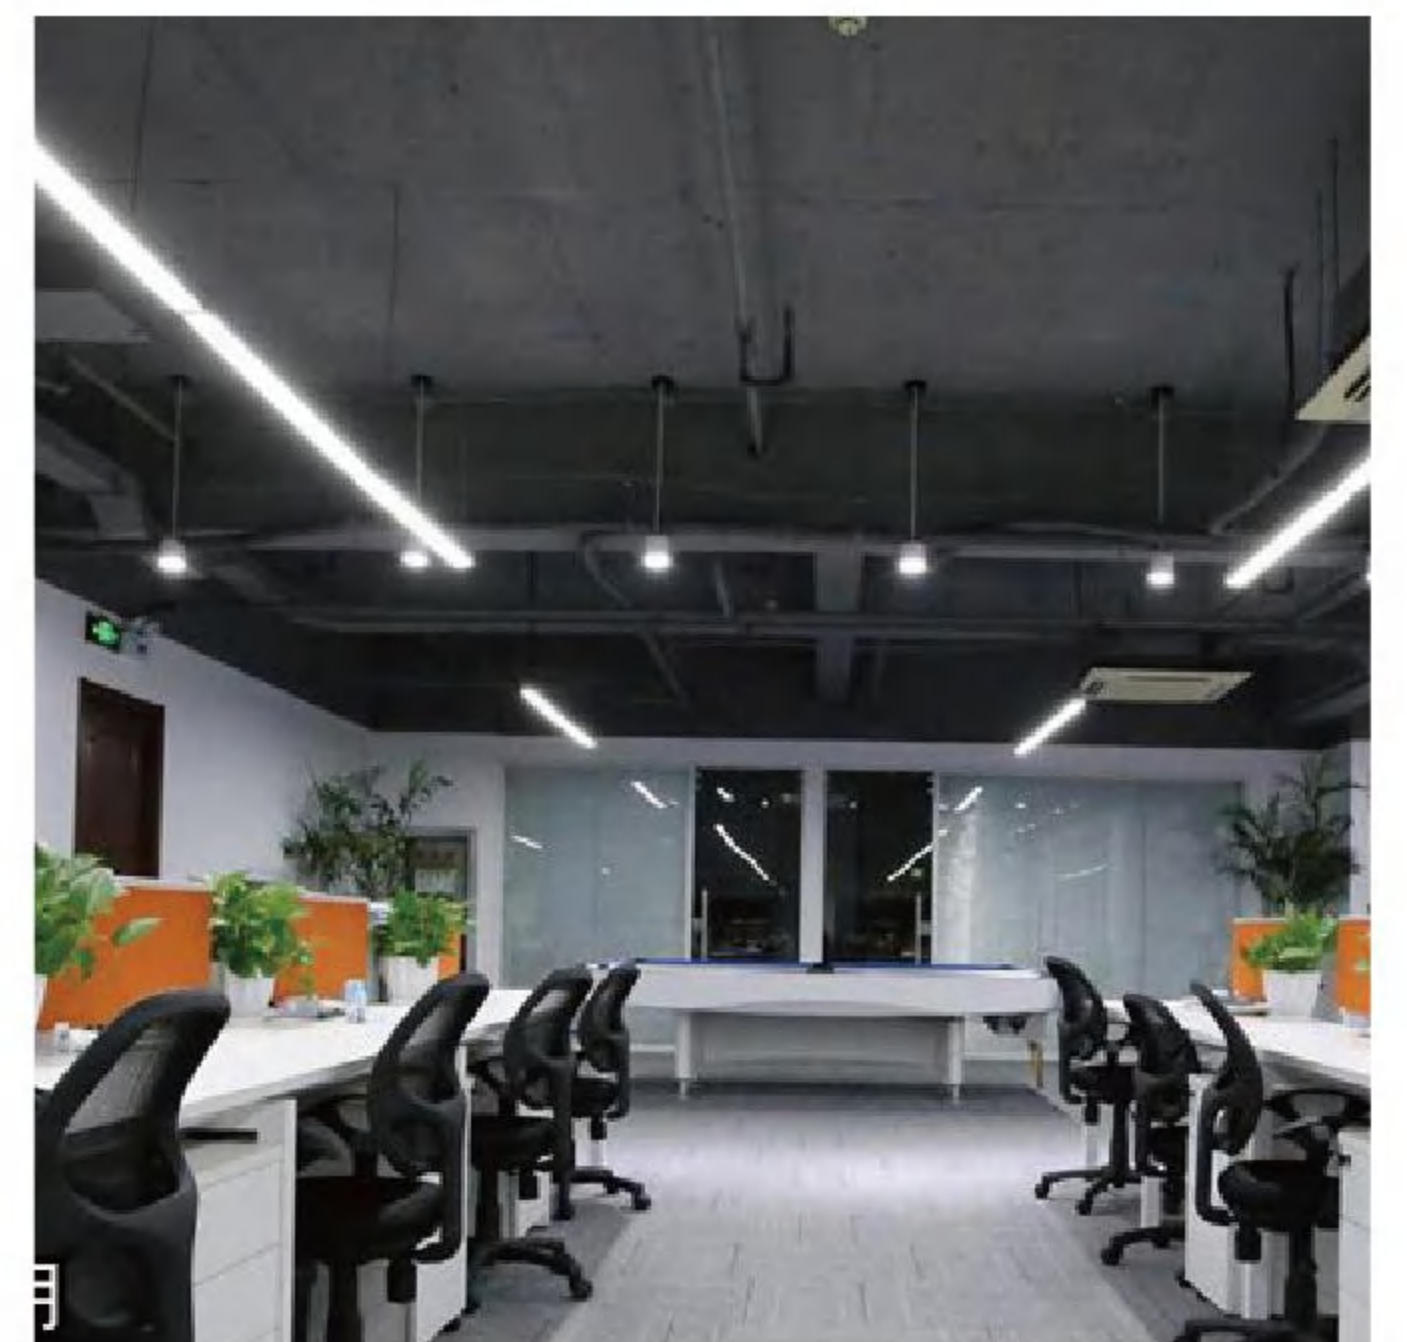

Tri-Proof Light

6052 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

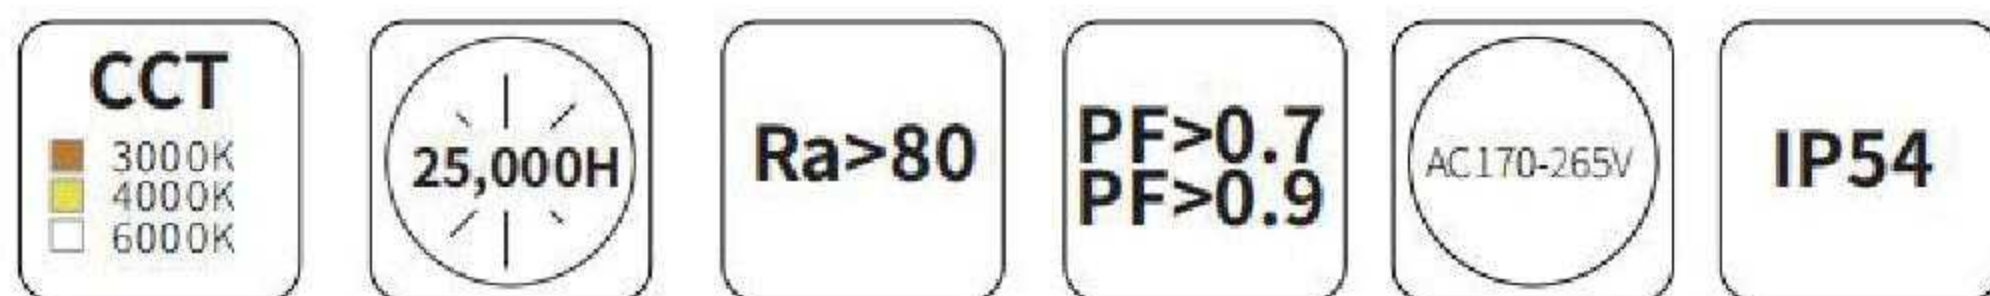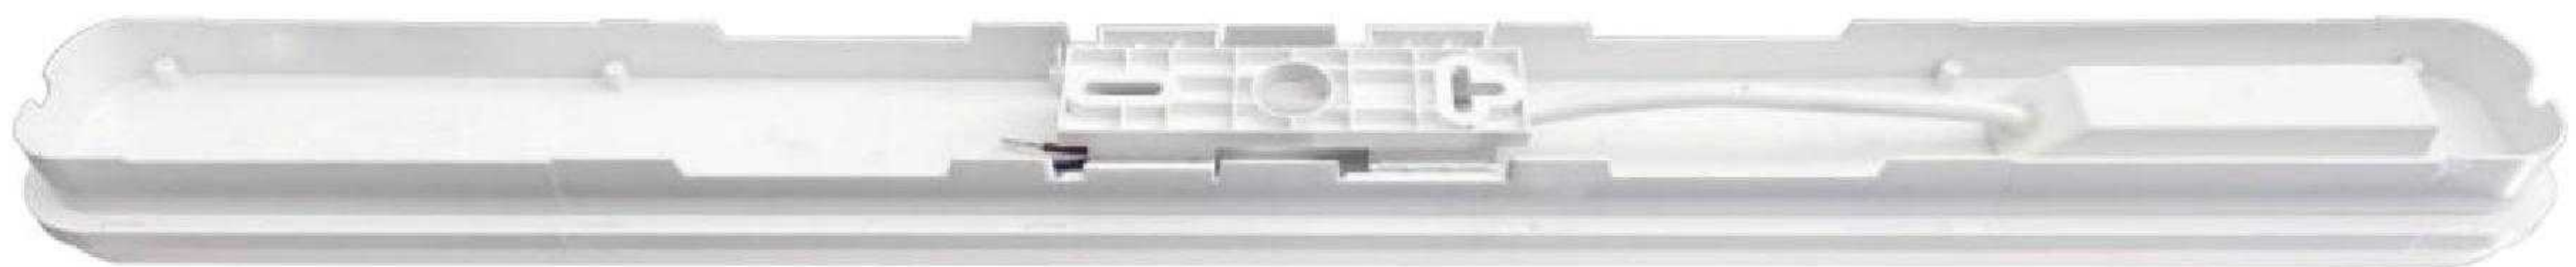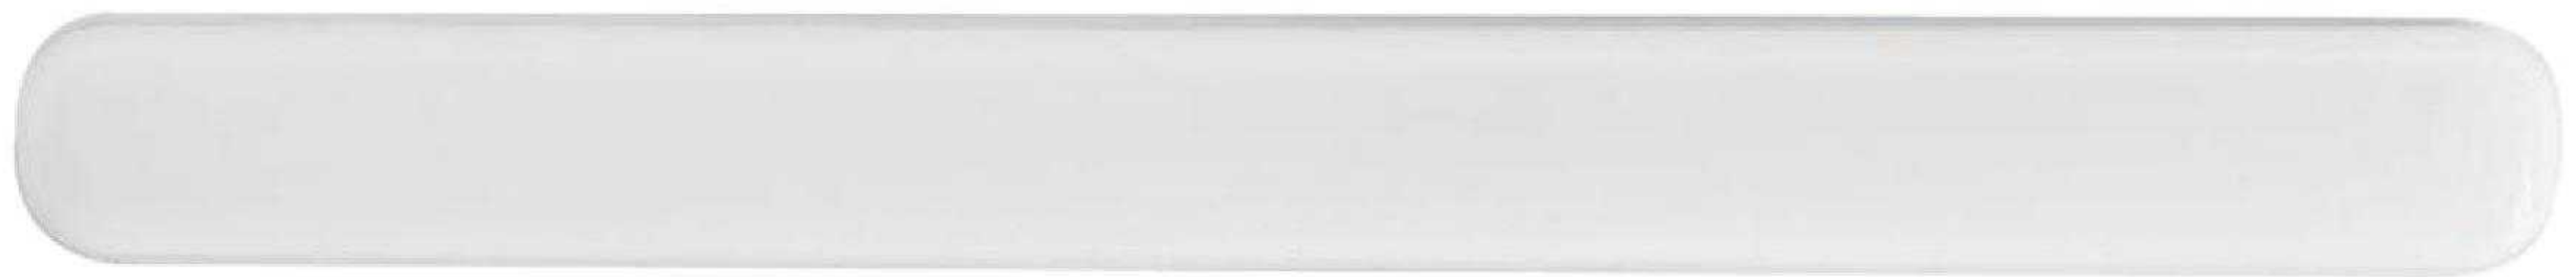

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
6052	SY-6052-25W NW	25W	3000LM	120°	>80	L600*W60*H52mm	PC
	SY-6052-25W CW	25W	3000LM	120°		L600*W60*H52mm	
	SY-6052-50W NW	50W	6000LM	120°		L1200*W60*H52mm	
	SY-6052-50W CW	50W	6000LM	360°		L1200*W60*H52mm	


2022

Linear Batten Light

Environmental protection, energy saving.

T5 Fixture Lamp



T5 Fixture Lamp

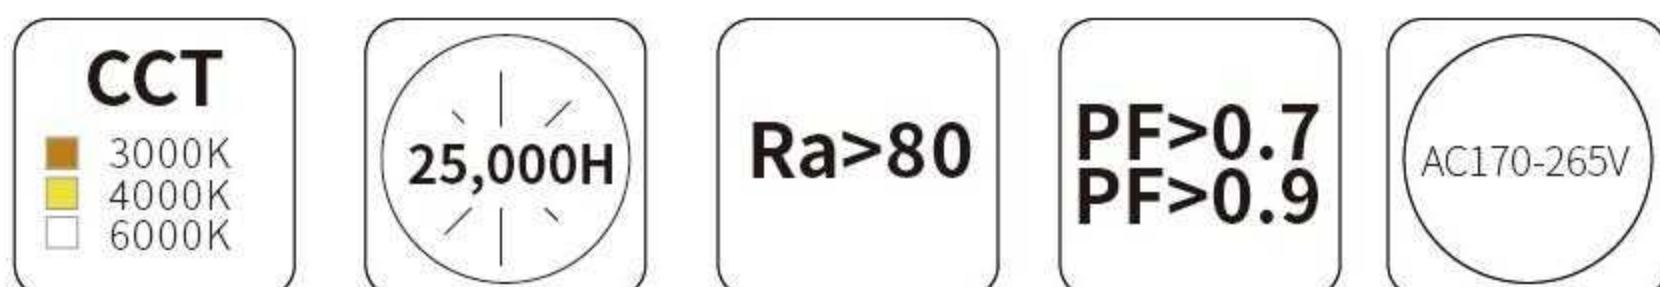

Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
SY-T5-03 4W CCT	4W	400LM		Φ313*28*36		
SY-T5-06 8W CCT	8W	800LM		Φ573*28*36		
SY-T5-09 12W CCT	12W	1200LM	120°	Φ873*28*36	/	PC
SY-T5-12 16W CCT	16W	1700LM		Φ1173*28*36		

T5 Fixture Lamp

T5 installation

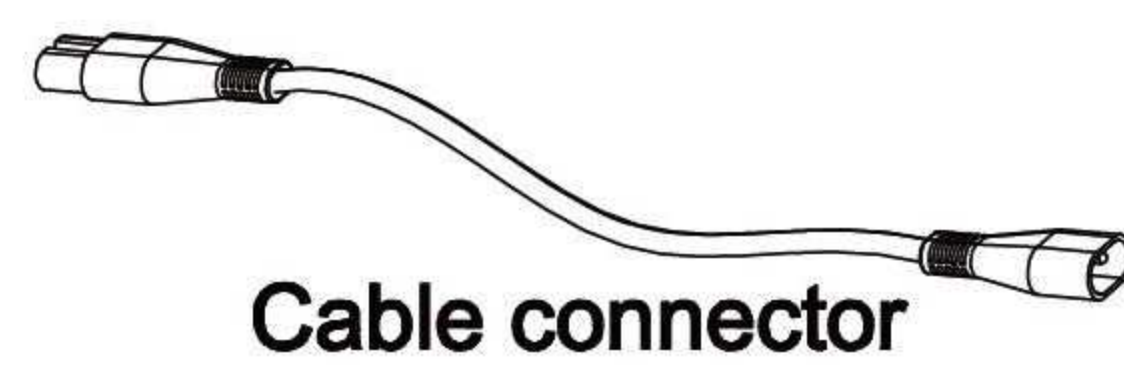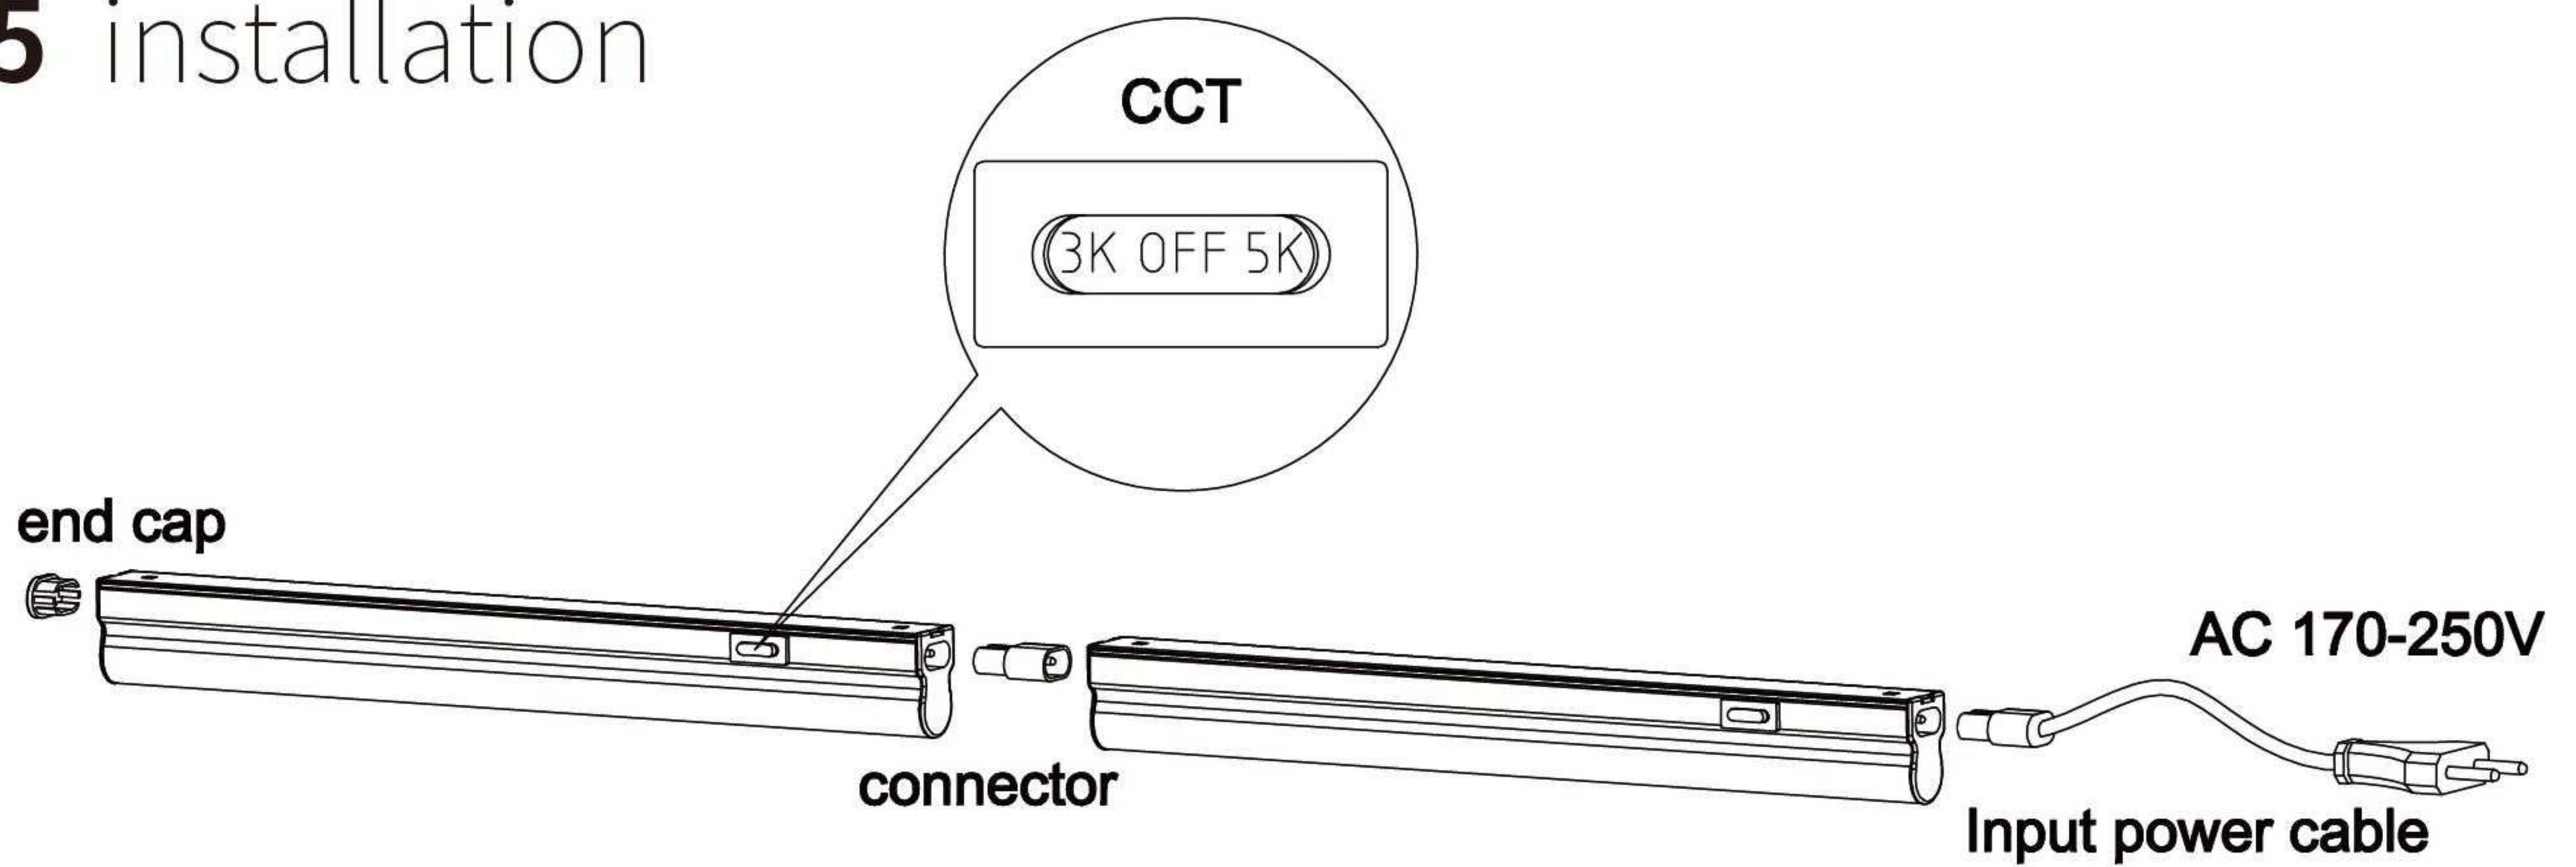

T5 spare part list

Spare part picture



a)



b)



c)



d)



e)



f)

Description

a:Connector(1PCS)

b:Brackets(2PCS)

c:One metre PVC input power cable[(one end with EU plug,another end with female connector)](1PCS)

d:25cm PVC cable connetor[(one end with male connector, another end with female connector)](1PCS)

e:Outlet end cap(1PCS)


f:Screws(2PCS)

LED Linear Batten Light

LED Linear Batten Light



STTPS01

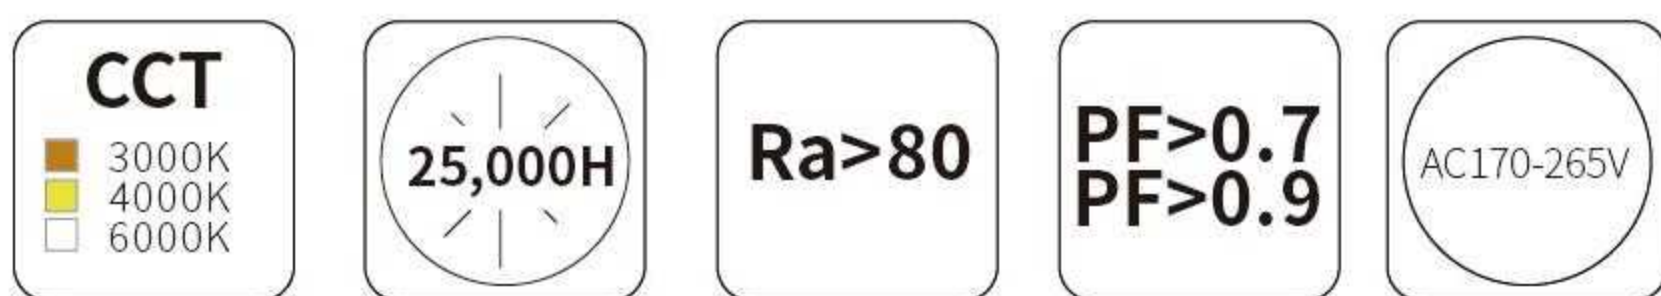


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
0.3M Linear Light	STTPS01-01	10W	900lm		L300*W75*H24		
0.6M Linear Light	STTPS01-02	18W	1620lm		L600*W75*H24		
0.9M Linear Light	STTPS01-03	27W	2430lm	120°	L900*W75*H24	44	Aluminum & Plastic
1.2M Linear Light	STTPS01-04	36W	3240lm		L1200*W75*H24		
1.5M Linear Light	STTPS01-05	48W	4320lm		L1500*W75*H24		



LED Linear Batten Light



STTPS02

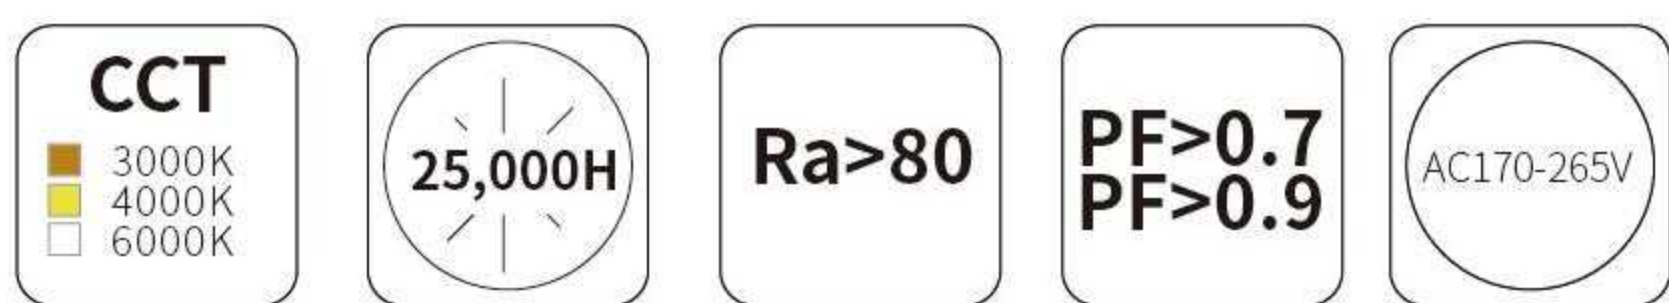

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
0.3M Linear Light	STTPS02-01	10W	900lm		L300*W75*H24		
0.6M Linear Light	STTPS02-02	18W	1620lm		L600*W75*H24		
0.9M Linear Light	STTPS02-03	27W	2430lm	120°	L900*W75*H24	44	Plastic
1.2M Linear Light	STTPS02-04	36W	3240lm		L1200*W75*H24		
1.5M Linear Light	STTPS02-05	48W	4320lm		L1500*W75*H24		




2023

LED Flood Light

Environmental protection, energy saving.

LED Flood Light


LED Flood Light

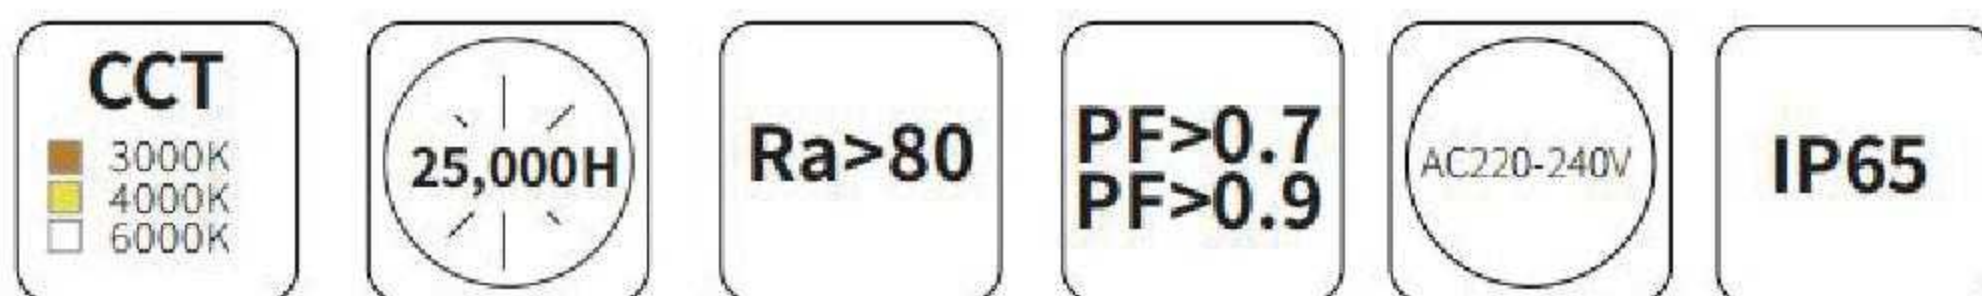

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
CK10W	SY6010	10W	1200lm		L98*W76*H20		
CK 20W	SY6020	20W	2400lm		L133*W97*H21.5		
CK 30W	SY6030	30W	3600lm	120°	L168*W120*H22.5	65	die-casting aluminum
CK 50W	SY6050	50W	6000lm		L213*W168*H24		
CK 100W	SY6100	100W	12000lm		L282*W222*H25		

LED Flood Light

Embedded infrared induction

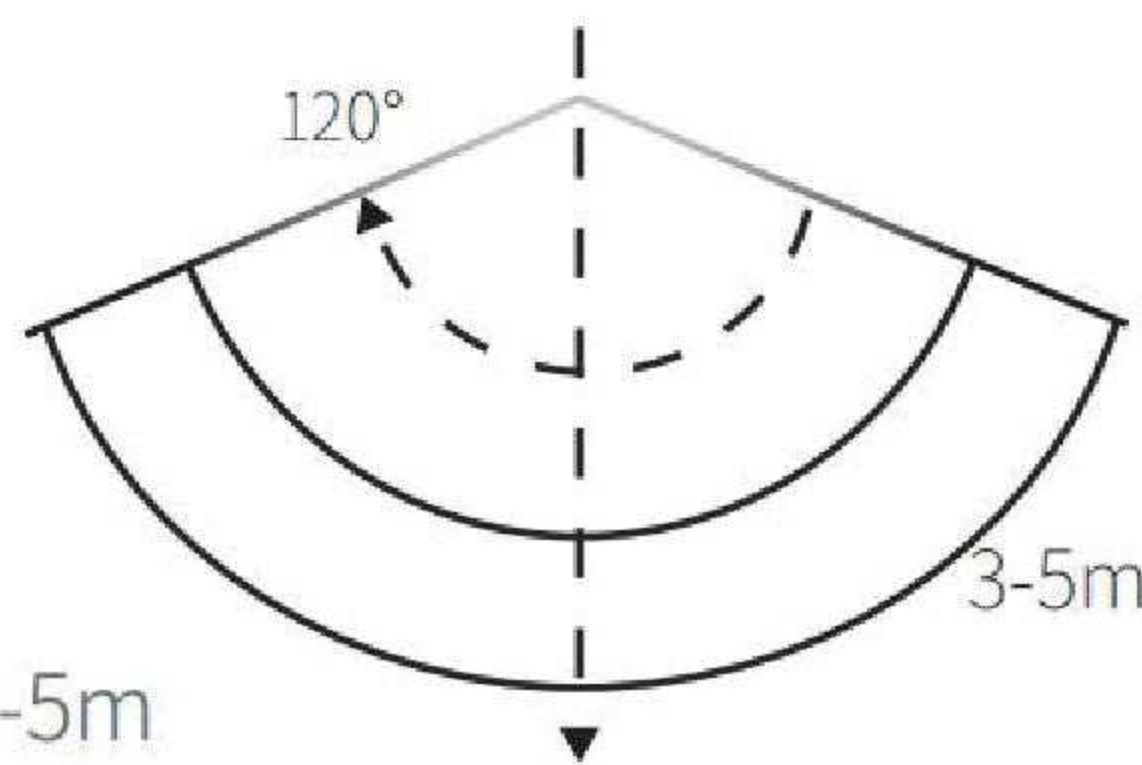

- Sensing distance: 3-5m
- Induction angle: 120°

CCT
■ 3000K
■ 4000K
□ 6000K

25,000H

Ra>80

PF>0.7
PF>0.9


AC220-240V

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
CK10W With IR	SY6010S	10W	1200lm		L90*W148*H20		
CK 20W With IR	SY6020S	20W	2400lm		L133*W169*H21.5		
CK 30W With IR	SY6030S	30W	3600lm	120°	L168*W192*H22.5	65	die-casting aluminum
CK 50W With IR	SY6050S	50W	6000lm		L213*W240*H24		
CK 100W With IR	SY6100S	100W	12000lm		L282*W294*H25		

LED Flood Light



SY7010-SY7300

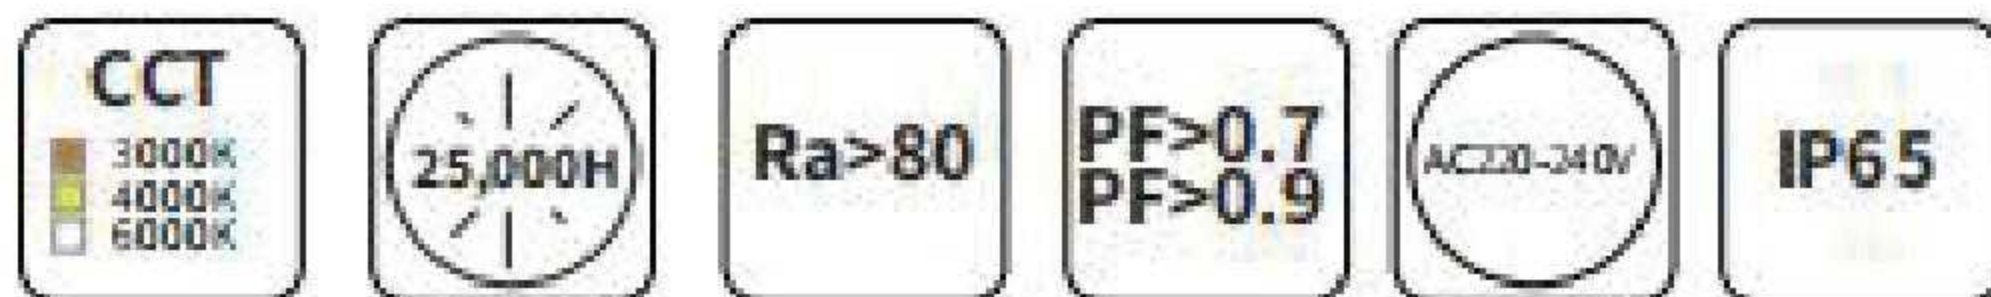


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
BK10W	SY7010	10W	1000lm	120°	L93*W103*H24	65	die-casting aluminum
BK 20W	SY7020	20W	2000lm		L132*W160*H26		
BK 30W	SY7030	30W	3000lm		L132*W160*H26		
BK 50W	SY7050	50W	5000lm		L170*W206*H33		
BK 100W	SY7100	100W	10000lm		L210*W270*H33		
BK 150W	SY7150	150W	15000lm		L280*W380*H35		
BK 200W	SY7200	200W	20000lm		L280*W380*H35		
BK 300W	SY7300	300W	30000lm		L335*W445*H45		

LED Flood Light

LED Flood Light



SY5010—SY5100

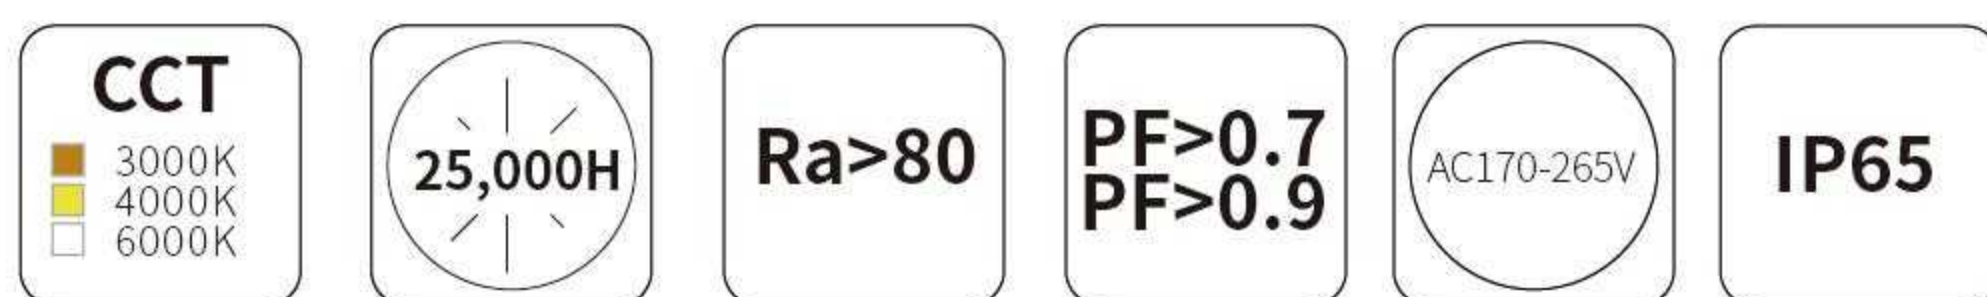


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
EK10W	SY5010	10W	1000lm		L70*W90*H22		
EK 20W	SY5020	20W	2000lm		L88*W125*H25		
EK 30W	SY5030	30W	3000lm	120°	L110*W159*H30	65	die-casting aluminum
EK 50W	SY5050	50W	5000lm		L161*W206*H30		
EK 100W	SY5100	100W	10000lm		L211*W270*H30		

LED Flood Light



SY5010—SY5100

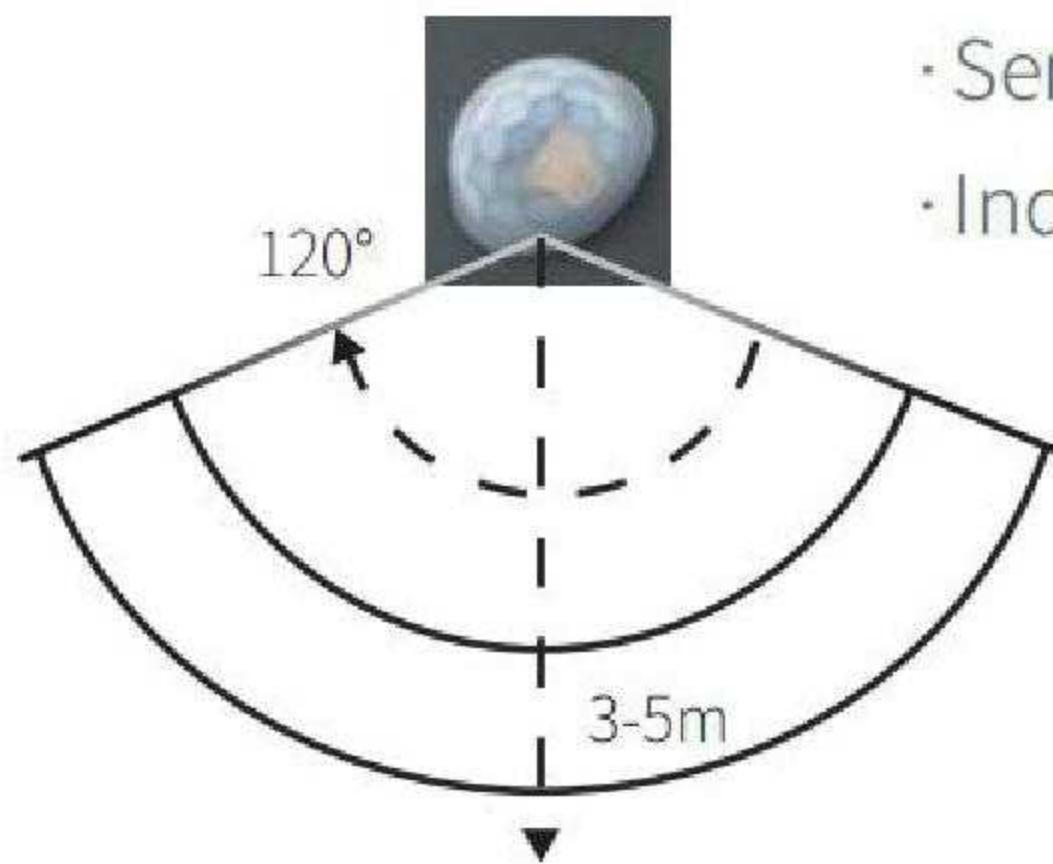

- Sensing distance: 3-5m
- Induction angle: 120°



CCT
3000K
4000K
6000K

25,000H

Ra>80

**PF>0.7
PF>0.9**

AC220-240V

IP65


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
EK 10W With IR	SY5010S	10W	1000lm		L90*W145*H22		
EK 20W With IR	SY5020S	20W	2000lm		L125*W163*H25		
EK 30W With IR	SY5030S	30W	3000lm	120°	L159*W185*H30	65	die-casting aluminum
EK 50W With IR	SY5050S	50W	5000lm		L206*W236*H30		
EK 100W With IR	SY5100S	100W	10000lm		L270*W286*H30		

LED Flood Light

LED Flood Light



SY9010-SY9050

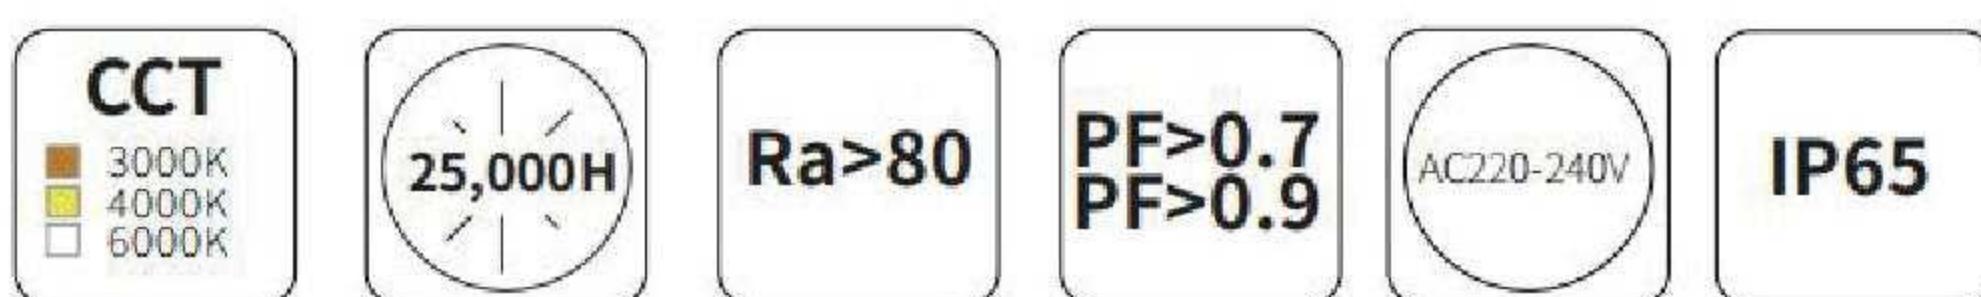


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
PZ 10W	SY9010	10W	1000lm		L161*W140*H47		
PZ 20W	SY9020	20W	2000lm	120°	L193*W170*H47	65	die-casting aluminum
PZ 30W	SY9030	30W	3000lm		L219*W195*H47		
PZ 50W	SY9050	50W	5000lm		L264*W235*H49		

LED Flood Light



SY9010S-SY9050S

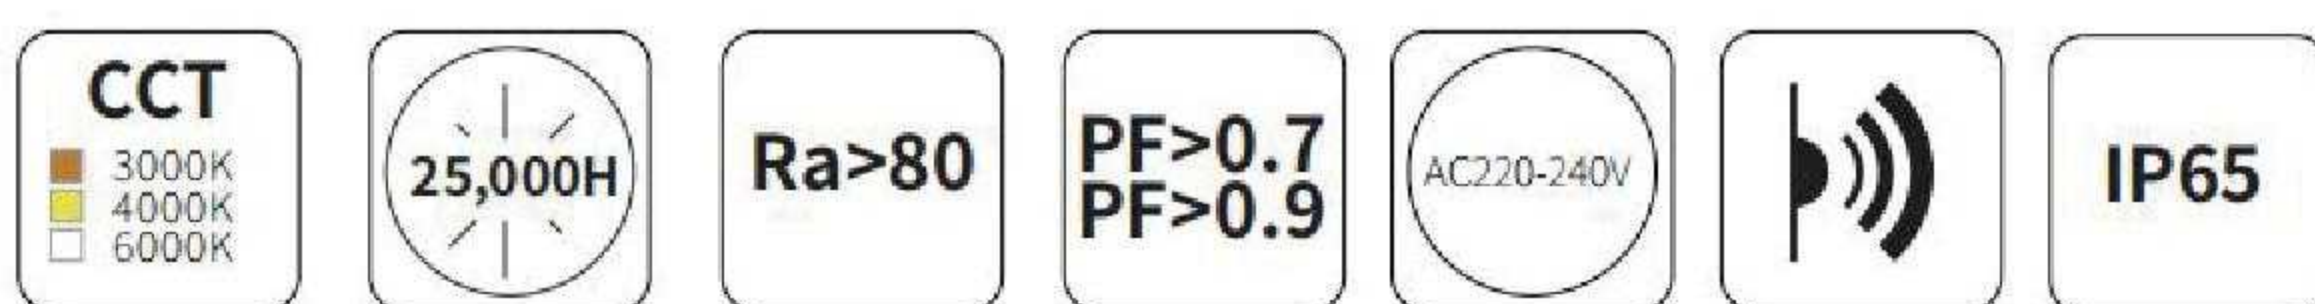


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
PZ 10W With IR	SY9010S	10W	1000lm	120°	L161*W140*H47	65	die-casting aluminum
PZ 20W With IR	SY9020S	20W	2000lm		L193*W170*H47		
PZ 30W With IR	SY9030S	30W	3000lm		L219*W195*H47		
PZ 50W With IR	SY9050S	50W	5000lm		L264*W235*H49		

LED Flood Light

LED Flood Light

SY9010M-SY9050M

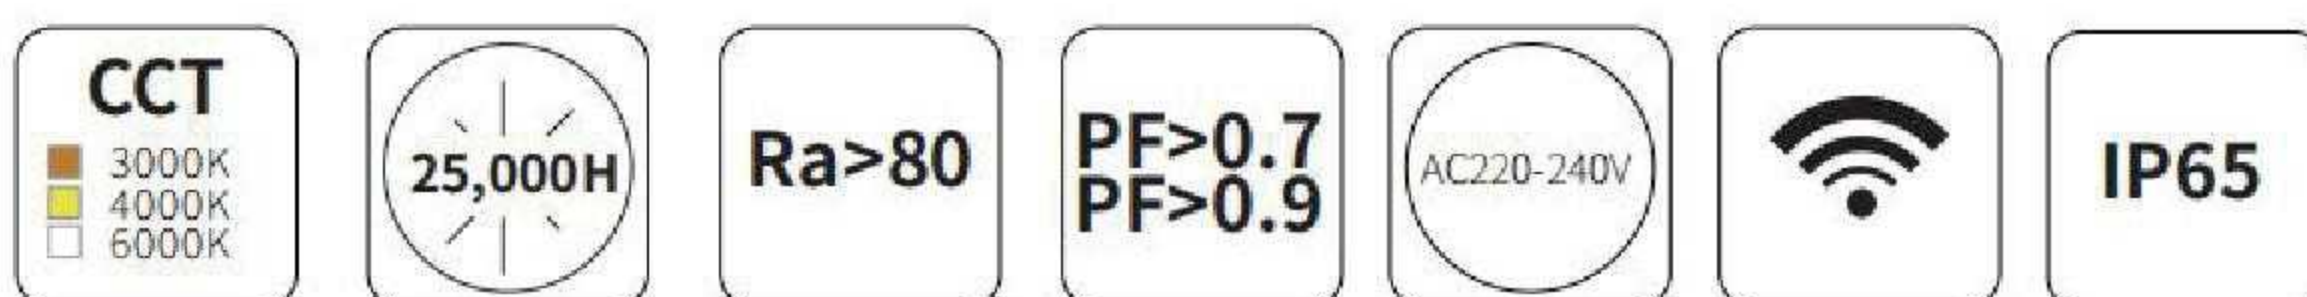


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
PZ 10W With MS	SY9010M	10W	1000lm		L161*W140*H47		
PZ 20W With MS	SY9020M	20W	2000lm	120°	L193*W170*H47	65	die-casting aluminum
PZ 30W With MS	SY9030M	30W	3000lm		L219*W195*H47		
PZ 50W With MS	SY9050M	50W	5000lm		L264*W235*H49		

LED Flood Light




SYDL205-SYDL240

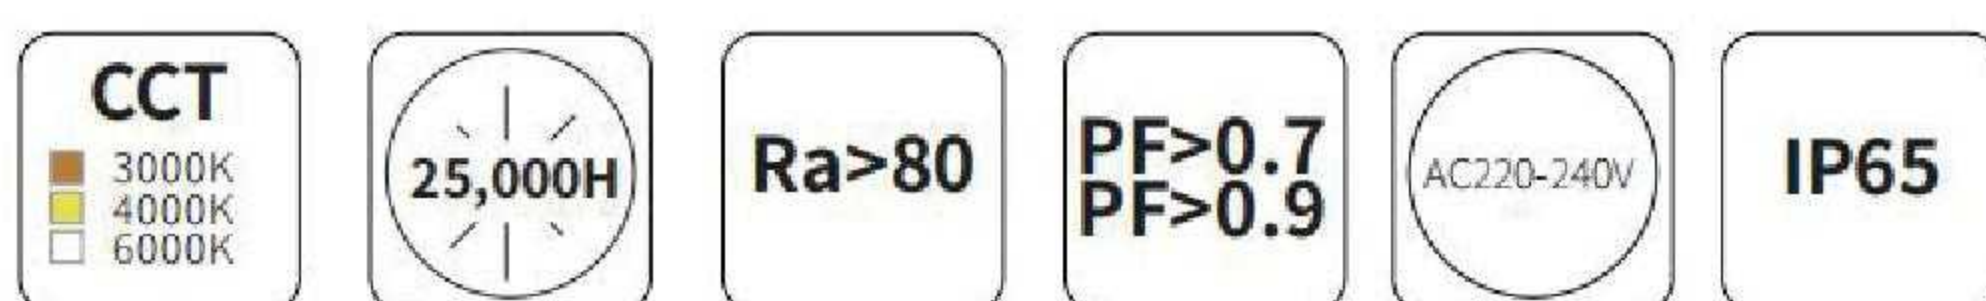


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
DL II 50W	SYDL205	50W	5000lm	60°/90°	L255*W190*H42		
DL II 100W	SYDL210	100W	10000lm	60°/90°	L312*W232*H52		
DL II 150W	SYDL215	150W	15000lm	60°/90°	L375*W275*H52	65	die-casting aluminum
DL II 200W	SYDL220	200W	20000lm	60°/90°	L428*W310*H52		
DL II 300W	SYDL230	300W	30000lm	60°/90°	L495*W345*H88		
DL II 400W	SYDL240	400W	40000lm	60°/90°	L595*W380*H88		

LED Flood Light

LED Flood Light

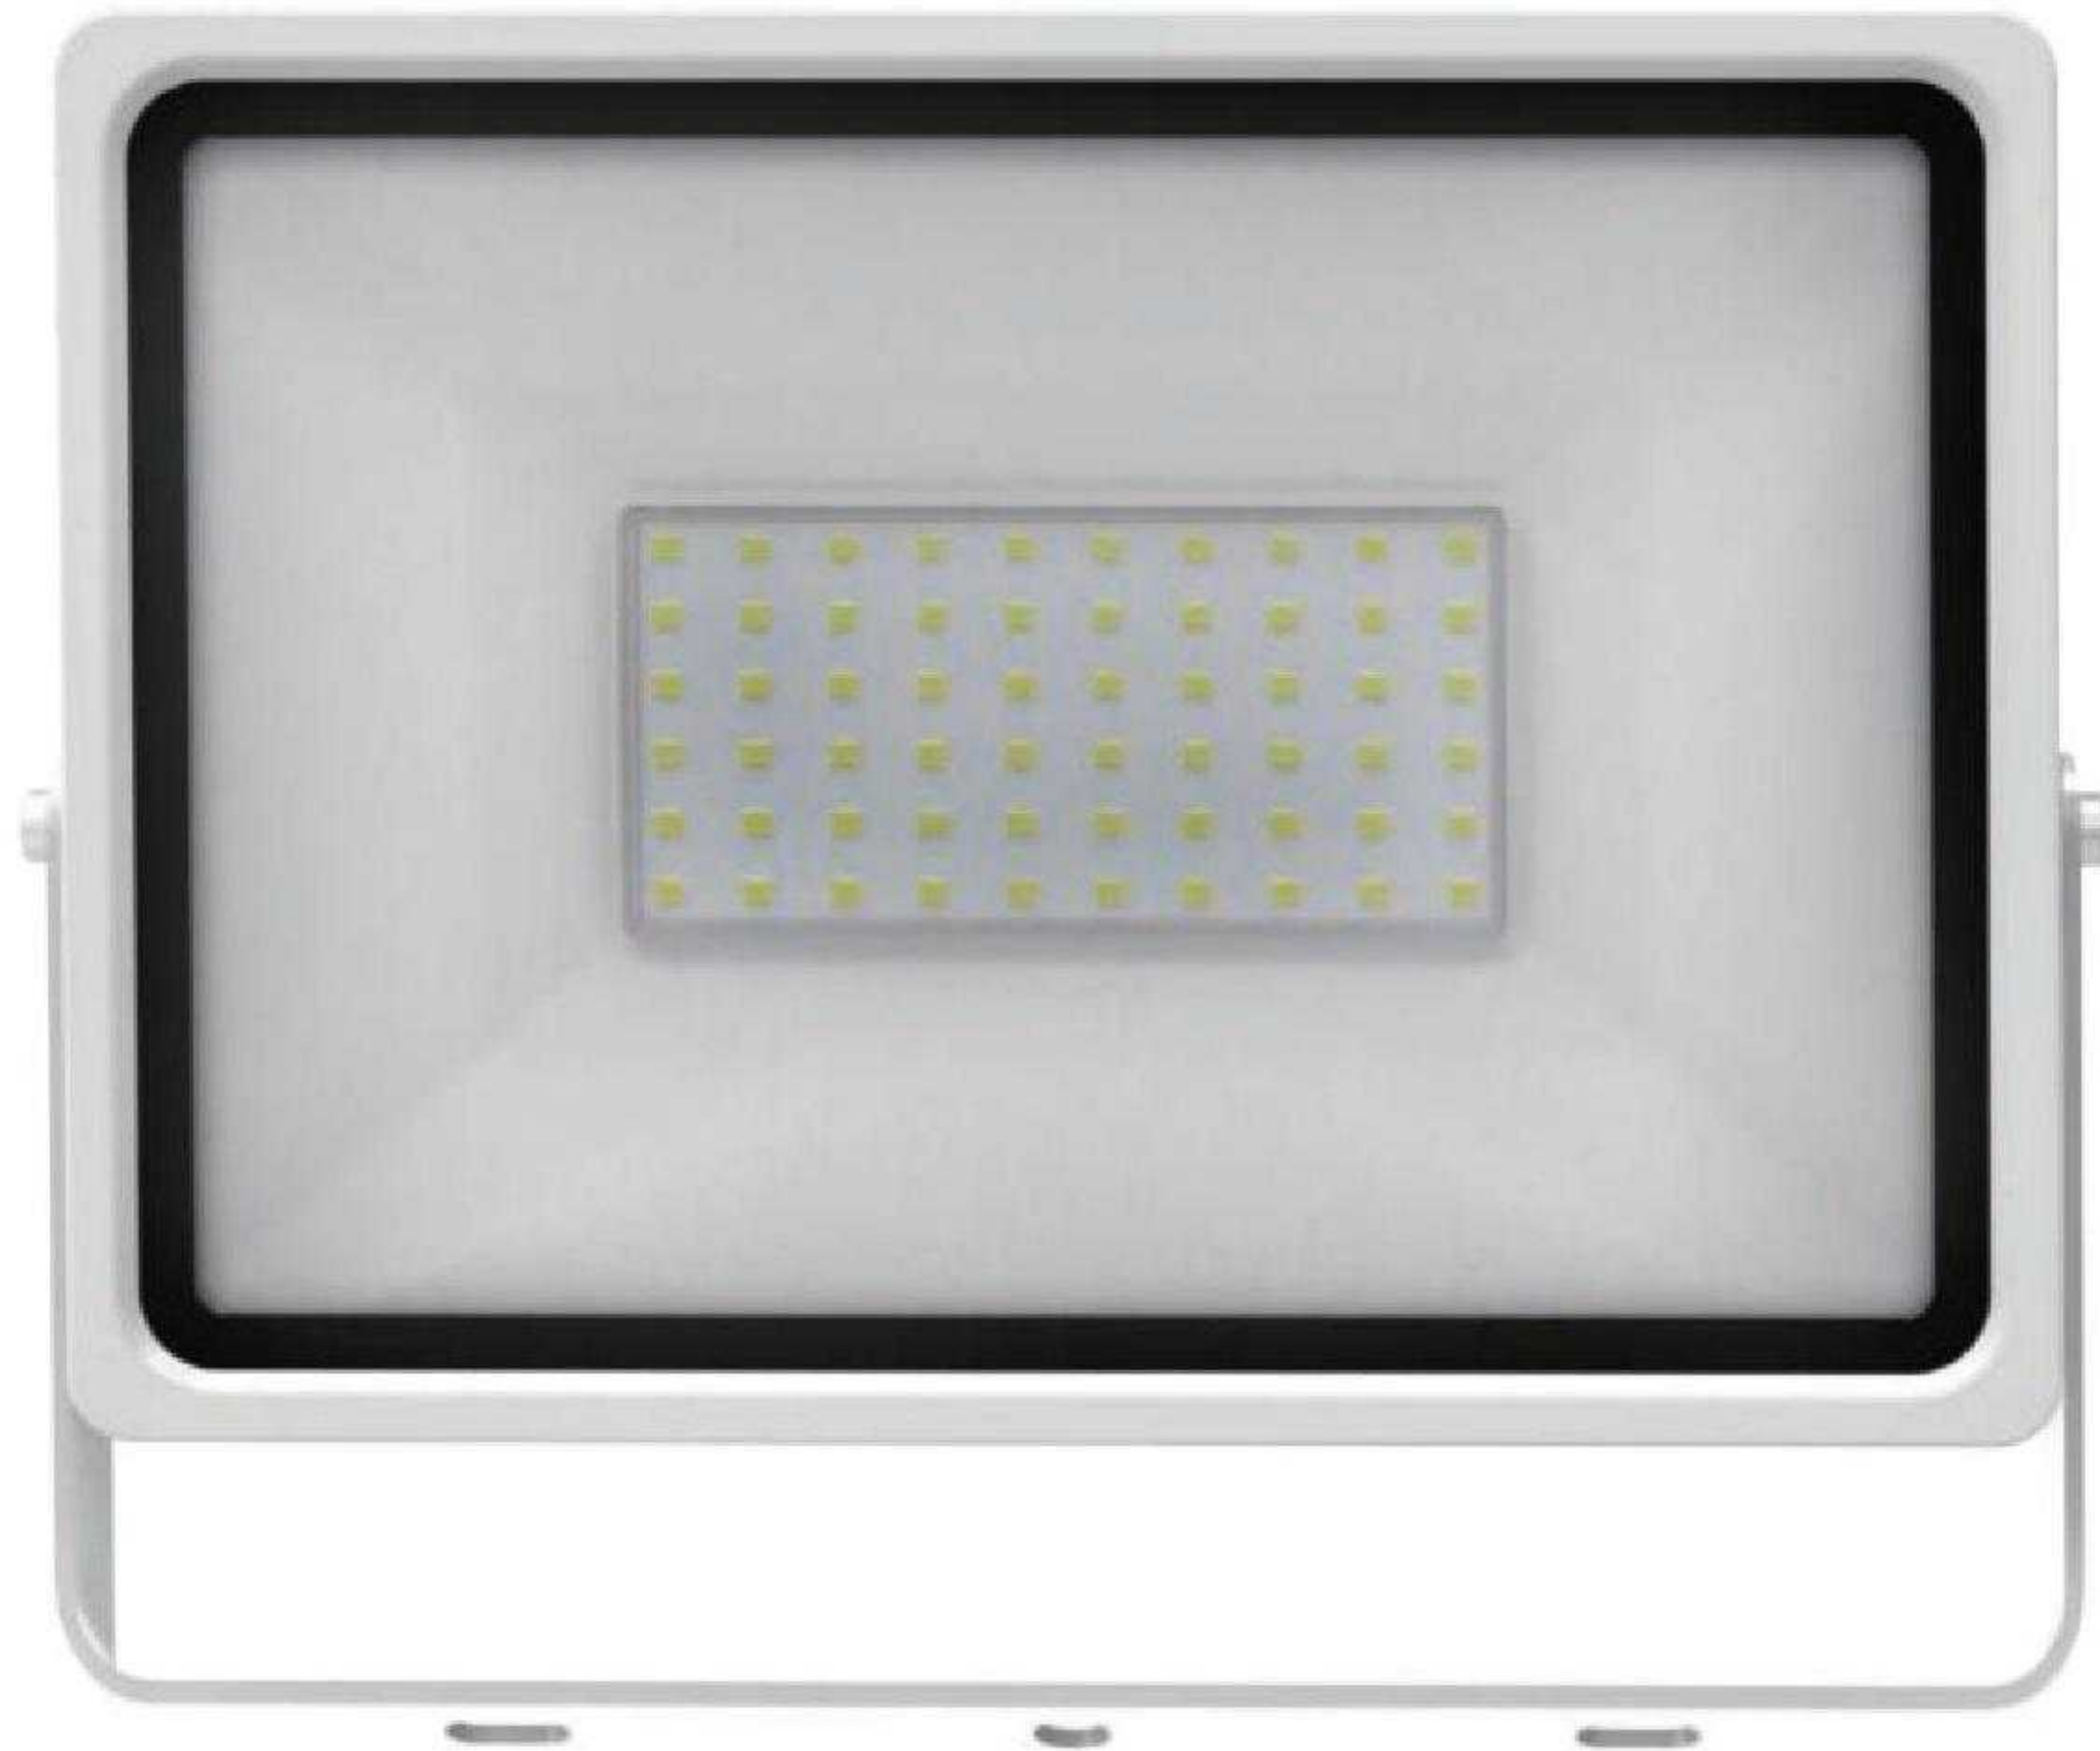

SY8010-SY8050

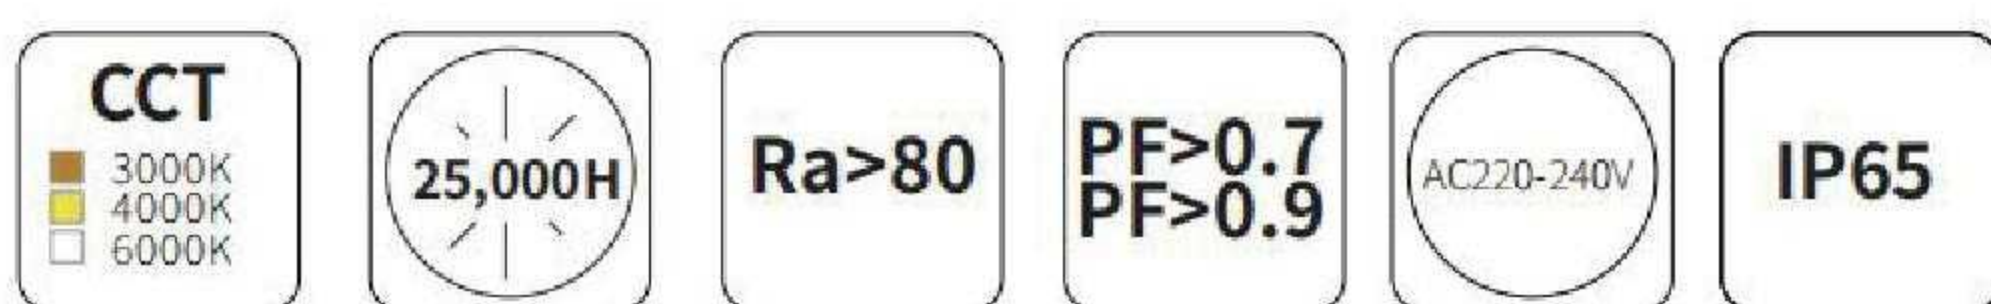


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
HBK 10W	SY8010	10W	1000lm	120°	L133*W120*H30	65	die-casting aluminum
HBK 20W	SY8020	20W	2000lm		L159*W160*H30		
HBK 30W	SY8030	30W	3000lm		L192*W190*H30		
HBK 50W	SY8050	50W	5000lm		L288*W255*H31		

LED Flood Light



SY8010S-SY8050S

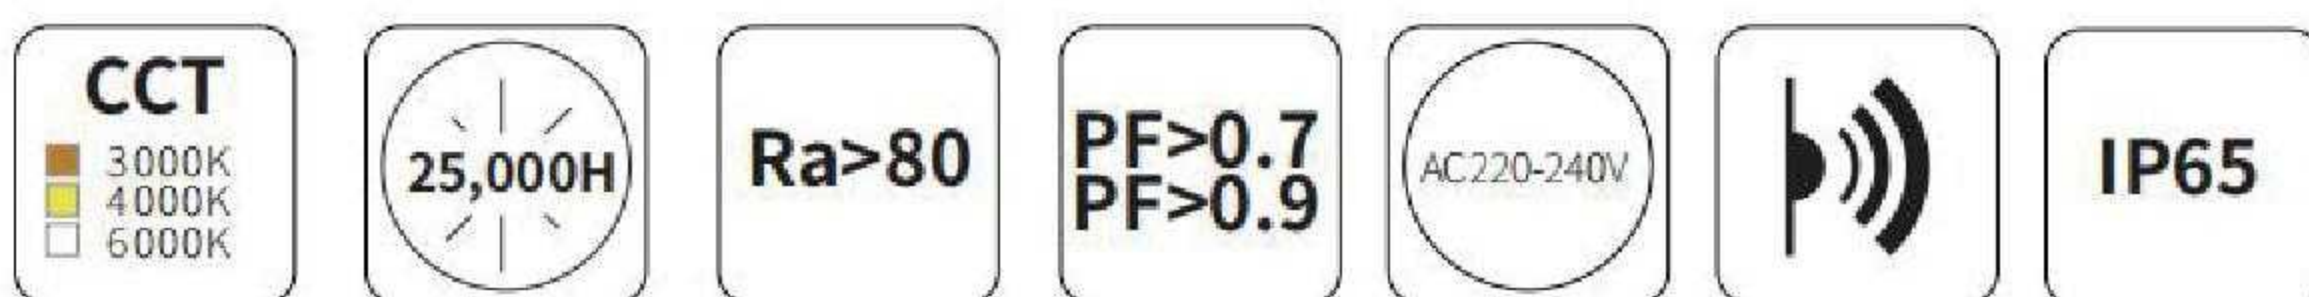


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
HBK 10W With IR	SY8010S	10W	1000lm		L133*W120*H30		
HBK 20W With IR	SY8020S	20W	2000lm	120°	L159*W160*H30	65	die-casting aluminum
HBK 30W With IR	SY8030S	30W	3000lm		L192*W190*H30		
HBK 50W With IR	SY8050S	50W	5000lm		L288*W255*H31		

LED Flood Light



SYOK10-SYOK300

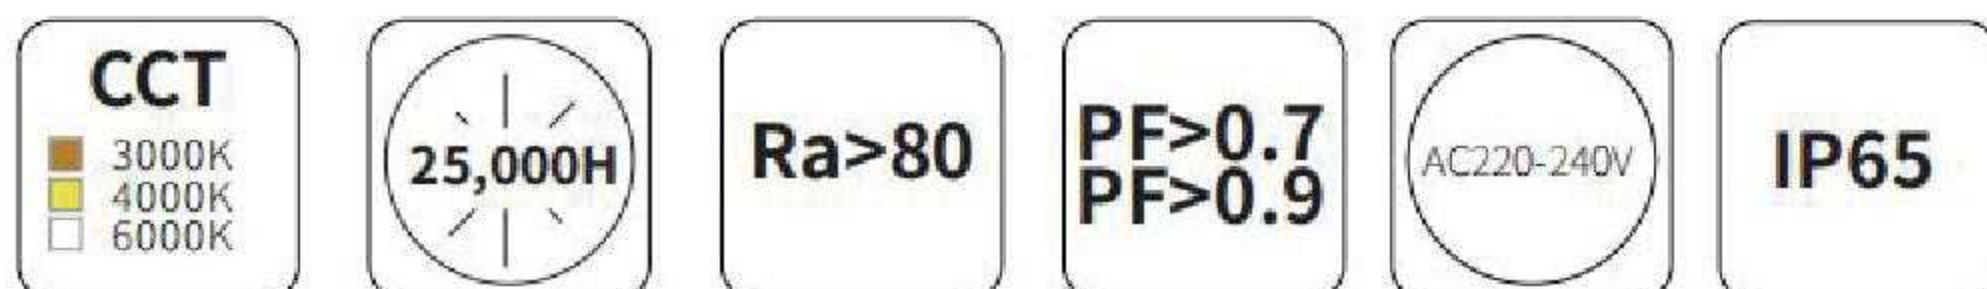


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
OK 10W	SYOK10	10W	1000lm	120°	L104*W25*H70	65	die-casting aluminum
OK 20W	SYOK20	20W	2000lm		L130*W28*H90		
OK 30W	SYOK30	30W	3000lm		L165*W30*H115		
OK 50W	SYOK50	50W	5000lm		L210*W30*H140		
OK 100W	SYOK100	100W	10000lm		L280*W35*H195		
OK 150W	SYOK150	150W	15000lm		L330*W35*H221		
OK 200W	SYOK200	200W	20000lm		L363*W35*H252		
OK 300W	SYOK300	300W	30000lm		L420*W35*H291		

LED Flood Light



SYFK10—SYFK200

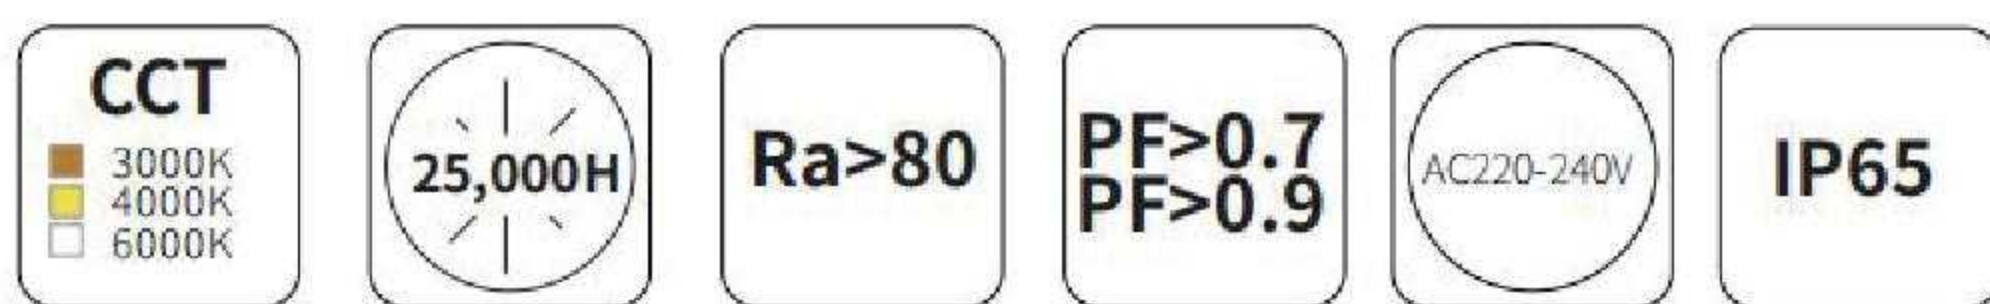


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
FK 10W	SYFK10	10W	1000lm		L80*W48*H115		
FK 20W	SYFK20	20W	2000lm		L90*W48*H130		
FK 30W	SYFK30	30W	3000lm		L115*W48*H130		
FK 50W	SYFK50	50W	5000lm	120°	L140*W55*H200	65	die-casting aluminum
FK 100W	SYFK100	100W	10000lm		L165*W55*H240		
FK 150W	SYFK150	150W	15000lm		L200*W55*H290		
FK 200W	SYFK200	200W	20000lm		L230*W60*H330		

LED Flood Light



SYFK10S—SYFK100S

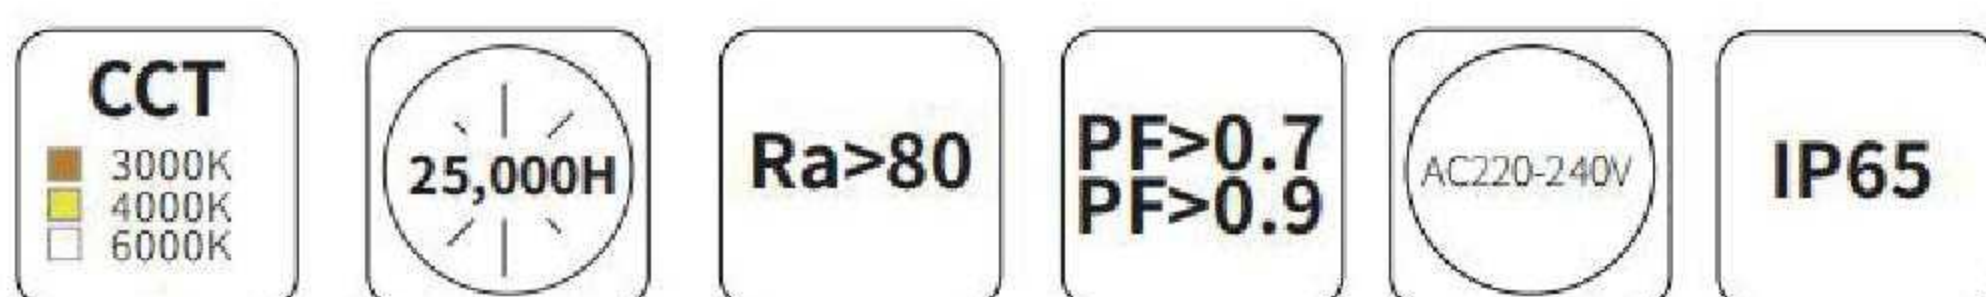

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
FK 10W With IR	SYFK10S	10W	1000lm		L115*W55*H145		
FK 20W With IR	SYFK20S	20W	2000lm		L130*W55*H155		
FK 30W With IR	SYFK30S	30W	3000lm	120°	L165*W55*H175	65	die-casting aluminum
FK 50W With IR	SYFK50S	50W	5000lm		L200*W55*H205		
FK 100W With IR	SYFK100S	100W	10000lm		L220*W55*H240		

2023

SMART Light String

Environmental protection, energy saving.

SMART Light String

APPLICATION ADVANTAGE OF OUR PRODUCTS



home

FULL CONTROL



mine



EASY CONNECTION




BLUETOOTH MESH TECHNOLOGY





SMART Light String

APPLICATION AREAS

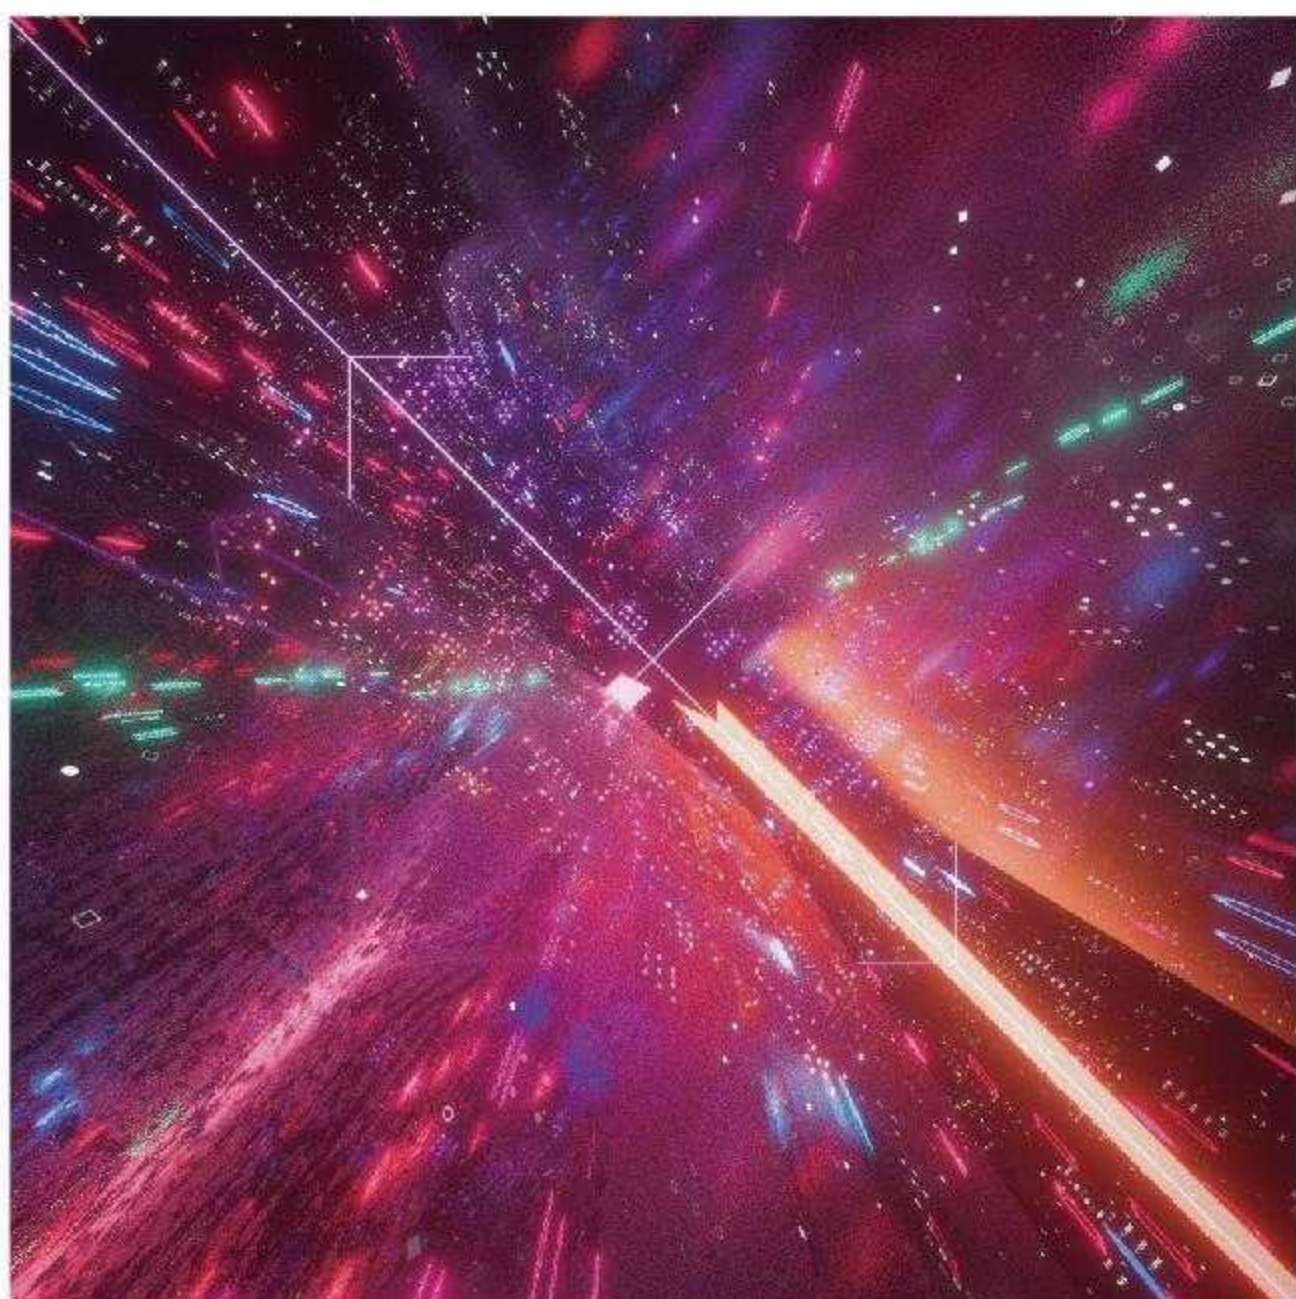

APPLICATION
AREAS
LIGHTS&LIFE

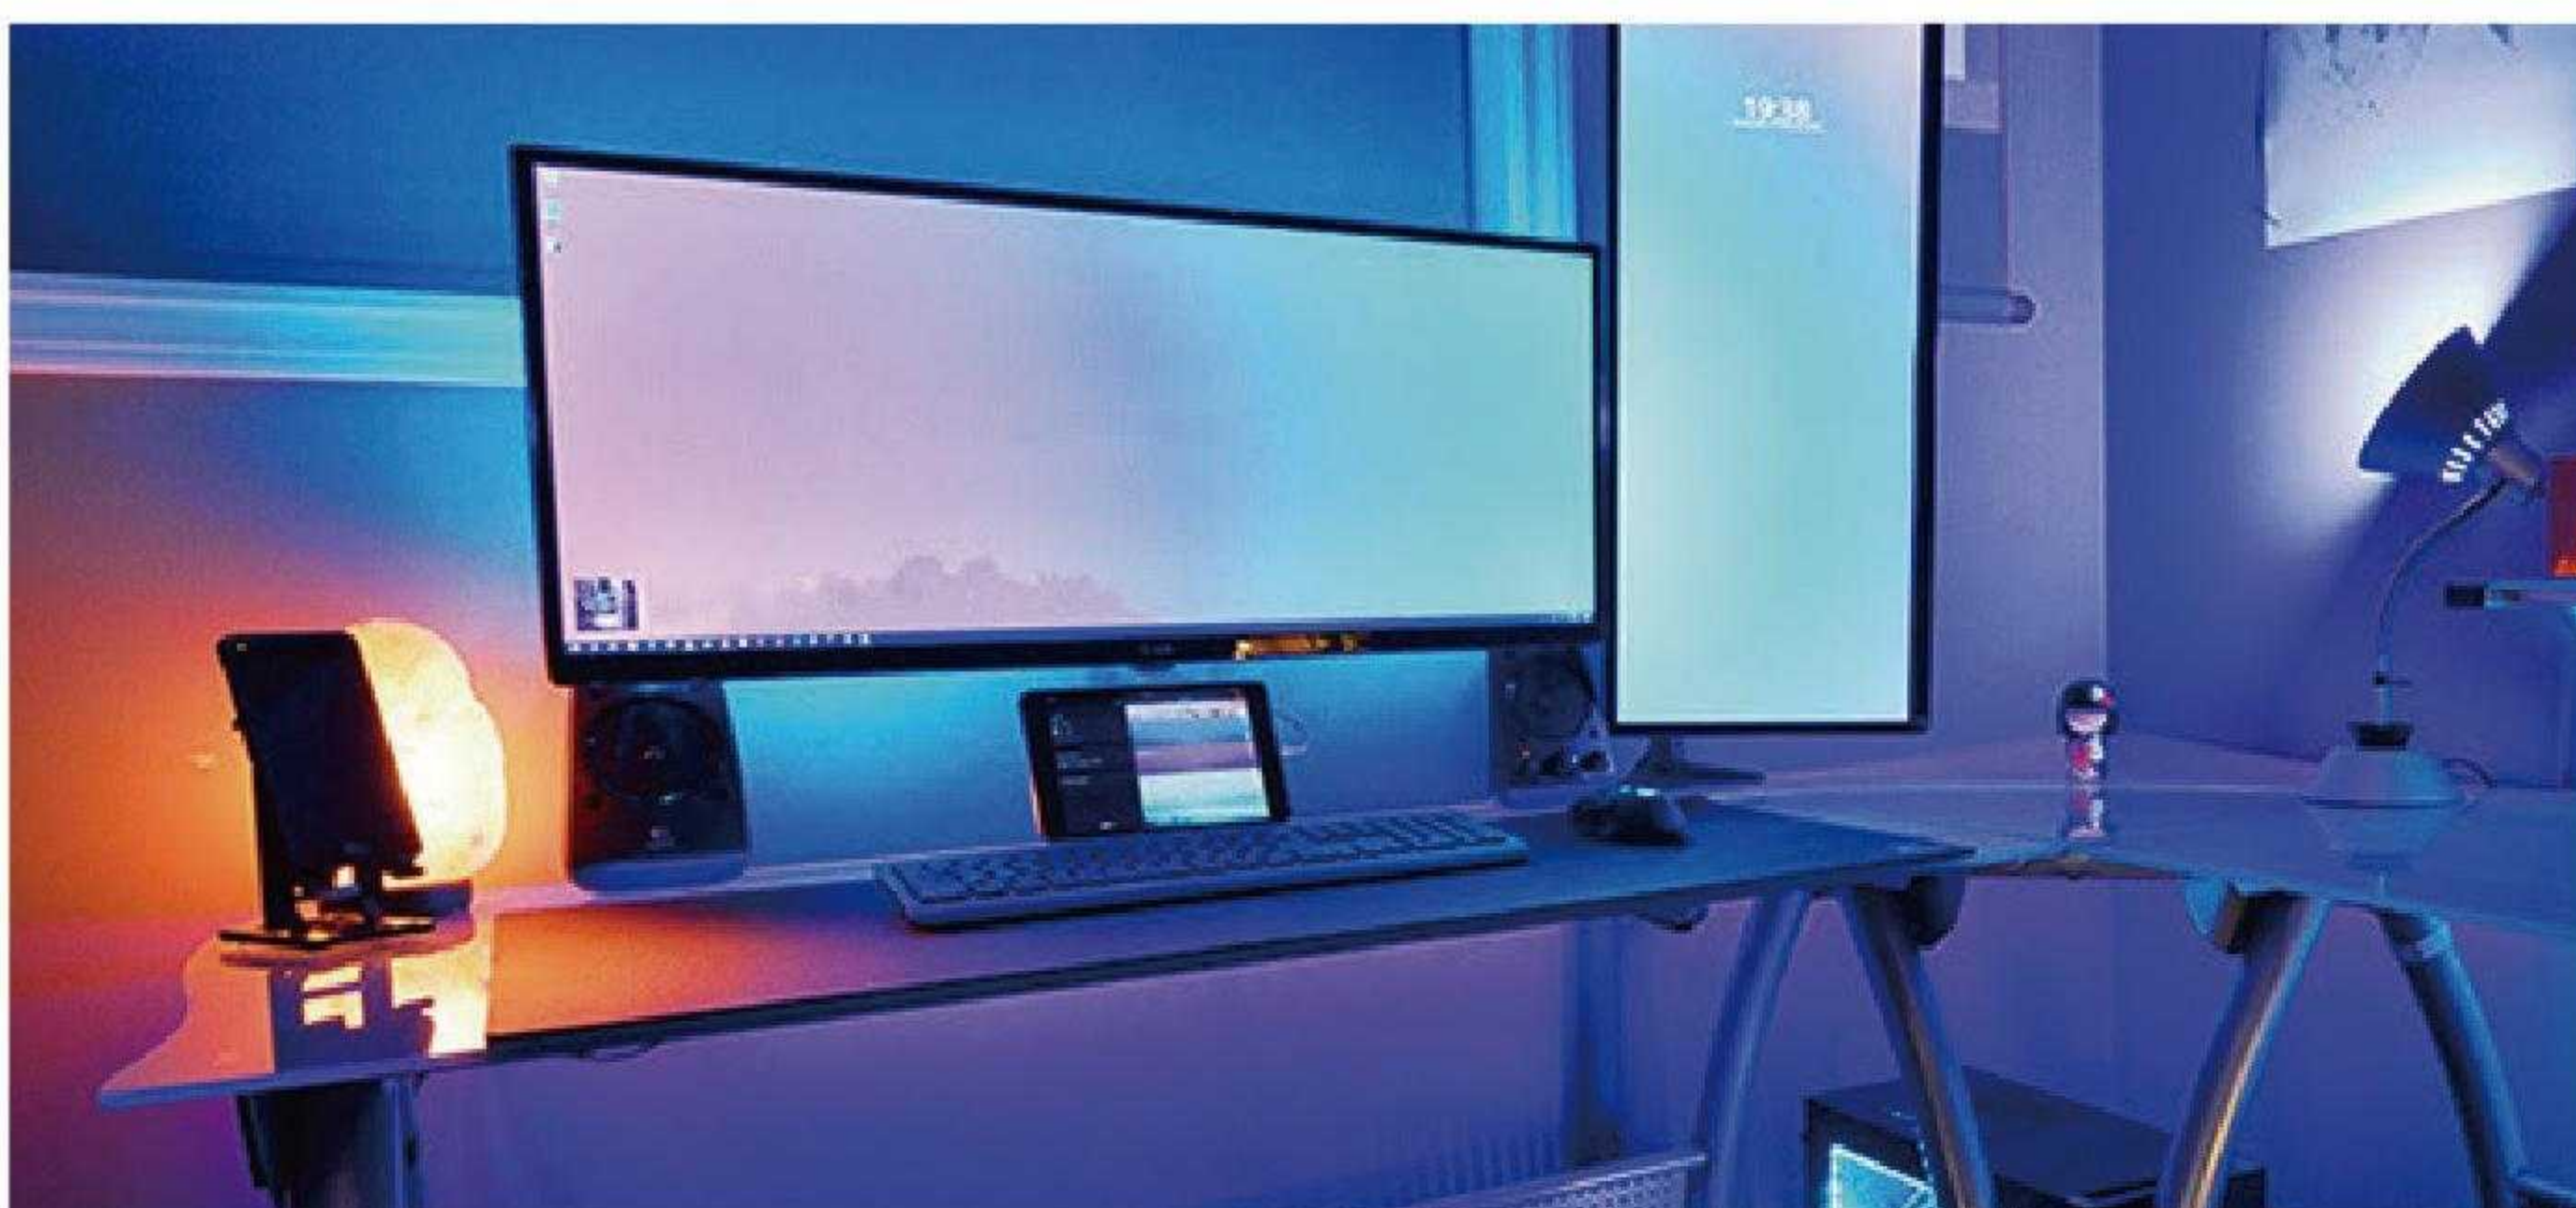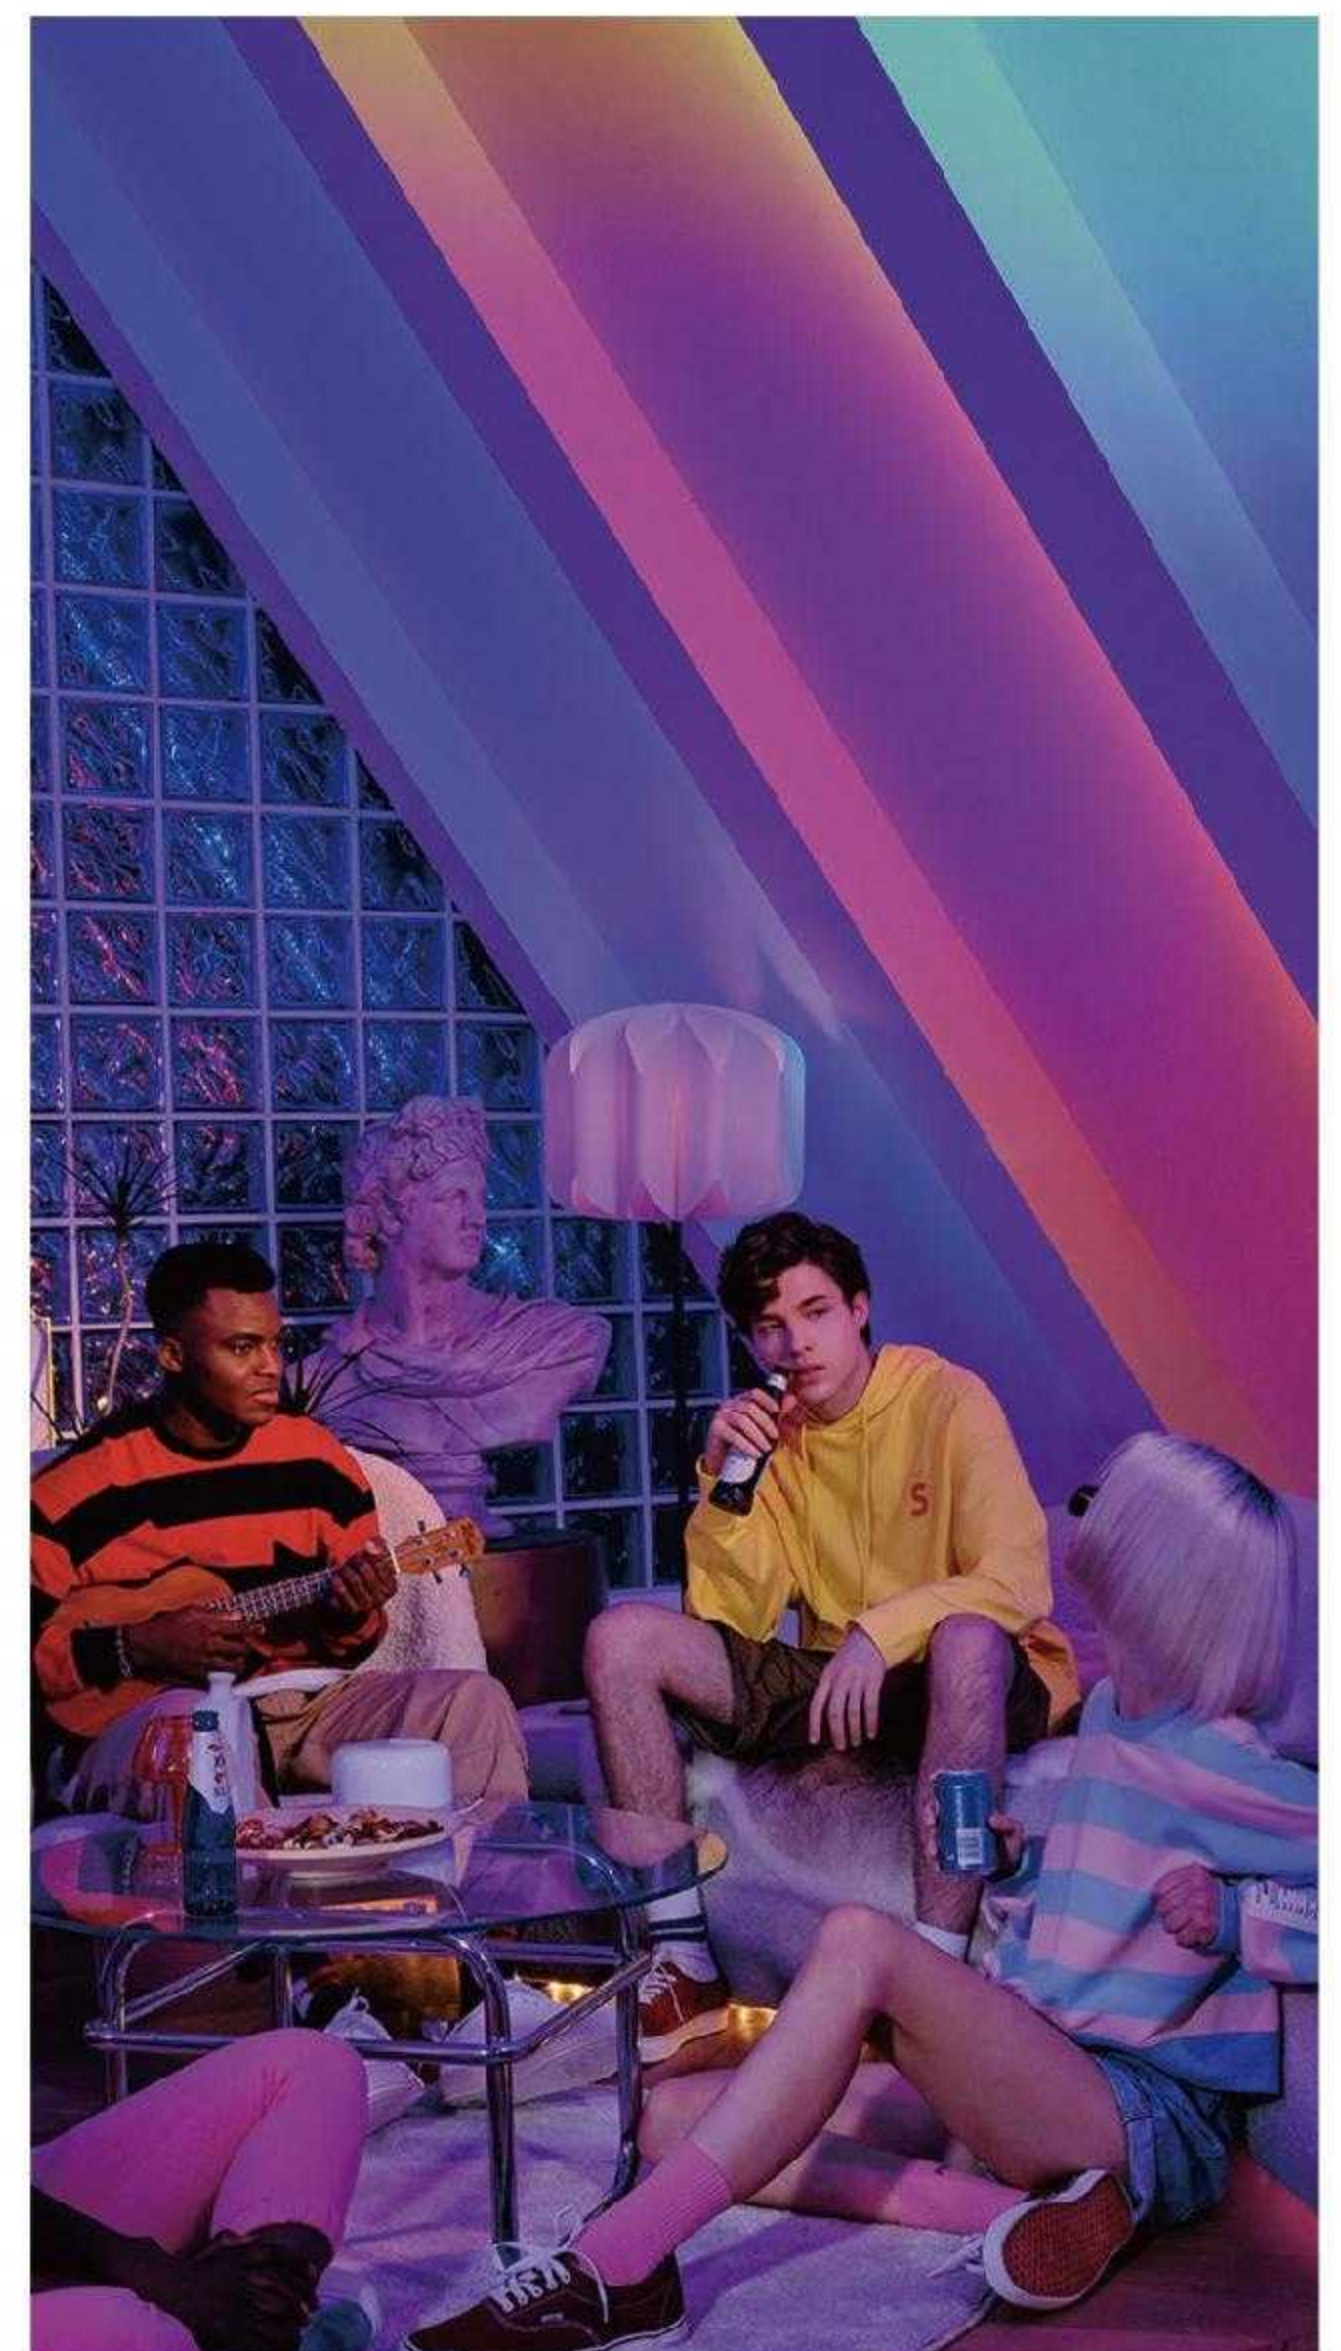

SMART Light String

Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700-6500K Turnable
Cable	H05VV-F 3X0.75mm ² /3X1.0mm ² H05RN-F 3X0.75mm ² /3X1.0mm ² H07RN-F 3X0.75mm ² /3X1.0mm ² 21996 3/C 22AWG



Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 3X0.75mm ² /3X1.0mm ² H05RN-F 3X0.75mm ² /3X1.0mm ² H07RN-F 3X0.75mm ² /3X1.0mm ² 21996 3/C 20AWG

Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 3X0.75mm ² /3X1.0mm ² H05RN-F 3X0.75mm ² /3X1.0mm ² H07RN-F 3X0.75mm ² /3X1.0mm ² 21996 3/C 22AWG






2.4GHz Wi-Fi + Bluetooth



Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700K
Cable	H05W-F 2X0.75mm ² /2X1.0mm ² H05RN-F 2X0.75mm ² /2X1.0mm ² 21996 2/C

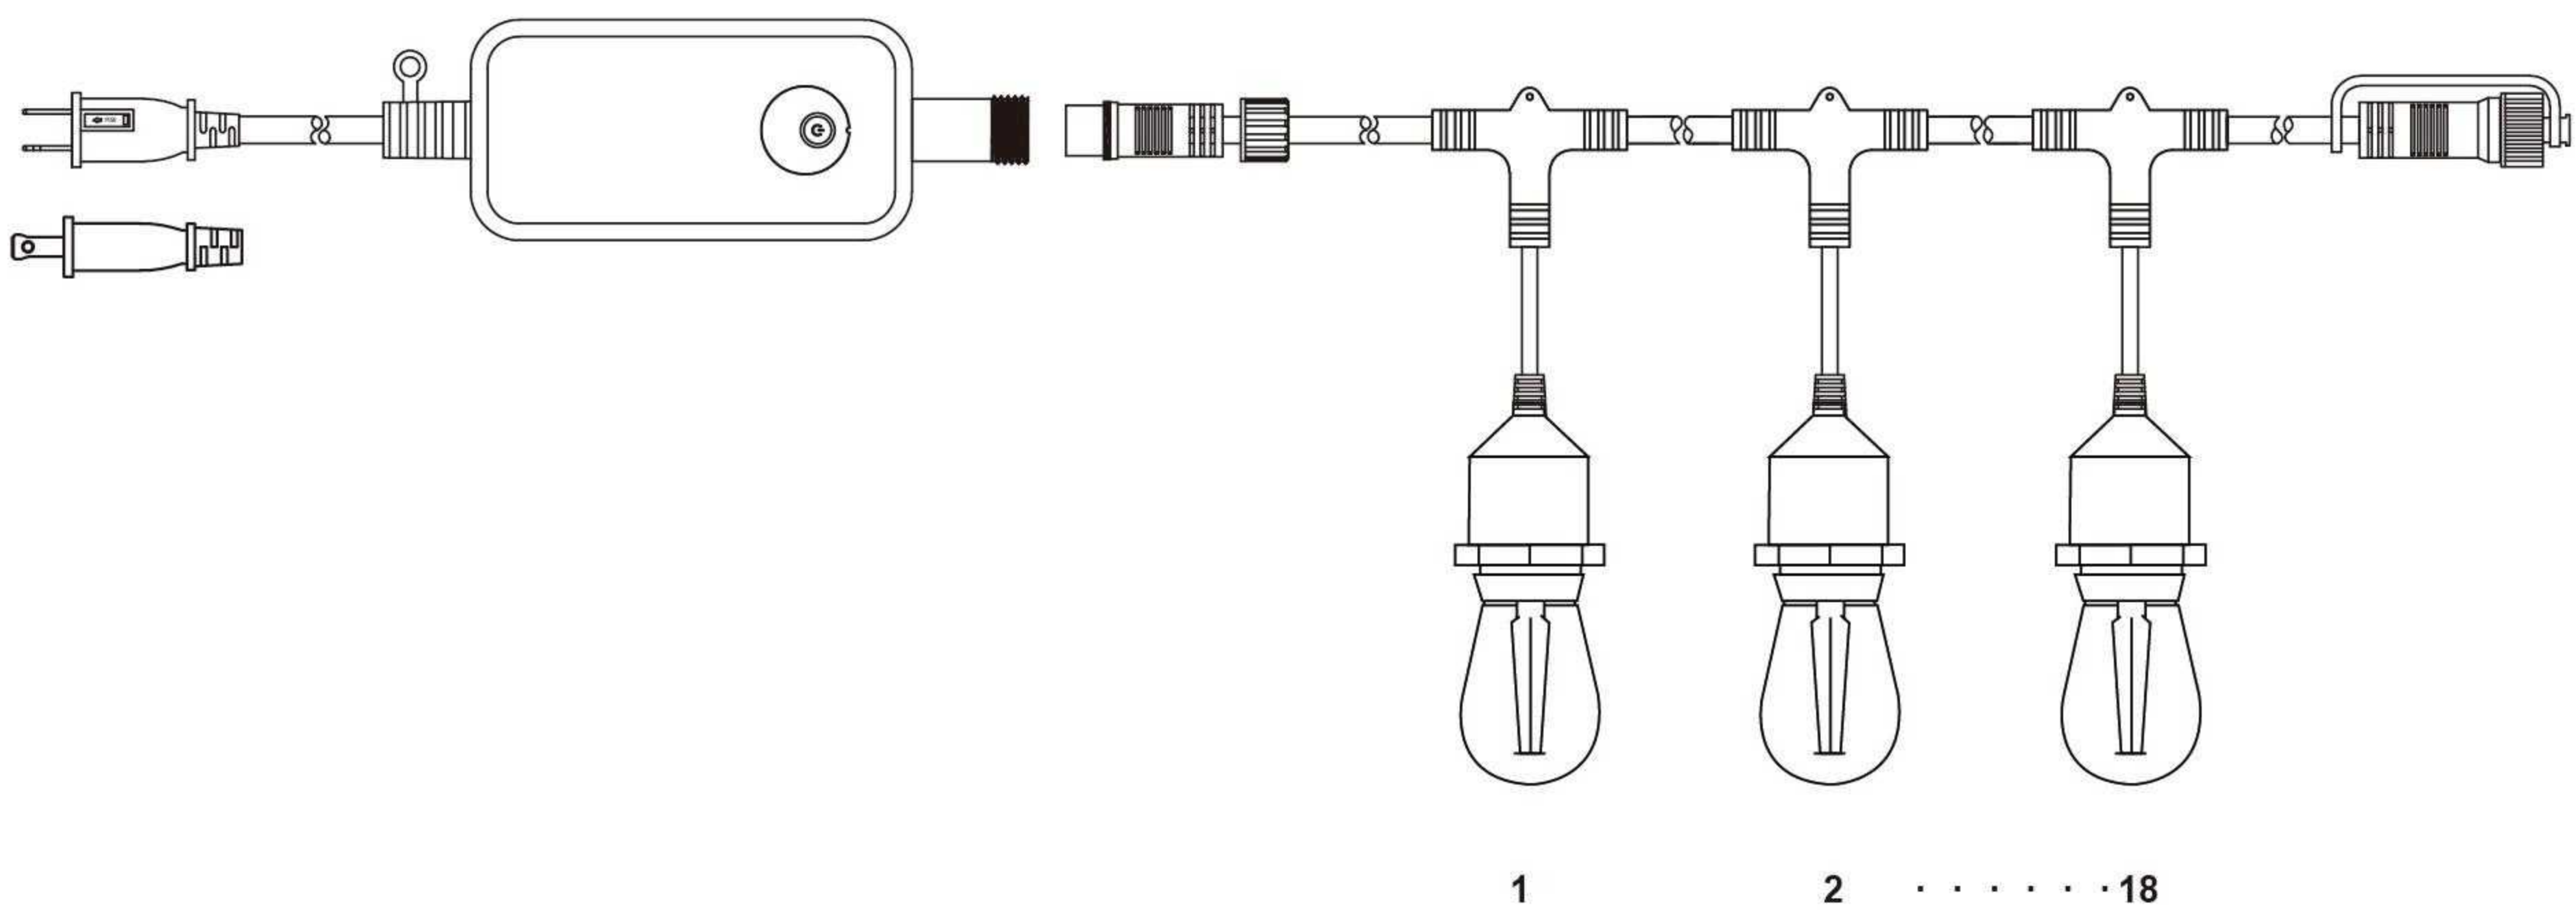

Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700K
Cable	H05W-F 2X0.75mm ² /2X1.0mm ² H05RN-F 2X0.75mm ² /2X1.0mm ² 21996 2/C 20AWG






2.4GHz Wi-Fi + Bluetooth



Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700-6500K Turnable
Cable	H05VV-F 3X0.75mm ² /3X1.0mm ² H05RN-F 3X0.75mm ² /3X1.0mm ² H07RN-F 3X0.75mm ² /3X1.0mm ² 21996 3/C 20AWG

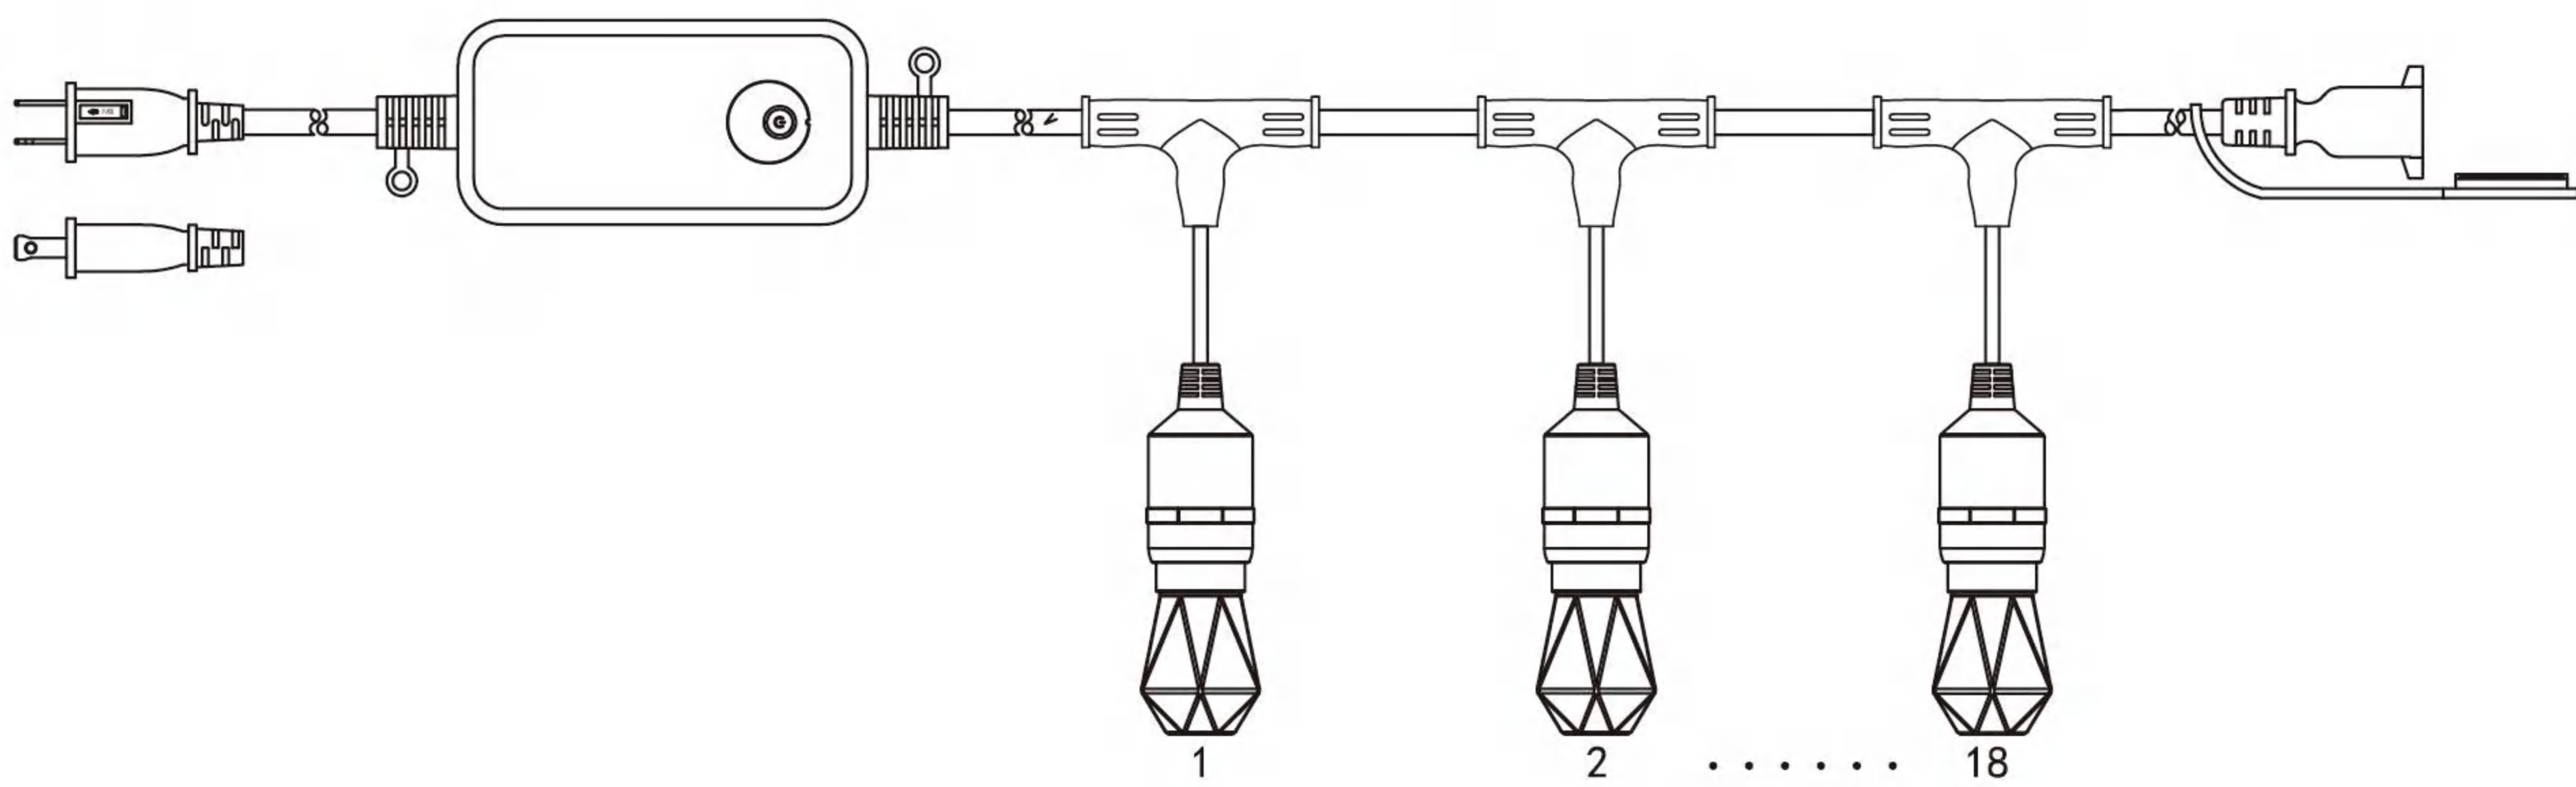


Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05V-F 3X0.75mm ² /3X1.0mm ² H05RN-F 3X0.75mm ² /3X1.0mm ² H07RN-F 3X0.75mm ² /3X1.0mm ² 21996 3/C 20AWG

SMART Light String

2.4GHz Wi-Fi +Bluetooth



Voltage	Input 100-240V, 50/60Hz Output 5V DC
Adapter	12W Max connected 432W
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 5X0.75mm ² /5X1.0mm ² H05RN-F 5X0.75mm ² /5X1.0mm ² H07RN-F 5X0.75mm ² /5X1.0mm ² 21996 5/C 22AWG or SJTW 5/C 18AWG

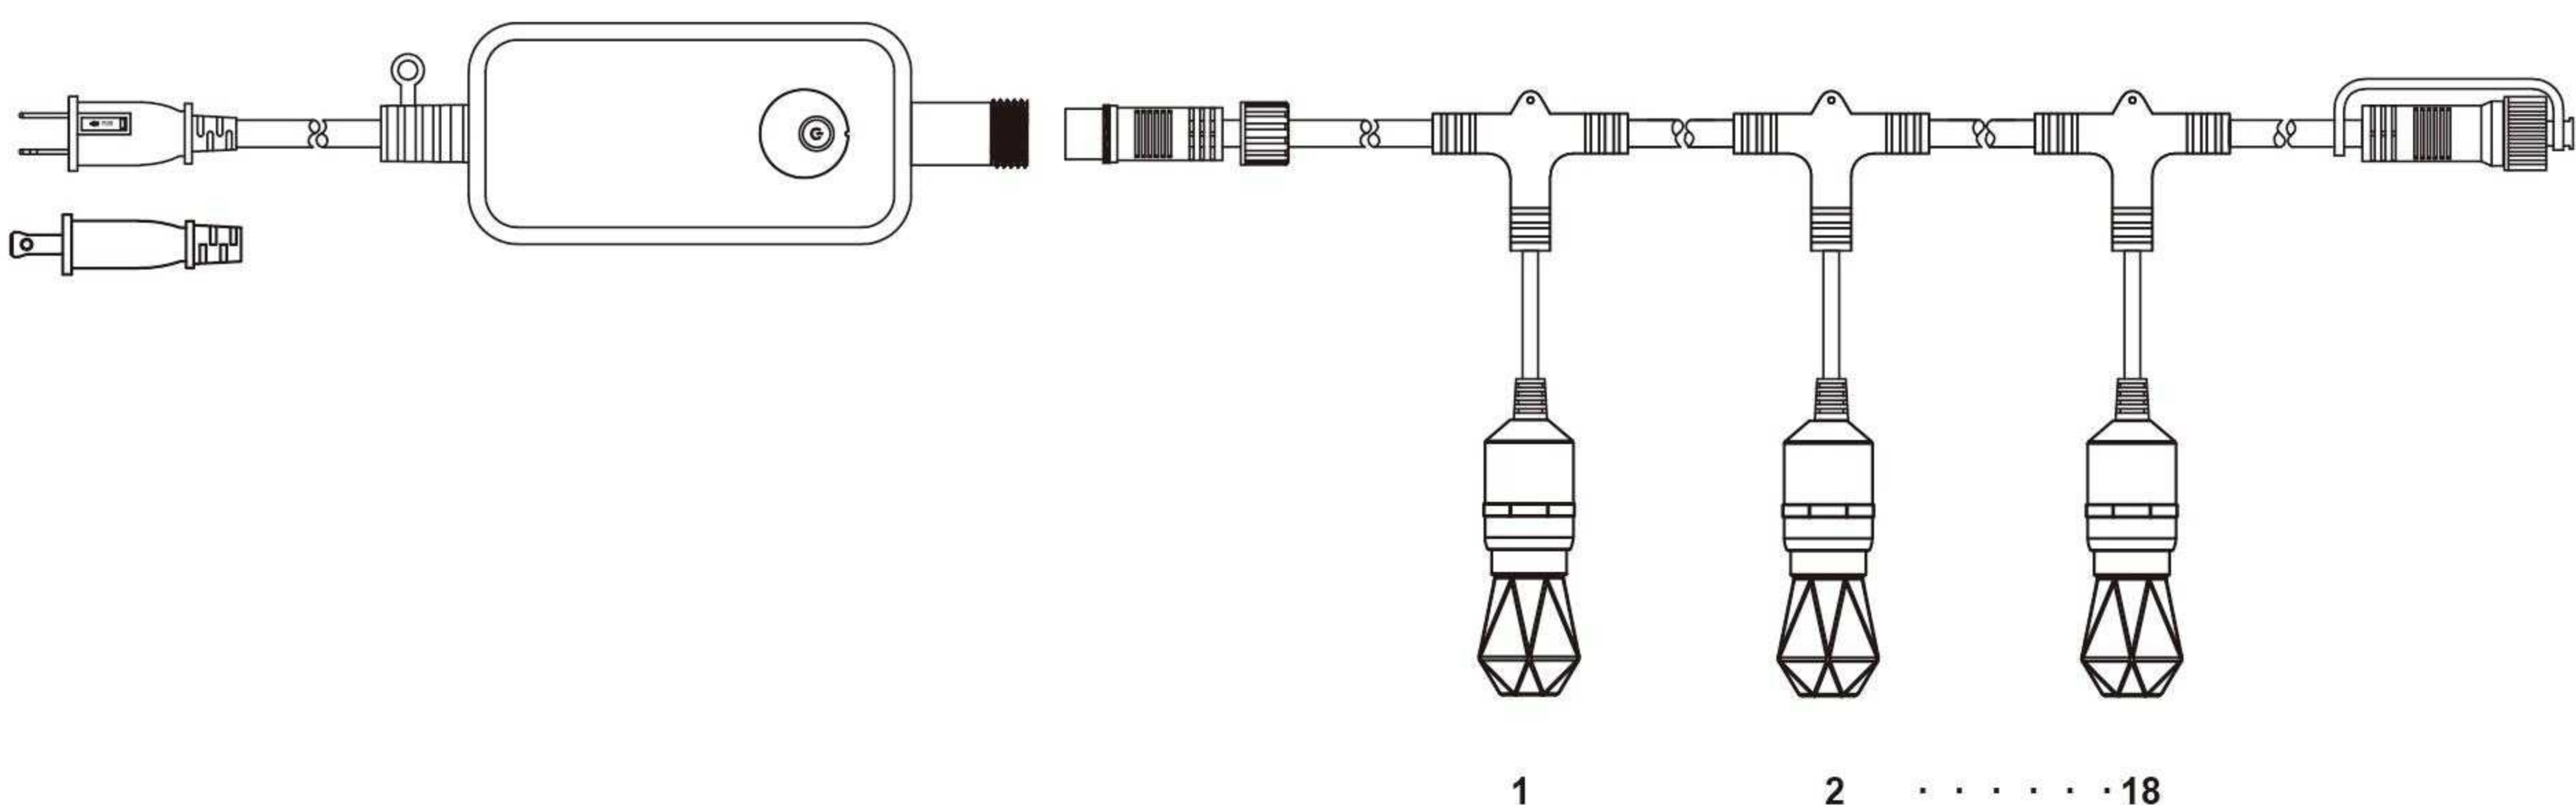

Voltage	Input 100-240V, 50/60Hz Output 5V DC
Adapter	12W Max connected 432W
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 5X0.75mm ² /5X1.0mm ² H05RN-F 5X0.75mm ² /5X1.0mm ² H07RN-F 5X0.75mm ² /5X1.0mm ² 21996 5/C 22AWG or SJTW 5/C 18AWG



2023


SMART Lawn Lamp

Environmental protection, energy saving.

Make your outdoor life

Control your smart wall light right from your smartphone!

“Alexa, turn on wall lights”

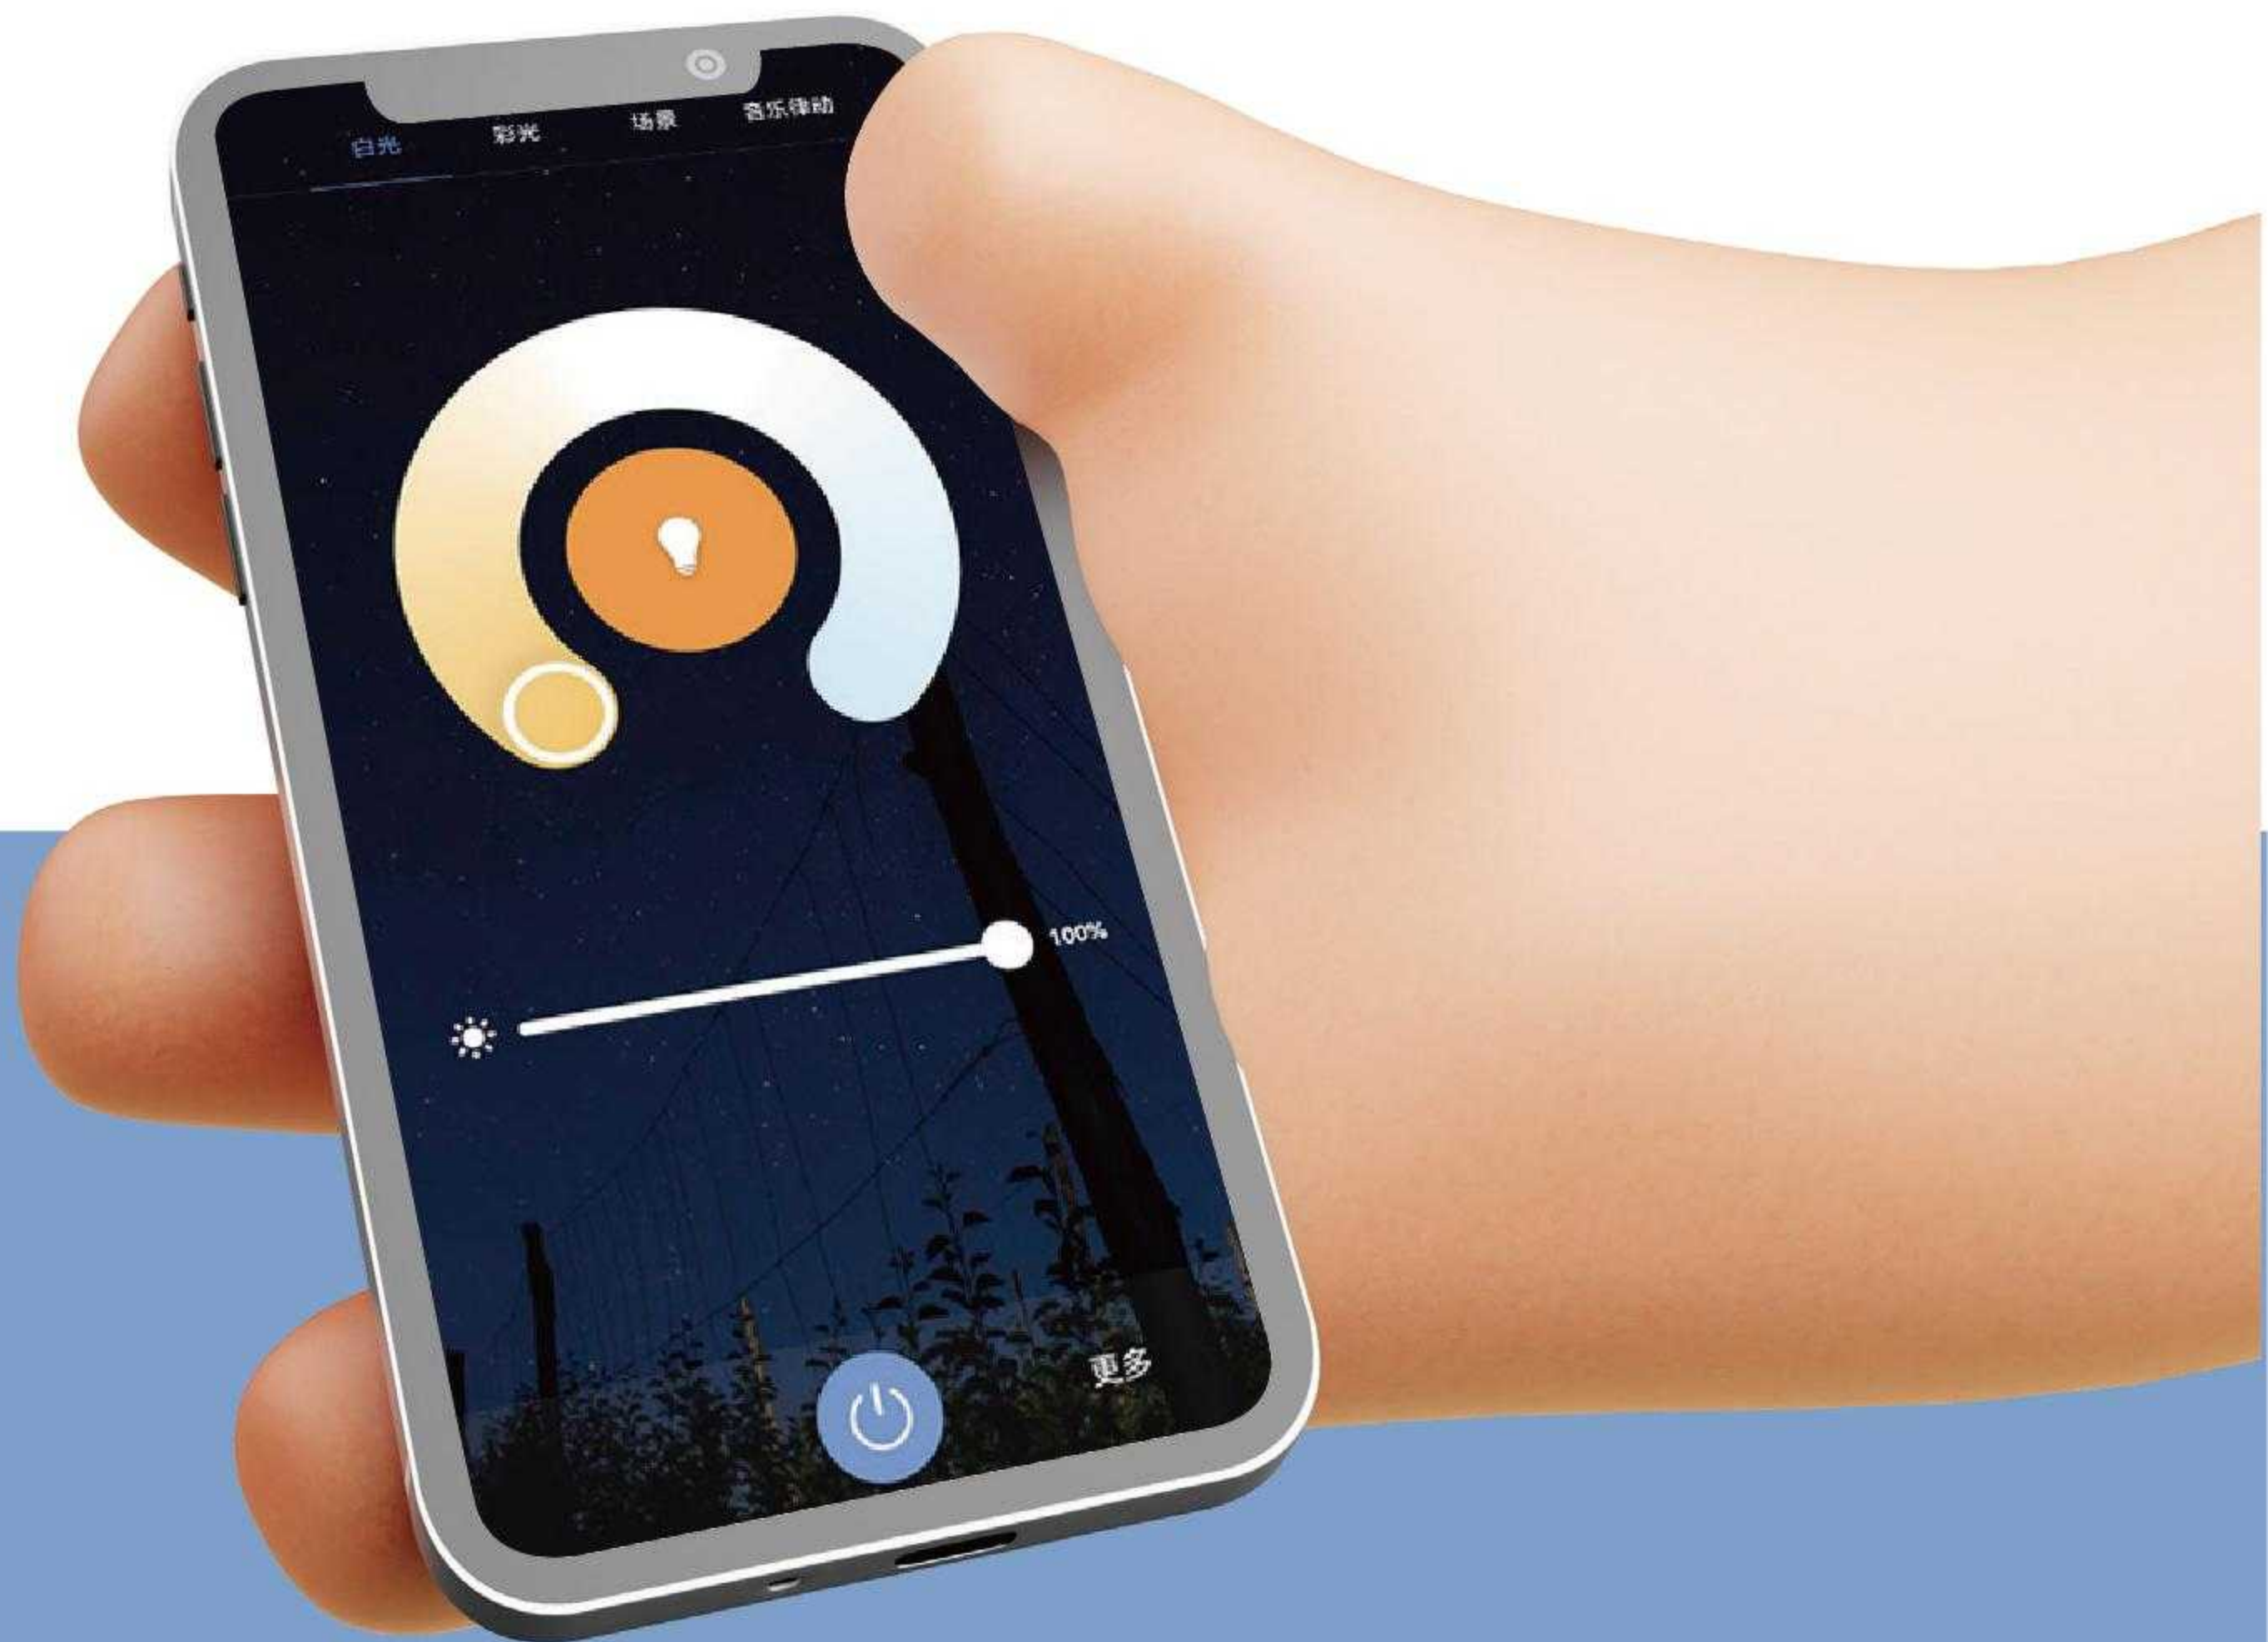


SMARTER



SMART Lawn Lamp

Double-headed lawn lamp

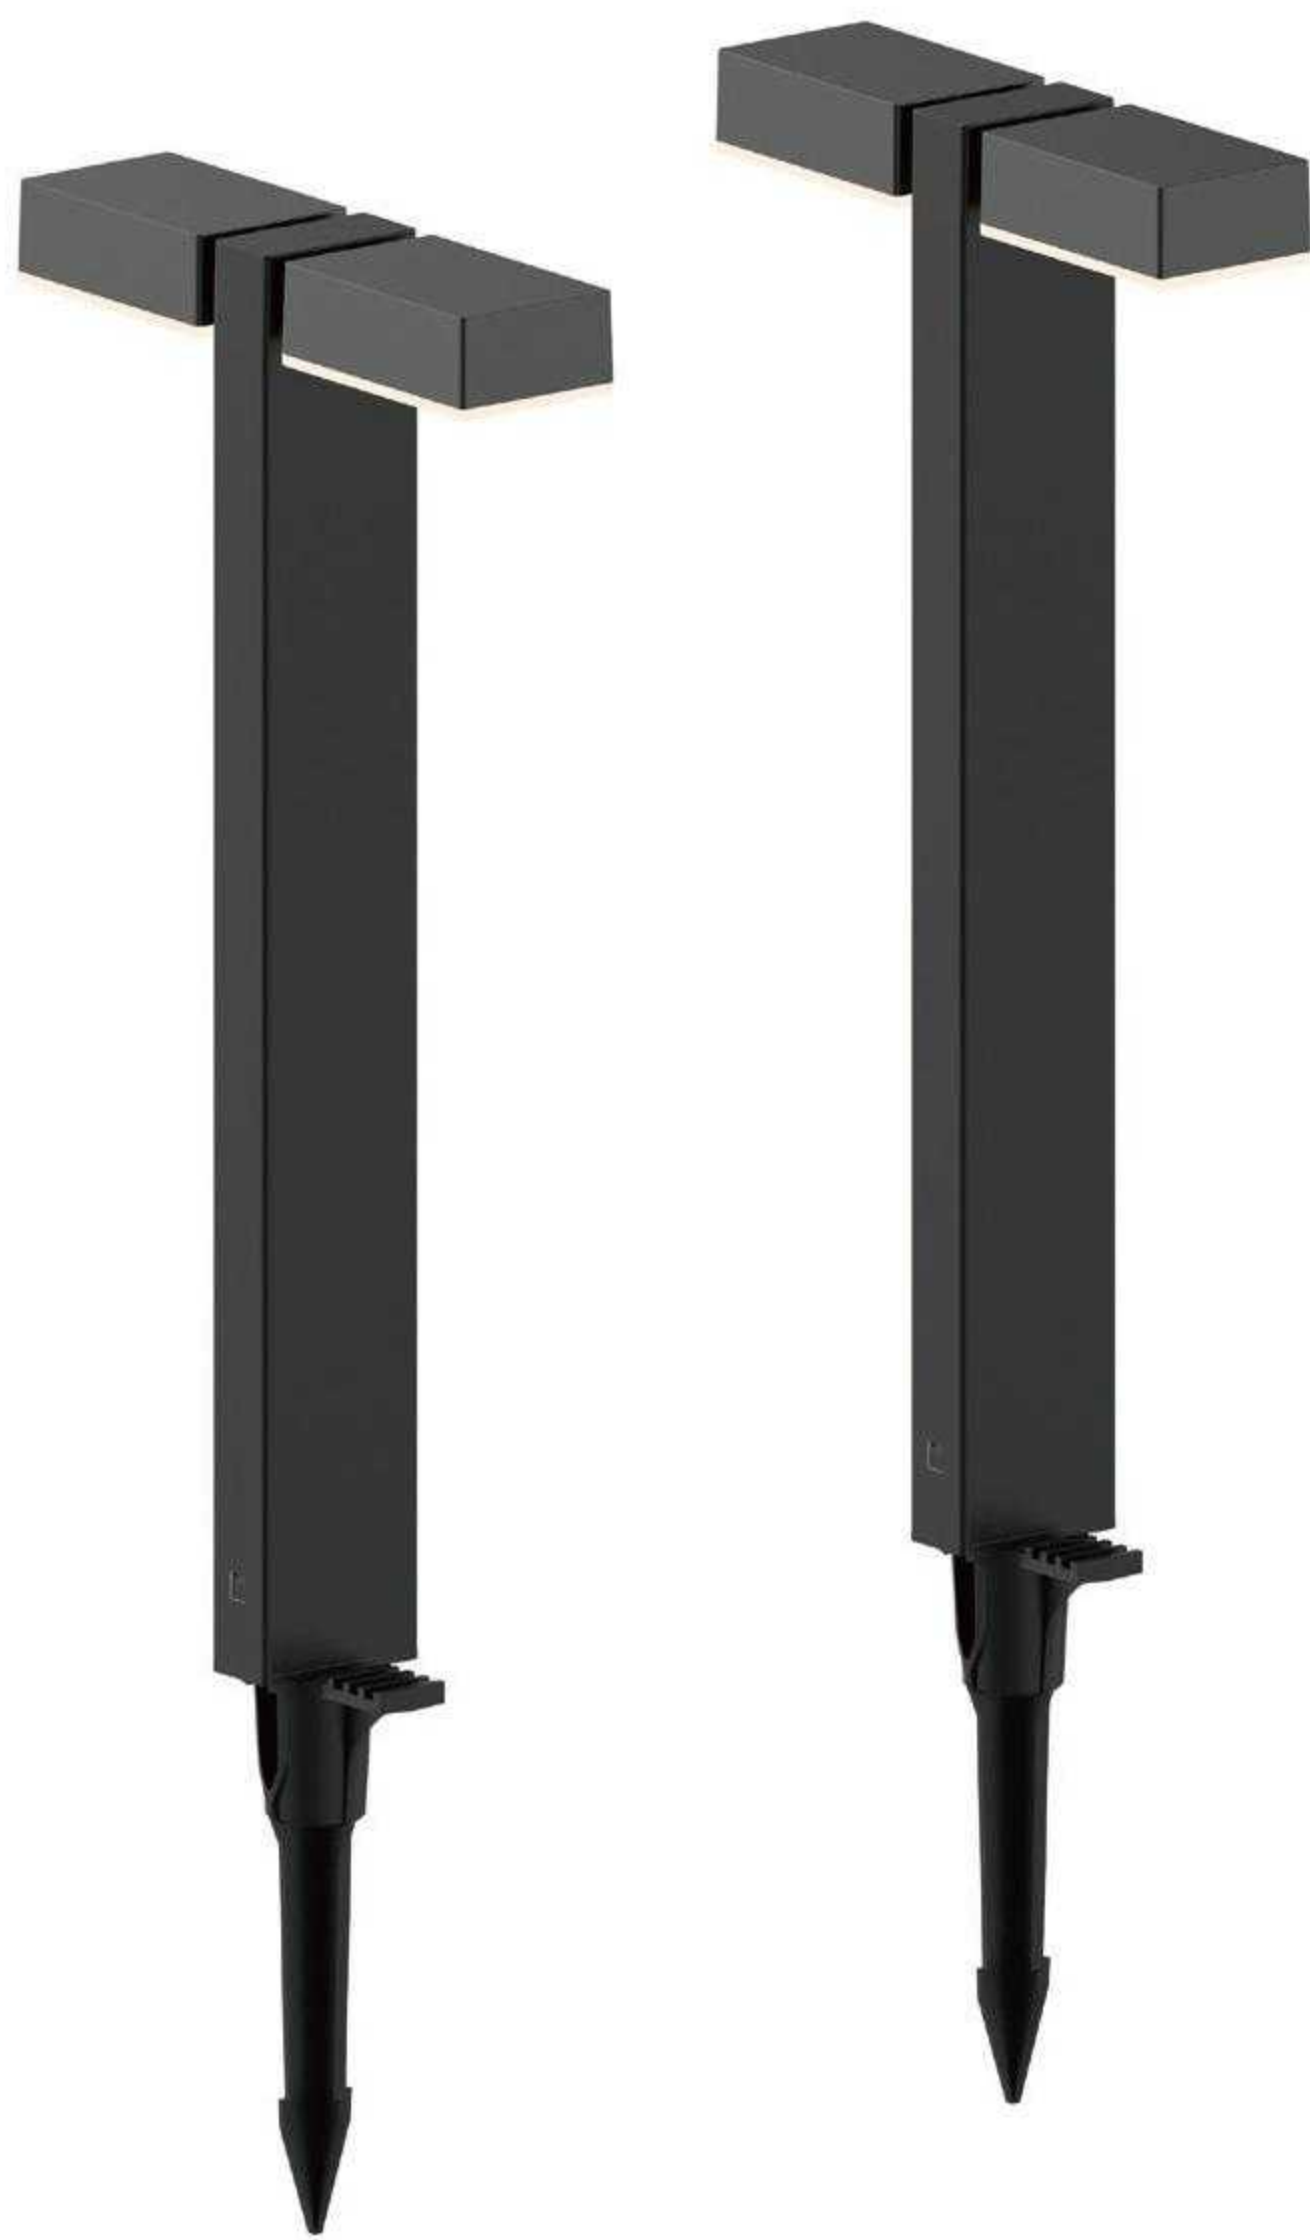


2.4GHz Wi-Fi +Bluetooth/ Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	6W
Light color	RGB/RGBW



2700K-6500K

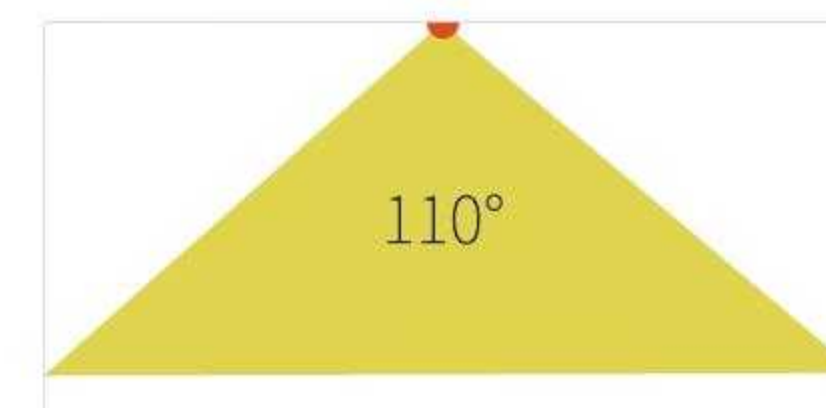

SCENCE



- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft. Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft. Extension Cable



SMART Lawn Lamp

Basic lawn lamp




2.4GHz Wi-Fi + Bluetooth/ Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	6W
Light color	RGB/RGBW



2700K-6500K

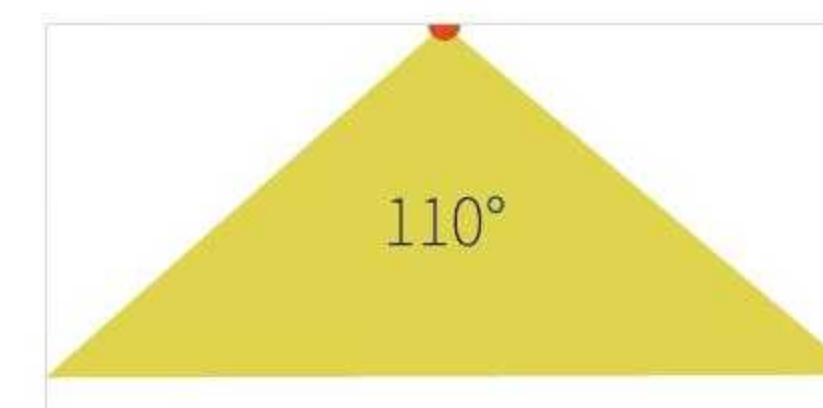

- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft. Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft. Extension Cable



SMART Lawn Lamp

Classic lawn lamp




2.4GHz Wi-Fi +Bluetooth /Bluetooth SIGmesh


Voltage	:	Input 100-240V 50/60Hz
	:	Output 24V DC
Adapter	:	36W
IP Rating	:	IP65
Bulb	:	6W
Light color	:	RGB/RGBW




2700K-6500K

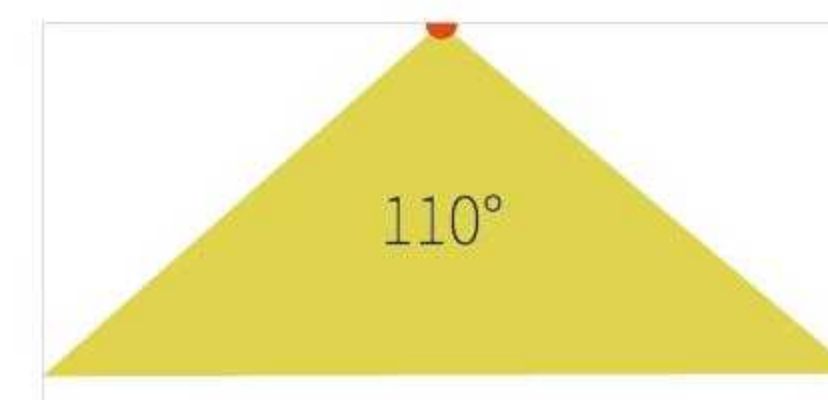

SCENCE

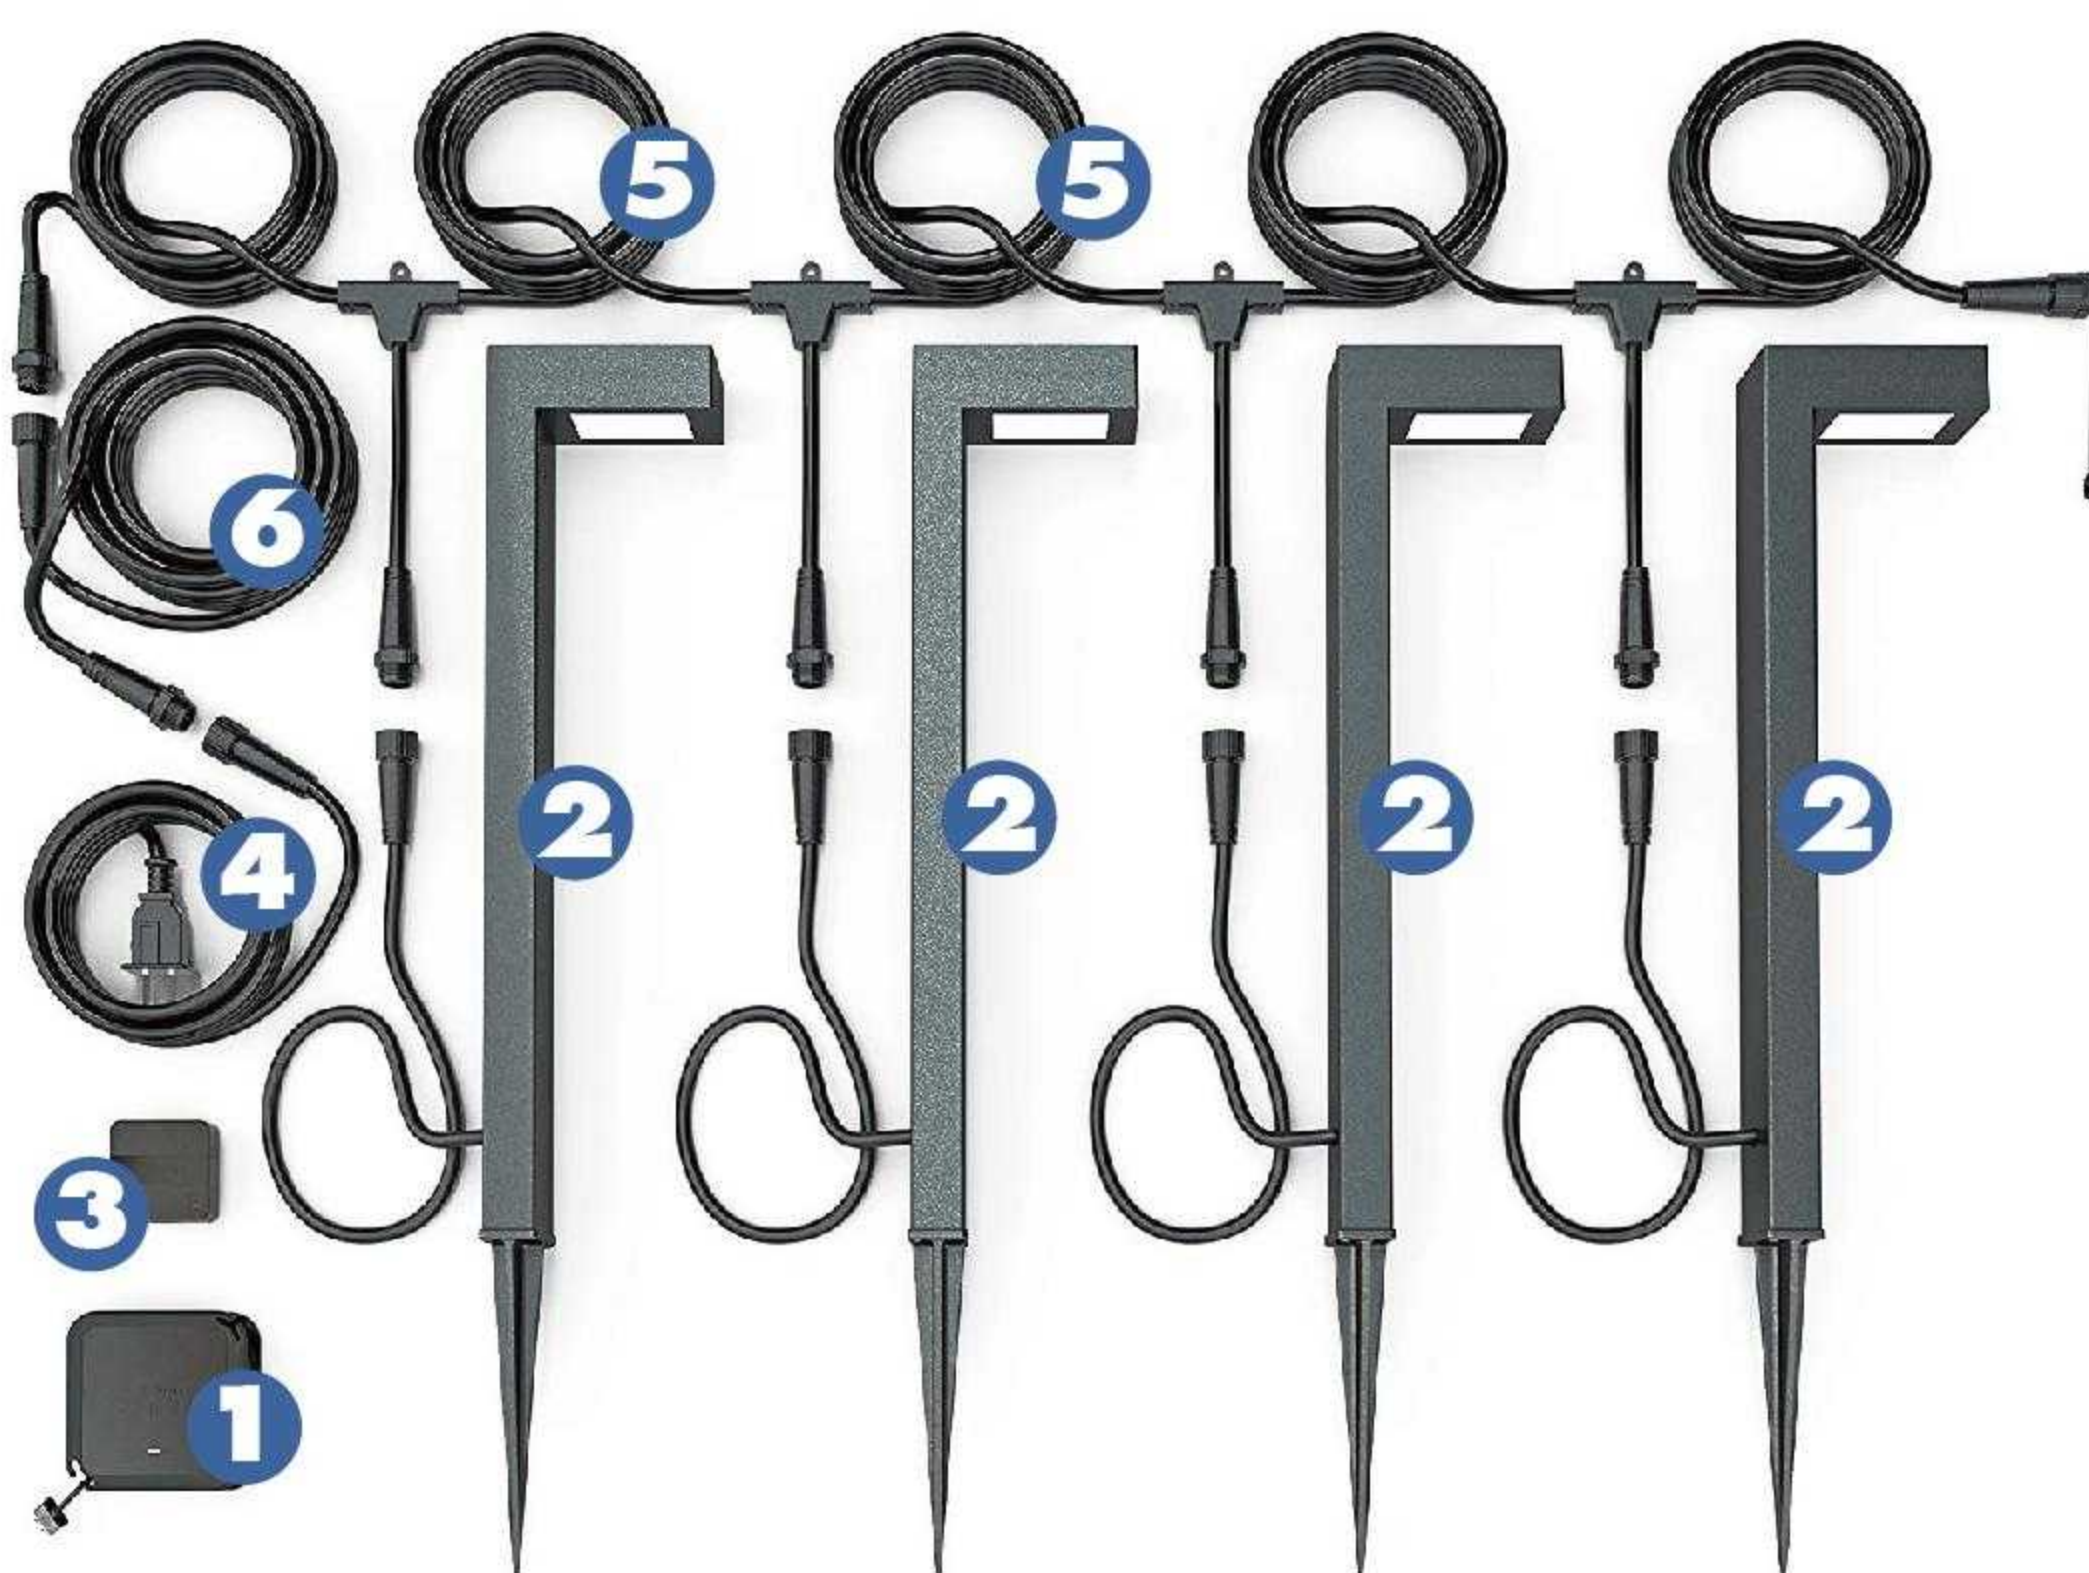

- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft.Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft.Extension Cable

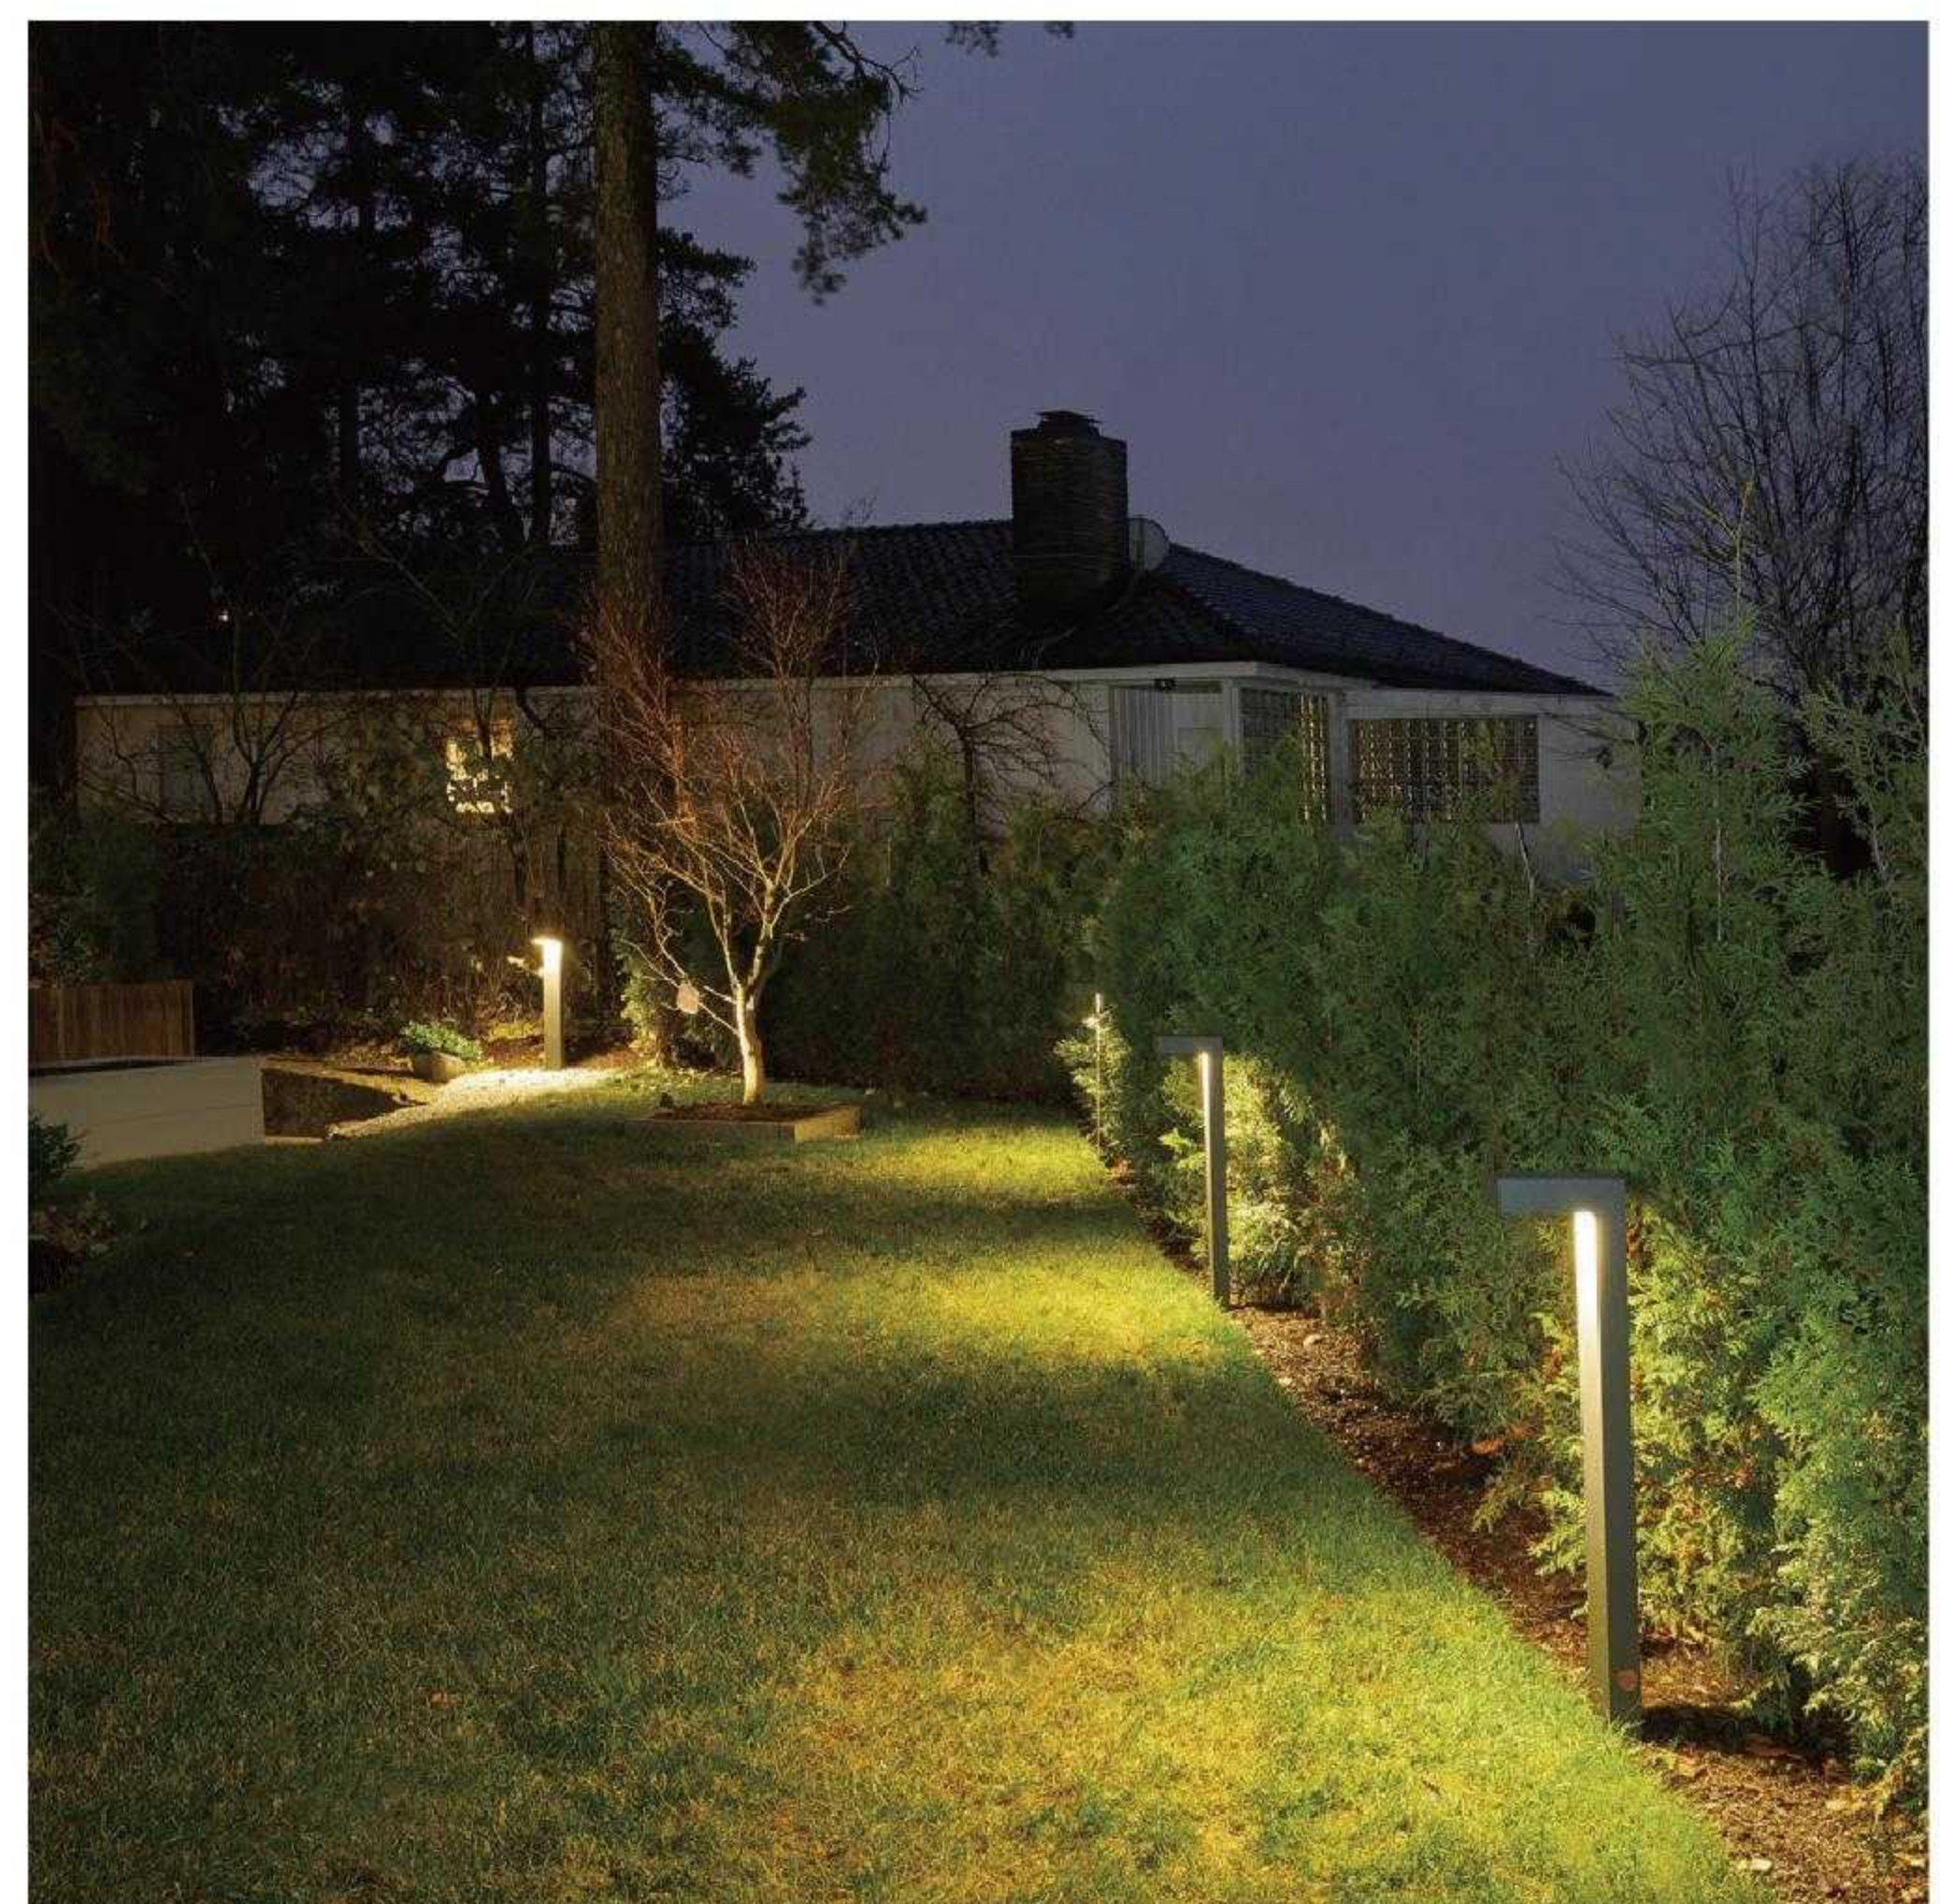



SMART Lawn Lamp

Basic lawn lamp




2.4GHz Wi-Fi +Bluetooth /Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	6W
Light color	RGB/RGBW

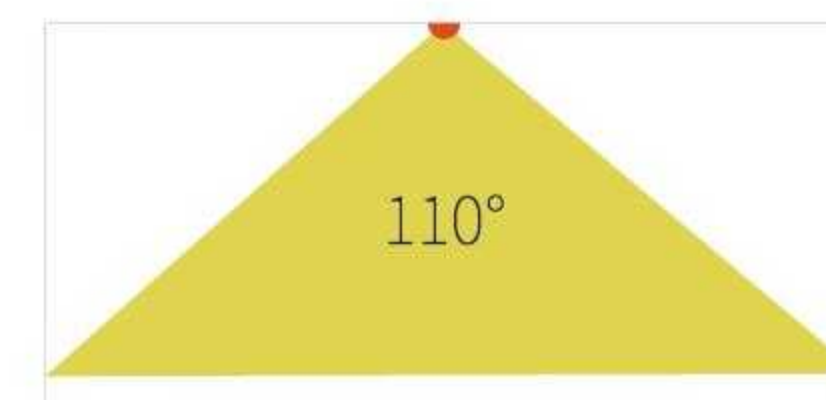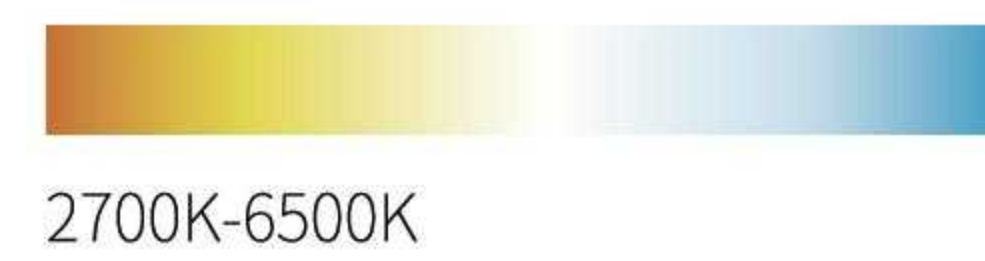

- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft. Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft. Extension Cable

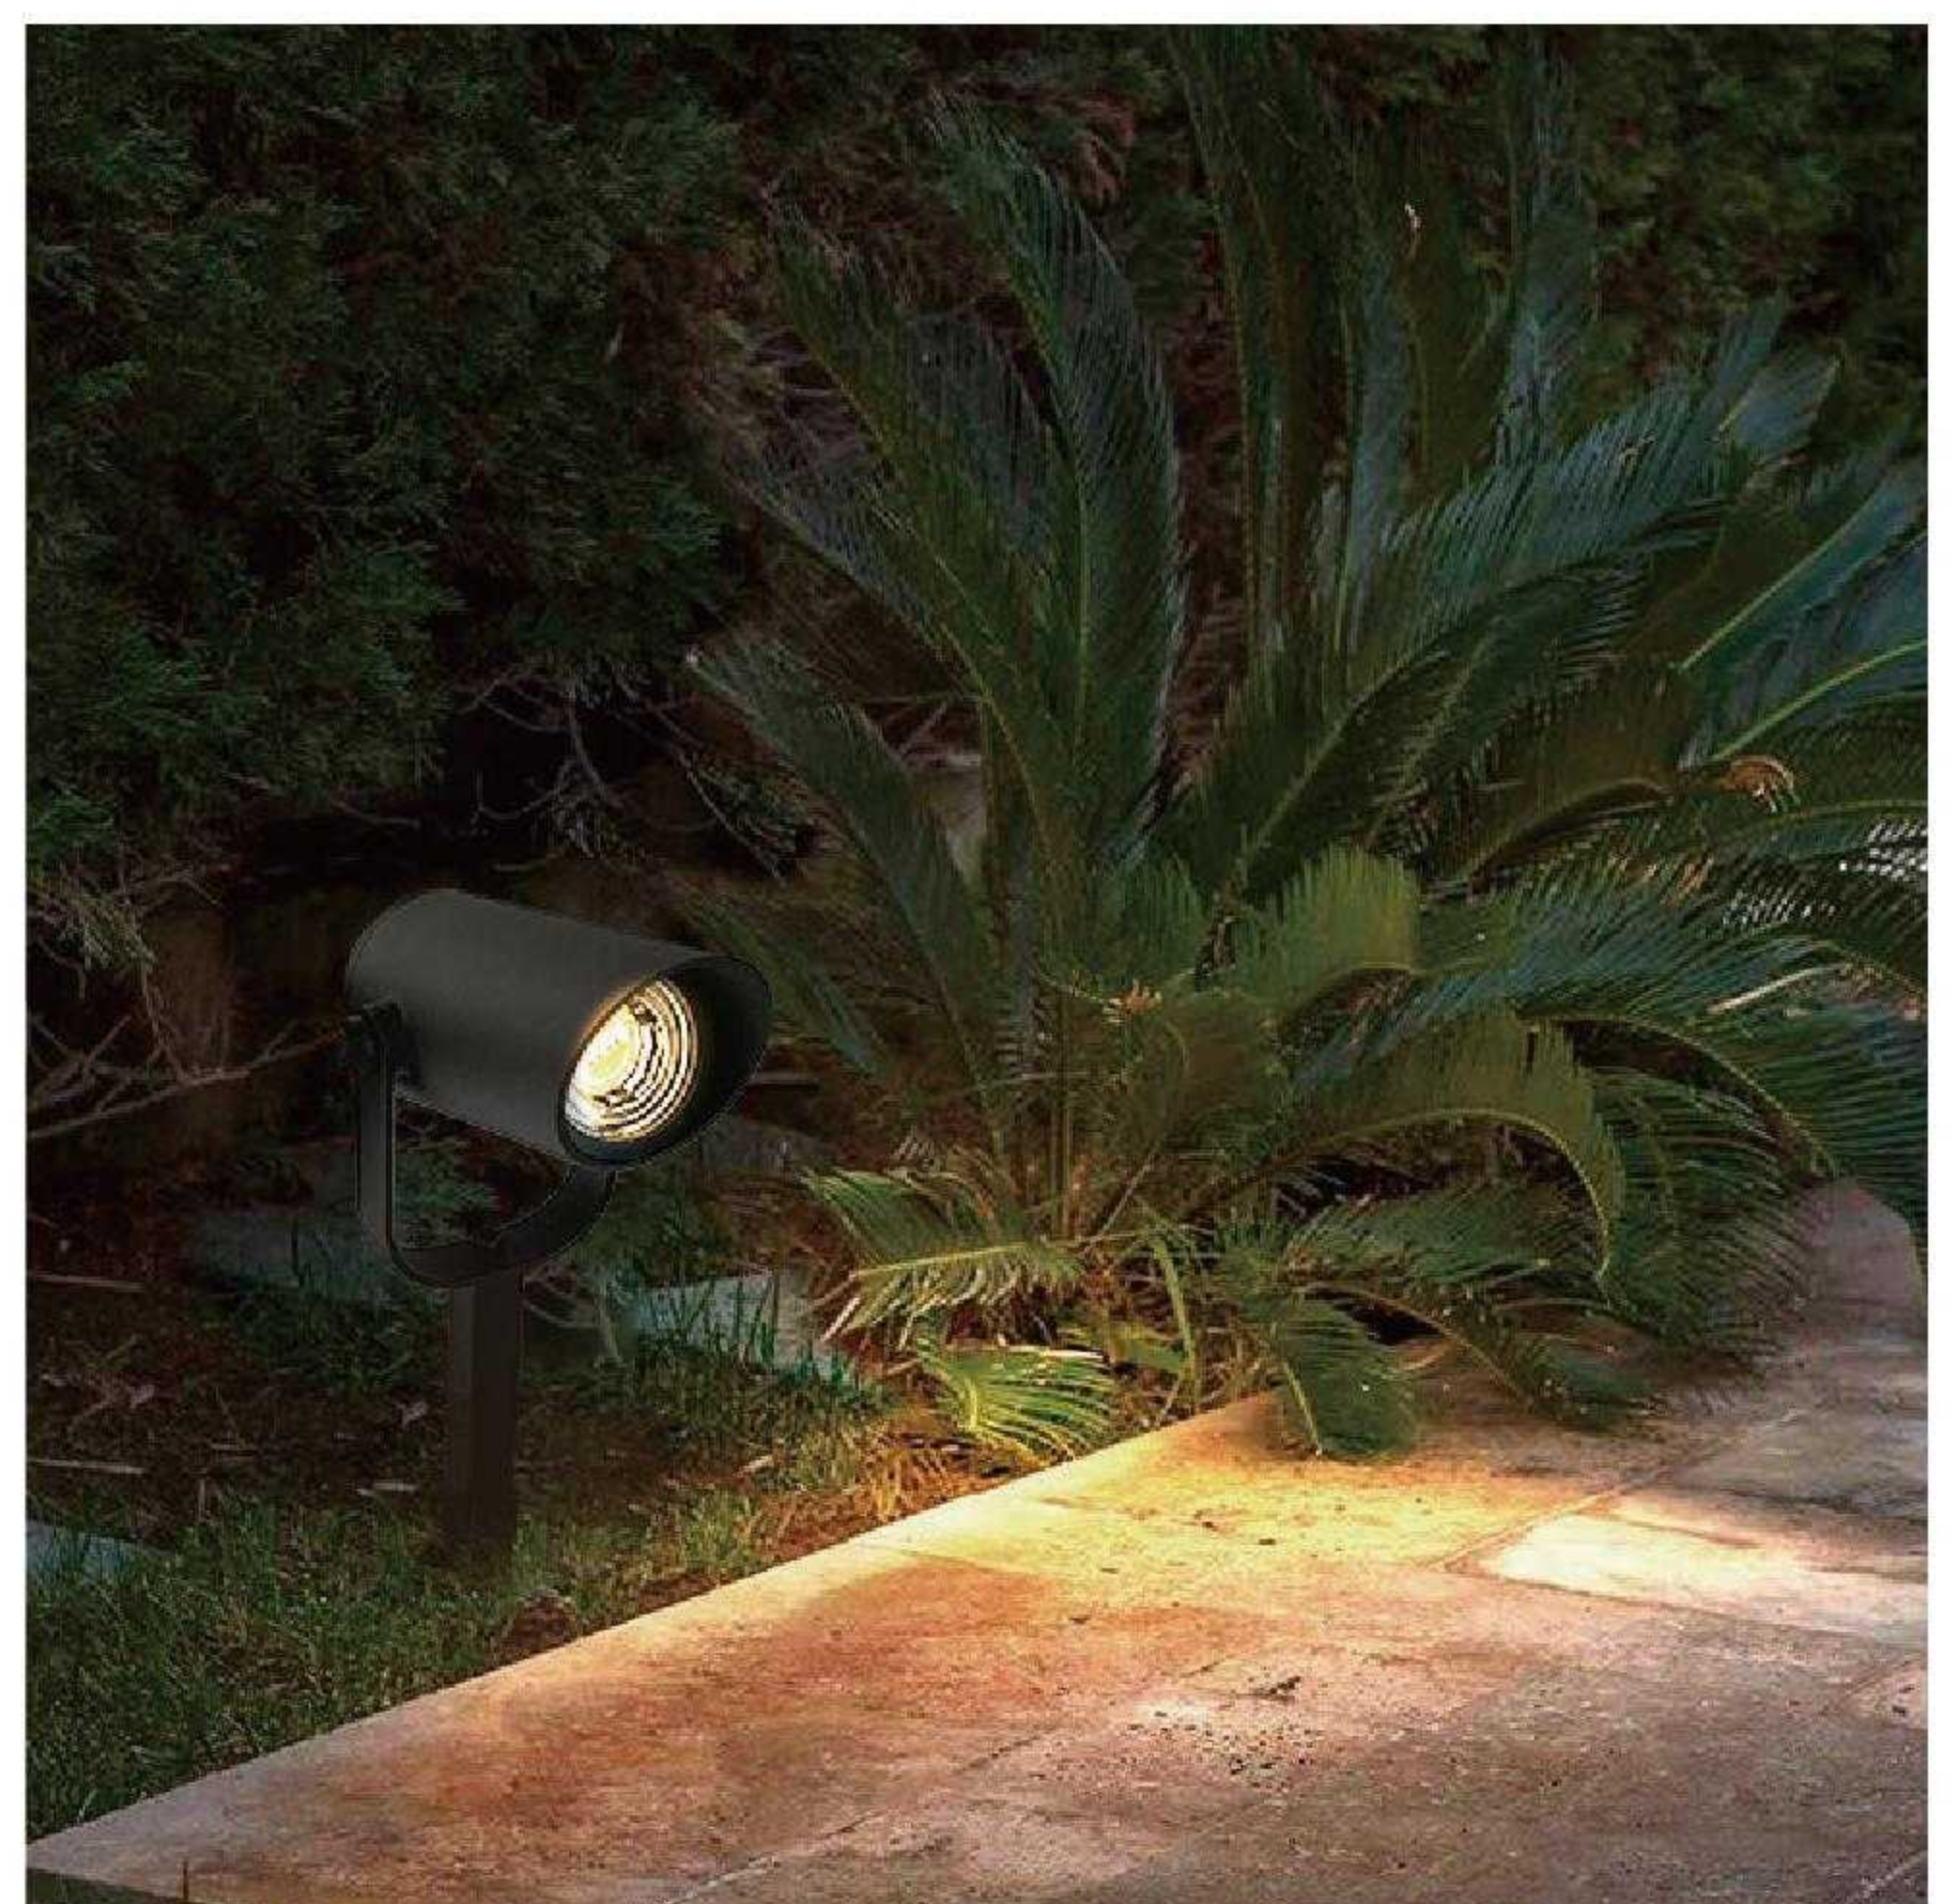



SMART Lawn Lamp

Mashroom Lawn lamp





2.4GHz Wi-Fi +Bluetooth Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	3W
Light color	RGB/RGBW

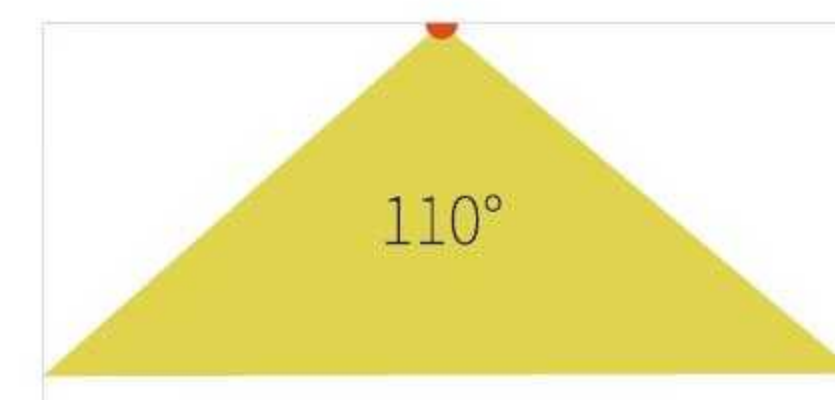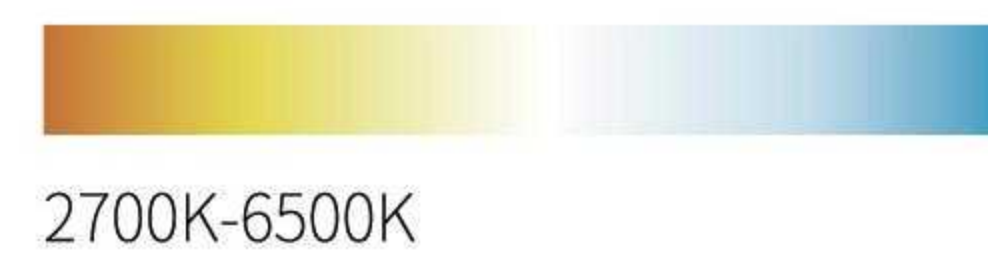

SCENCE

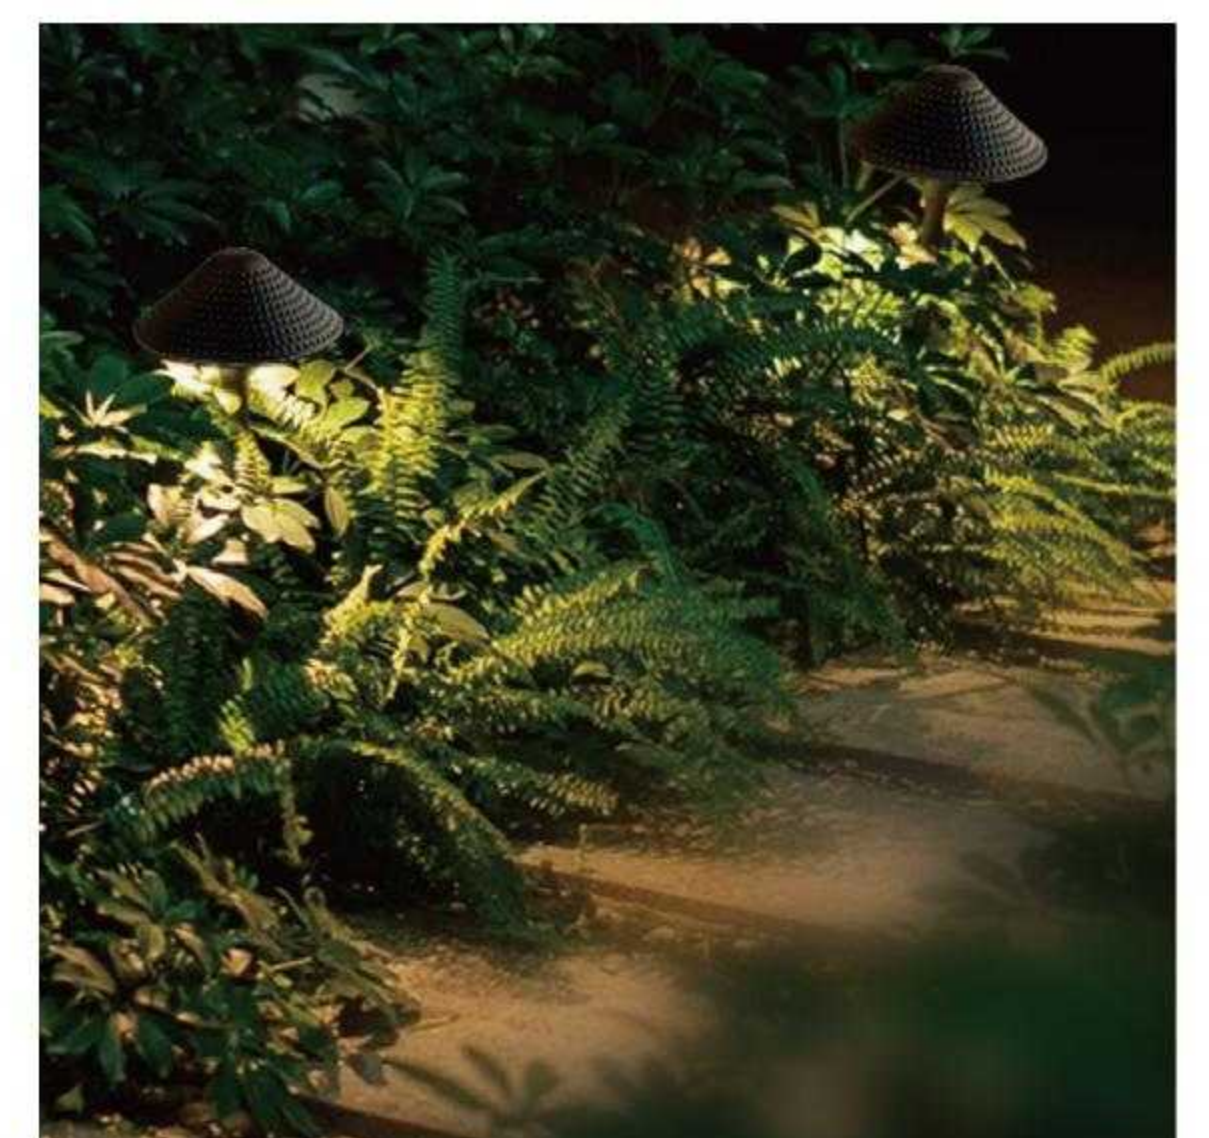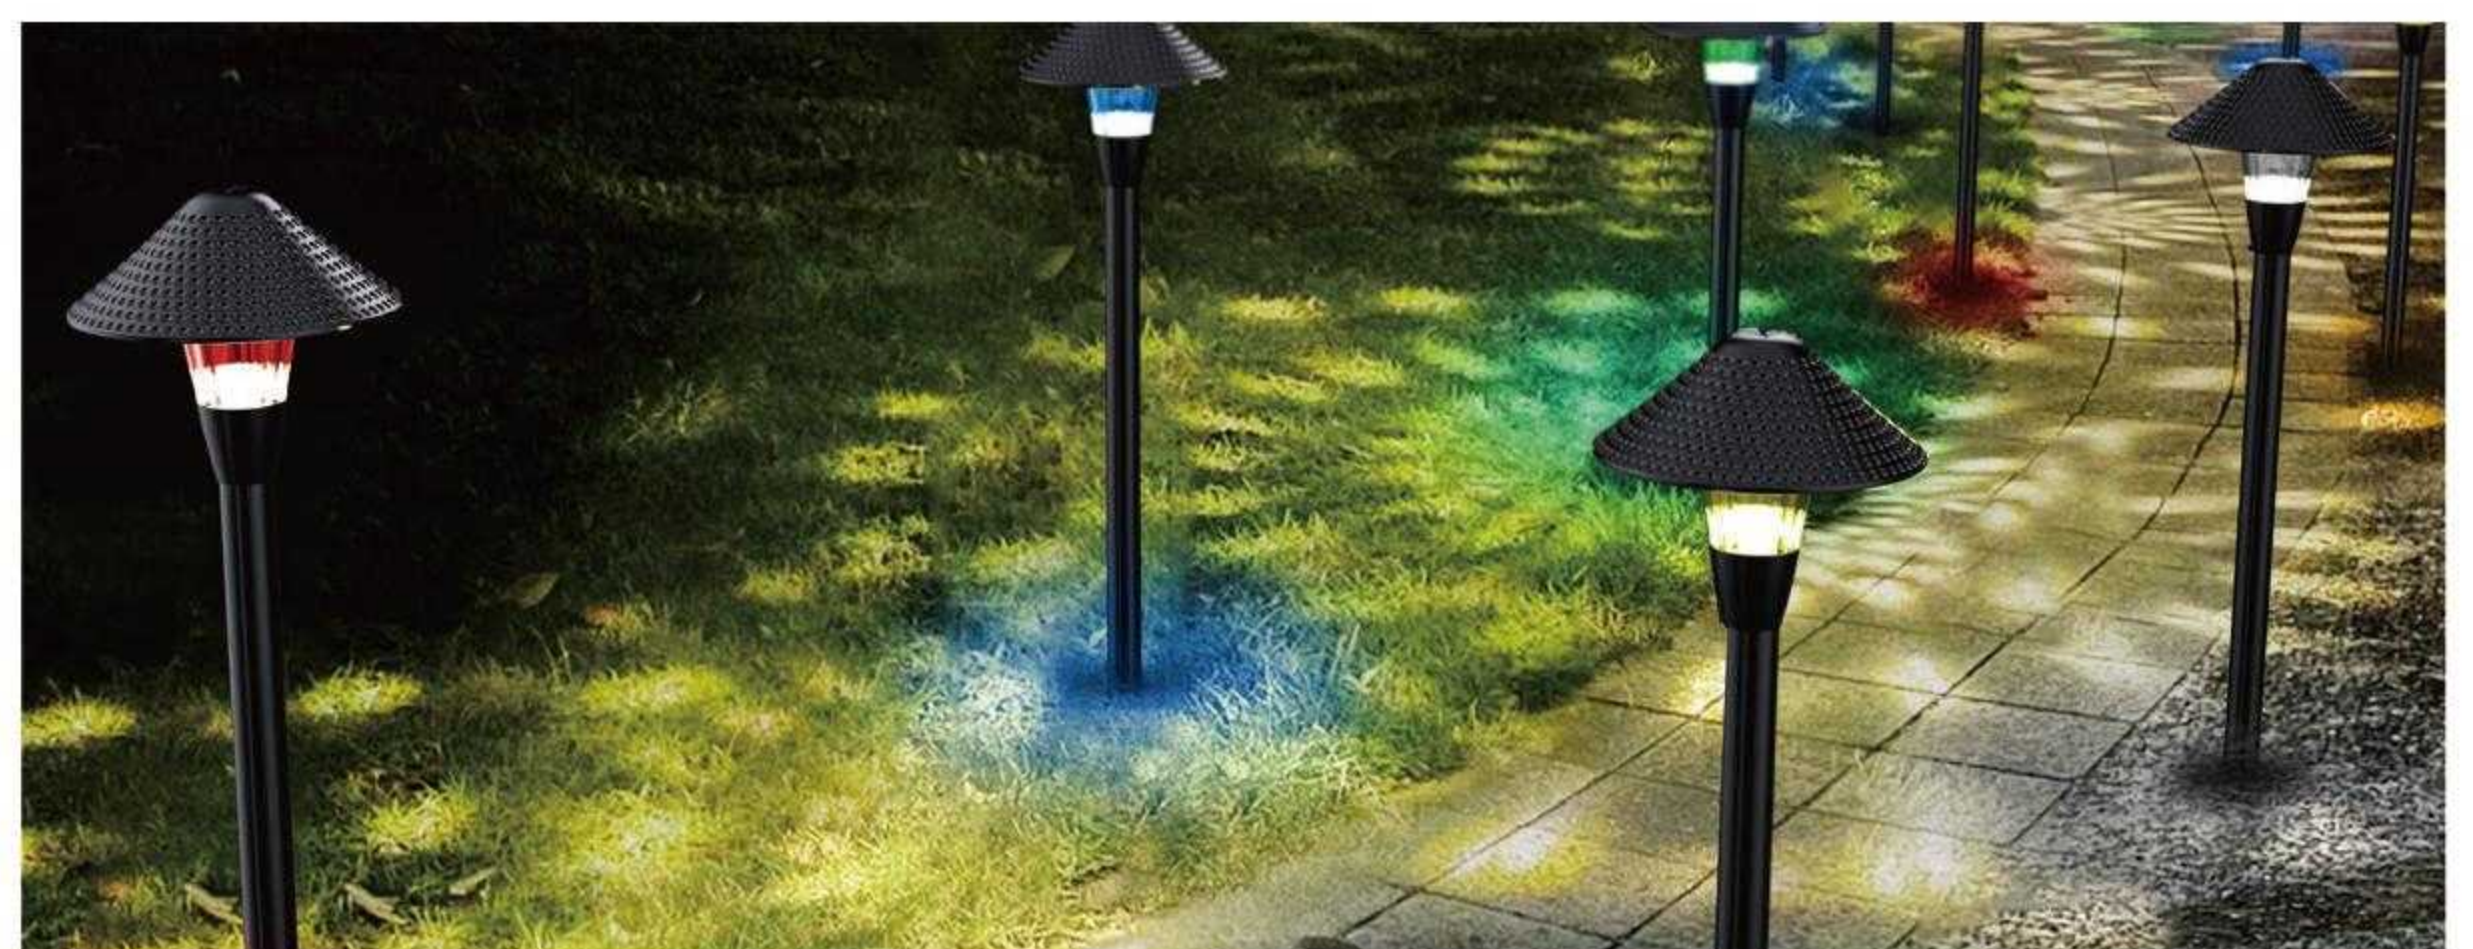



SMART Lawn Lamp

Basic lawn lamp



2.4GHz Wi-Fi +Bluetooth Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	3W
Light color	RGB/RGBW

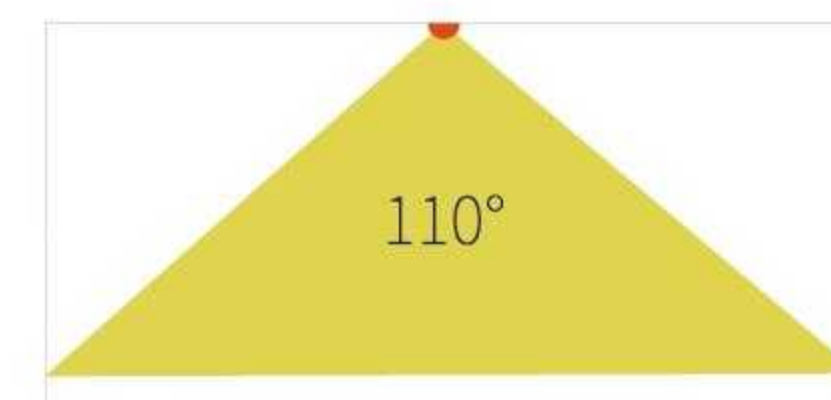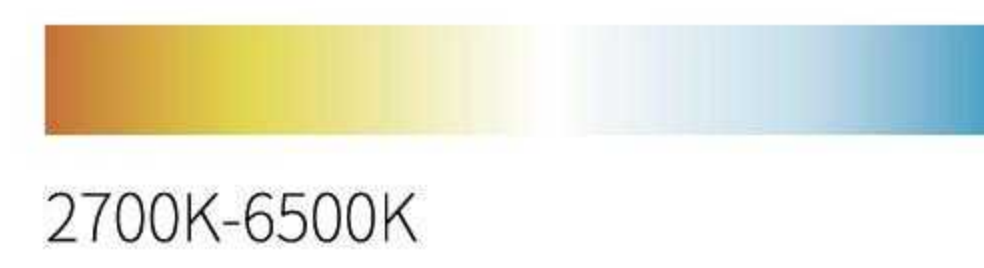



SMART Lawn Lamp

Teacup lawn lamp



2.4GHz Wi-Fi +Bluetooth Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz Output 24V DC
Adapter	10W
IP Rating	IP65
Bulb	3W
Light color	RGB/RGBW

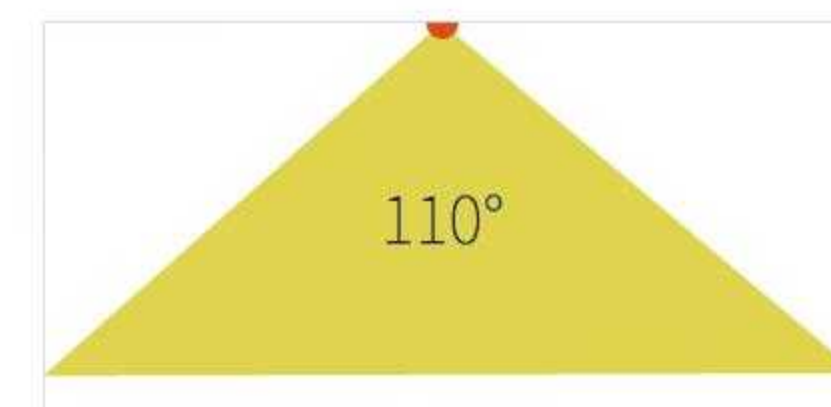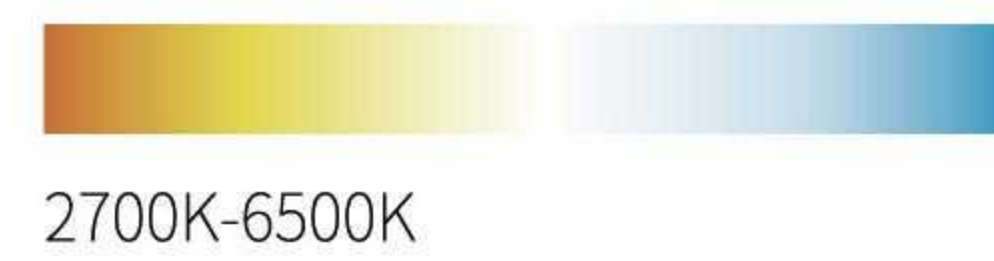

2023

SMART Wall Lamp

Environmental protection, energy saving.

SMART Wall Lamp

WALL LAMP

It can make life more colorful




Bluetooth®



CLOUD STORAGE

VOICE CONTROL

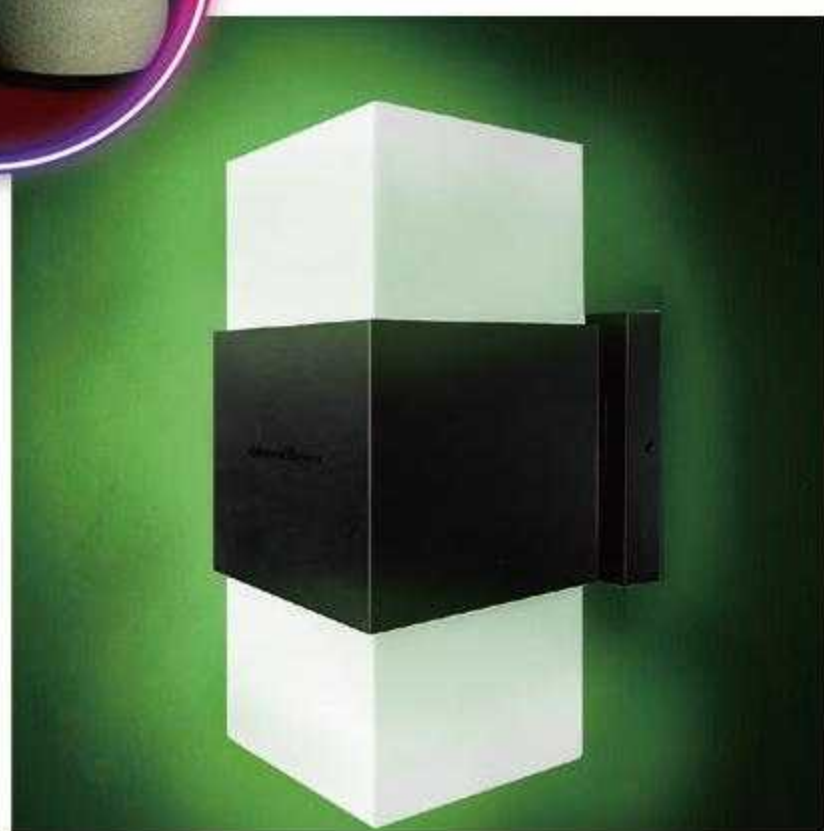

• Basic User

Use the "SMART LIFE" APP control together with the luminaires / luminaires to adjust brightness, colours and mood. These functions are practical, easy to handle and will meet your daily needs.

• Advanced User

Use the full potential of "SMART LIFE" APP connect: Away from-Home control by integration in your WiFi, control by speech commands via Amazon Echo and Google Home. Use the App and expand your options – the future of lighting in your home.

SMART Lawn Lamp

2023 The NEW Model

It makes you feel magical and dreamy



• Creative inspiration

It was inspired by a drink, which is the most common type of sparkling water, but often the bubbles give you a thrilling feeling. You can have bubbles in a drink, so why not in a light fixture? So this lamp has some bubbles in it to make it feel like it's been enchanted.

SMART Lawn Lamp


Circular Wall Lamp

Full cover

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White



Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
60311	220-240V/100-240V	10W	900lm	WIFI/BLE	φ 170x101	PC

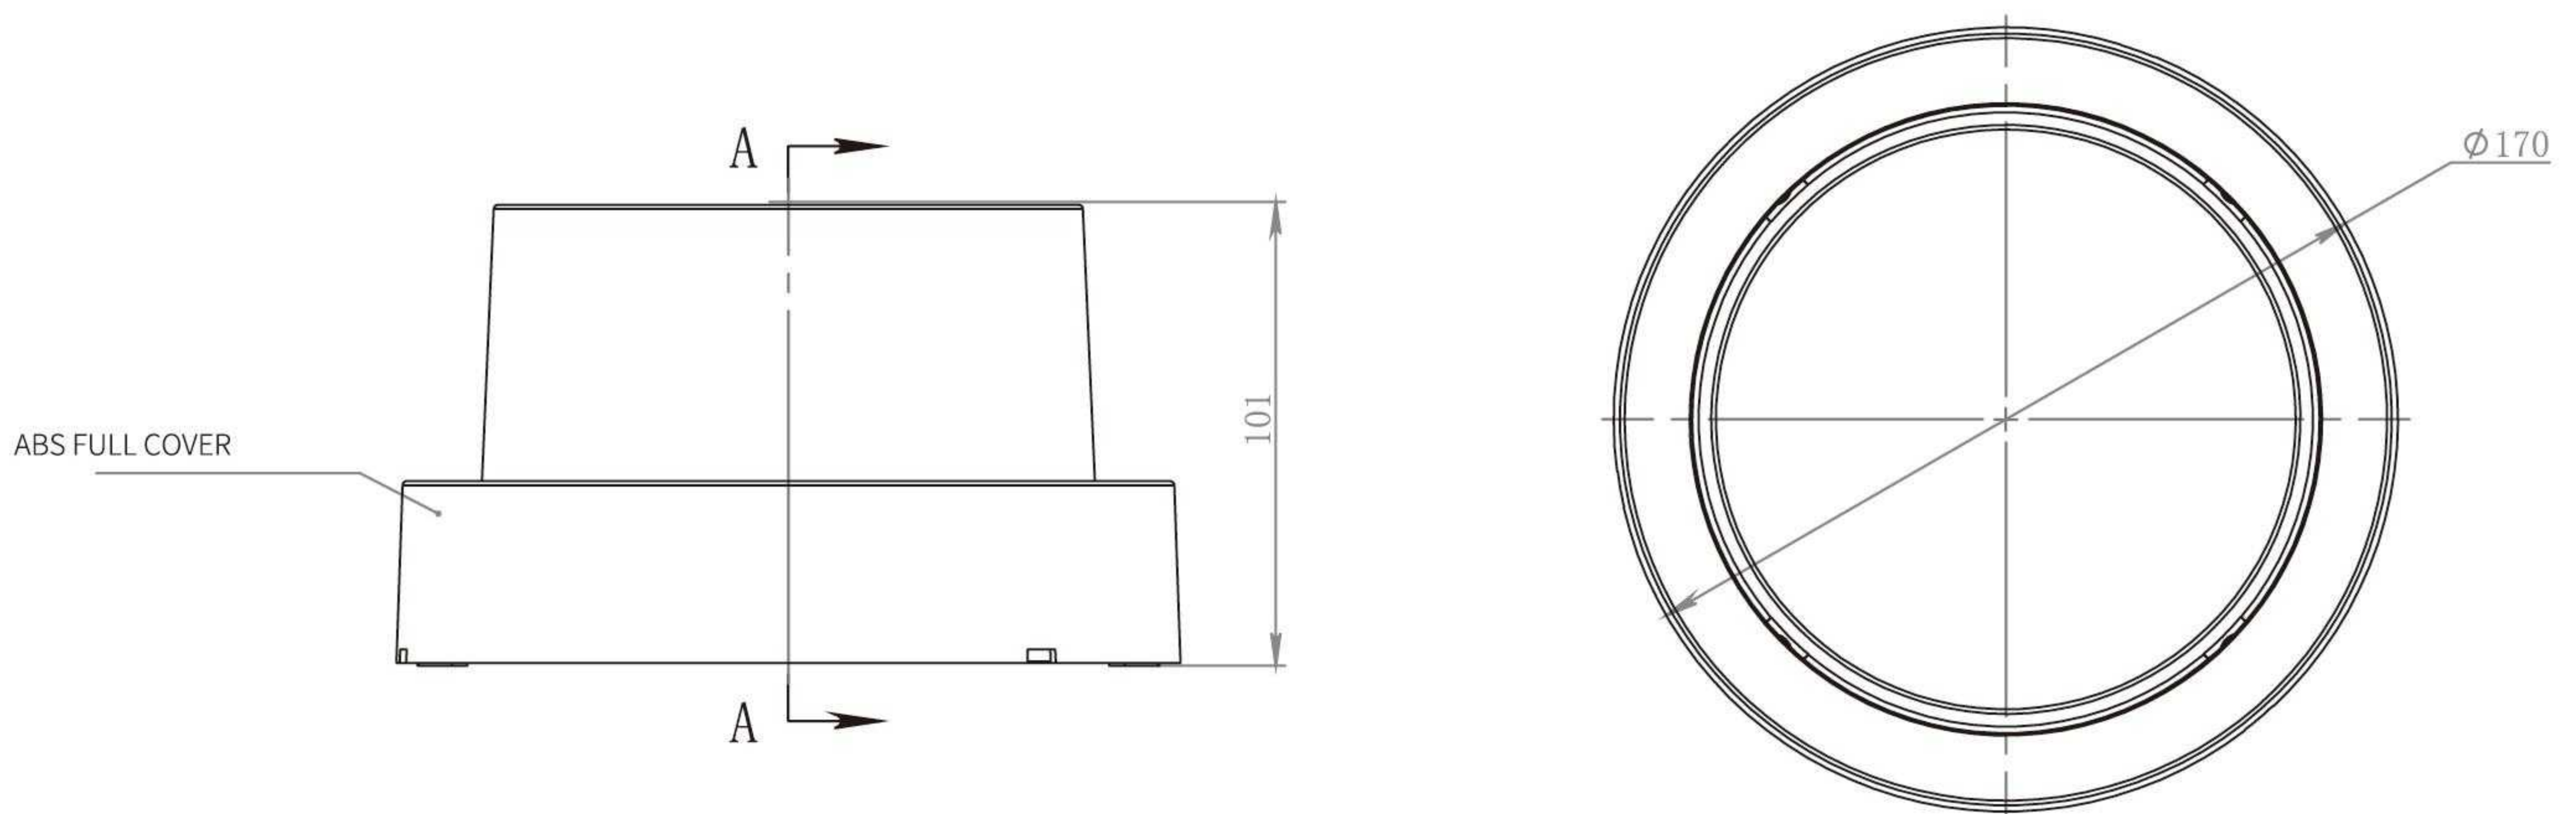


SMART Lawn Lamp



Circular Wall Lamp

Half cover

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

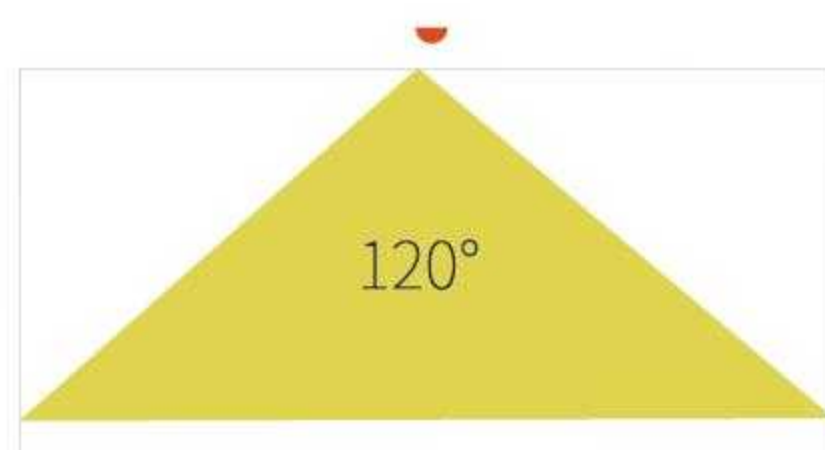


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
60313	220-240V/100-240V	10W	900lm	WIFI/BLE	φ 170x101	PC

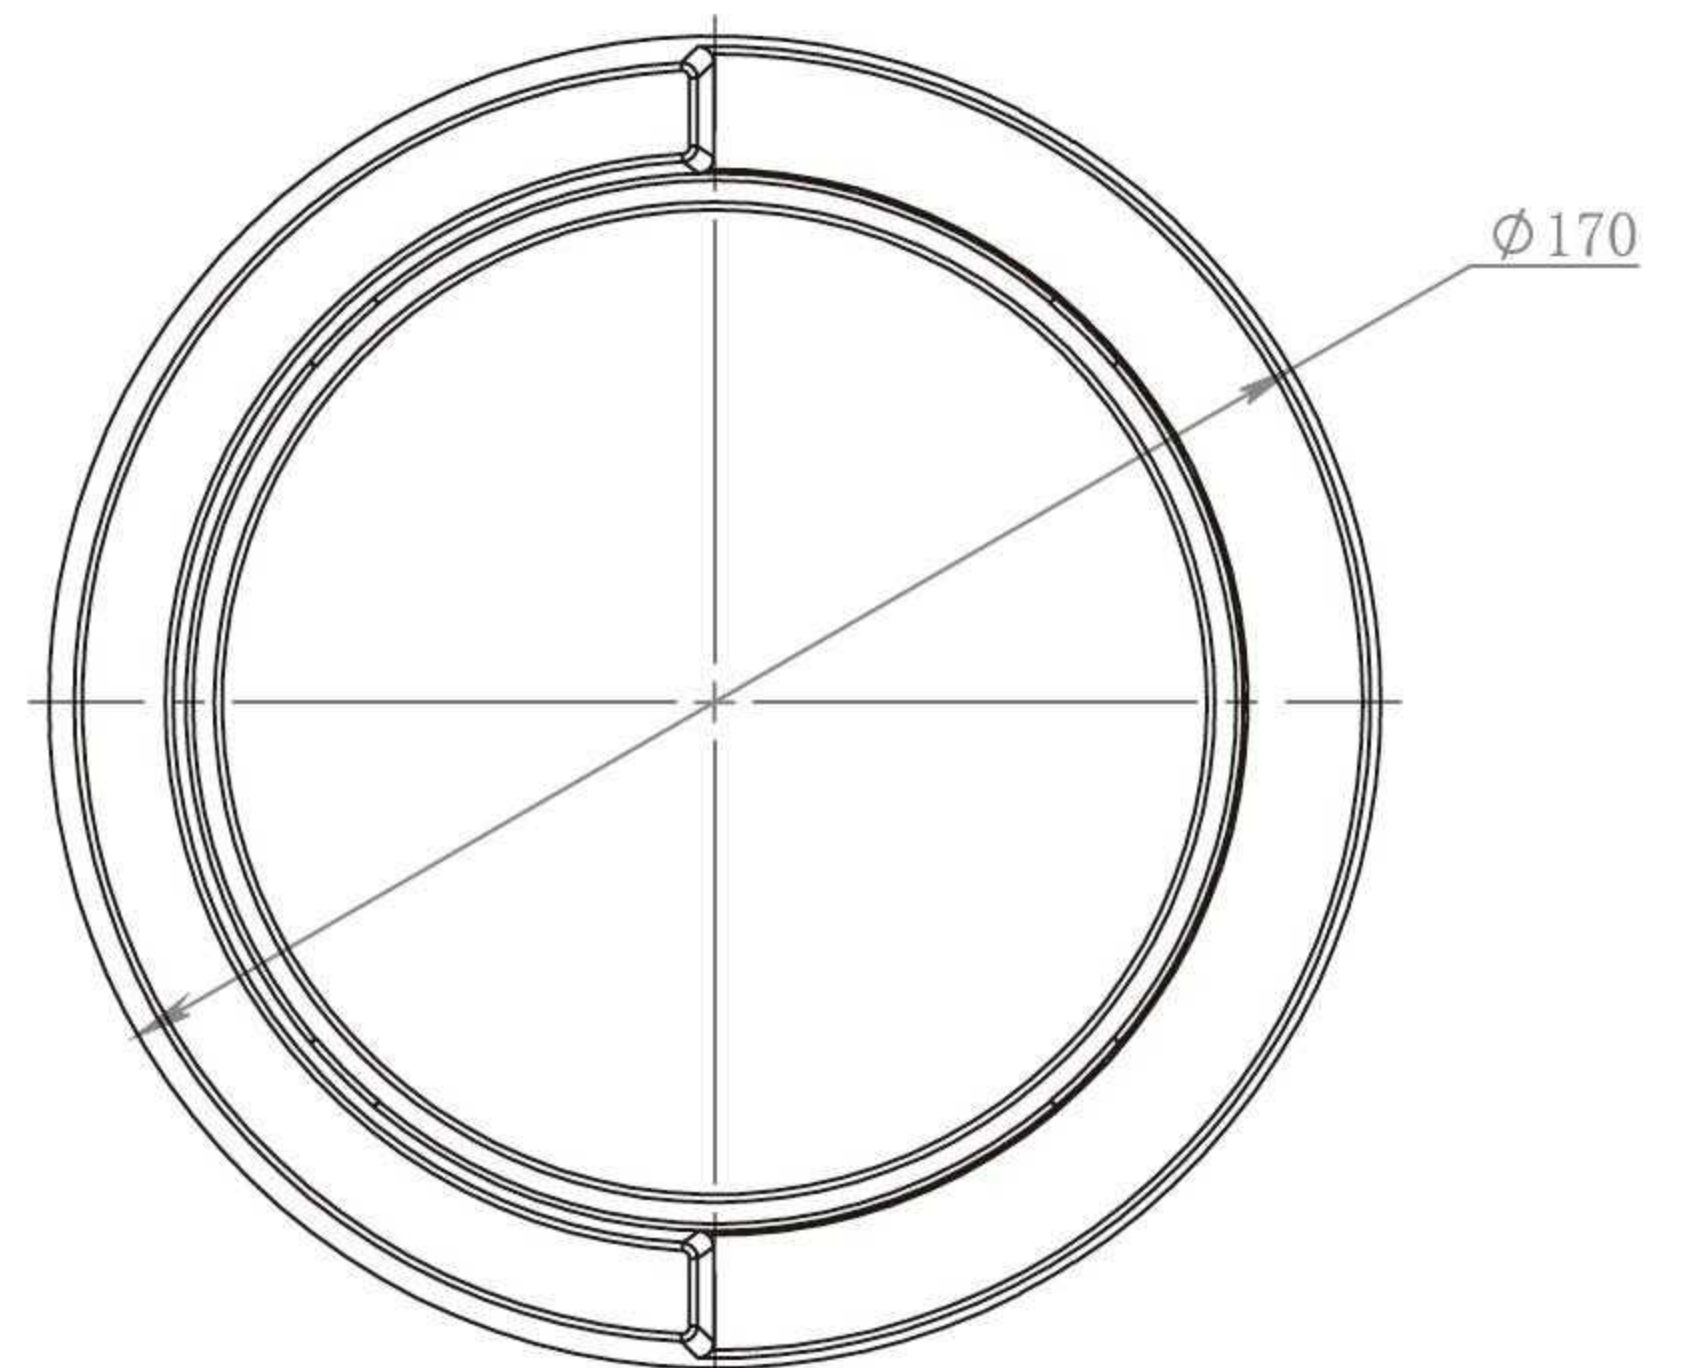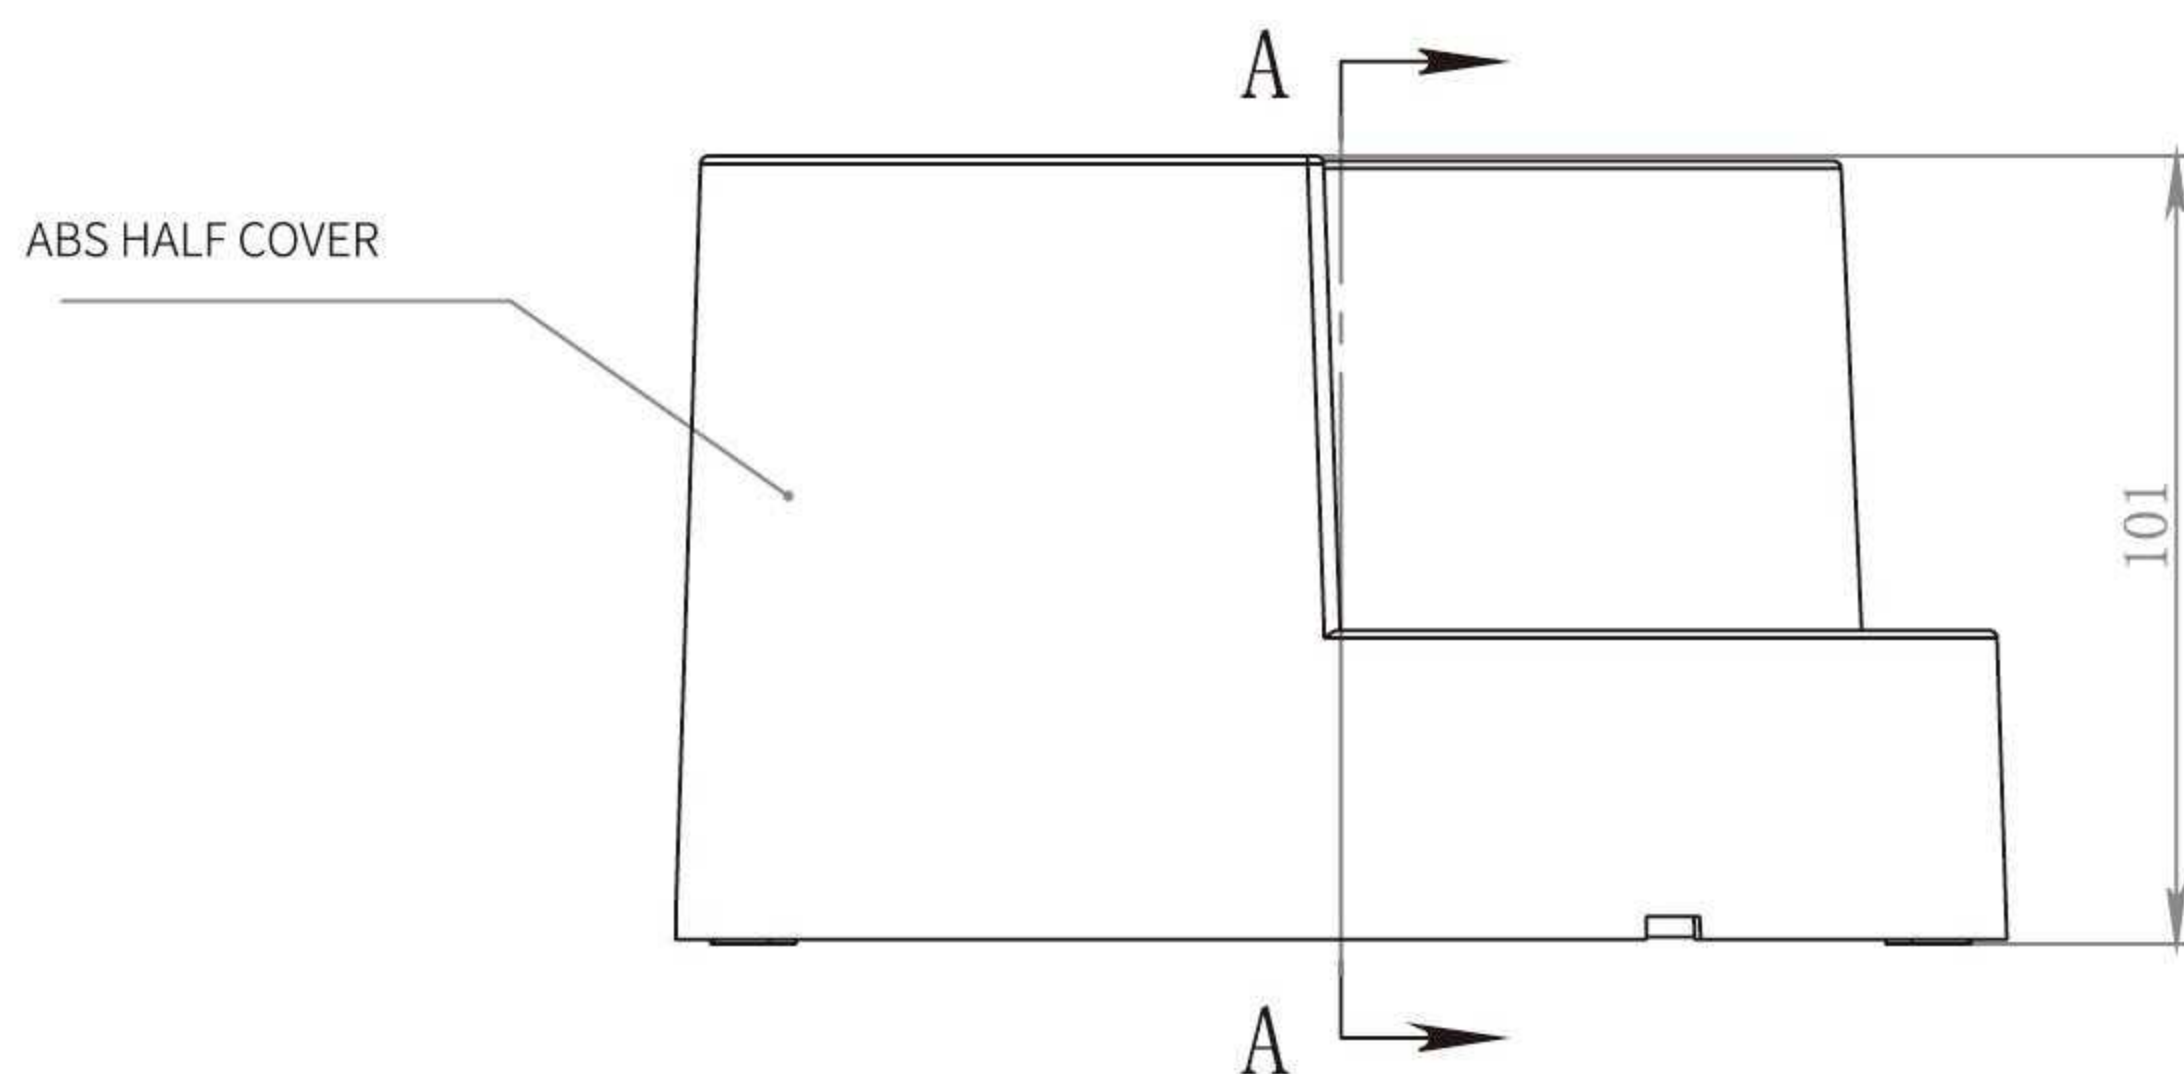




SMART Lawn Lamp

Double Head - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

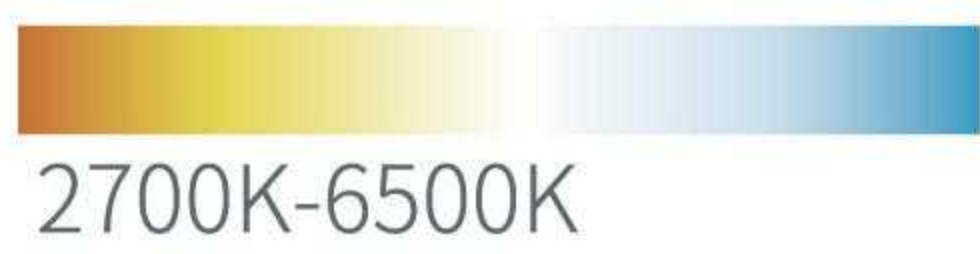



Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S01	100V-240V	20W	600lm	WIFI/BLE	φ108x308	Aluminum+PC

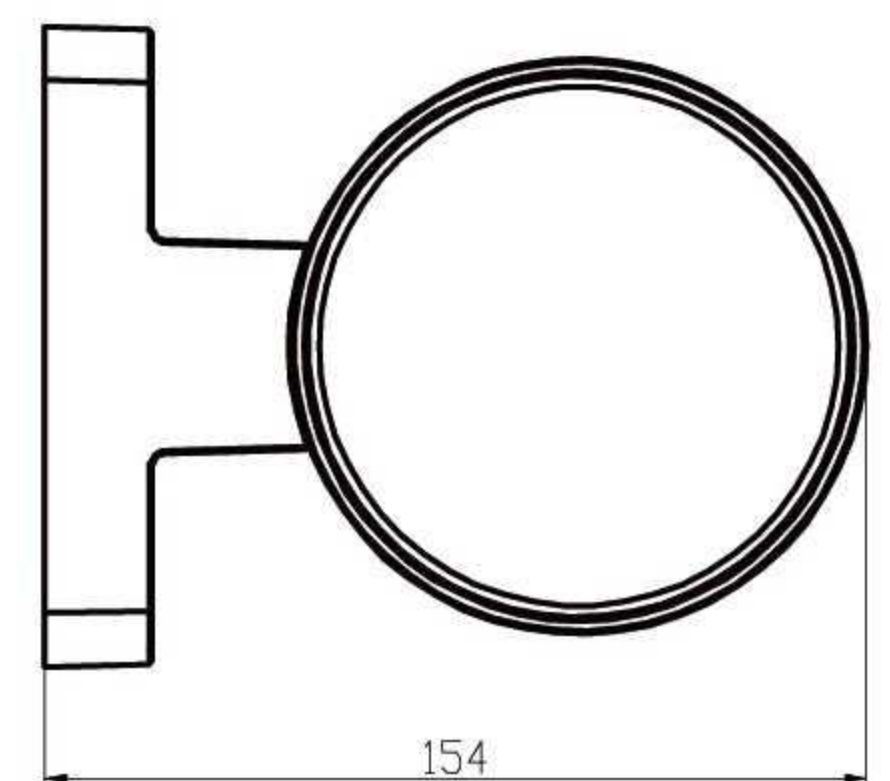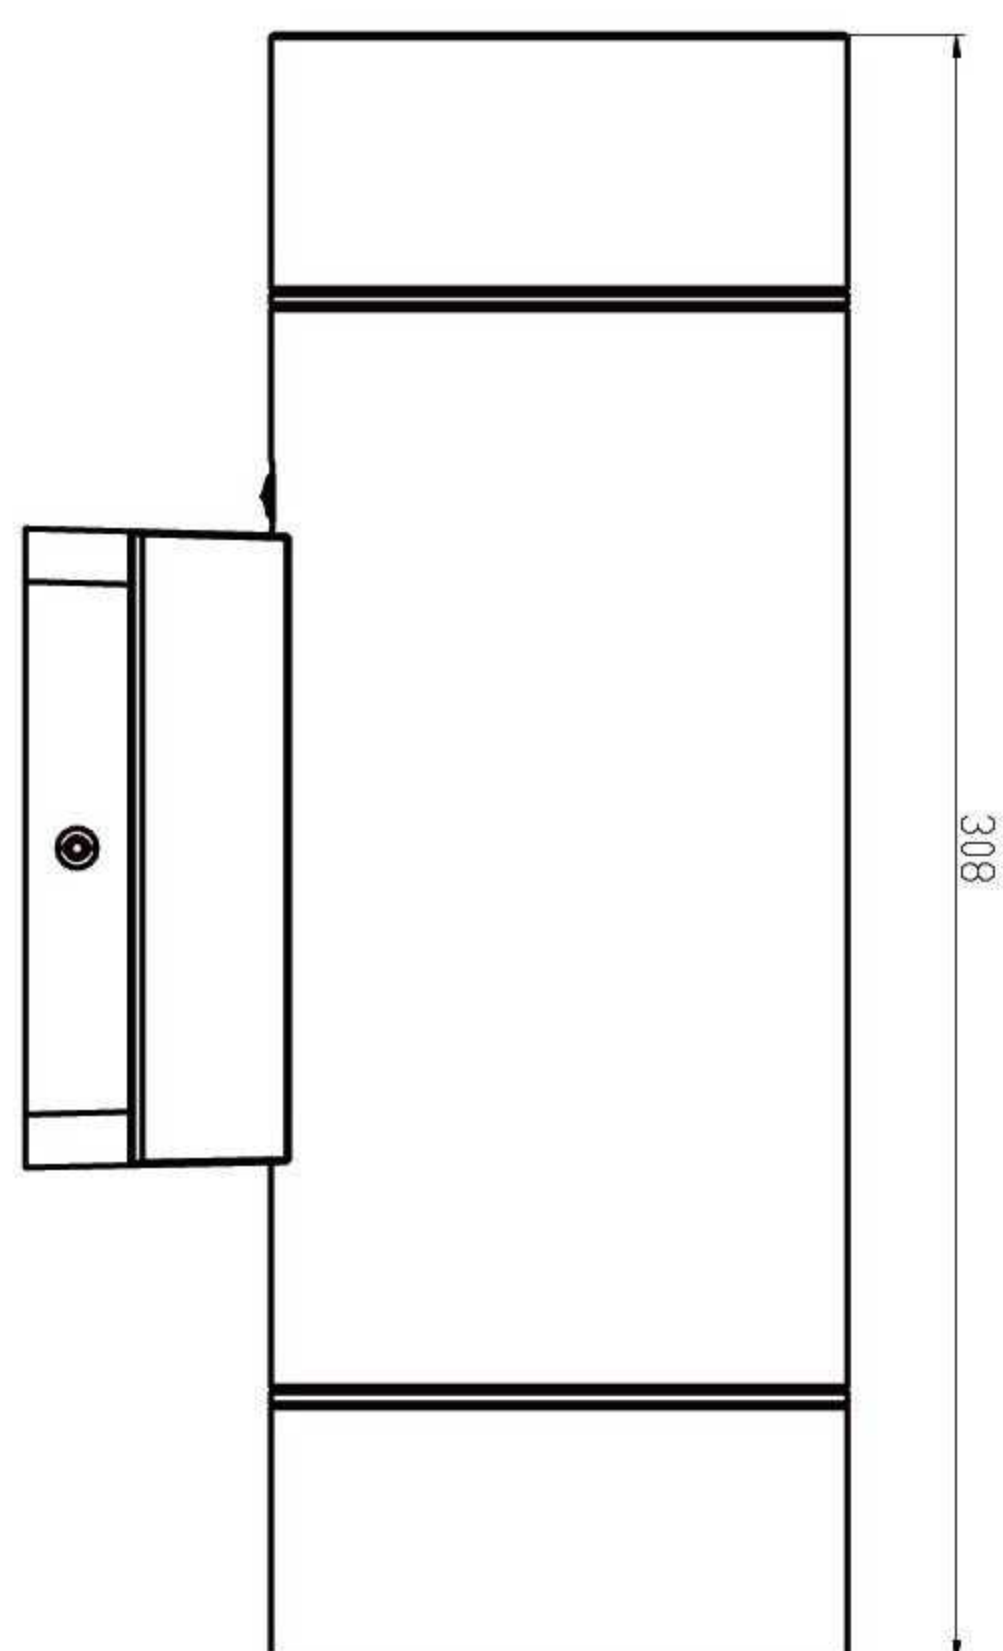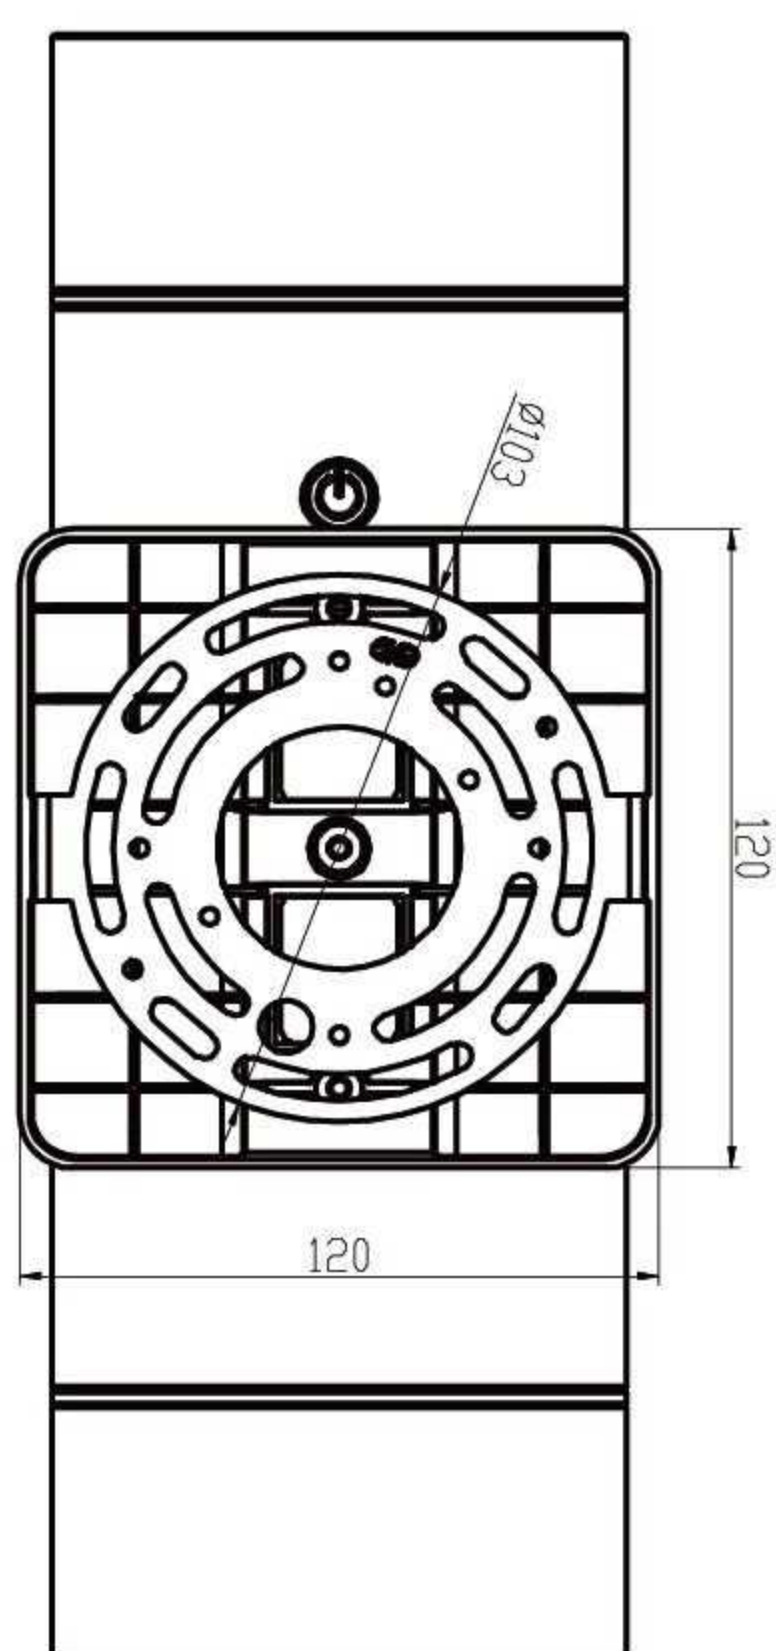




SMART Lawn Lamp

Rectangular - Wall Lamp

- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

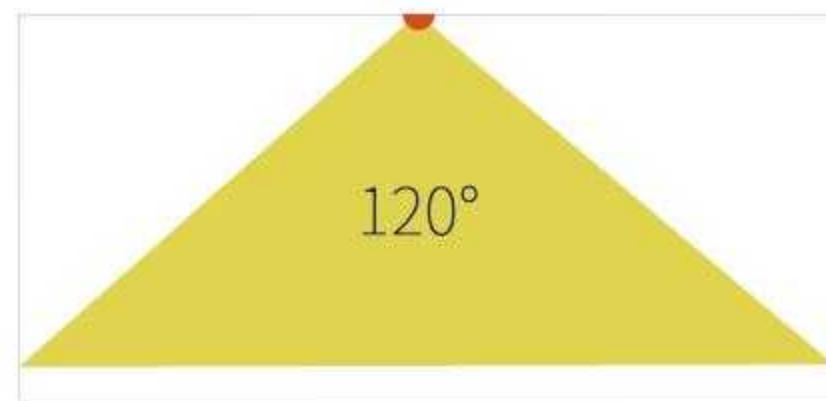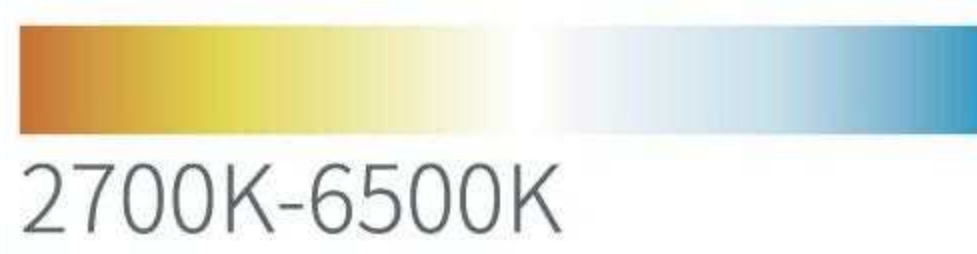


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S02	100V-240V	20W	1200lm	WIFI/BLE	127x127x305	Aluminum+PC

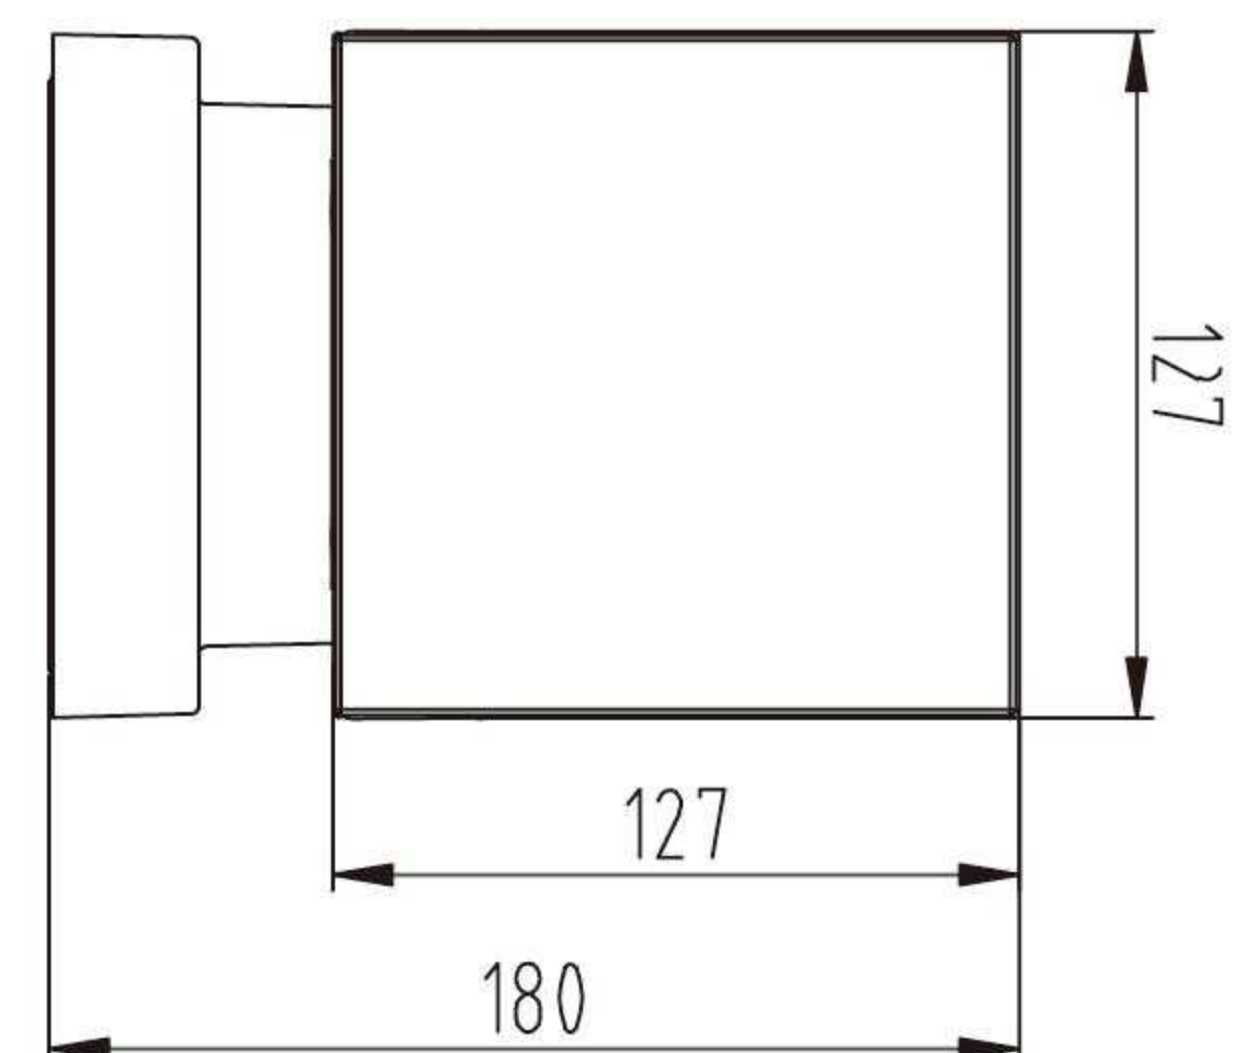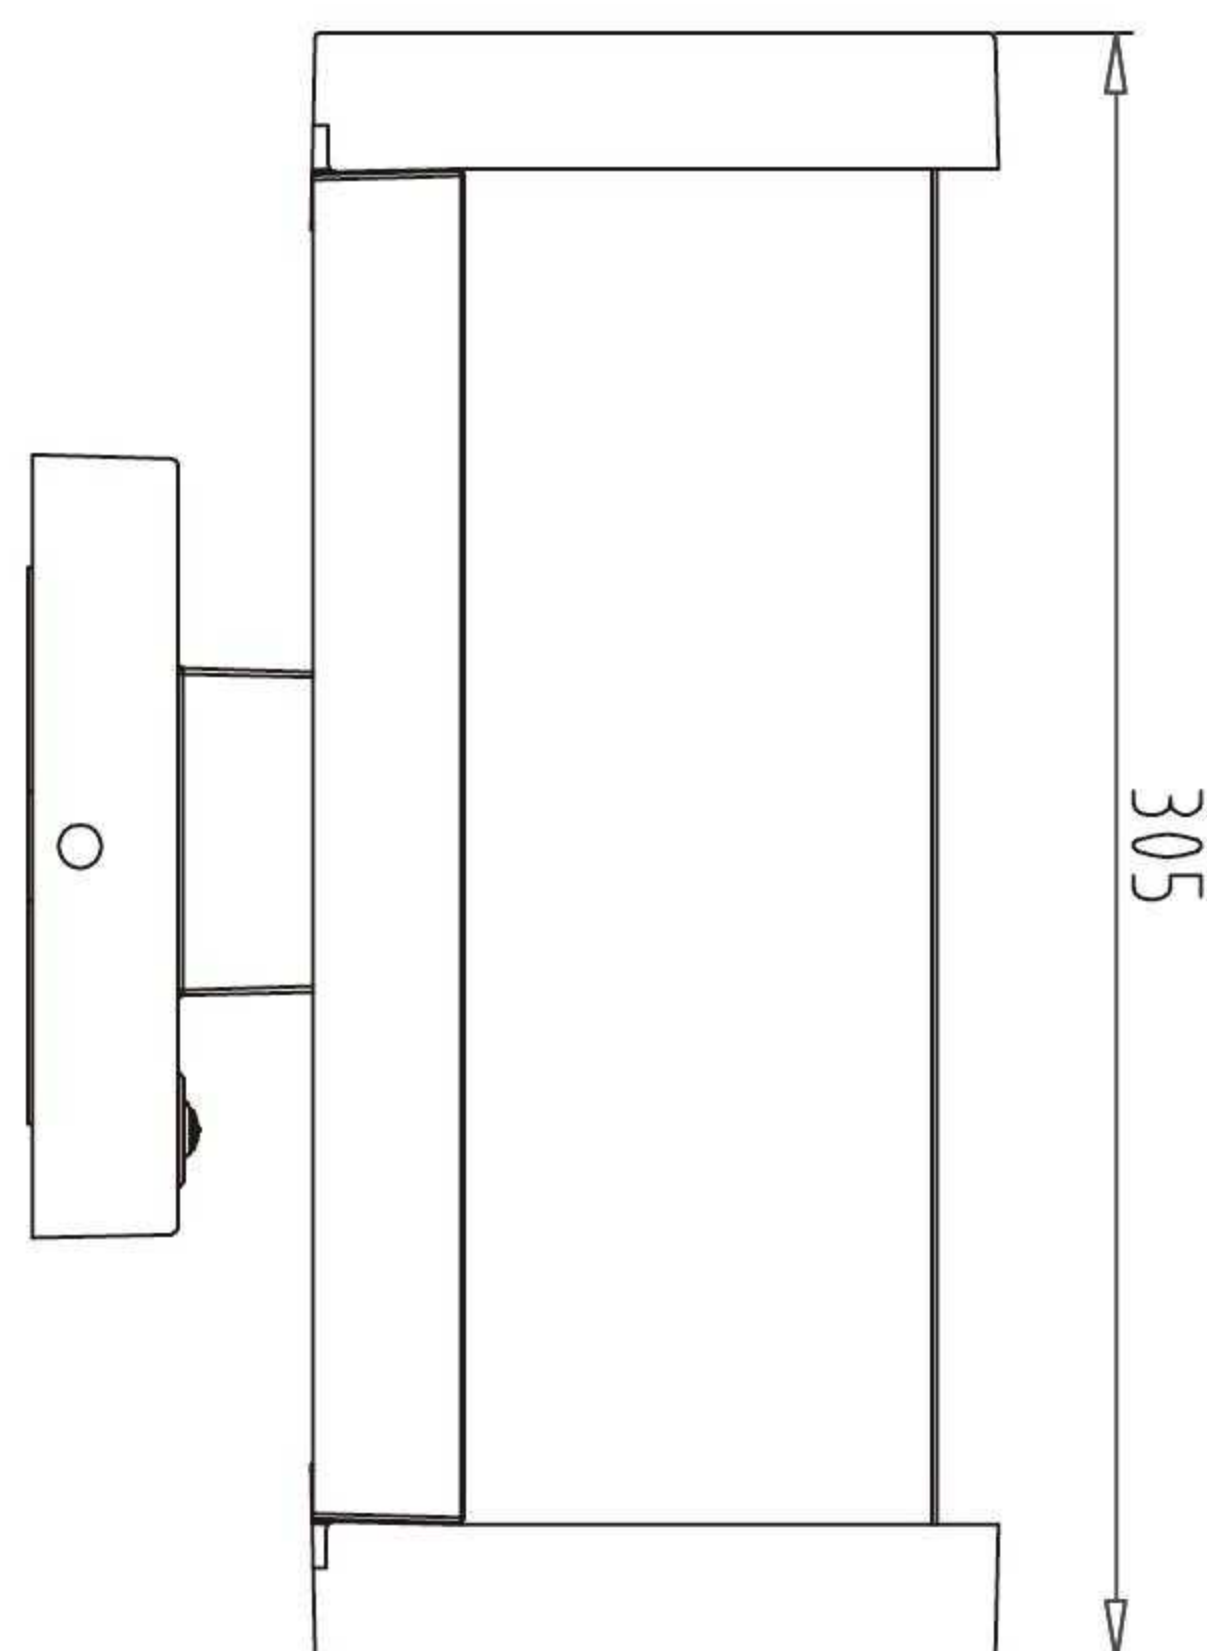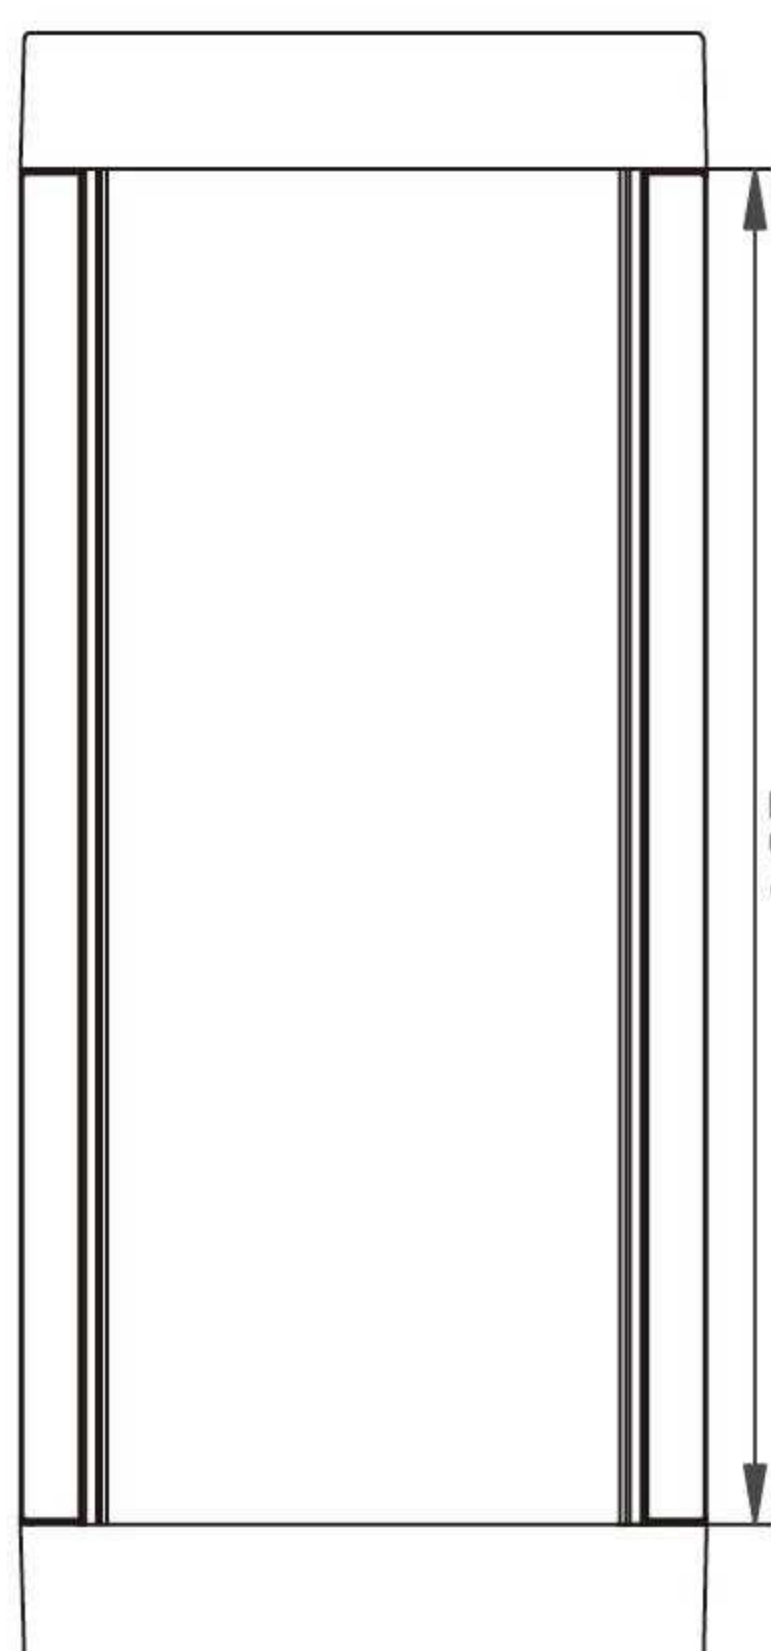




SMART Lawn Lamp

Rectangular - Wall Lamp

- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

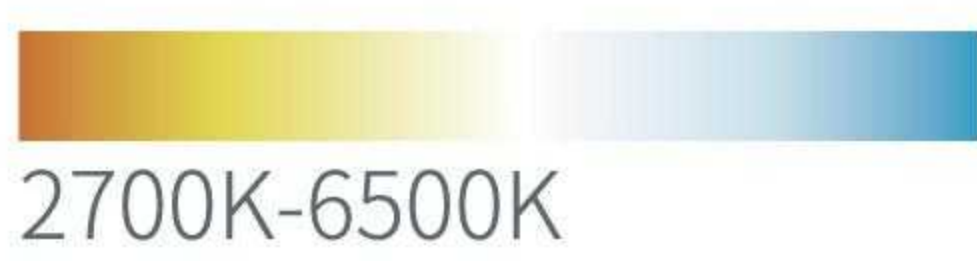



Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S03	100V-240V	20W	1200lm	WIFI/BLE	127x127x305	Aluminum+PC

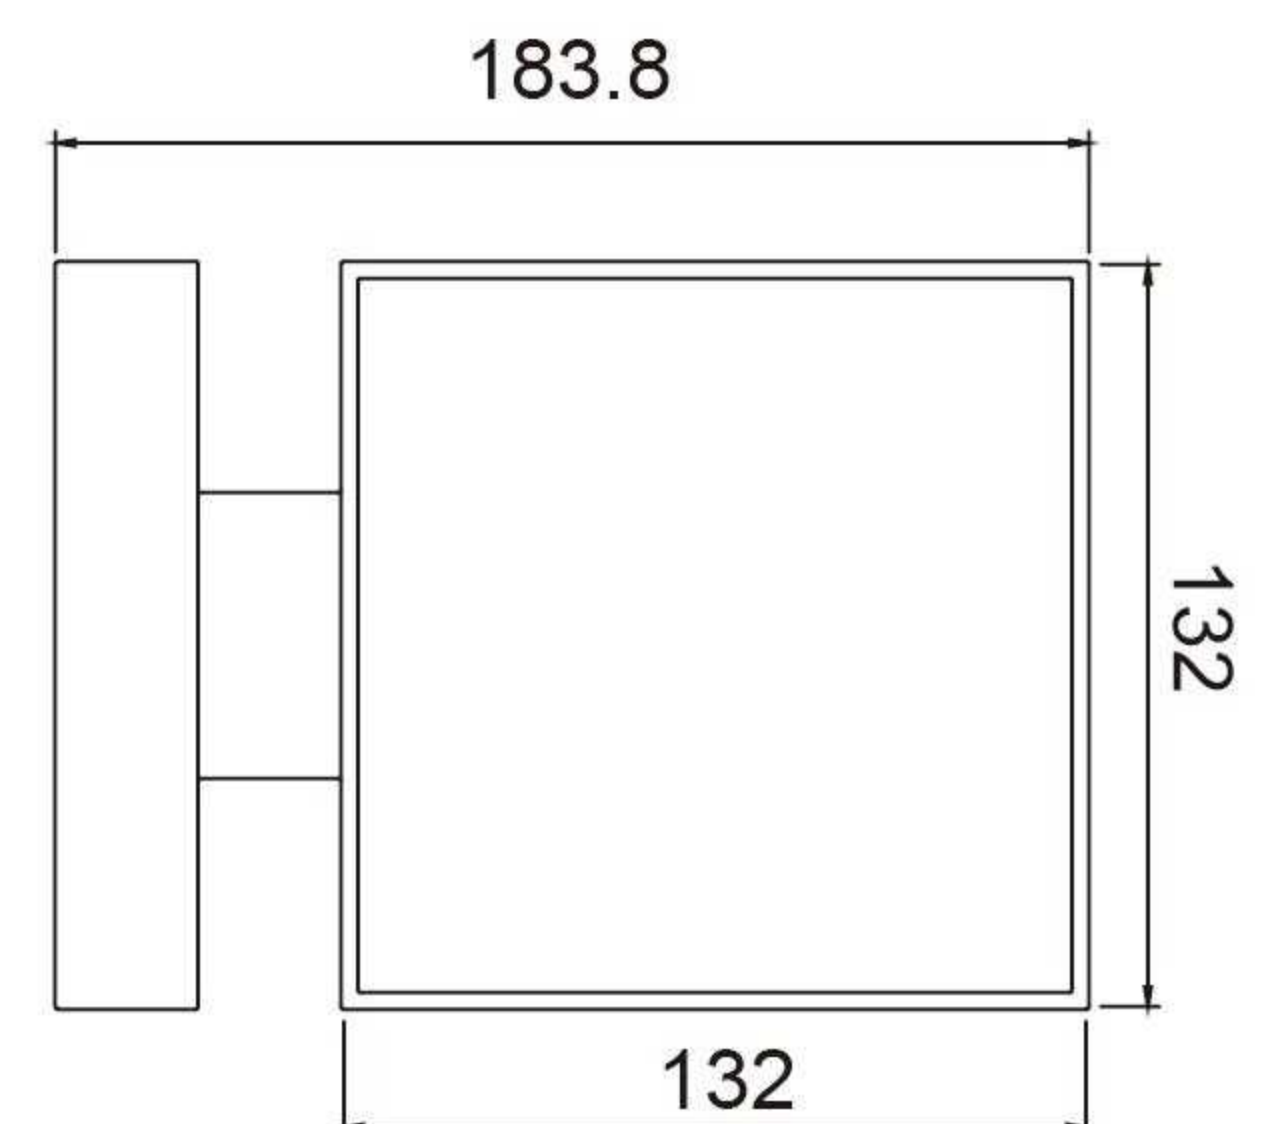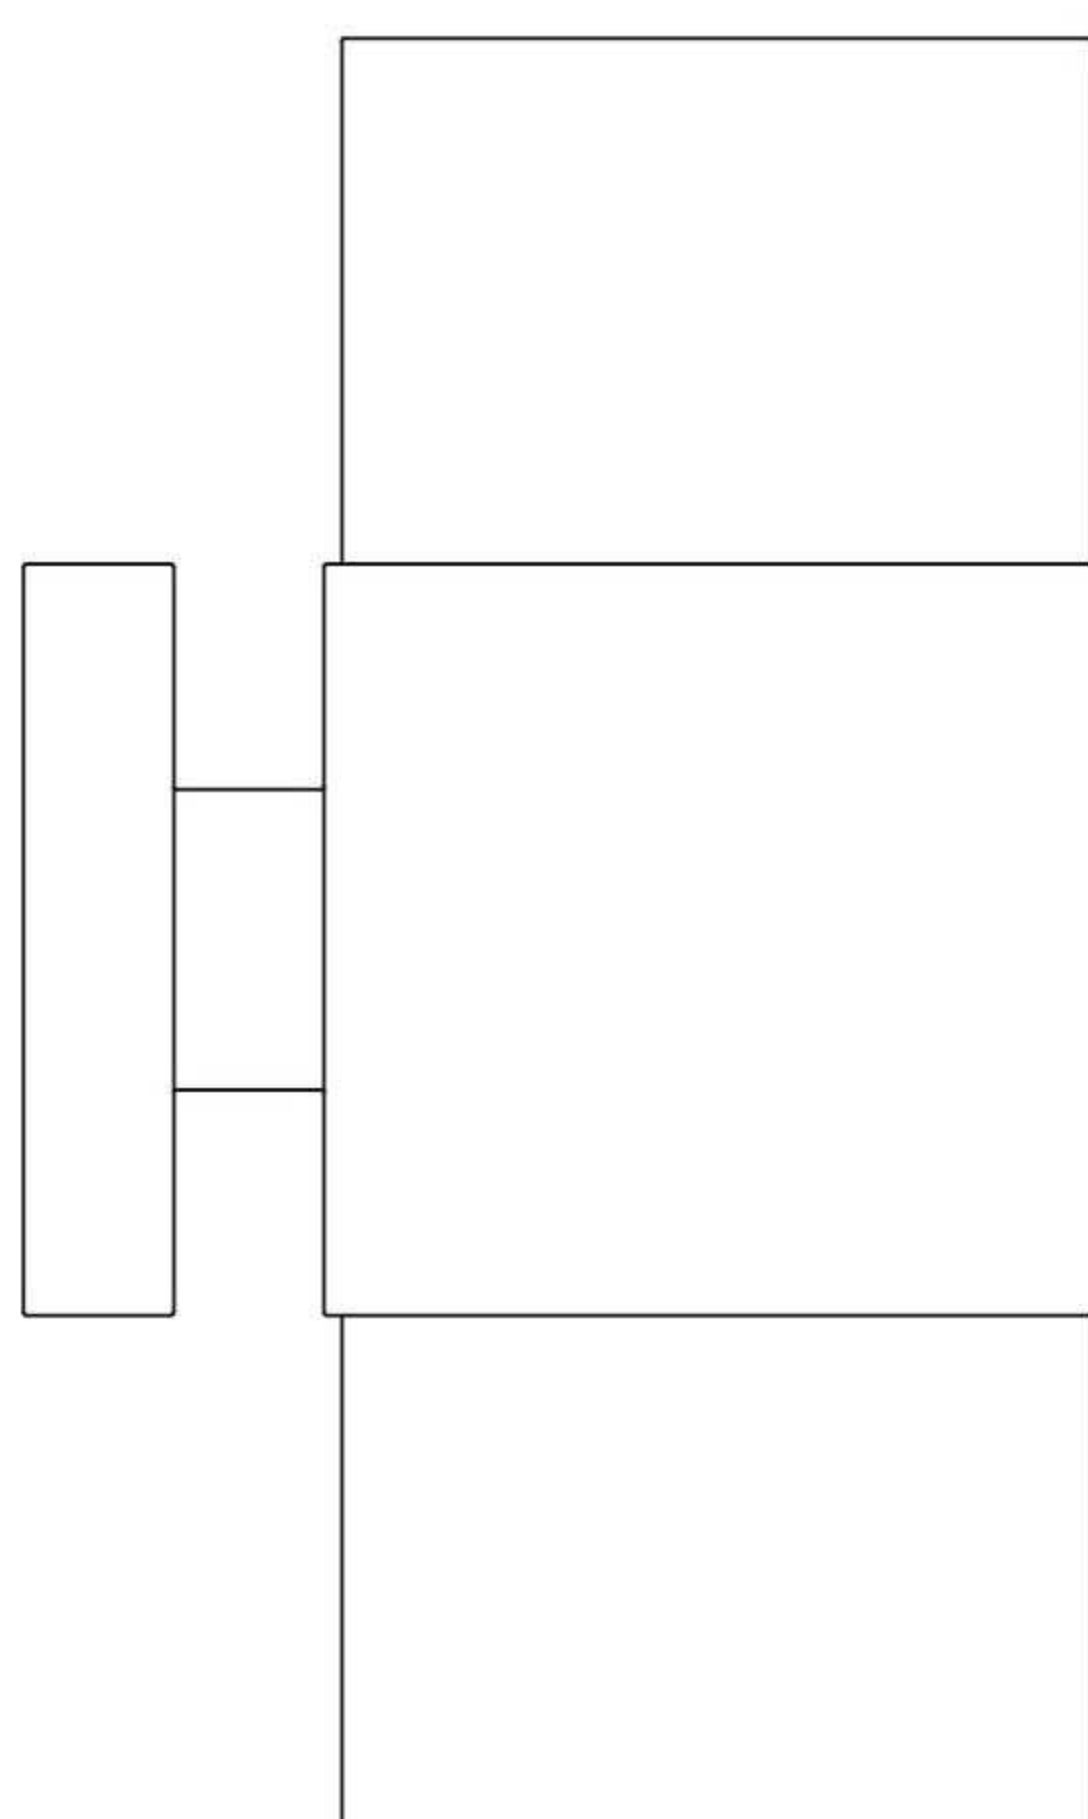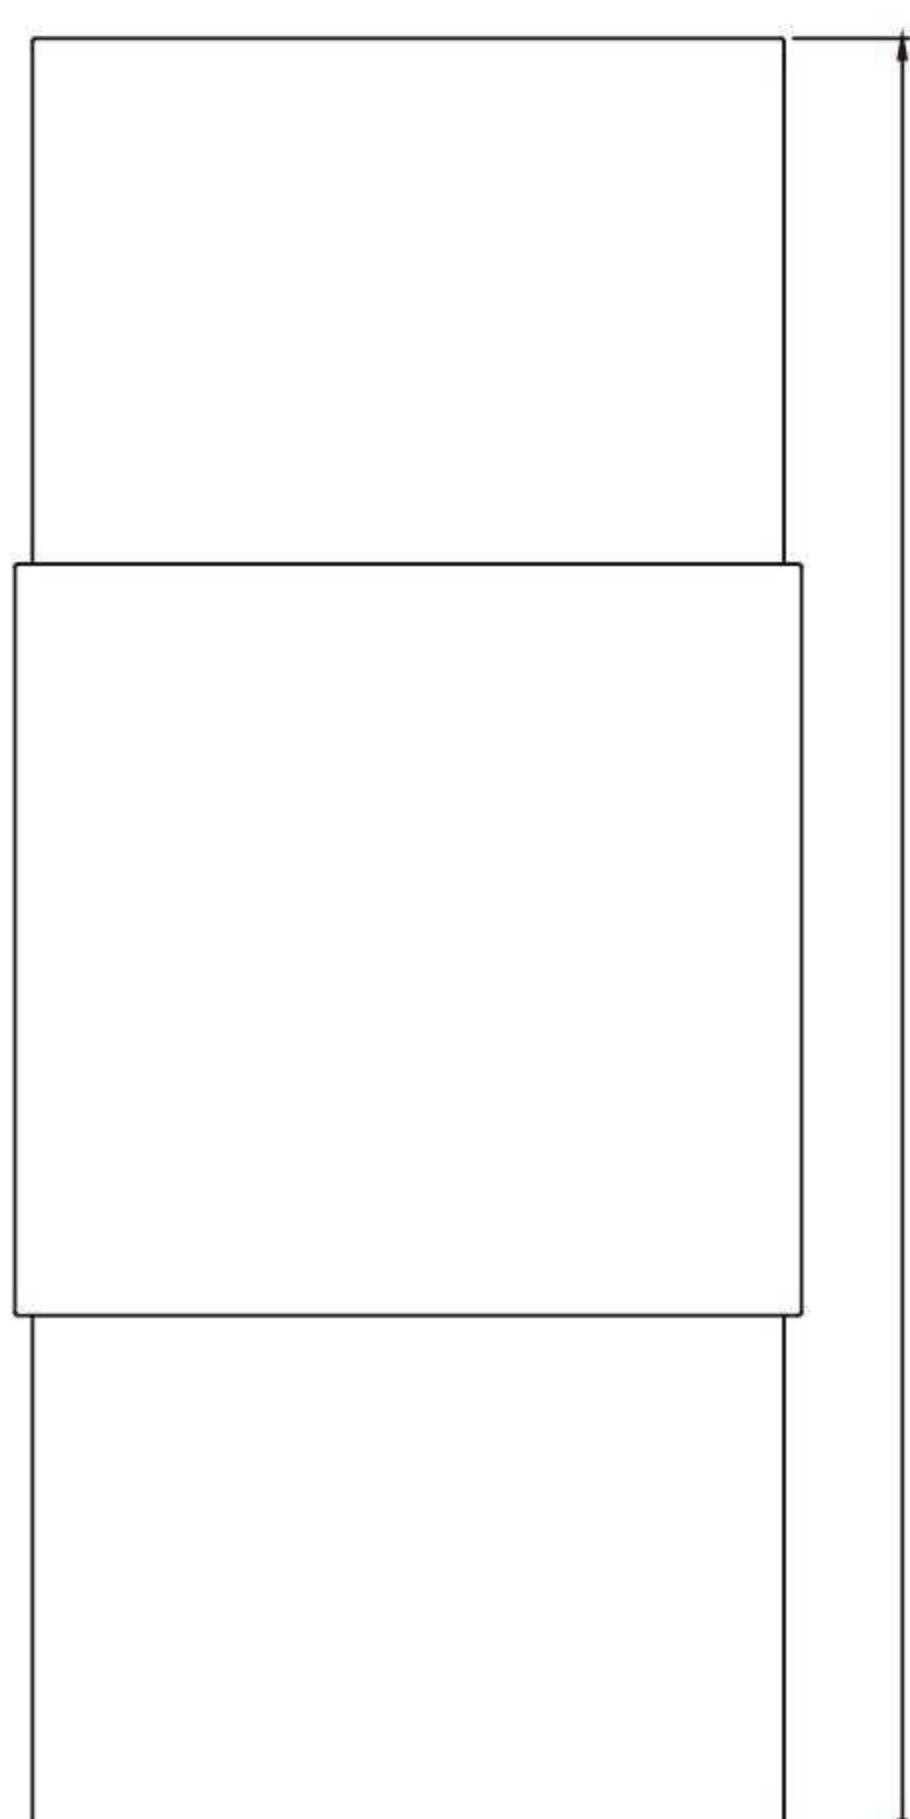



SMART Lawn Lamp

Ellipse - Wall Lamp

- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

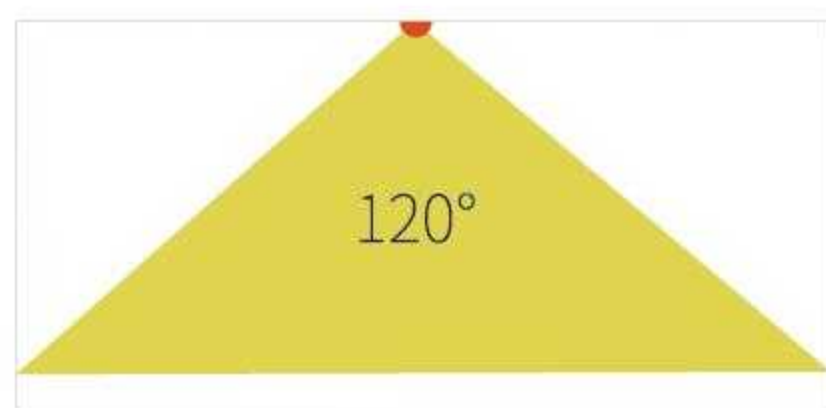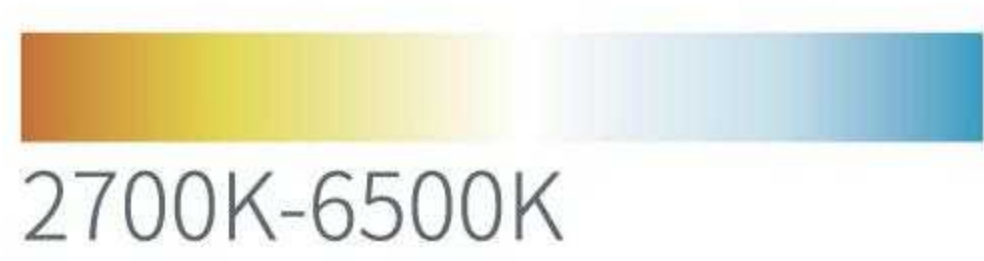


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S04	100V-240V	20W	1200lm	WIFI/BLE	203x76x211	Aluminum+PC

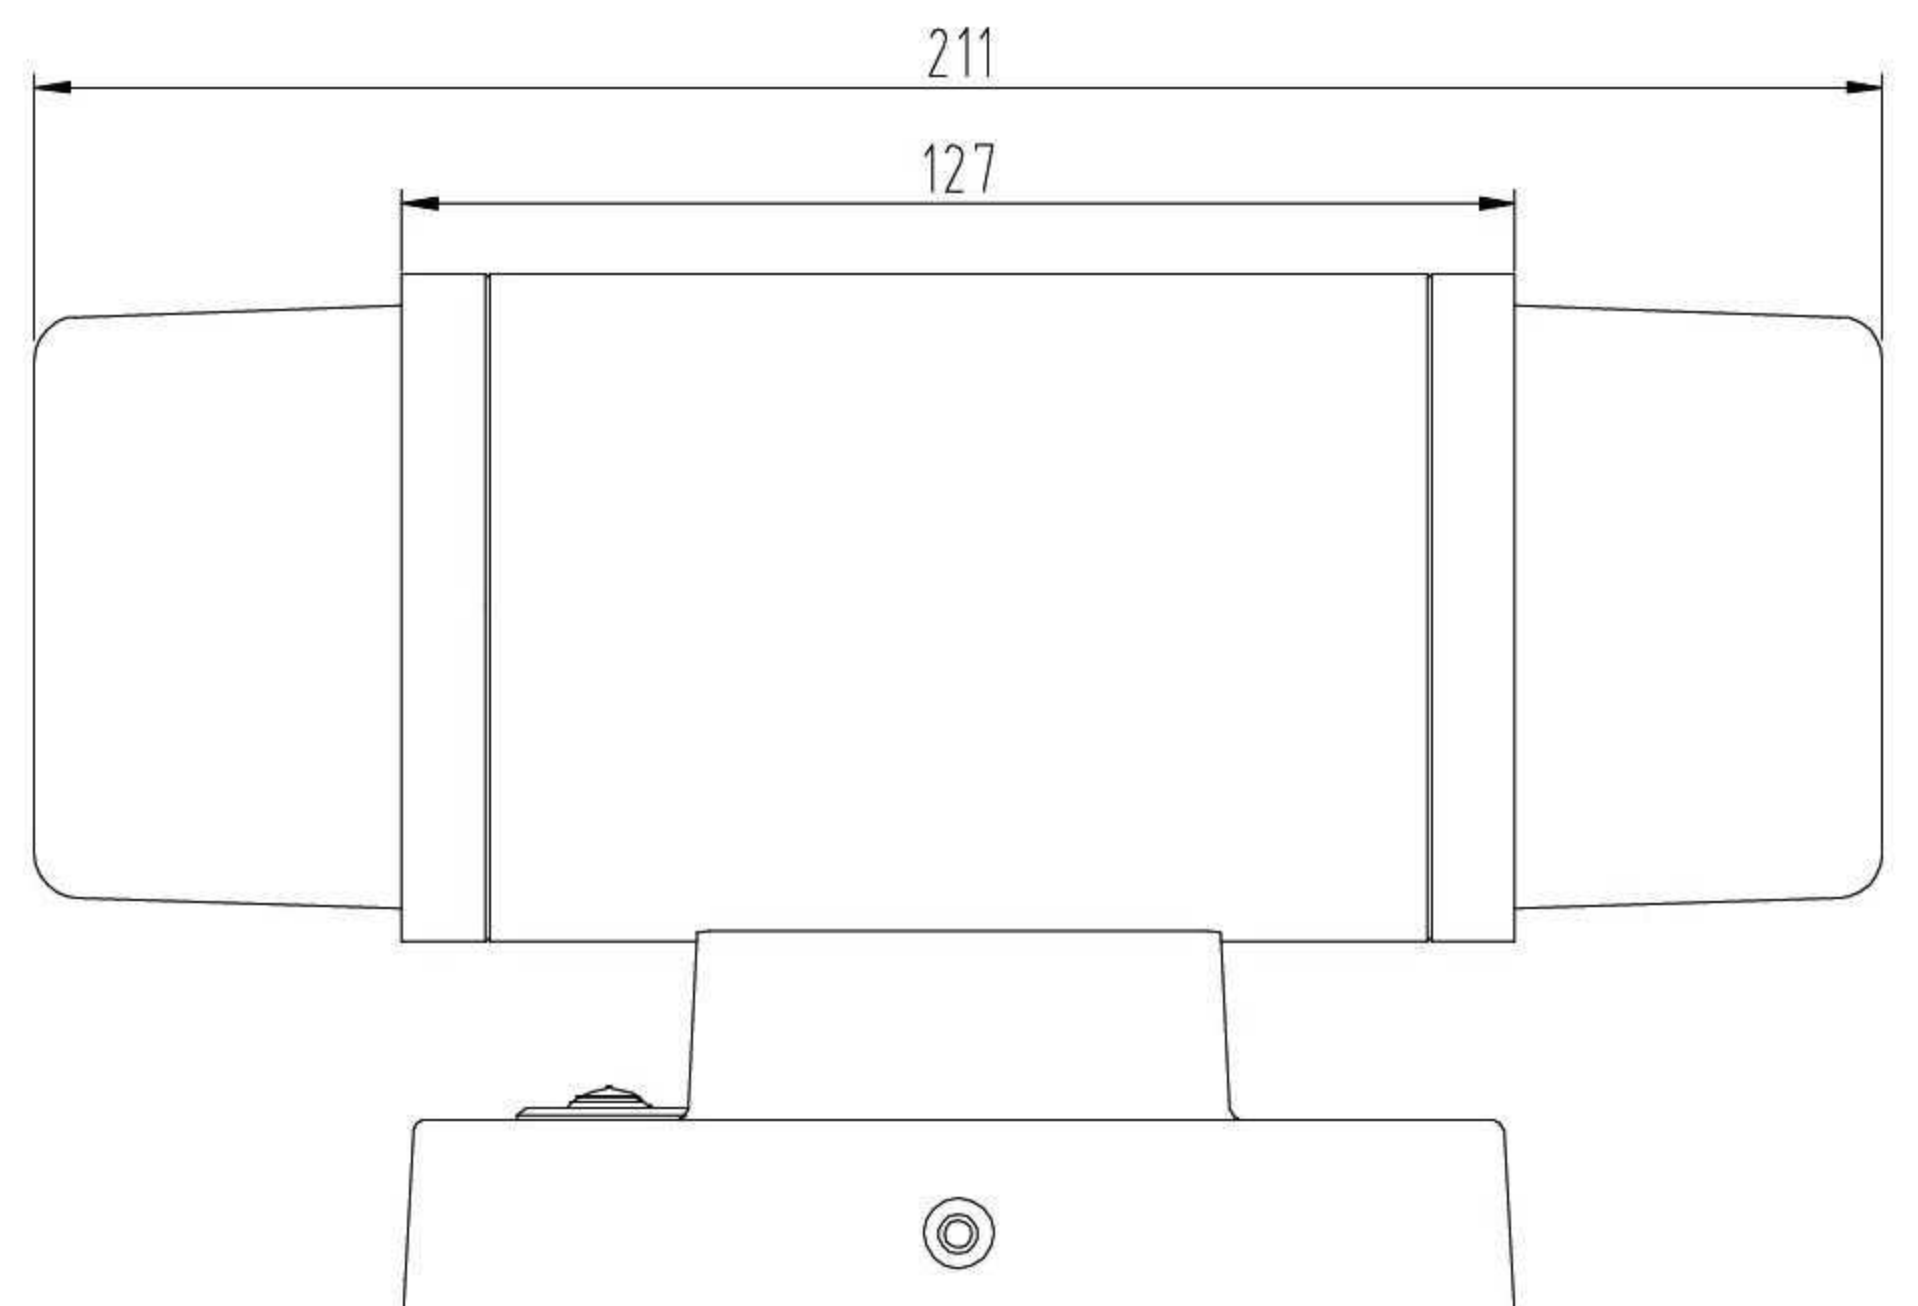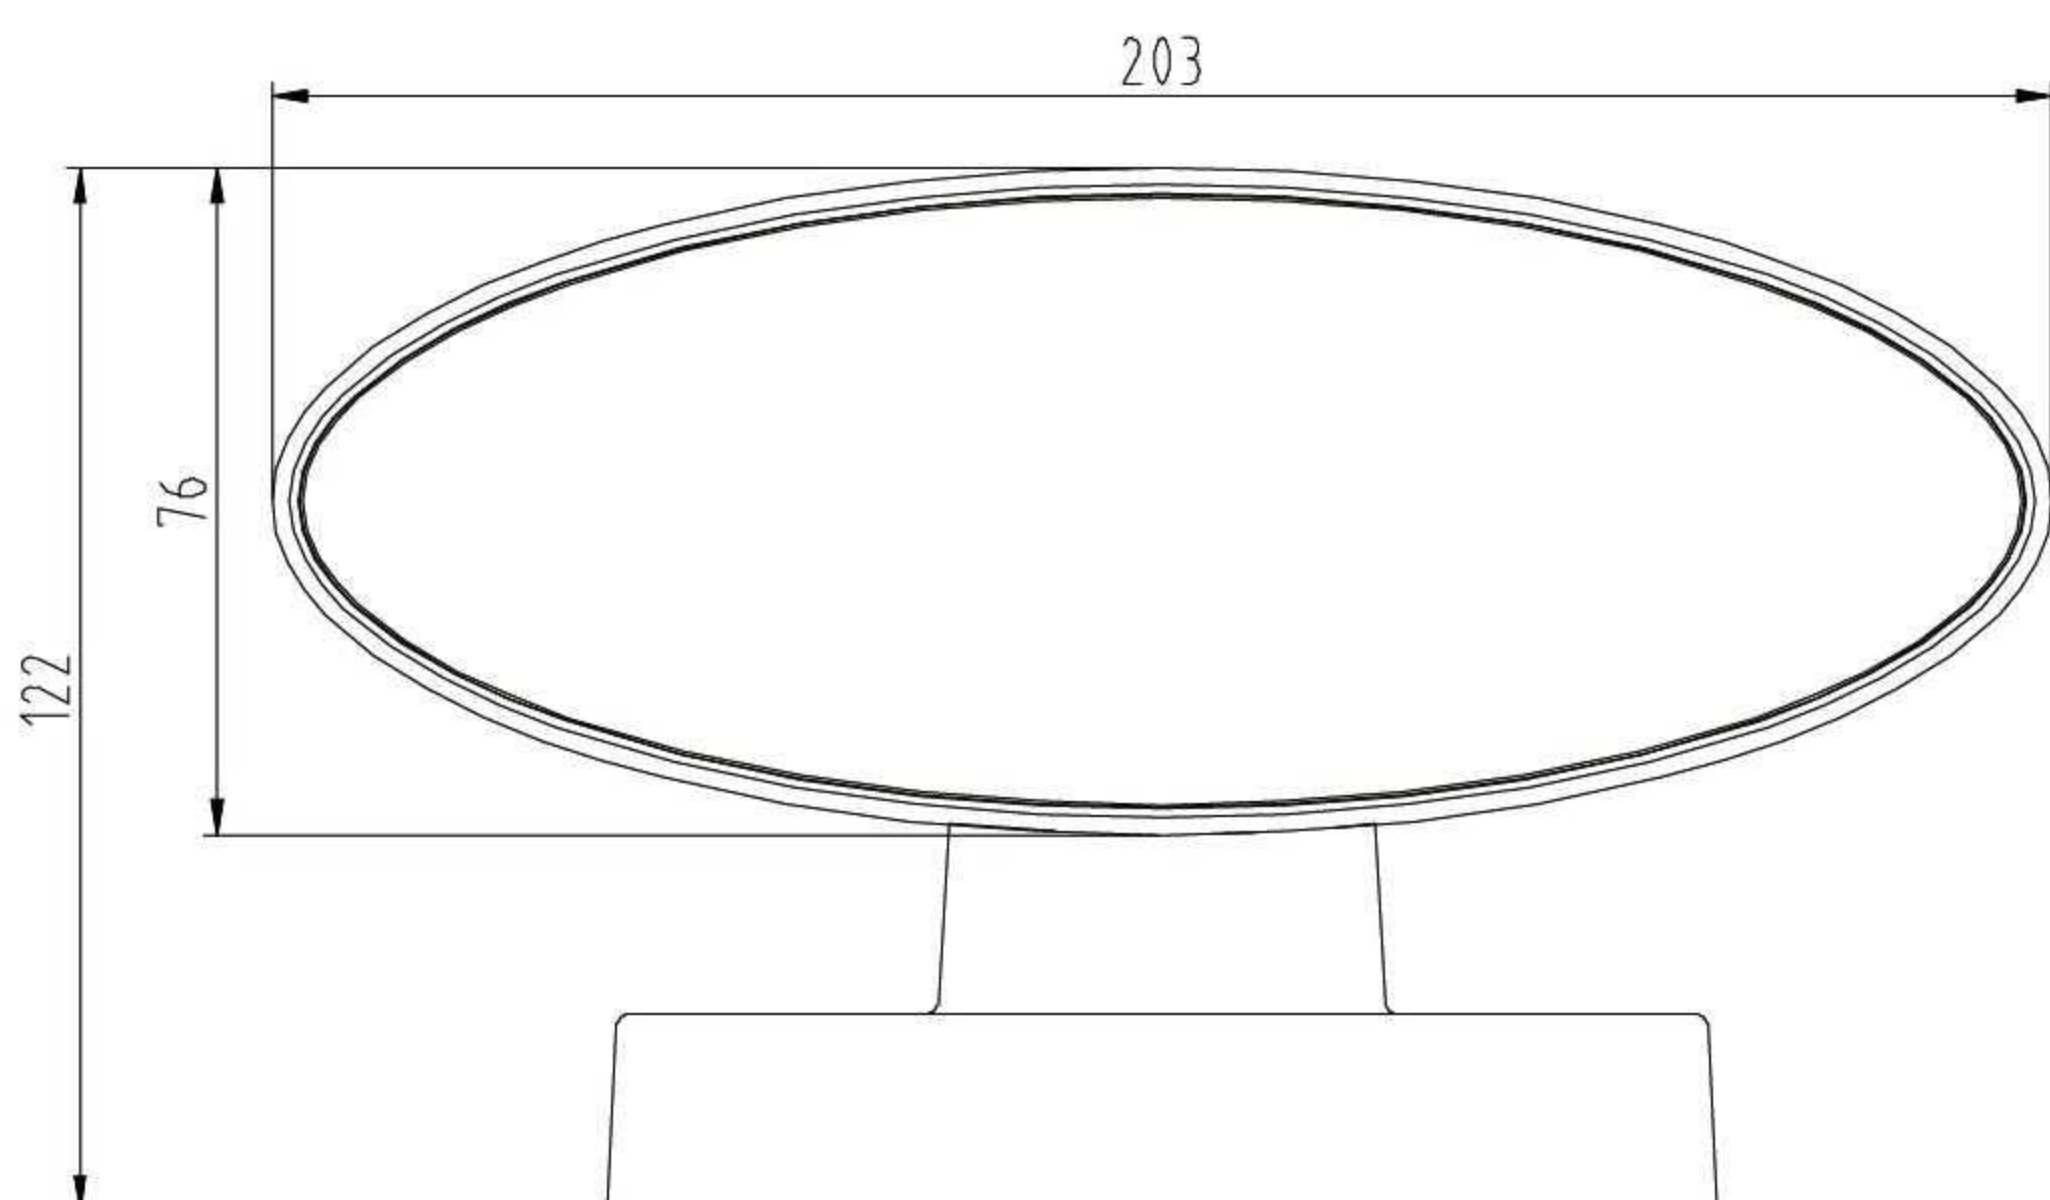


SMART Lawn Lamp

Block - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

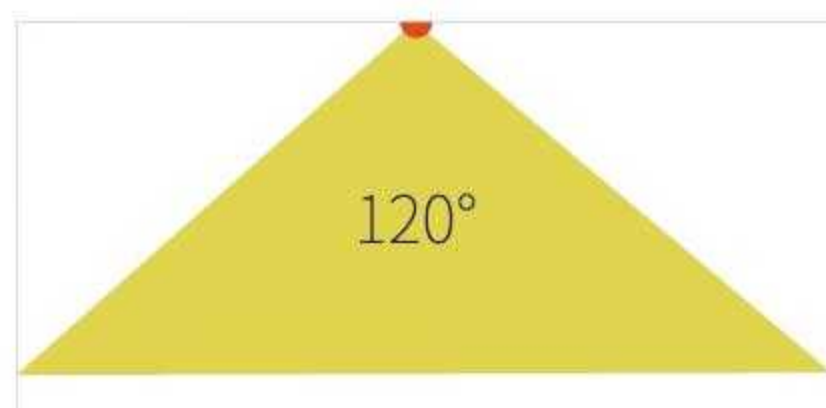


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S05	100V-240V	6W	480lm	WIFI/BLE	127x127x305	Alumiumum+Glass

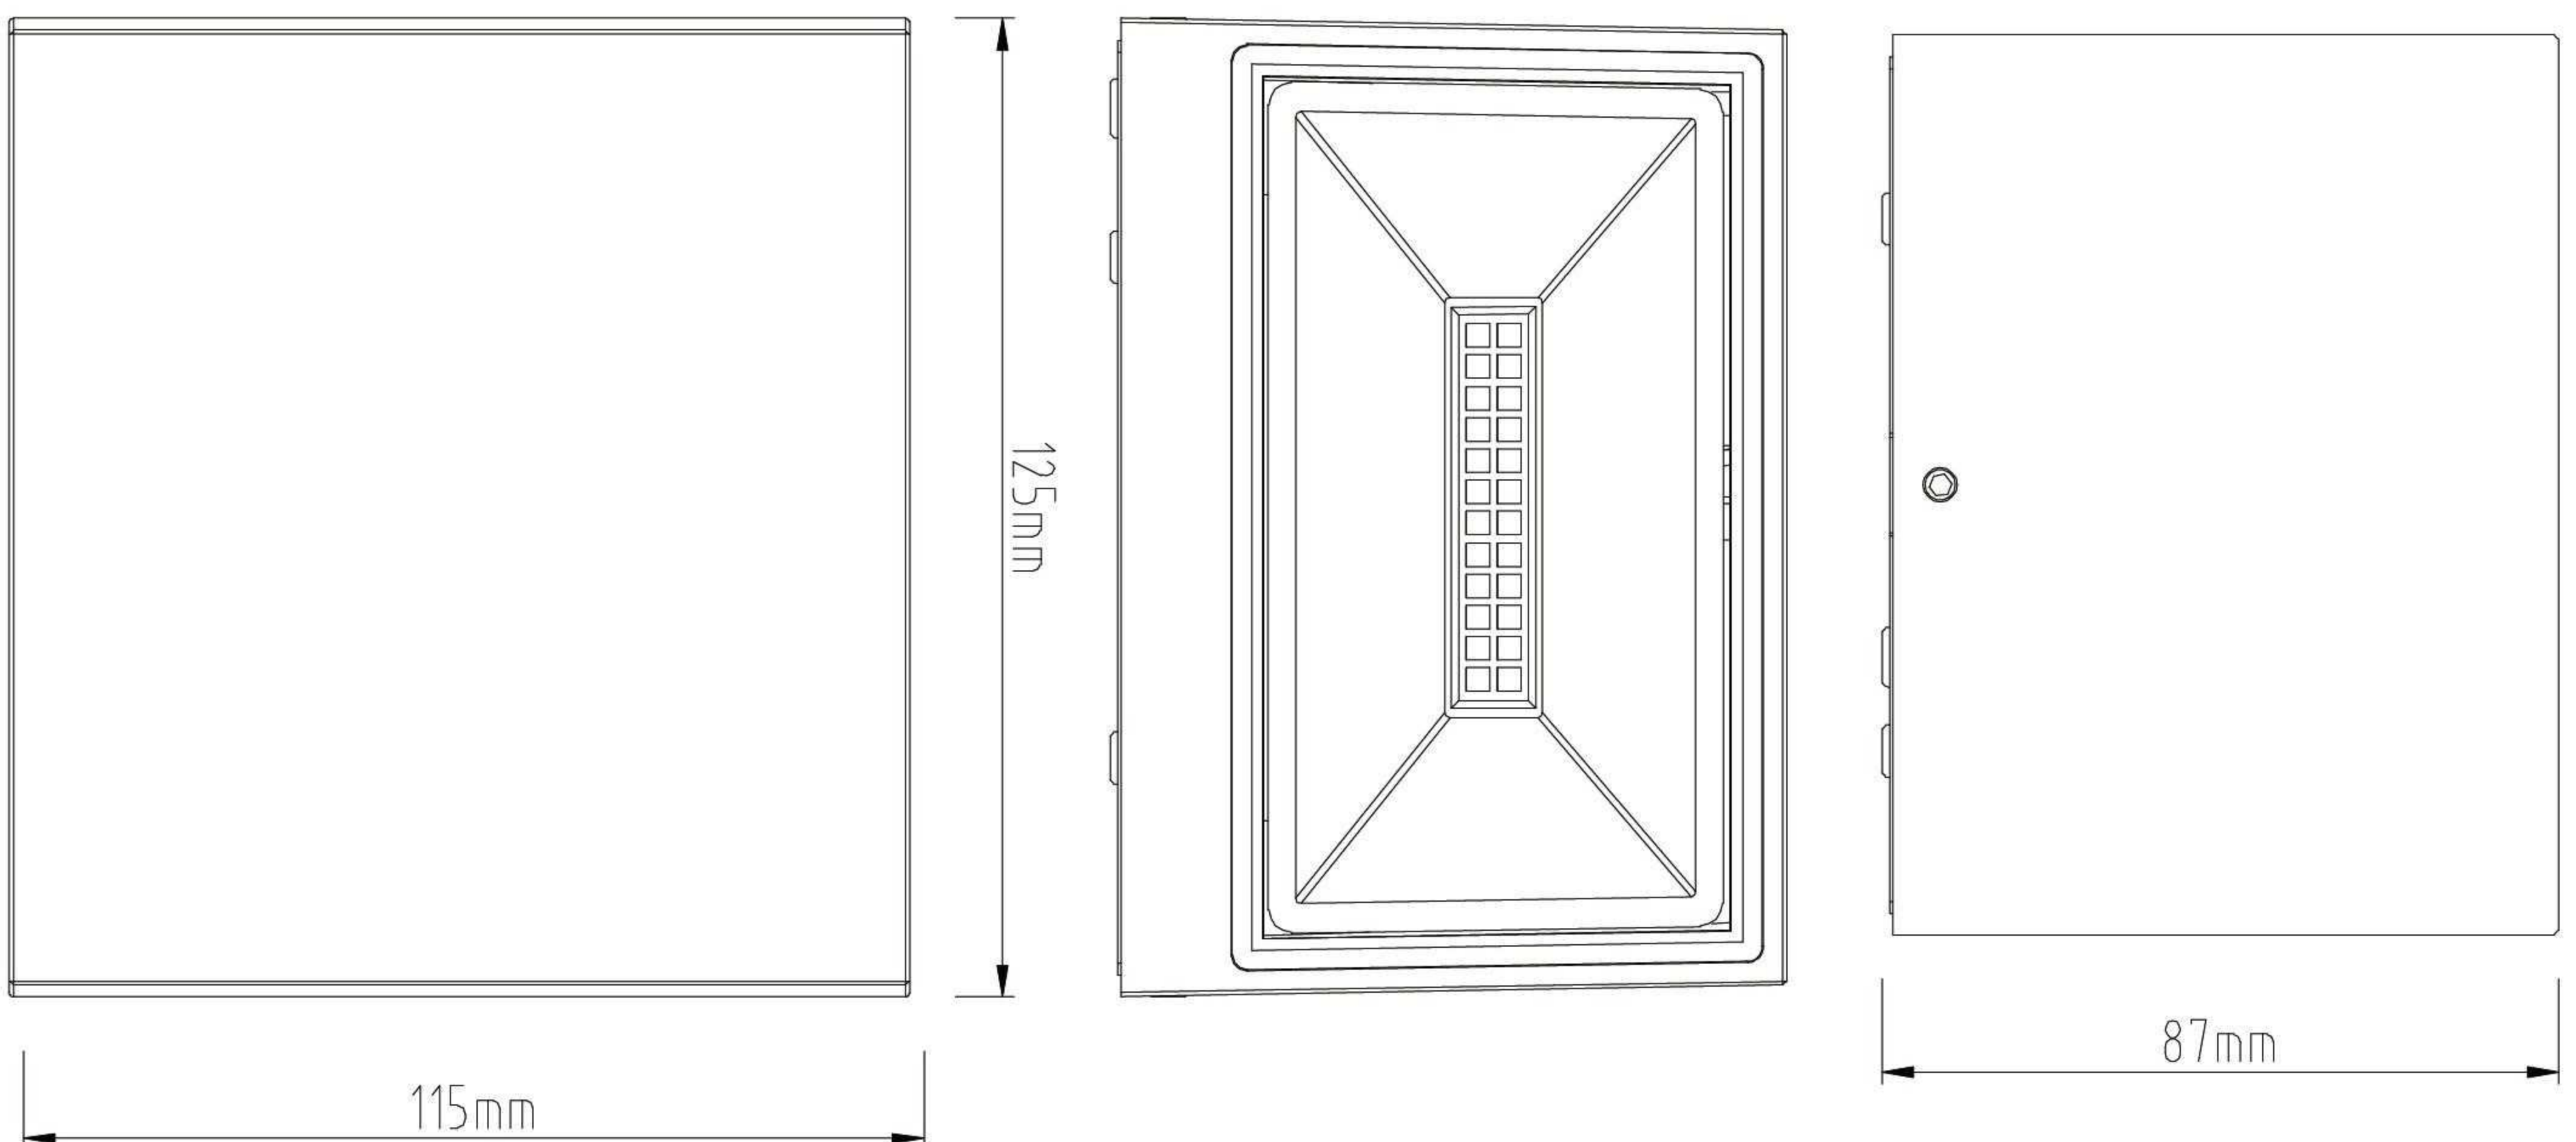




SMART Lawn Lamp

Double door - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

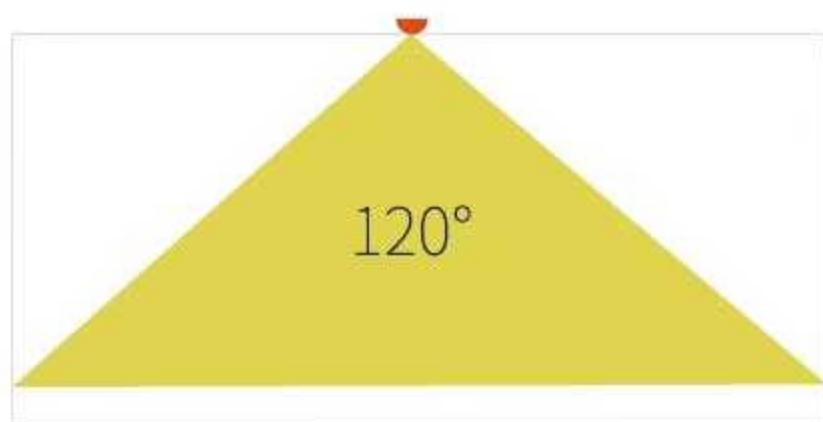

Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S06	100V-240V	20W	1800lm	WIFI/BLE	125x125x140	Aluminum+PC

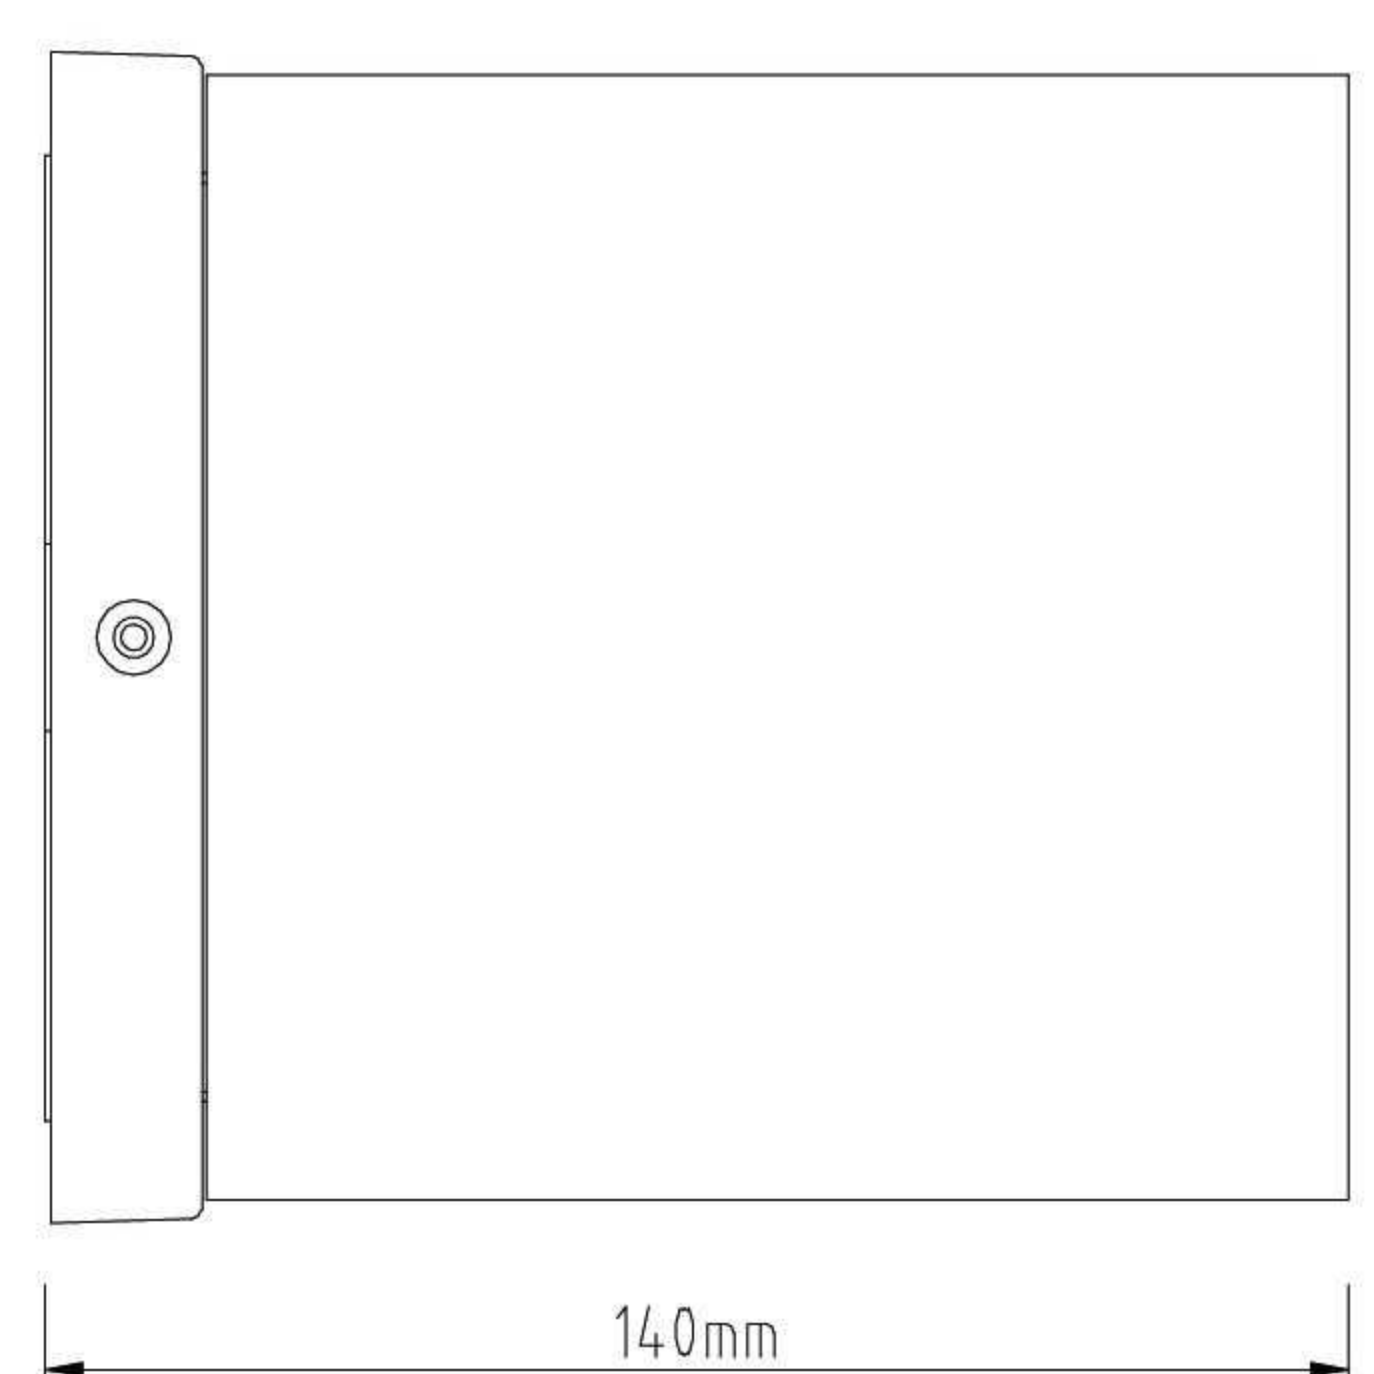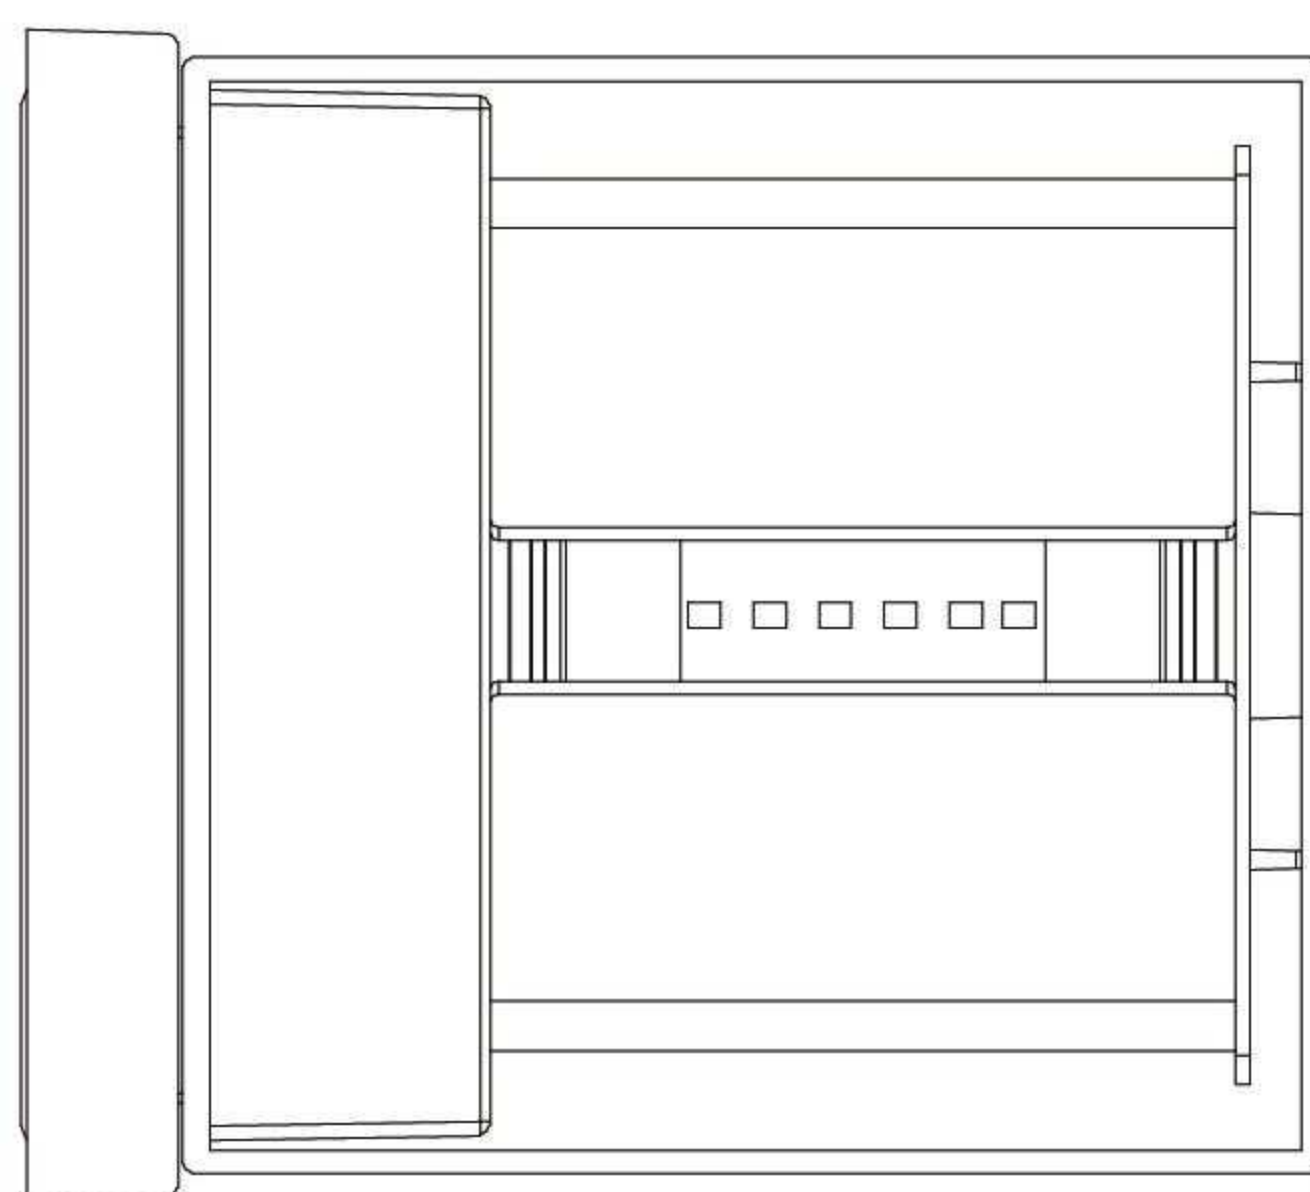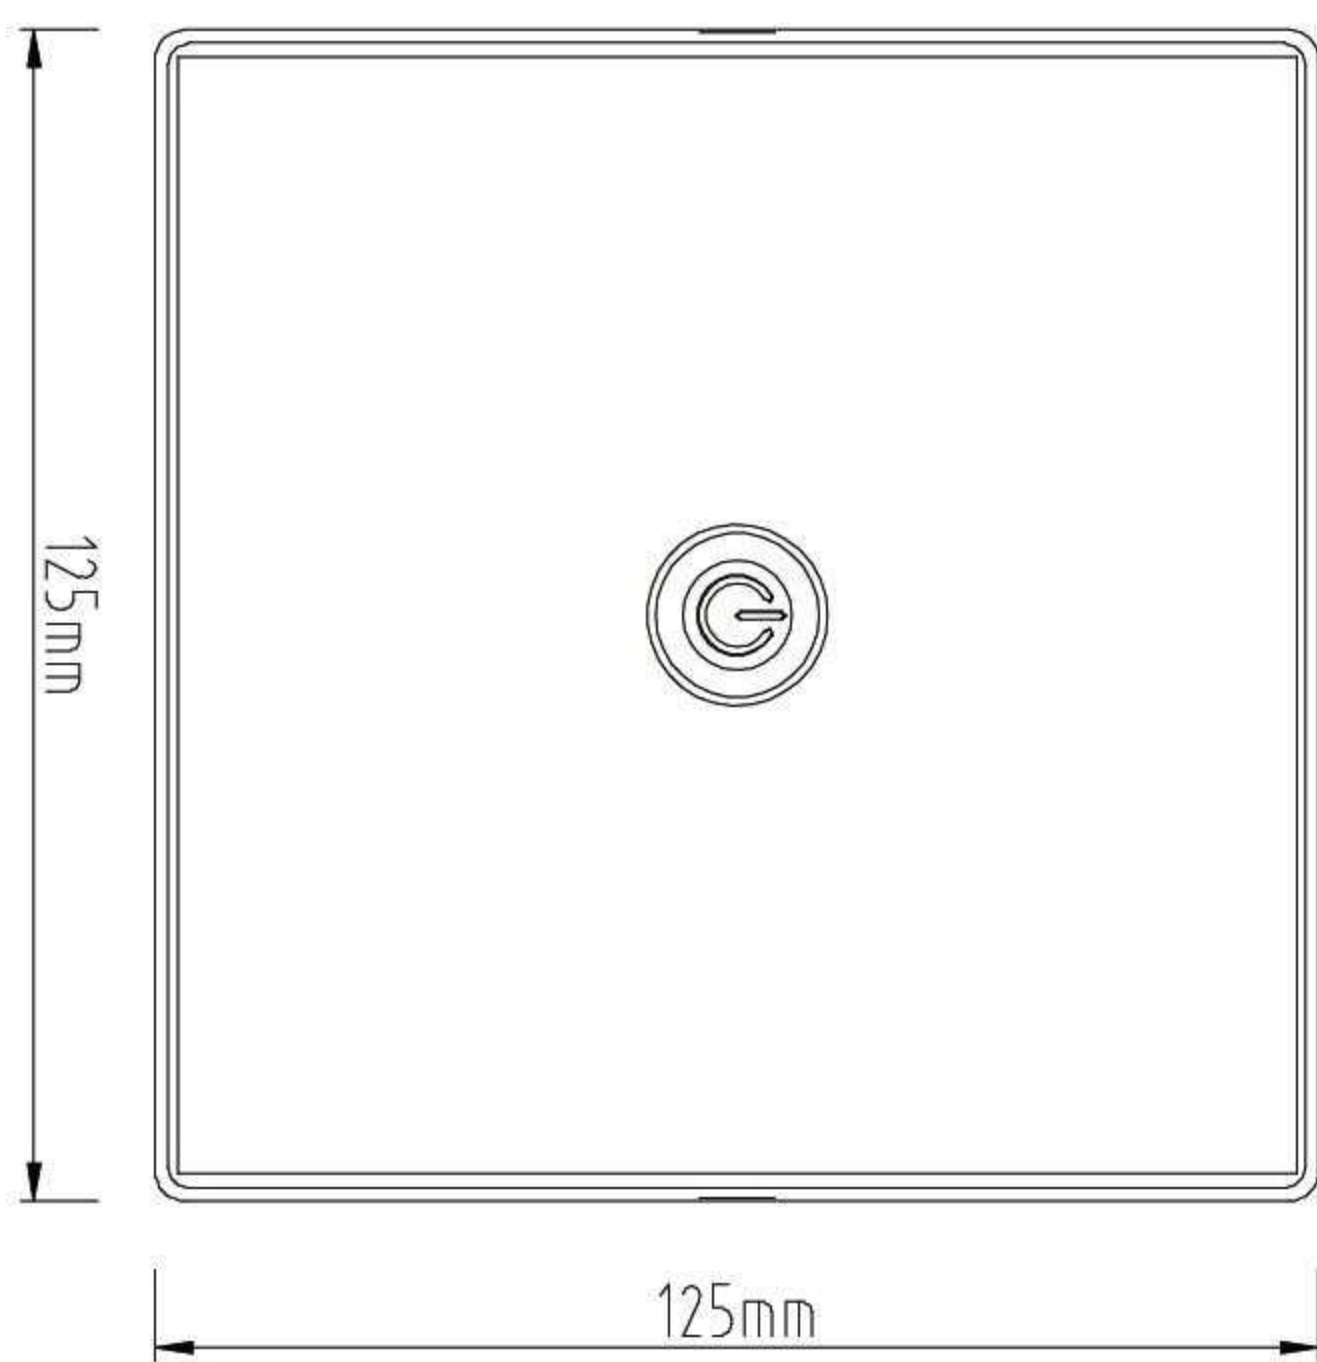




SMART Lawn Lamp

Teacup - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White




Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S08	100V-240V	20W	1800lm	WIFI/BLE	132x222x172	Aluminum+PC

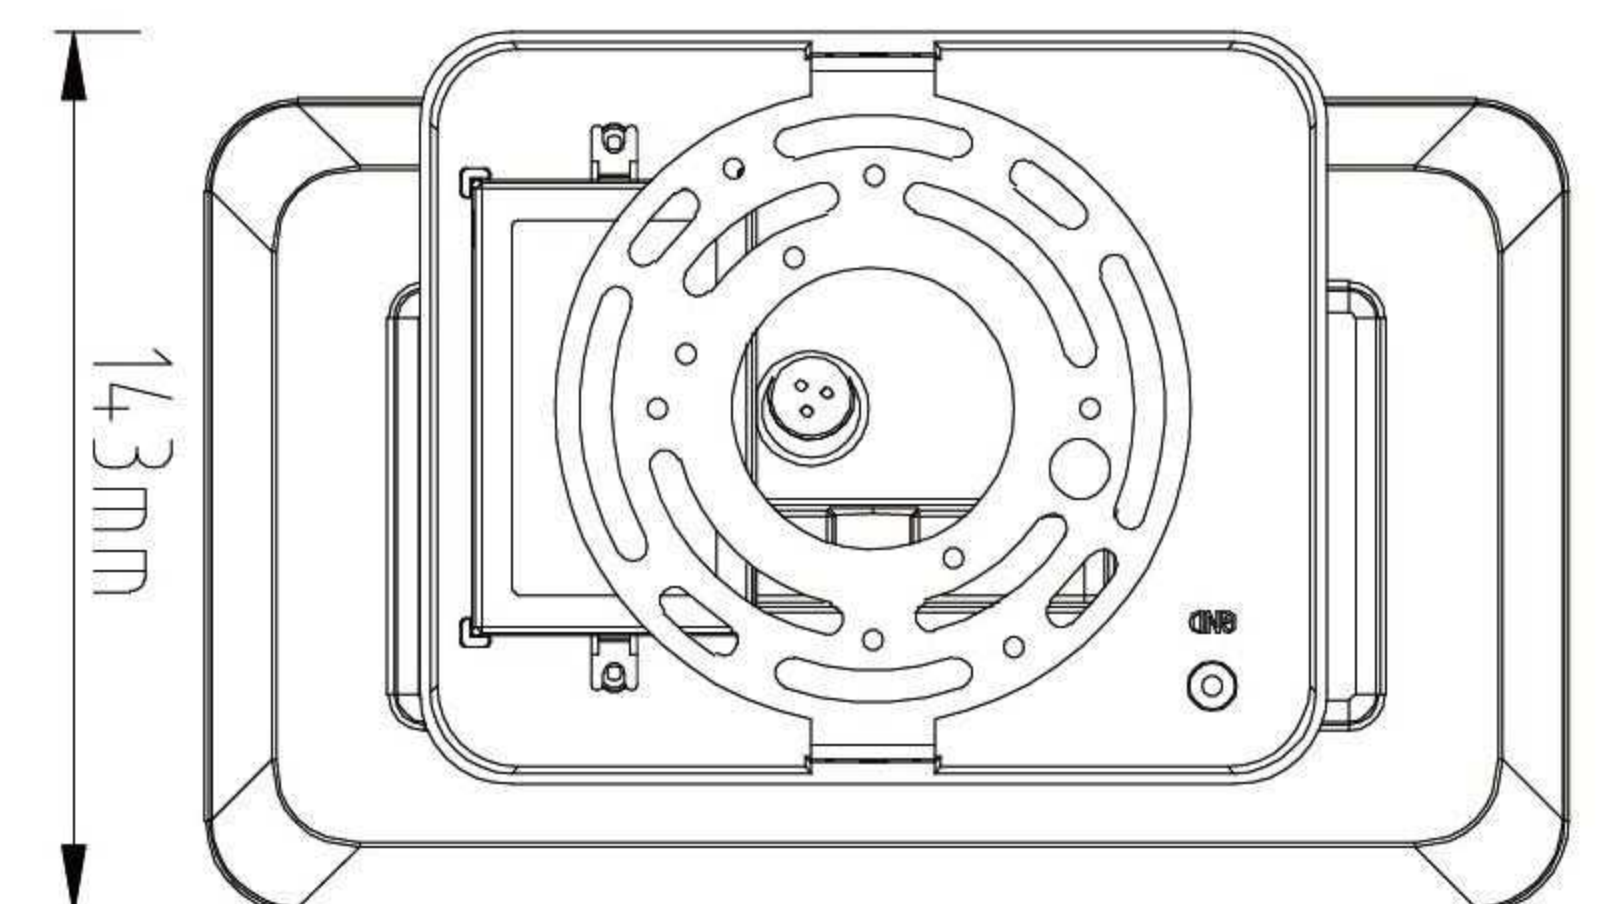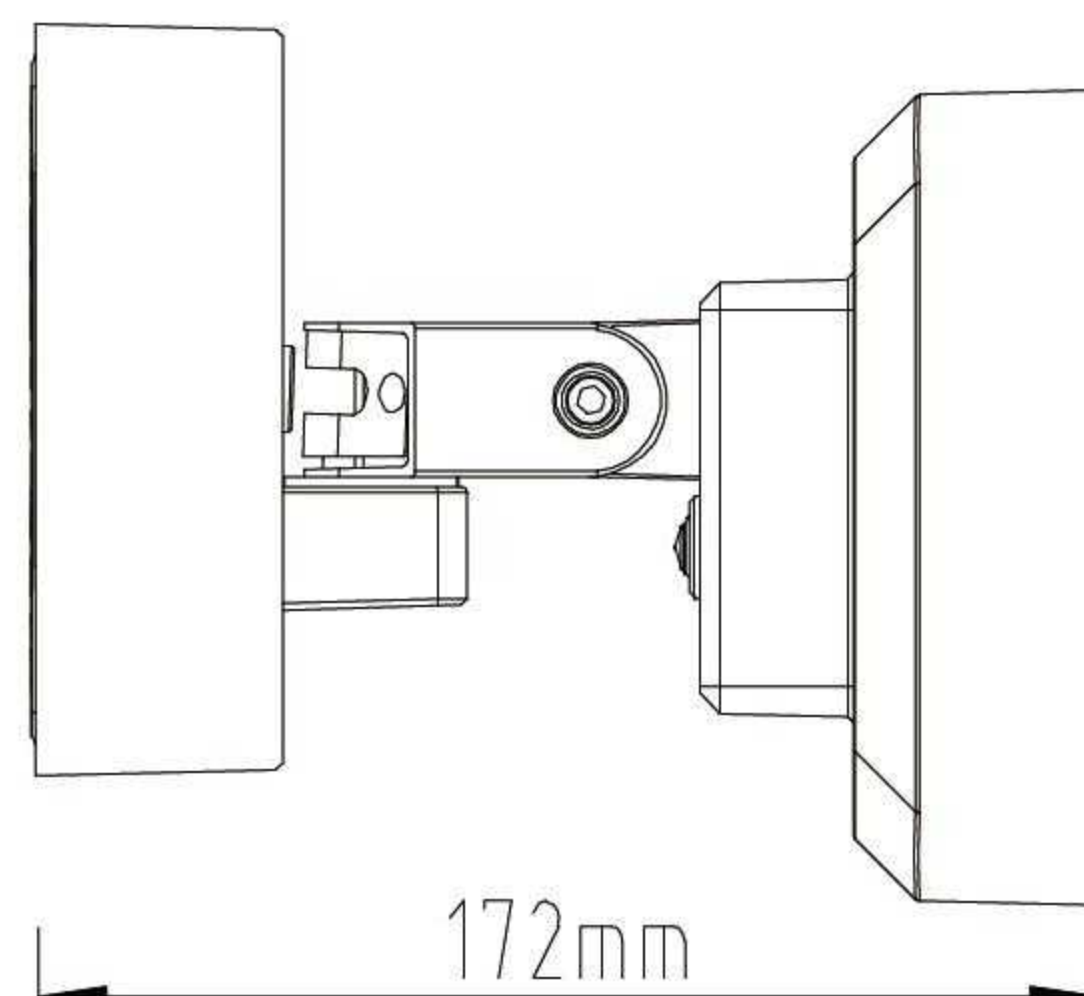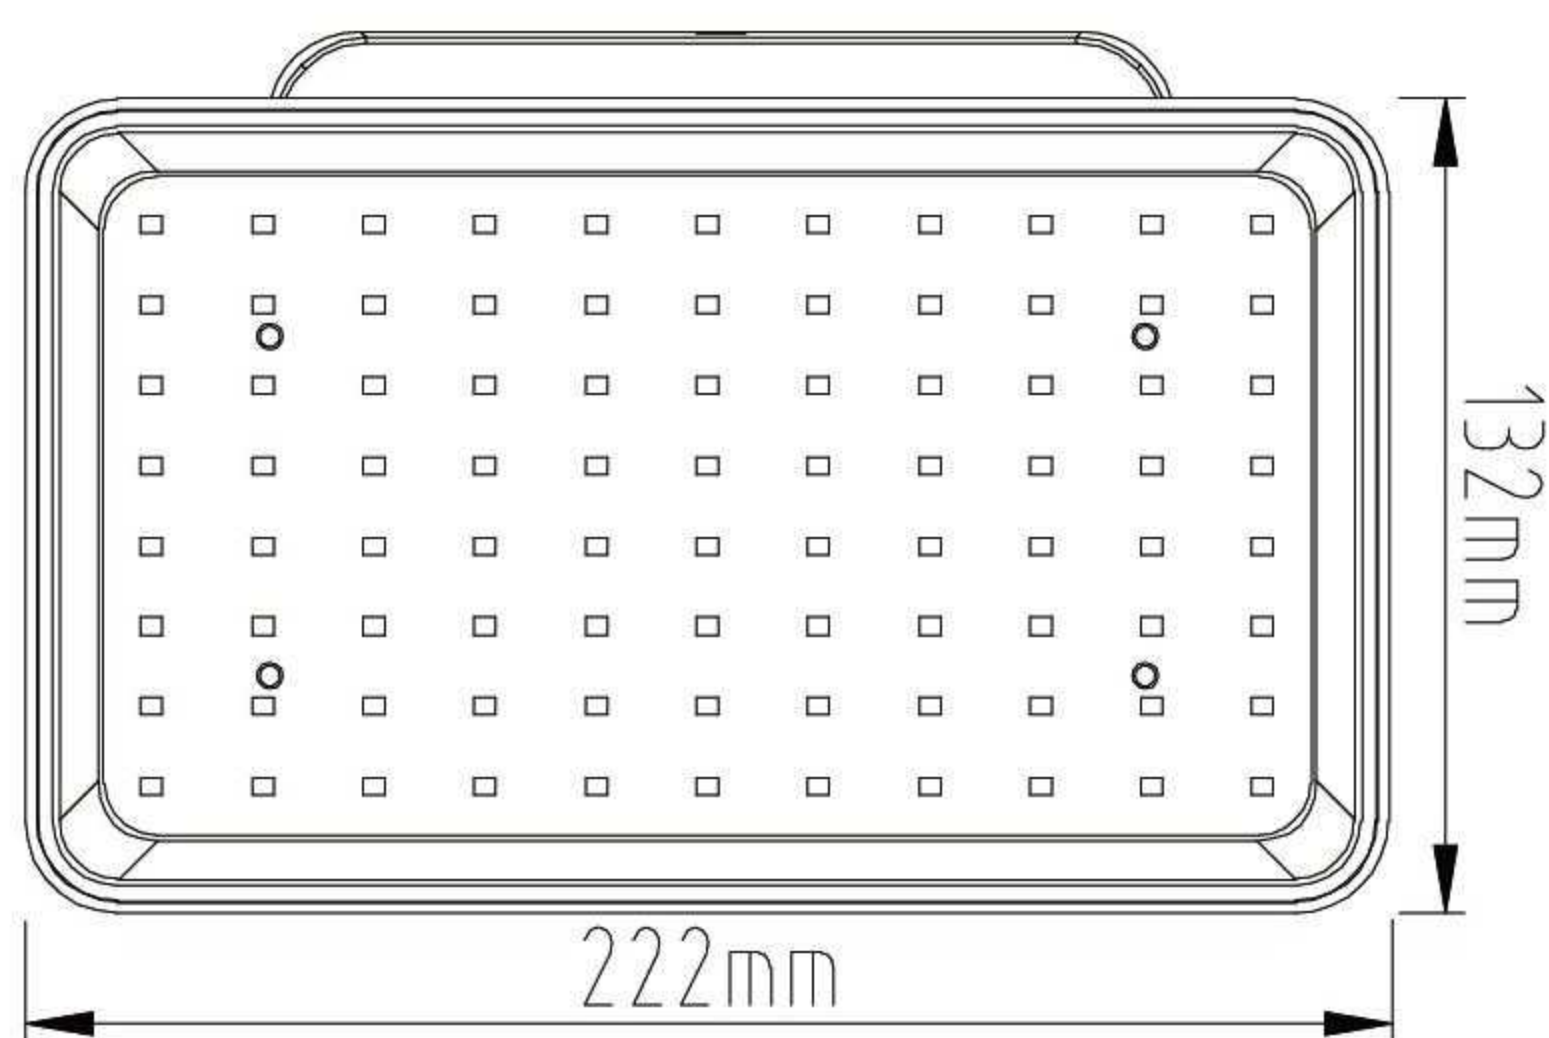




SMART Lawn Lamp

Teacup - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

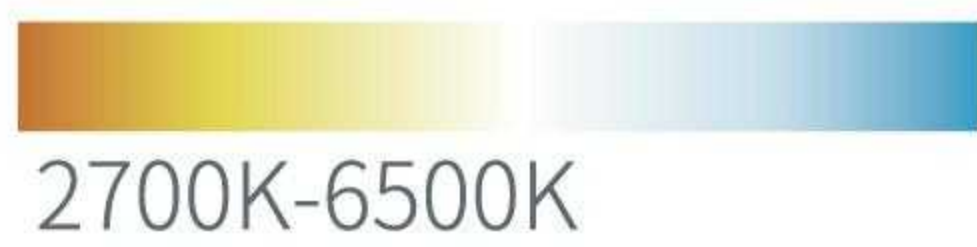

Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S07	100V-240V	10W	800lm	WIFI/BLE	φ102x161x190	Aluminum+PC

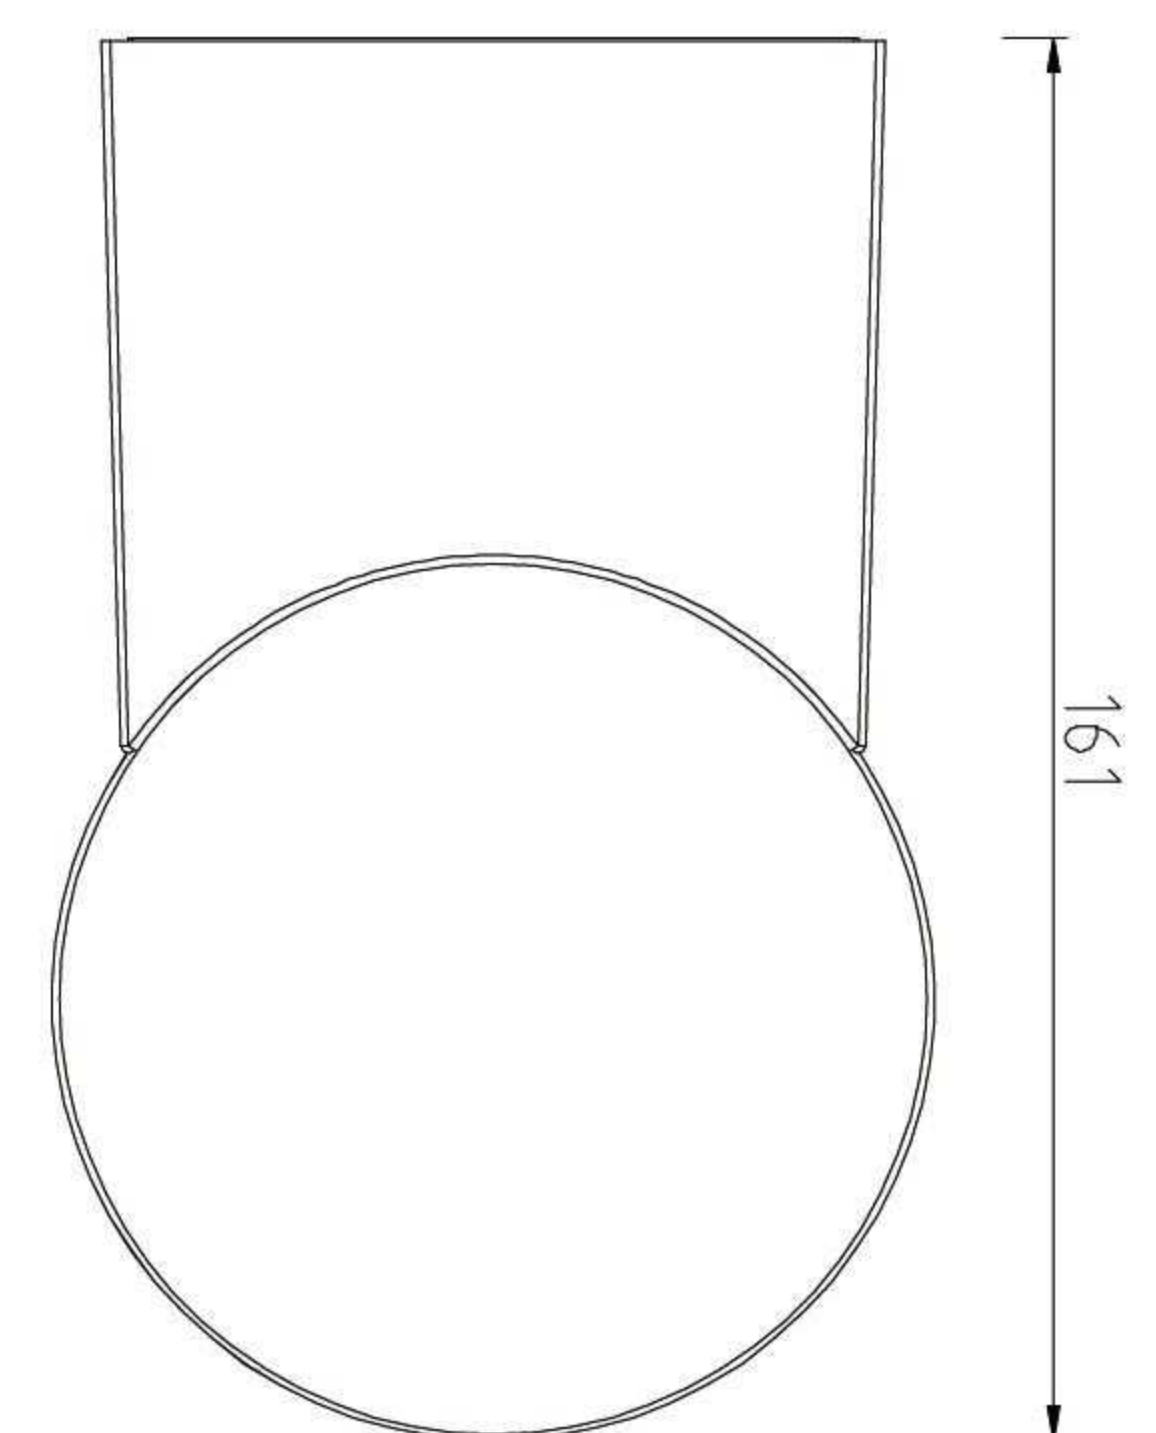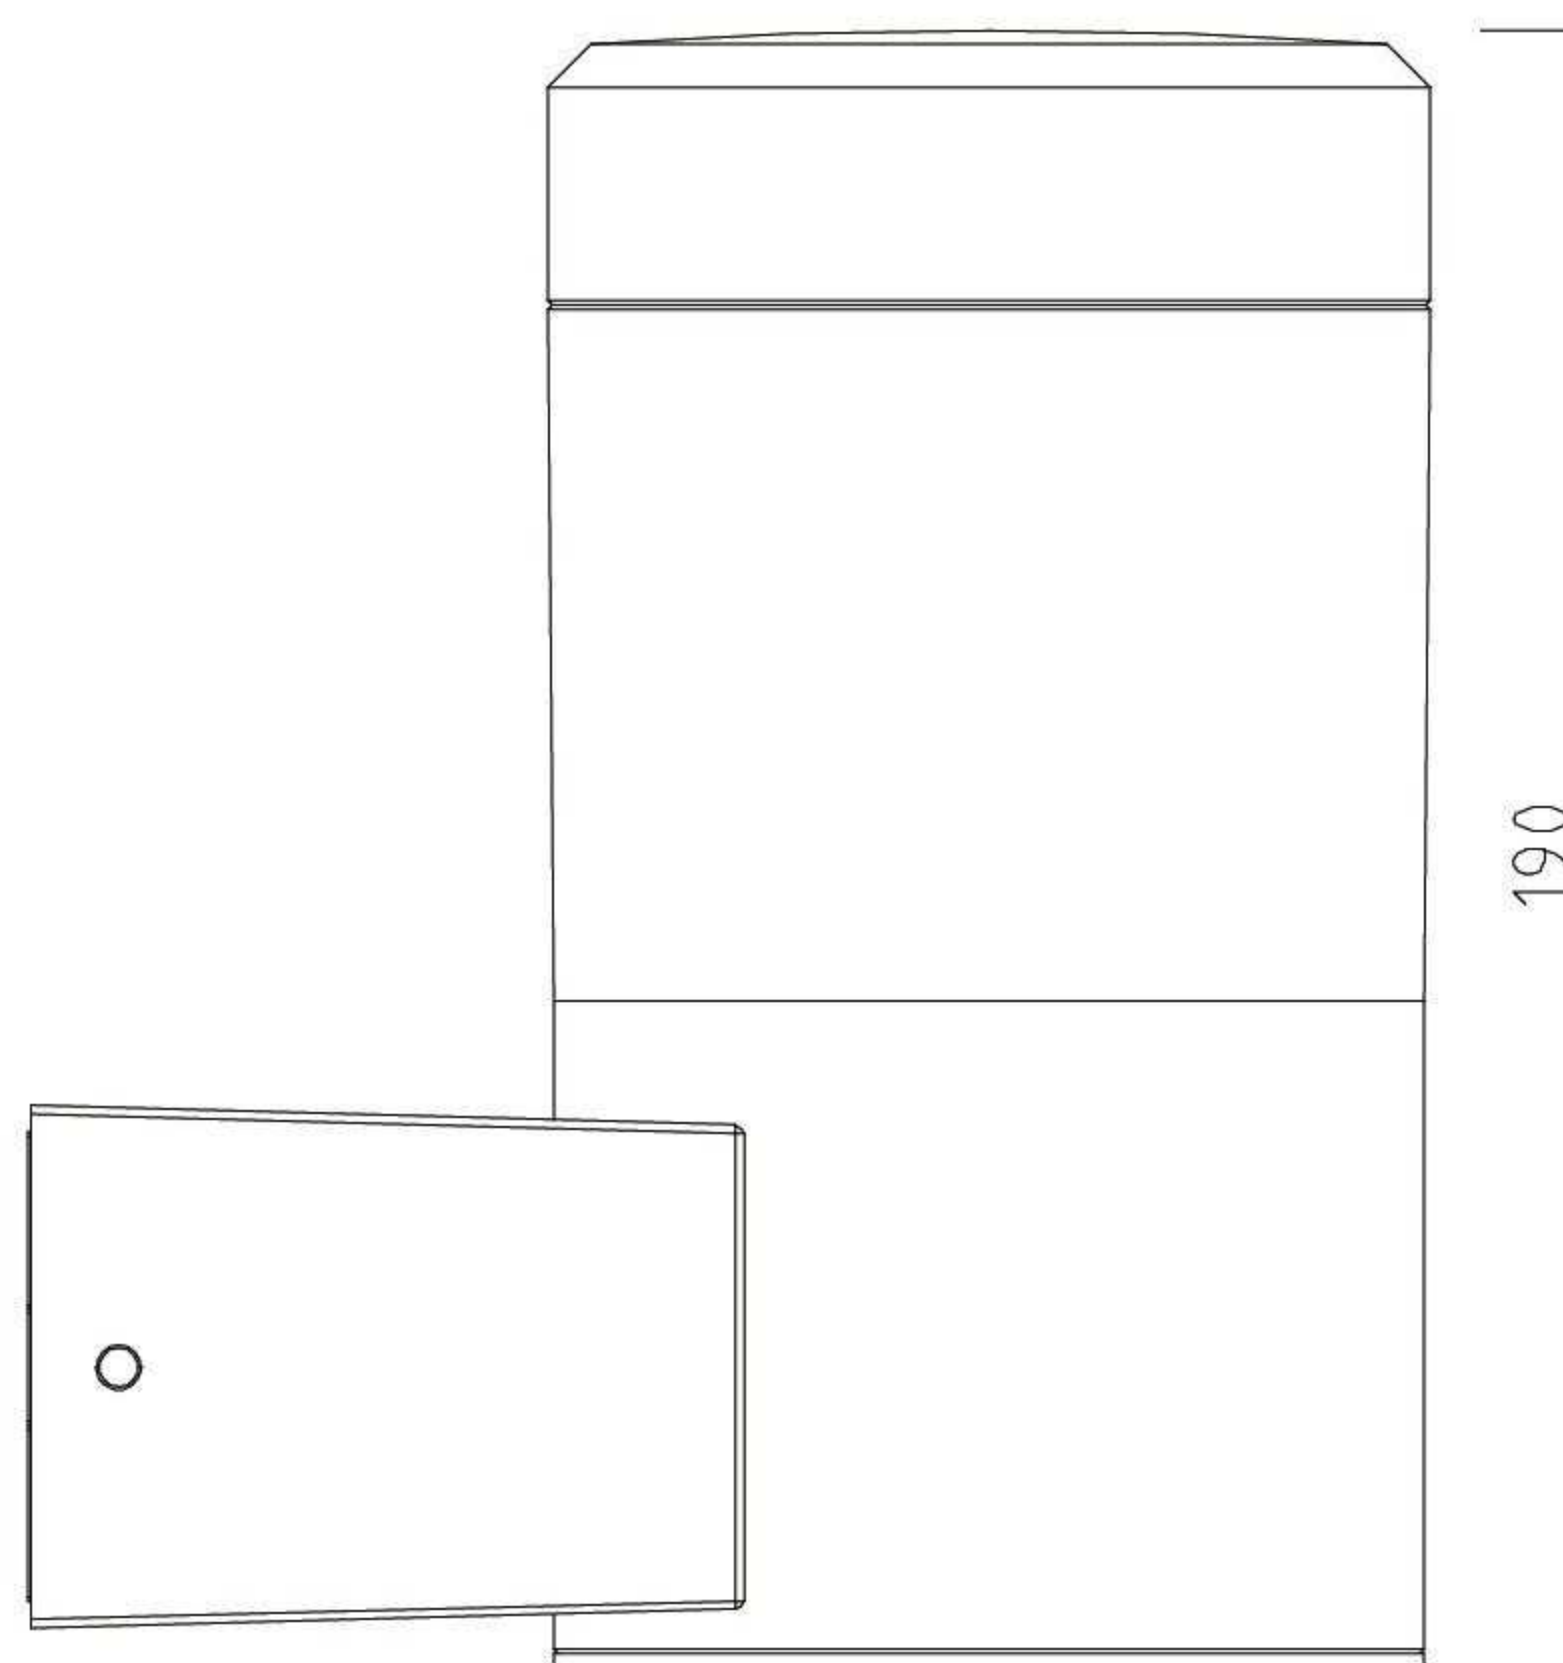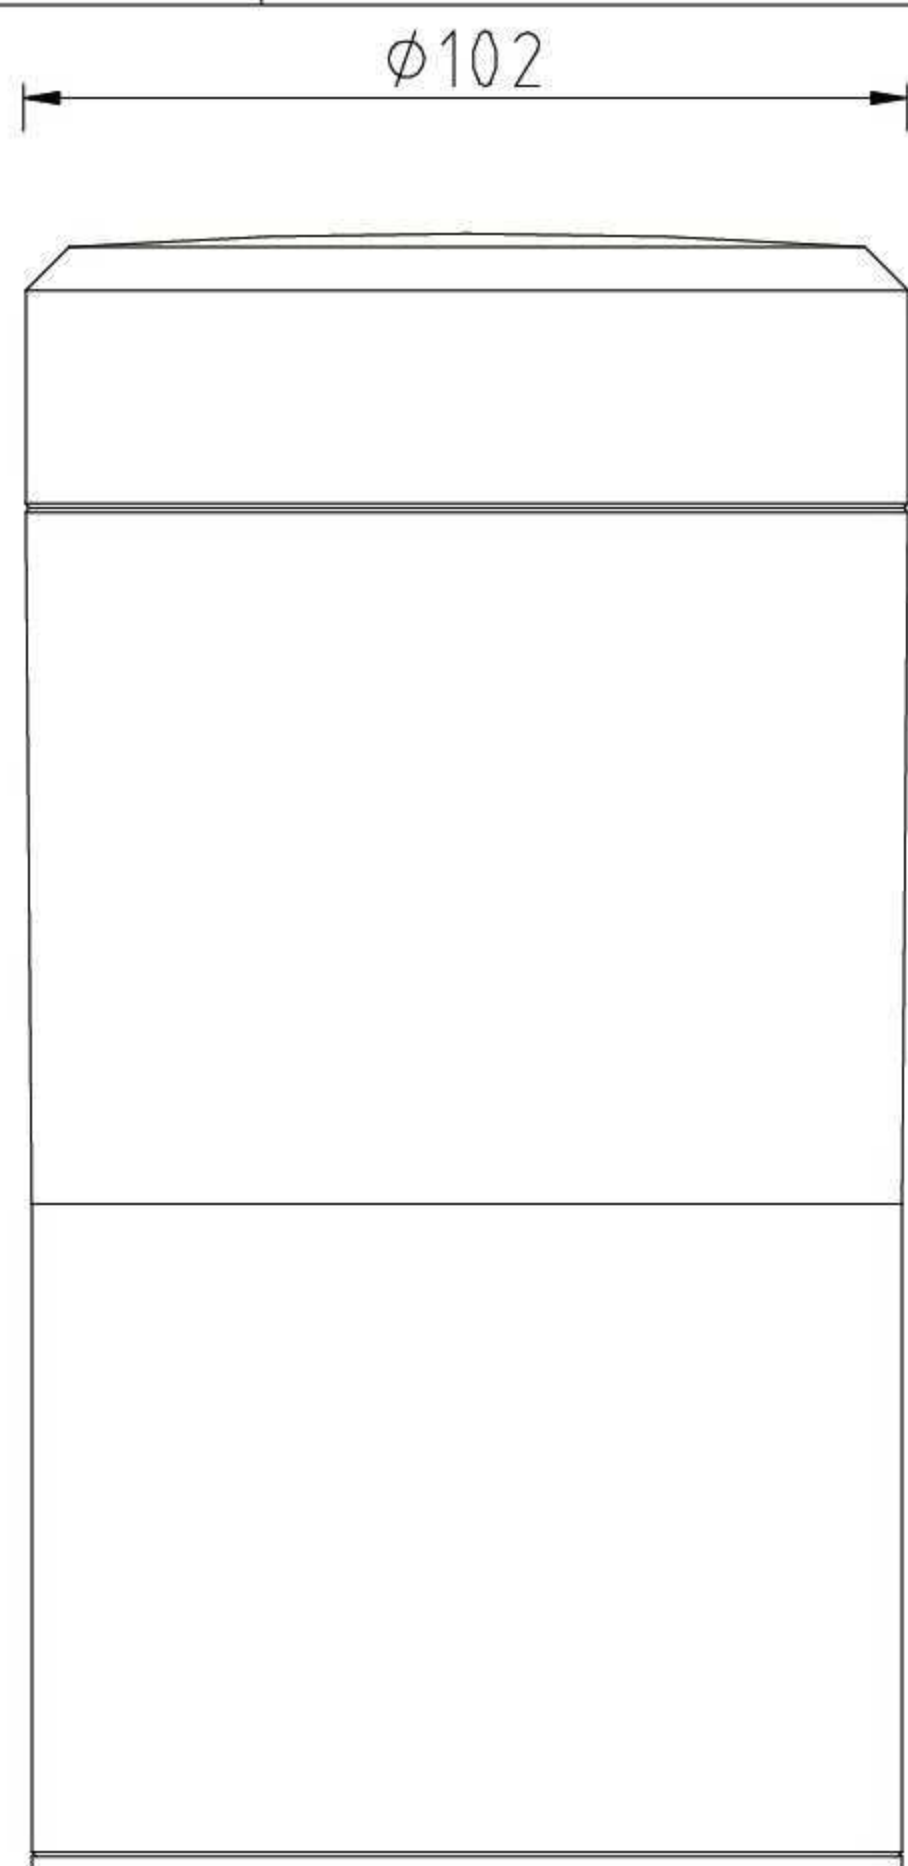

2023

SMART LED Strip

Environmental protection, energy saving


SMART LED Strip

SMART STRIP

It can render a colorful atmosphere



- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h

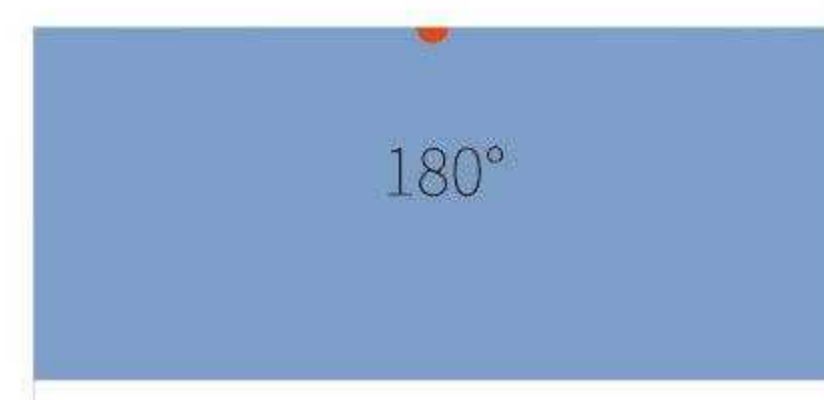

Scenes
/
Effects



PERFOR,AMCE AND APPLICATION

- 1) Product size (optional) 2/5/10meters.
- 2) Select FPCB material.
- 3) Available Bluetooth and WIFI control.
- 4) Voltage100-240V/The power of 2(m) is 7(W),15 watts at 5 meters and 10 meters.
- 5) The conventional color temperature lumens are 630(lm) and 1300(lm).

2023

SMART LED Bulb


Environmental protection, energy saving.

SMART BULB

It can render a colorful atmosphere



Voice Control



Bluetooth+WiFi Control



SMART Bulb

Smart Bulb

A60/C37/G45/GU10

- Beam Angle(A60):220°
- Beam Angle(C37/G45):180°
- Beam Angle(GU10):120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h



A60

C37

G45

GU10




Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
A60 (E27/E26/B22)	220-240V/100-240V	7W/9W/12W	630lm/810lm /1080lm	WIFI/BLE	60x109 60x118 60x123	Plastic+ Aluminum
C37 (E14/E12/B15)	220-240V/100-240V	5W	450lm	WIFI/BLE	37x100	Plastic+ Aluminum
G45 (E14/E12/B15)	220-240V/100-240V	5W	450lm	WIFI/BLE	45x79	Plastic+ Aluminum
GU10	220-240V/100-240V	5W	450lm	WIFI/BLE	50x55	Plastic+ Aluminum

Panel Light


Panel light 4 inch/6 inch

- Beam Angle:110°
- Ra>80
- CORLOR:RGB/CCT
- AVAILABLE>30000h


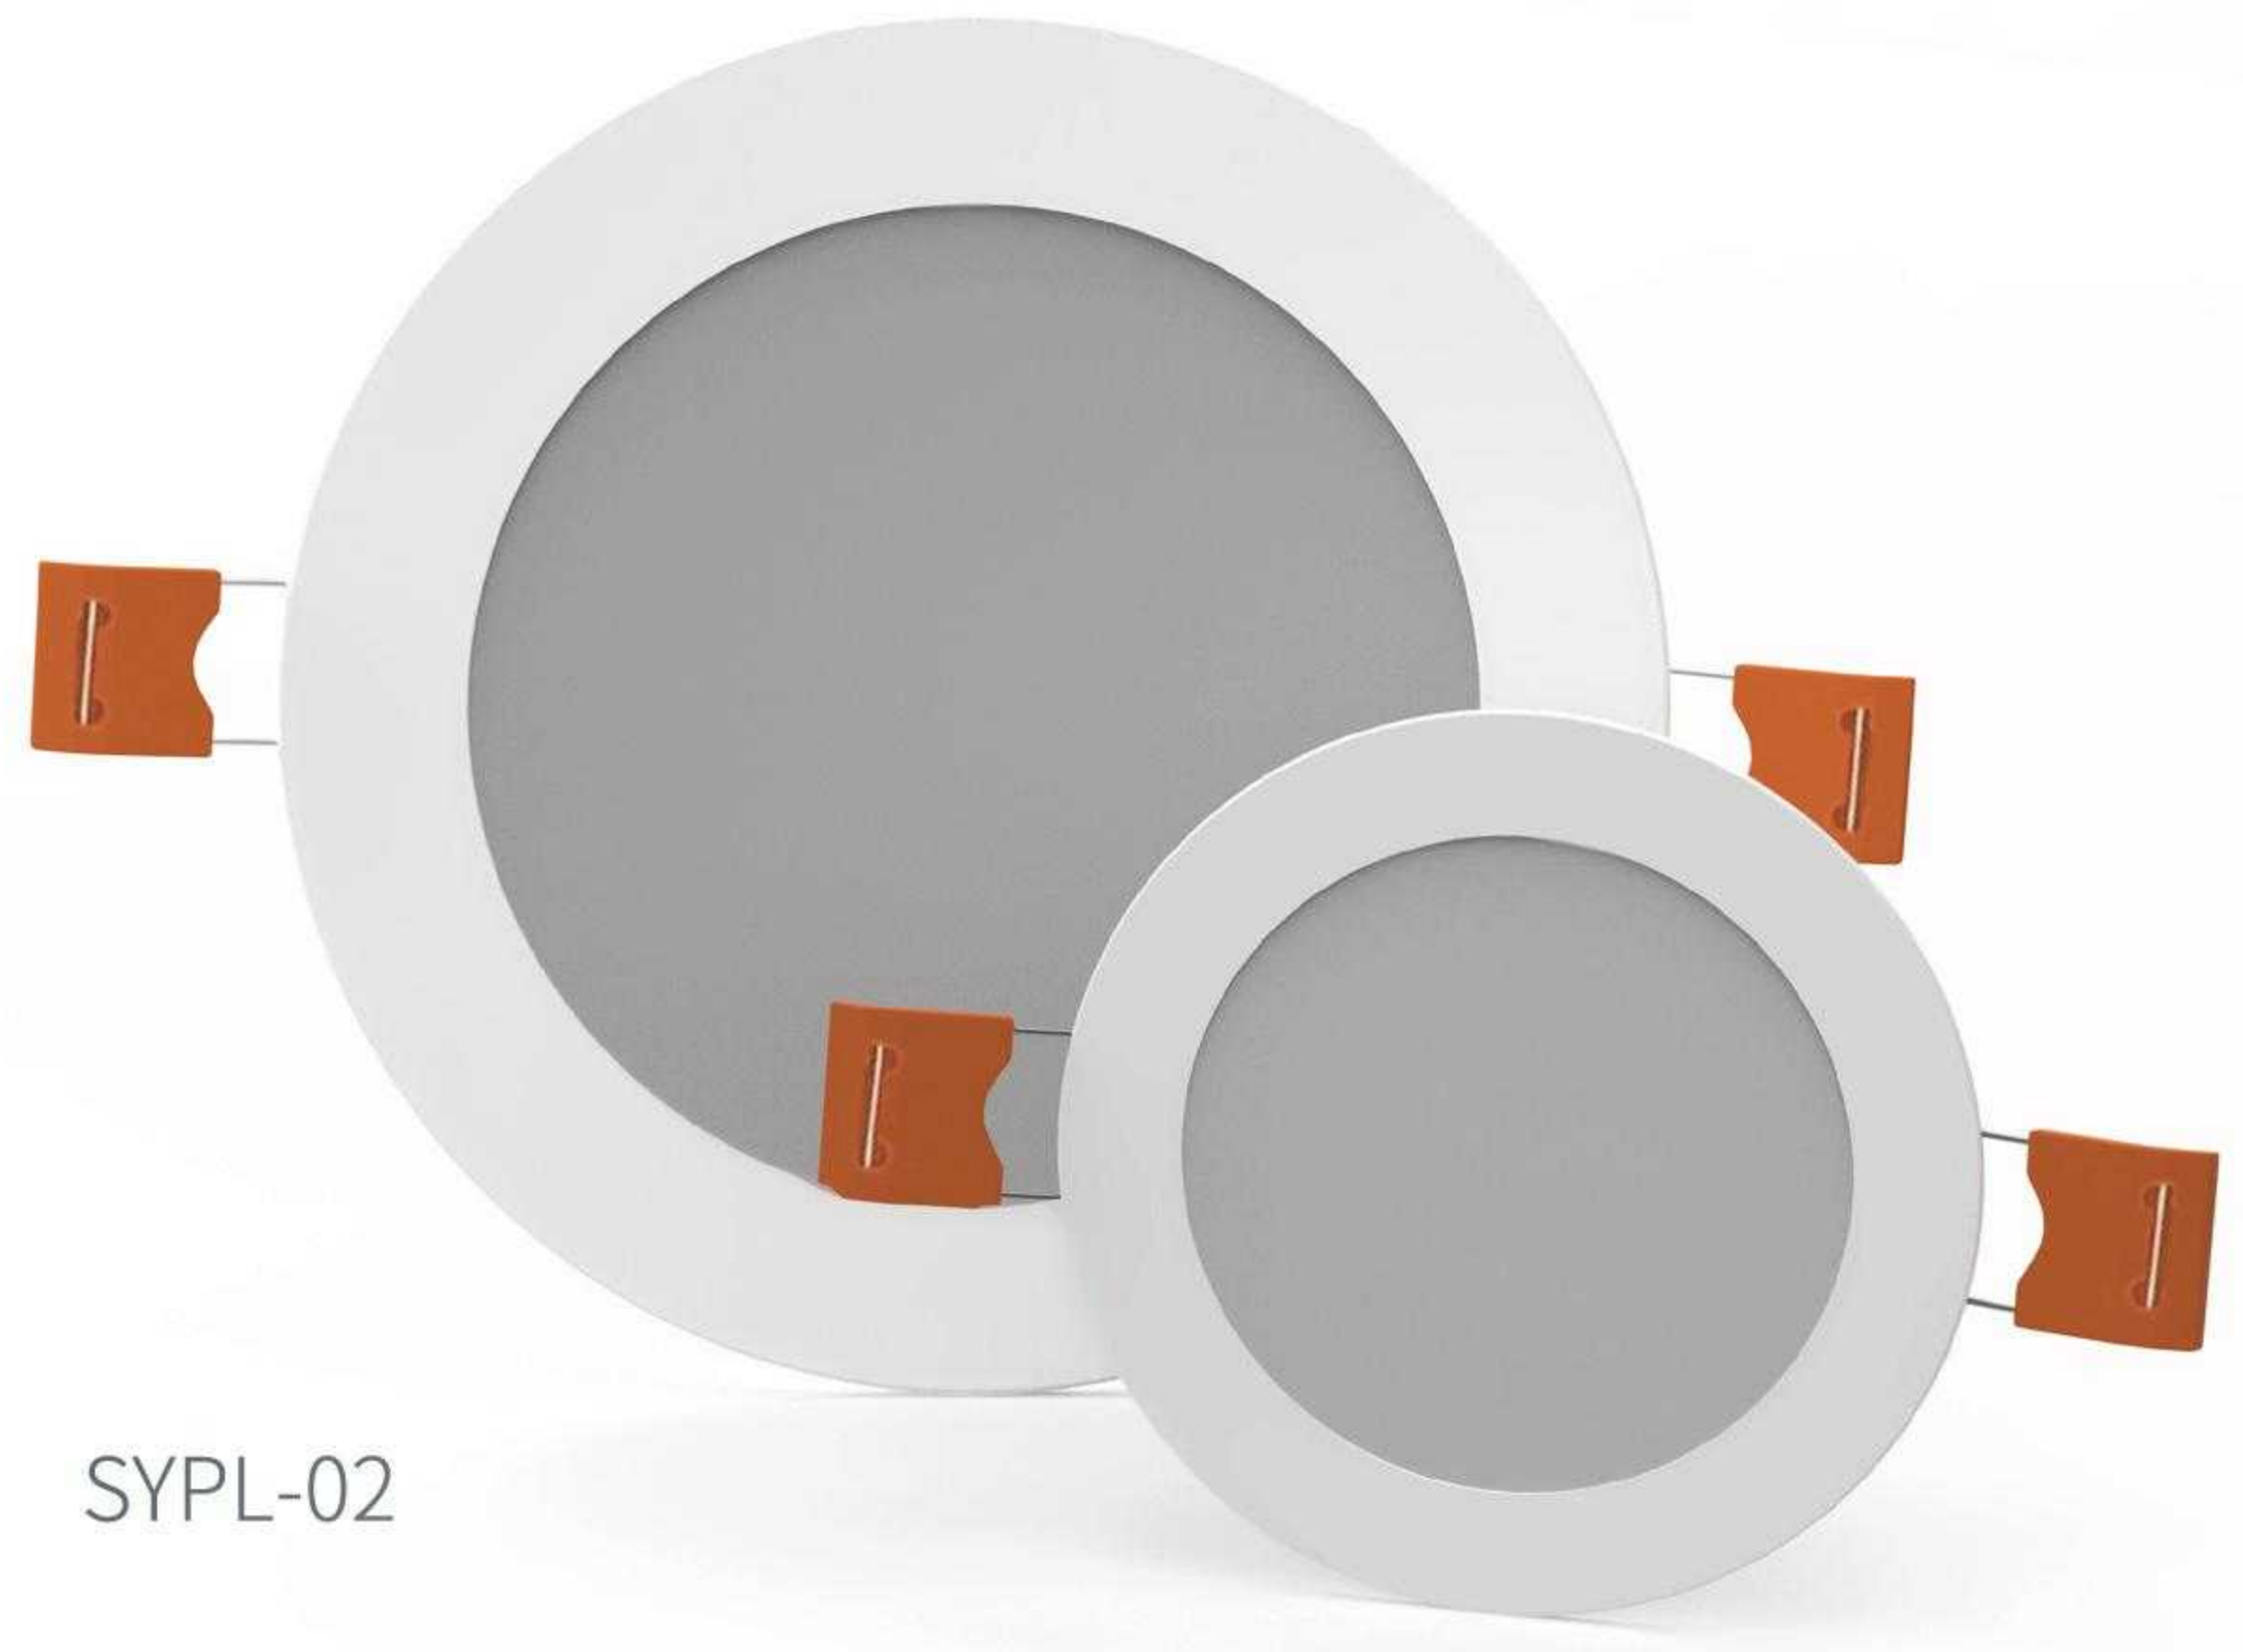


SYPL-02

SYPL-01

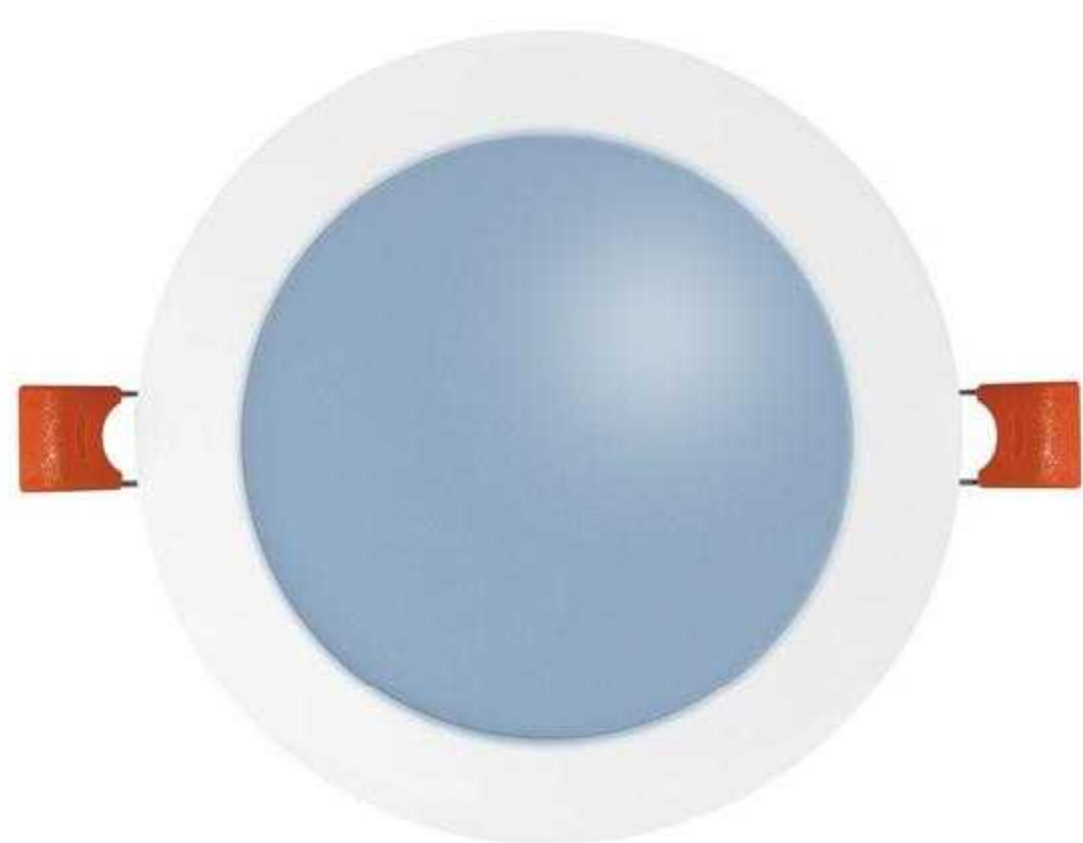

white

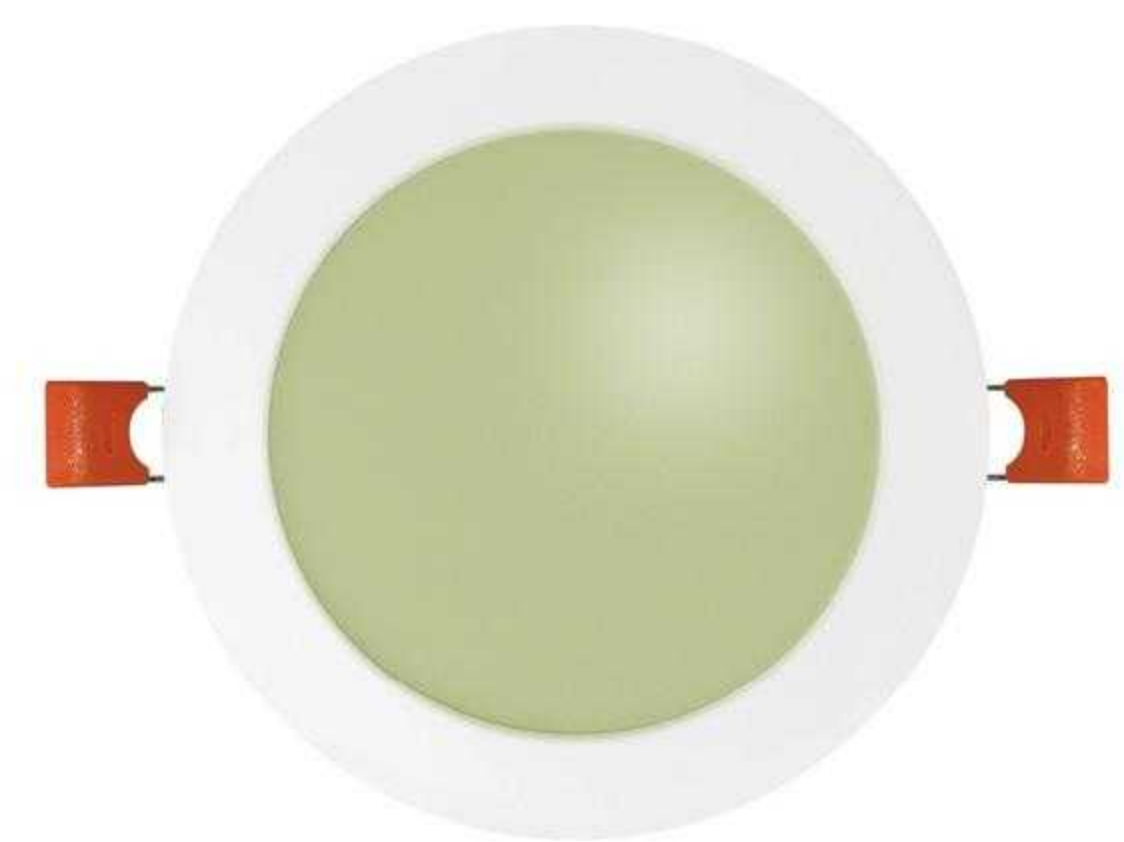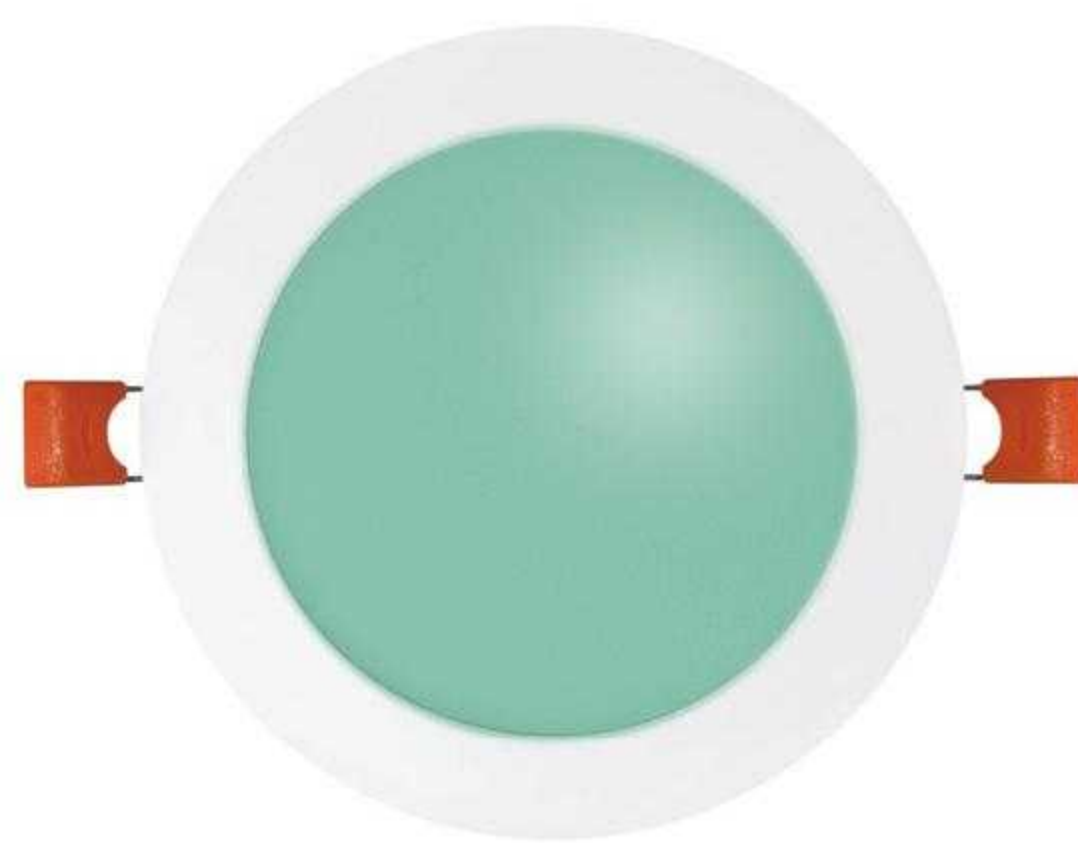

Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
SYPL-01 (4 inch)	100-130V	9W	810lm	WIFI/BLE	145x22(H)	Plastic+ Aluminum
SYPL-02 (6 inch)	100-130V	13W	1000lm	WIFI/BLE	170x22(H)	Plastic+ Aluminum