

2024

# CONTENT


## LED Ceramic Bulb

### P1-6



## LED Classic Bulb

### P7-22

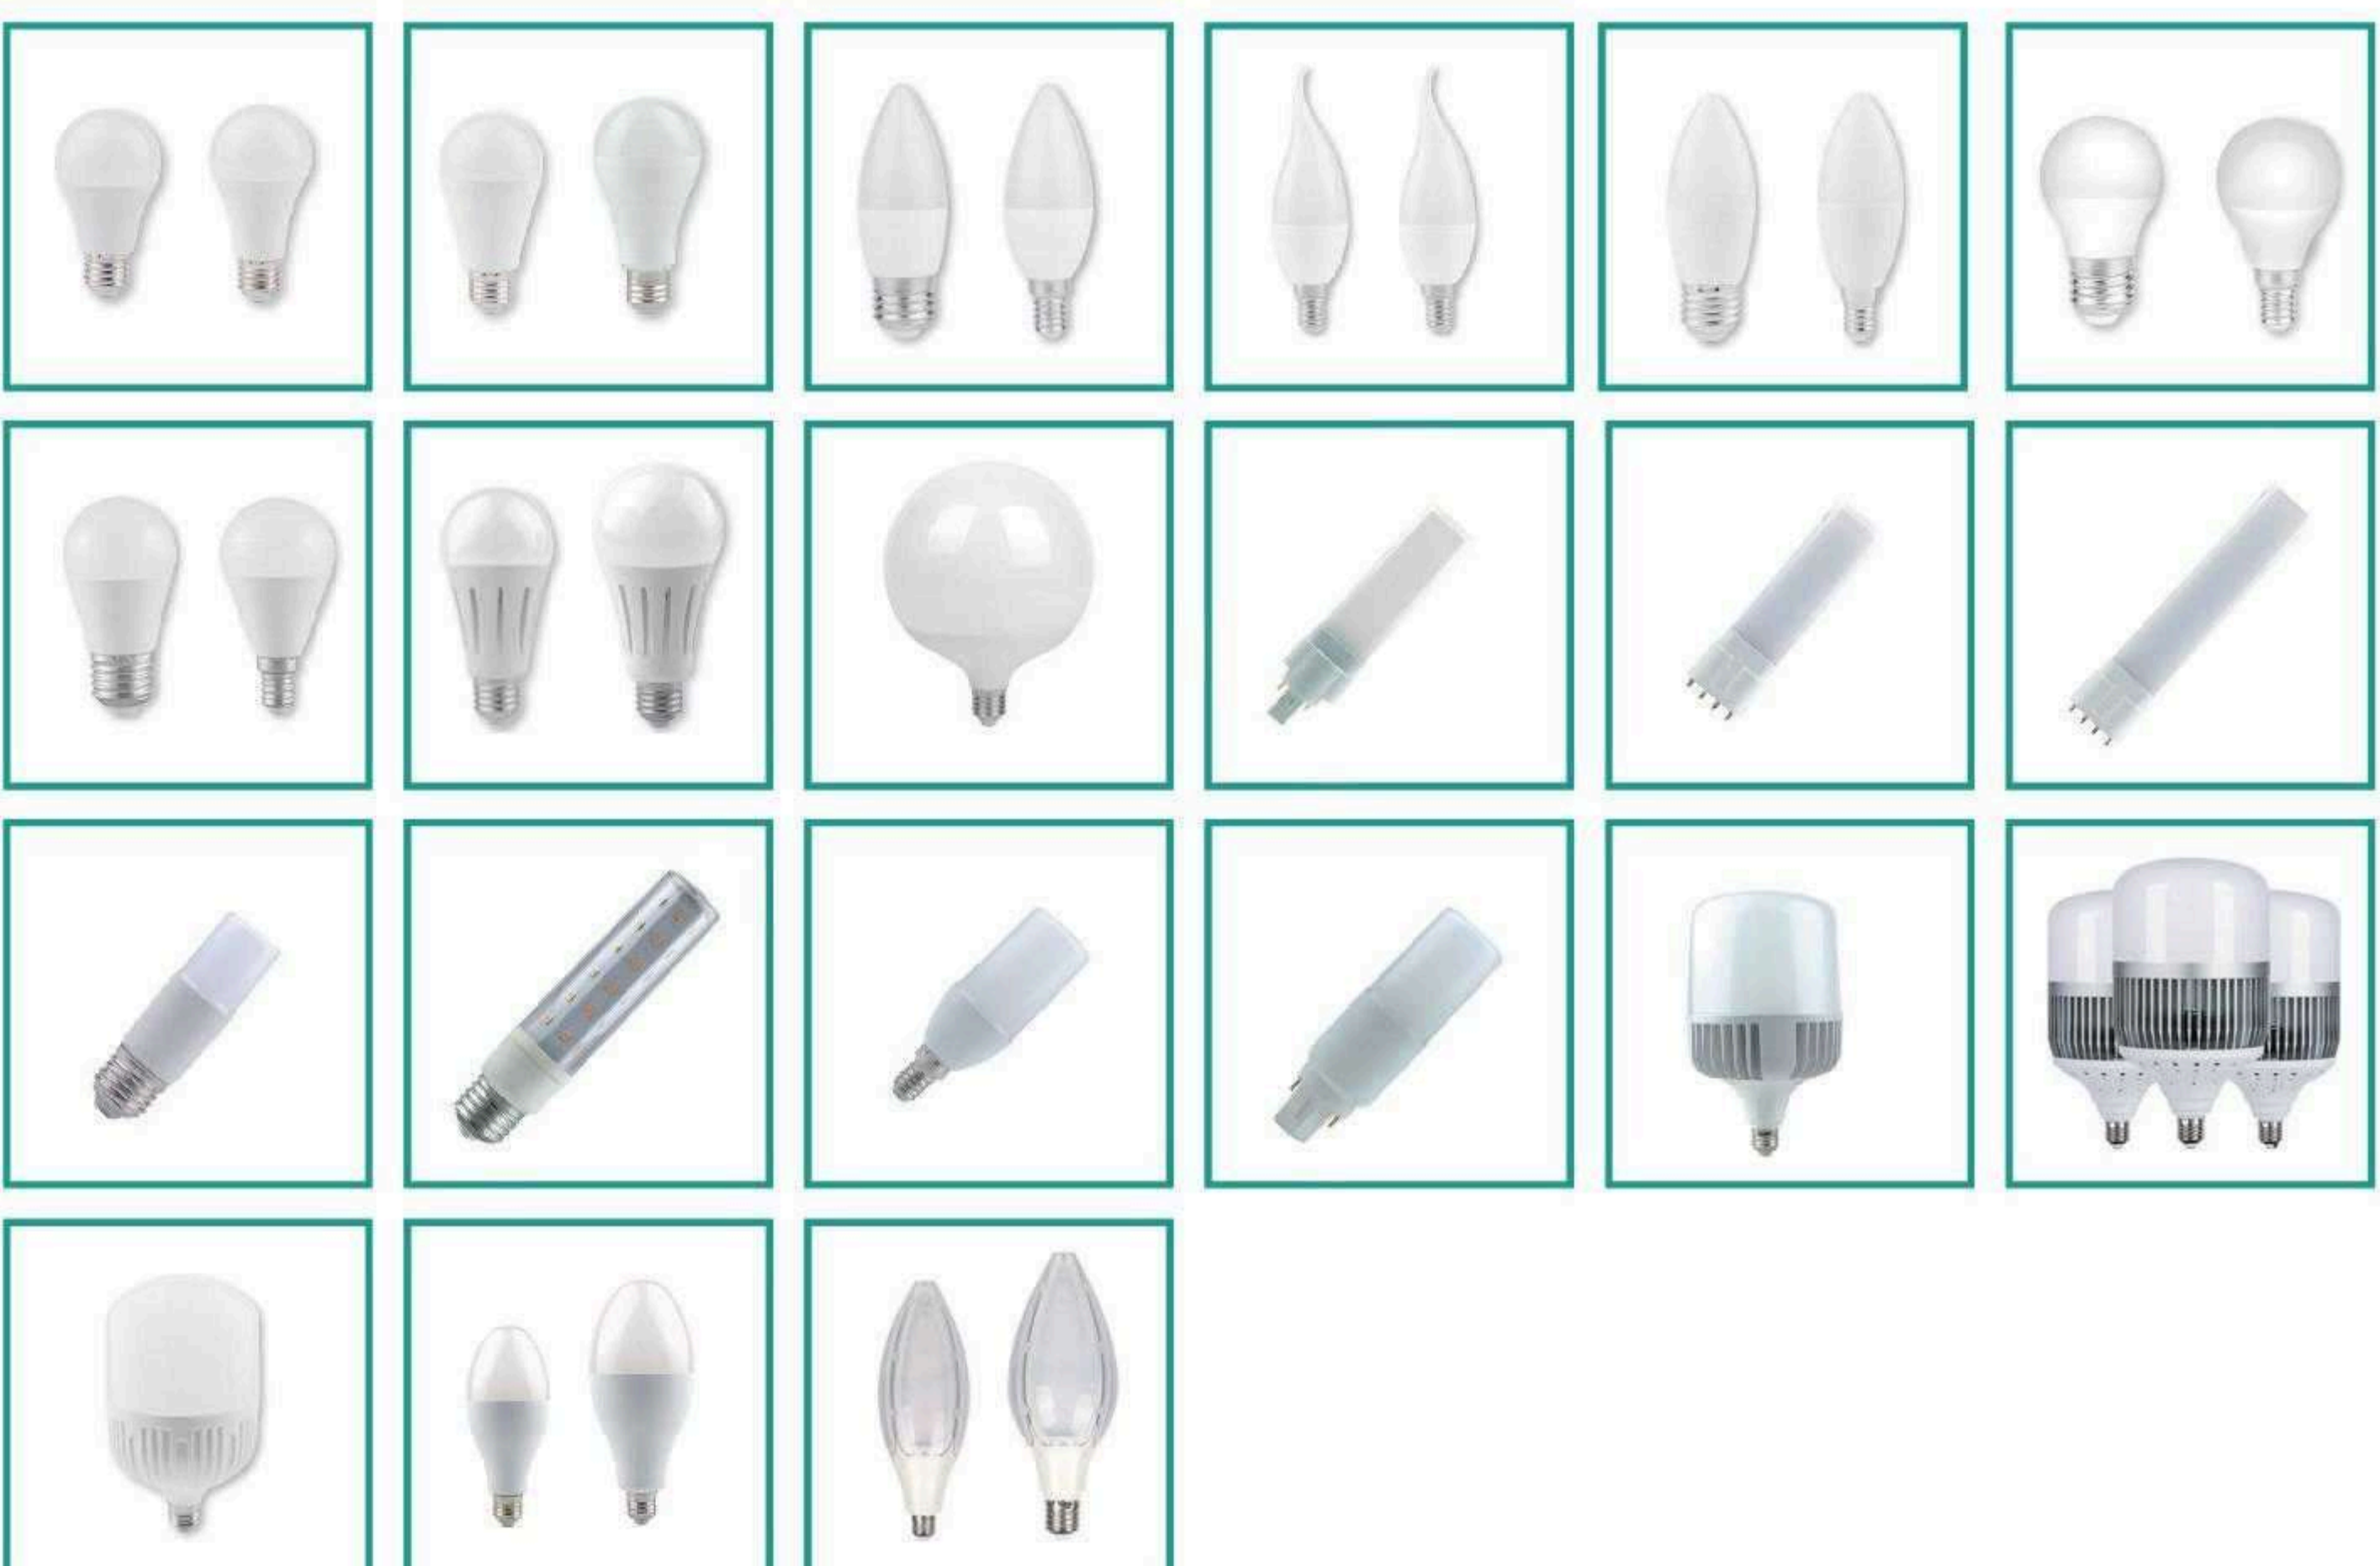

## LED Decorative Bulb

### P23-29



# LED Spotlight

P30-44



G4  
G9

P45-49




# CONTENT

## Ceiling Light



### P50-57

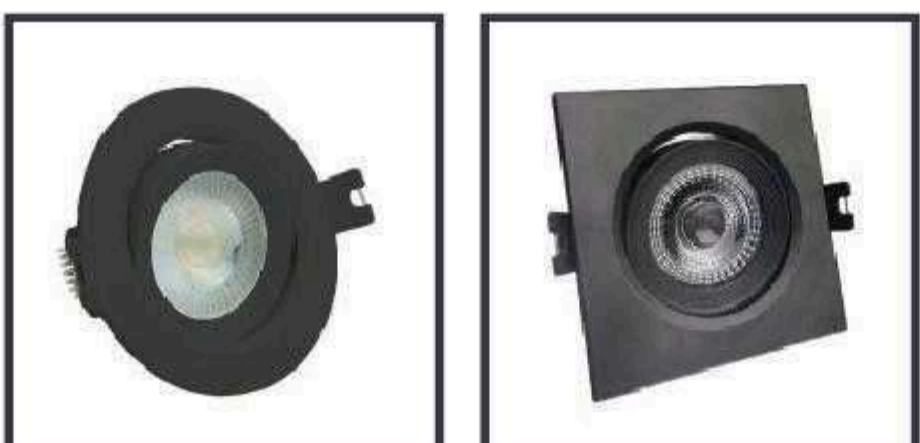

## TRI-Proof Light



### P58-74



## LED Flood Light



### P75-88



## Smart LED Light(Out)



### P83-114



## Smart LED Light(In)




### P112-120

2023


# LED Ceramic Bulb

Environmental protection, energy saving.

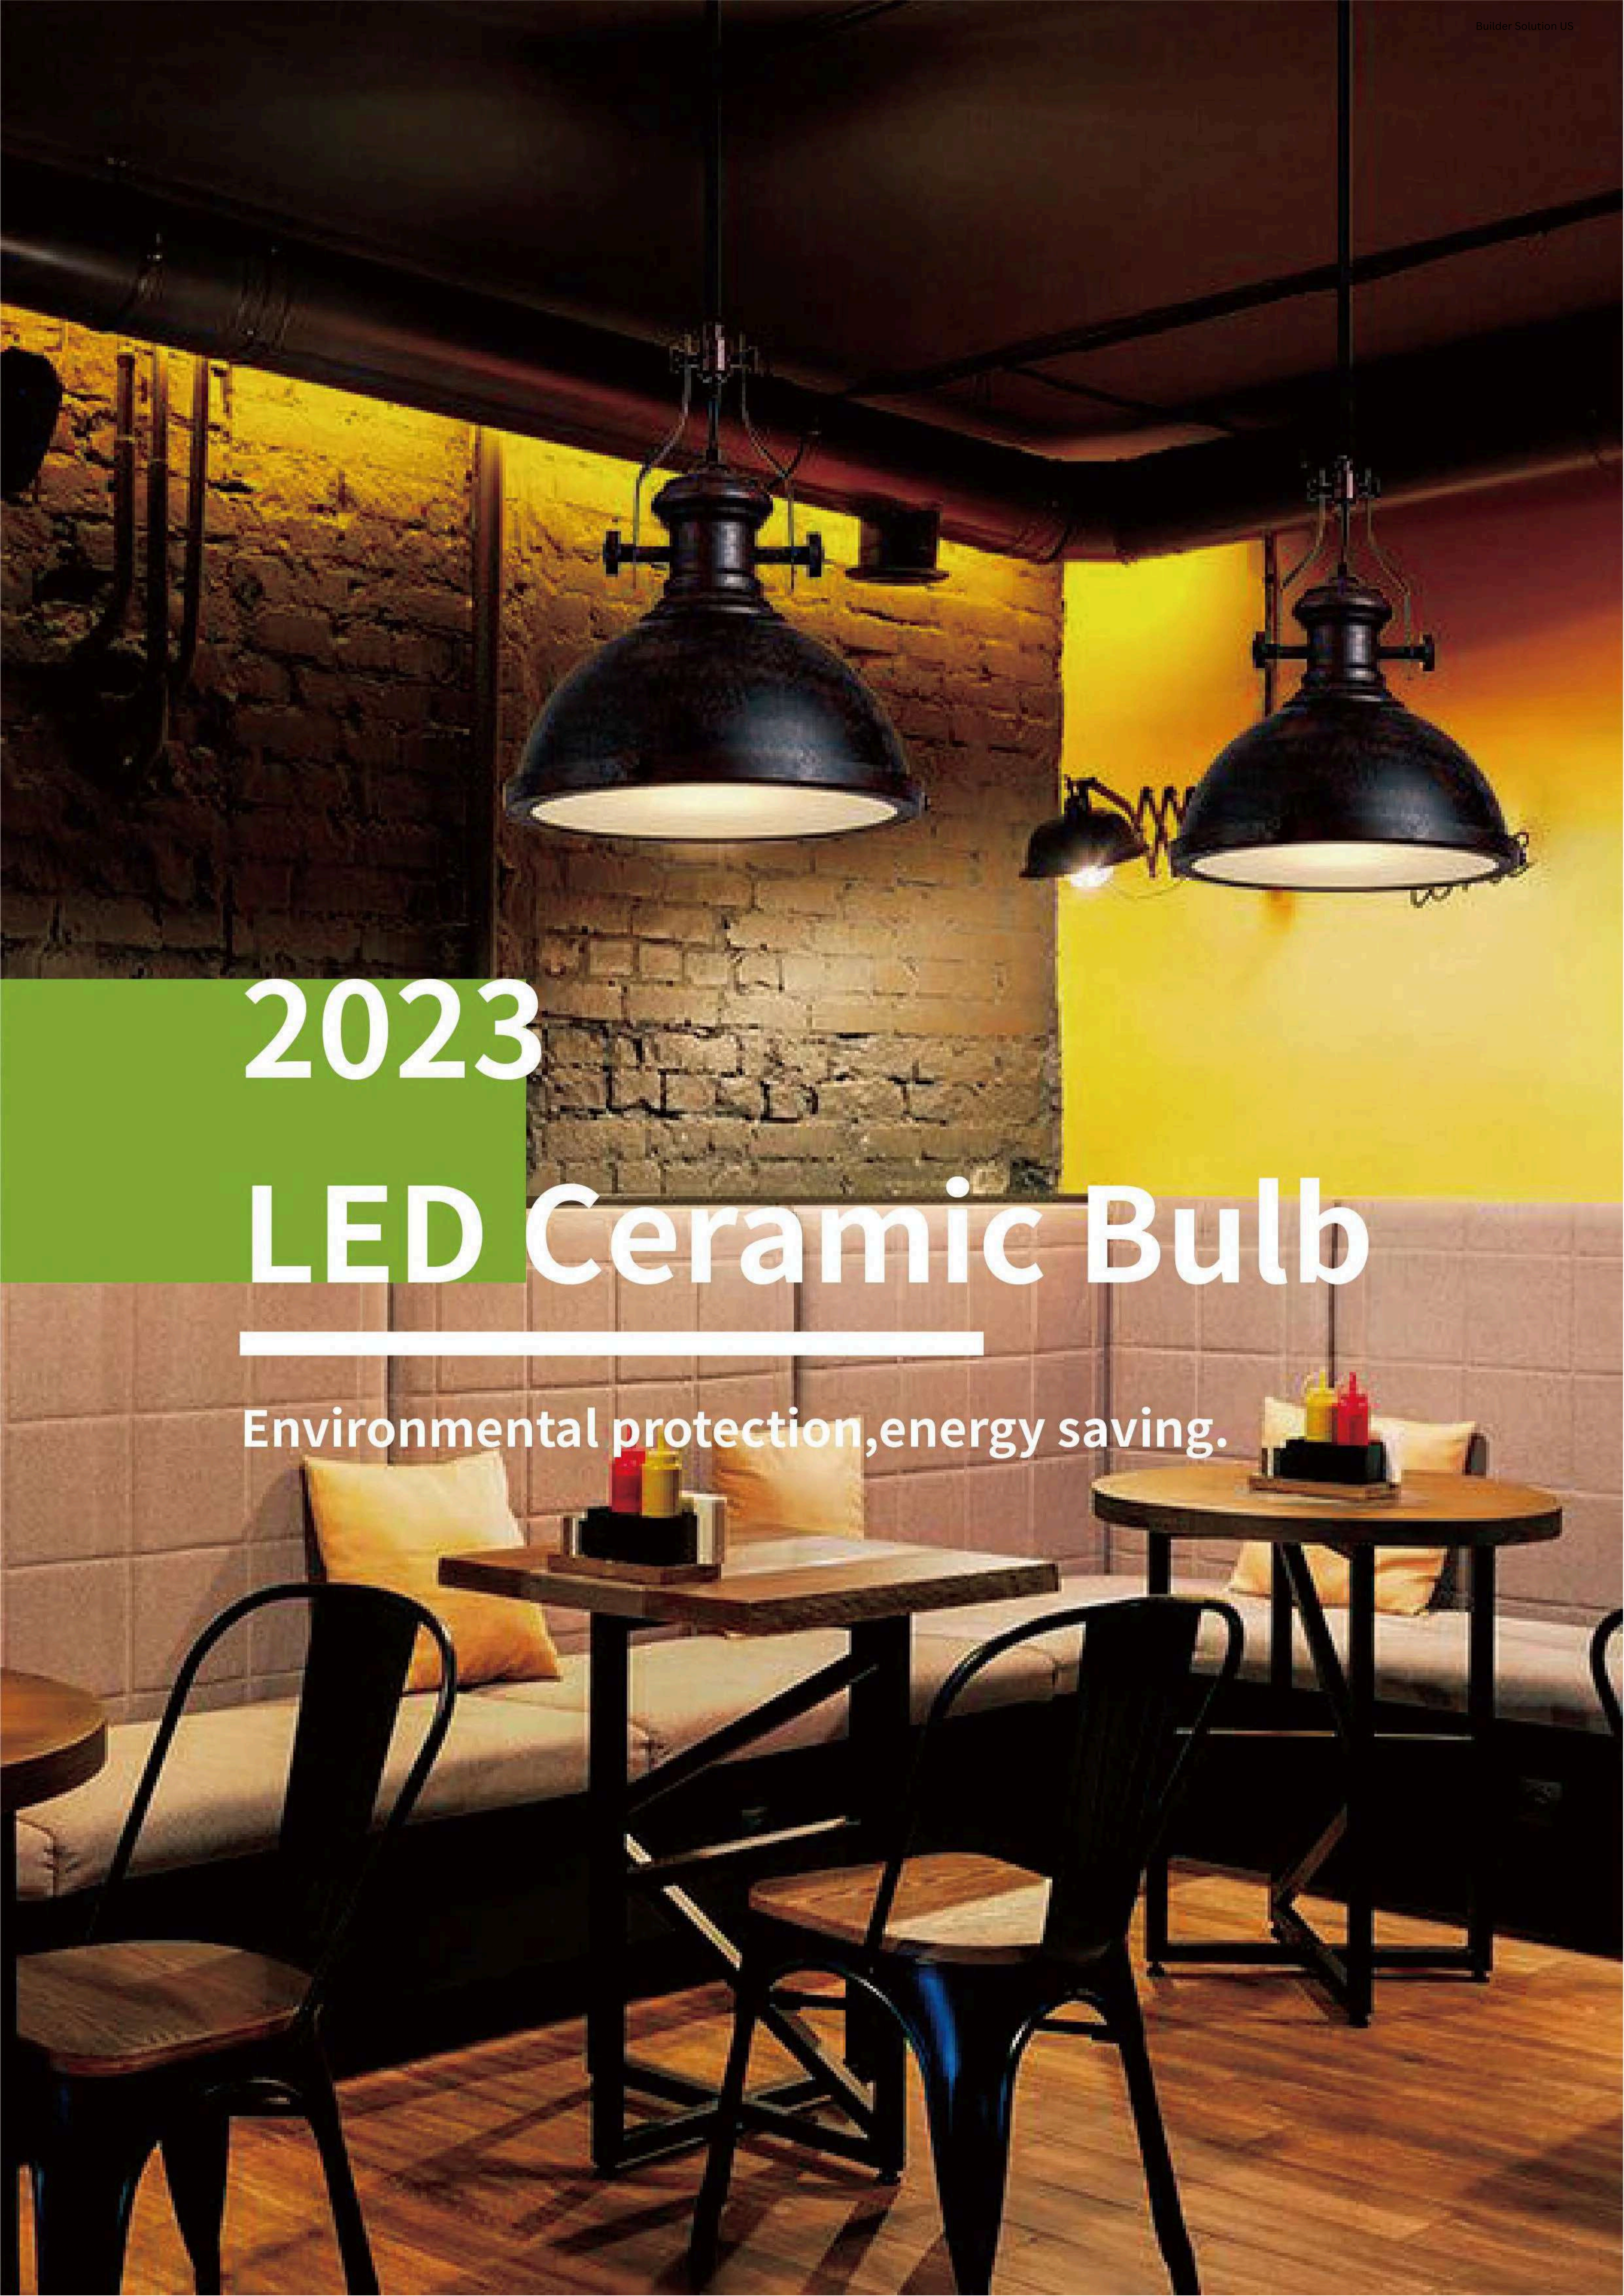

# LED Ceramic Bulb

## Ceramic+PC

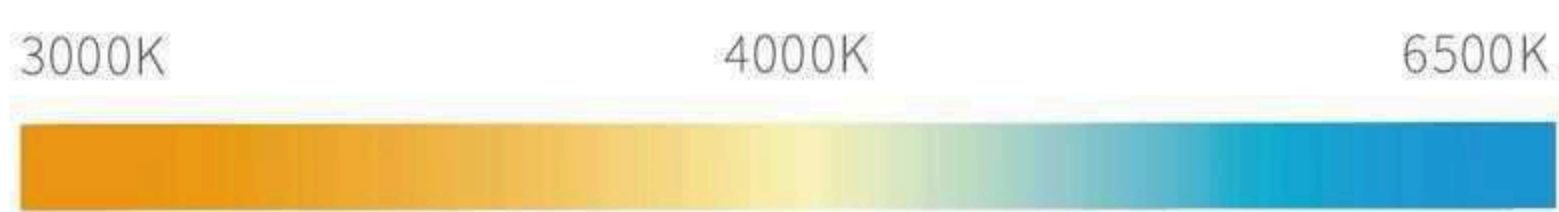

ErP RoHS SAA BSCI

DIMMABLE    
 Ra > 80  
 Ra > 90    
 80~150 LM/W    
 PF>0.5  
 PF>0.7  
 PF>0.9    
 Voltage  
 AC100-240V  
 AC220-240V  
 AC170-250V    
 30,000H



Model	Code	Wattage	EQ-Watts	Lumen	Base	Size(mm)	Beam angle
G45	SY-C011	7W	58W	700LM	E27	φ 45*H84	160°
G45	SY-C012	8W	65W	800LM	E27	φ 45*H84	160°
G45	SY-C013	9W	70W	900LM	E27	φ 45*H84	160°
G45	SY-C014	7W	58W	700LM	E14	φ 45*H89	160°
G45	SY-C015	8W	65W	800LM	E14	φ 45*H89	160°
G45	SY-C016	9W	70W	900LM	E14	φ 45*H89	160°
C37	SY-C017	7W	58W	700LM	E27/E14	φ 37*H109	160°
C37	SY-C018	8W	65W	800LM	E27/E14	φ 37*H109	160°
C37	SY-C019	9W	70W	900LM	E27/E14	φ 37*H109	160°
C37L	SY-C020	7W	58W	700LM	E27/E14	φ 37*H138	160°
C37L	SY-C021	8W	65W	800LM	E27/E14	φ 37*H138	160°
C37L	SY-C022	9W	70W	900LM	E27/E14	φ 37*H138	160°



## Ceramic+PC



3000K                      4000K                      6500K

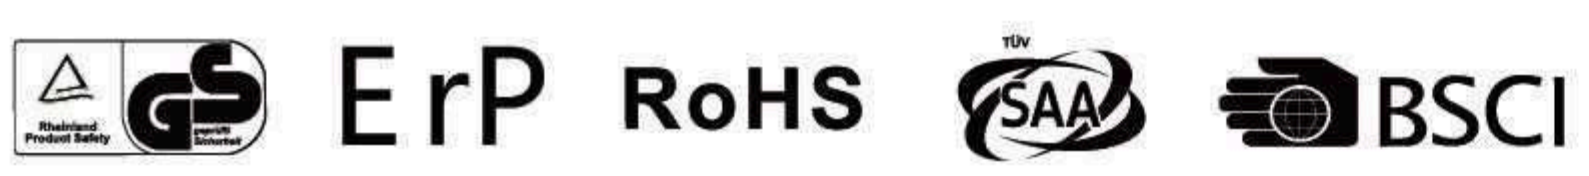

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	30,000H
----------	--------------------	----------------	----------------------------	---	---------

### Application

- Decorative--Living room, Kitchen, Bedroom, etc.
- Operating temperature:-20°C~40°C
- Not for emergency or exit lights

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	SY-C23	10W	90W	1200LM	φ 60*H109	200°
A60	SY-C24	12W	105W	1440LM	φ 60*H111	200°
A65	SY-C25	15W	135W	1800LM	φ 65*H119	200°
A70	SY-C26	18W	160W	2160LM	φ 70*H135	200°
A80	SY-C27	22W	195W	2640LM	φ 80*H153	200°
A95	SY-C28	25W	220W	3000LM	φ 95*H175	200°




## Ceramic+PC



# 120lm/w

3000K                      4000K                      6500K

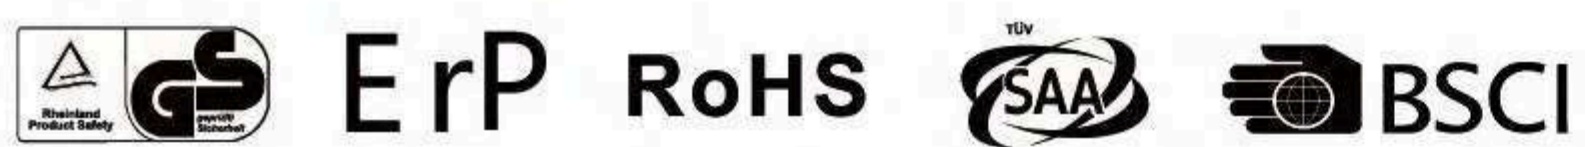

Ra > 80  
Ra > 90

80~150  
LM/W

PF>0.5  
PF>0.7  
PF>0.9

Voltage  
AC100~240V  
AC220~240V  
AC170~250V



### Application

- Decorative--Living room, Kitchen, Bedroom, etc.
- Operating temperature:-20°C~40°C
- Not for emergency or exit lights

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G50	SY-C29	8W	75W	960LM	φ 50*H85	220°
G55	SY-C30	10W	90W	1200LM	φ 55*H92	220°
G60	SY-C31	12W	105W	1440LM	φ 60*H96	220°
G125	SY-C32	35W	310W	4200LM	φ 125*H175	220°




# LED Ceramic Bulb

Ceramic+PC cover/  
Ceramic with lens



LED SMD

COB

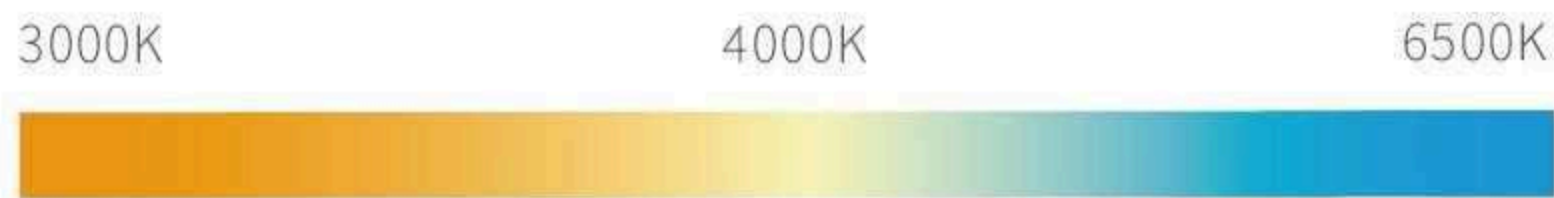

DIMMABLE

Ra > 80  
Ra > 90

80~150  
LM/W

PF>0.5  
PF>0.7  
PF>0.9


Voltage  
AC100~240V  
AC220~240V  
AC170~250V

30,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
GU10	SY-TC01	7W	58W	700LM	φ 50*H56	120°
GU10	SY-TC02	8W	65W	800LM	φ 50*H56	120°
GU10	SY-TC03	9W	70W	900LM	φ 50*H56	120°
GU10	SY-TC04	7W	58W	700LM	φ 50*H56	38°/60°/120°
GU10	SY-TC05	8W	65W	800LM	φ 50*H56	38°/60°/120°
GU10	SY-TC06	9W	70W	900LM	φ 50*H56	38°/60°/120°
MR16	SY-TC07	7W	58W	700LM	φ 50*H50	120°
MR16	SY-TC08	8W	65W	800LM	φ 50*H50	120°
MR16	SY-TC09	9W	70W	900LM	φ 50*H50	120°
MR16	SY-TC10	7W	58W	700LM	φ 50*H50	38°/60°/120°
MR16	SY-TC11	8W	65W	800LM	φ 50*H50	38°/60°/120°
MR16	SY-TC12	9W	70W	900LM	φ 50*H50	38°/60°/120°

# LED Ceramic Bulb

## Ceramic with lens

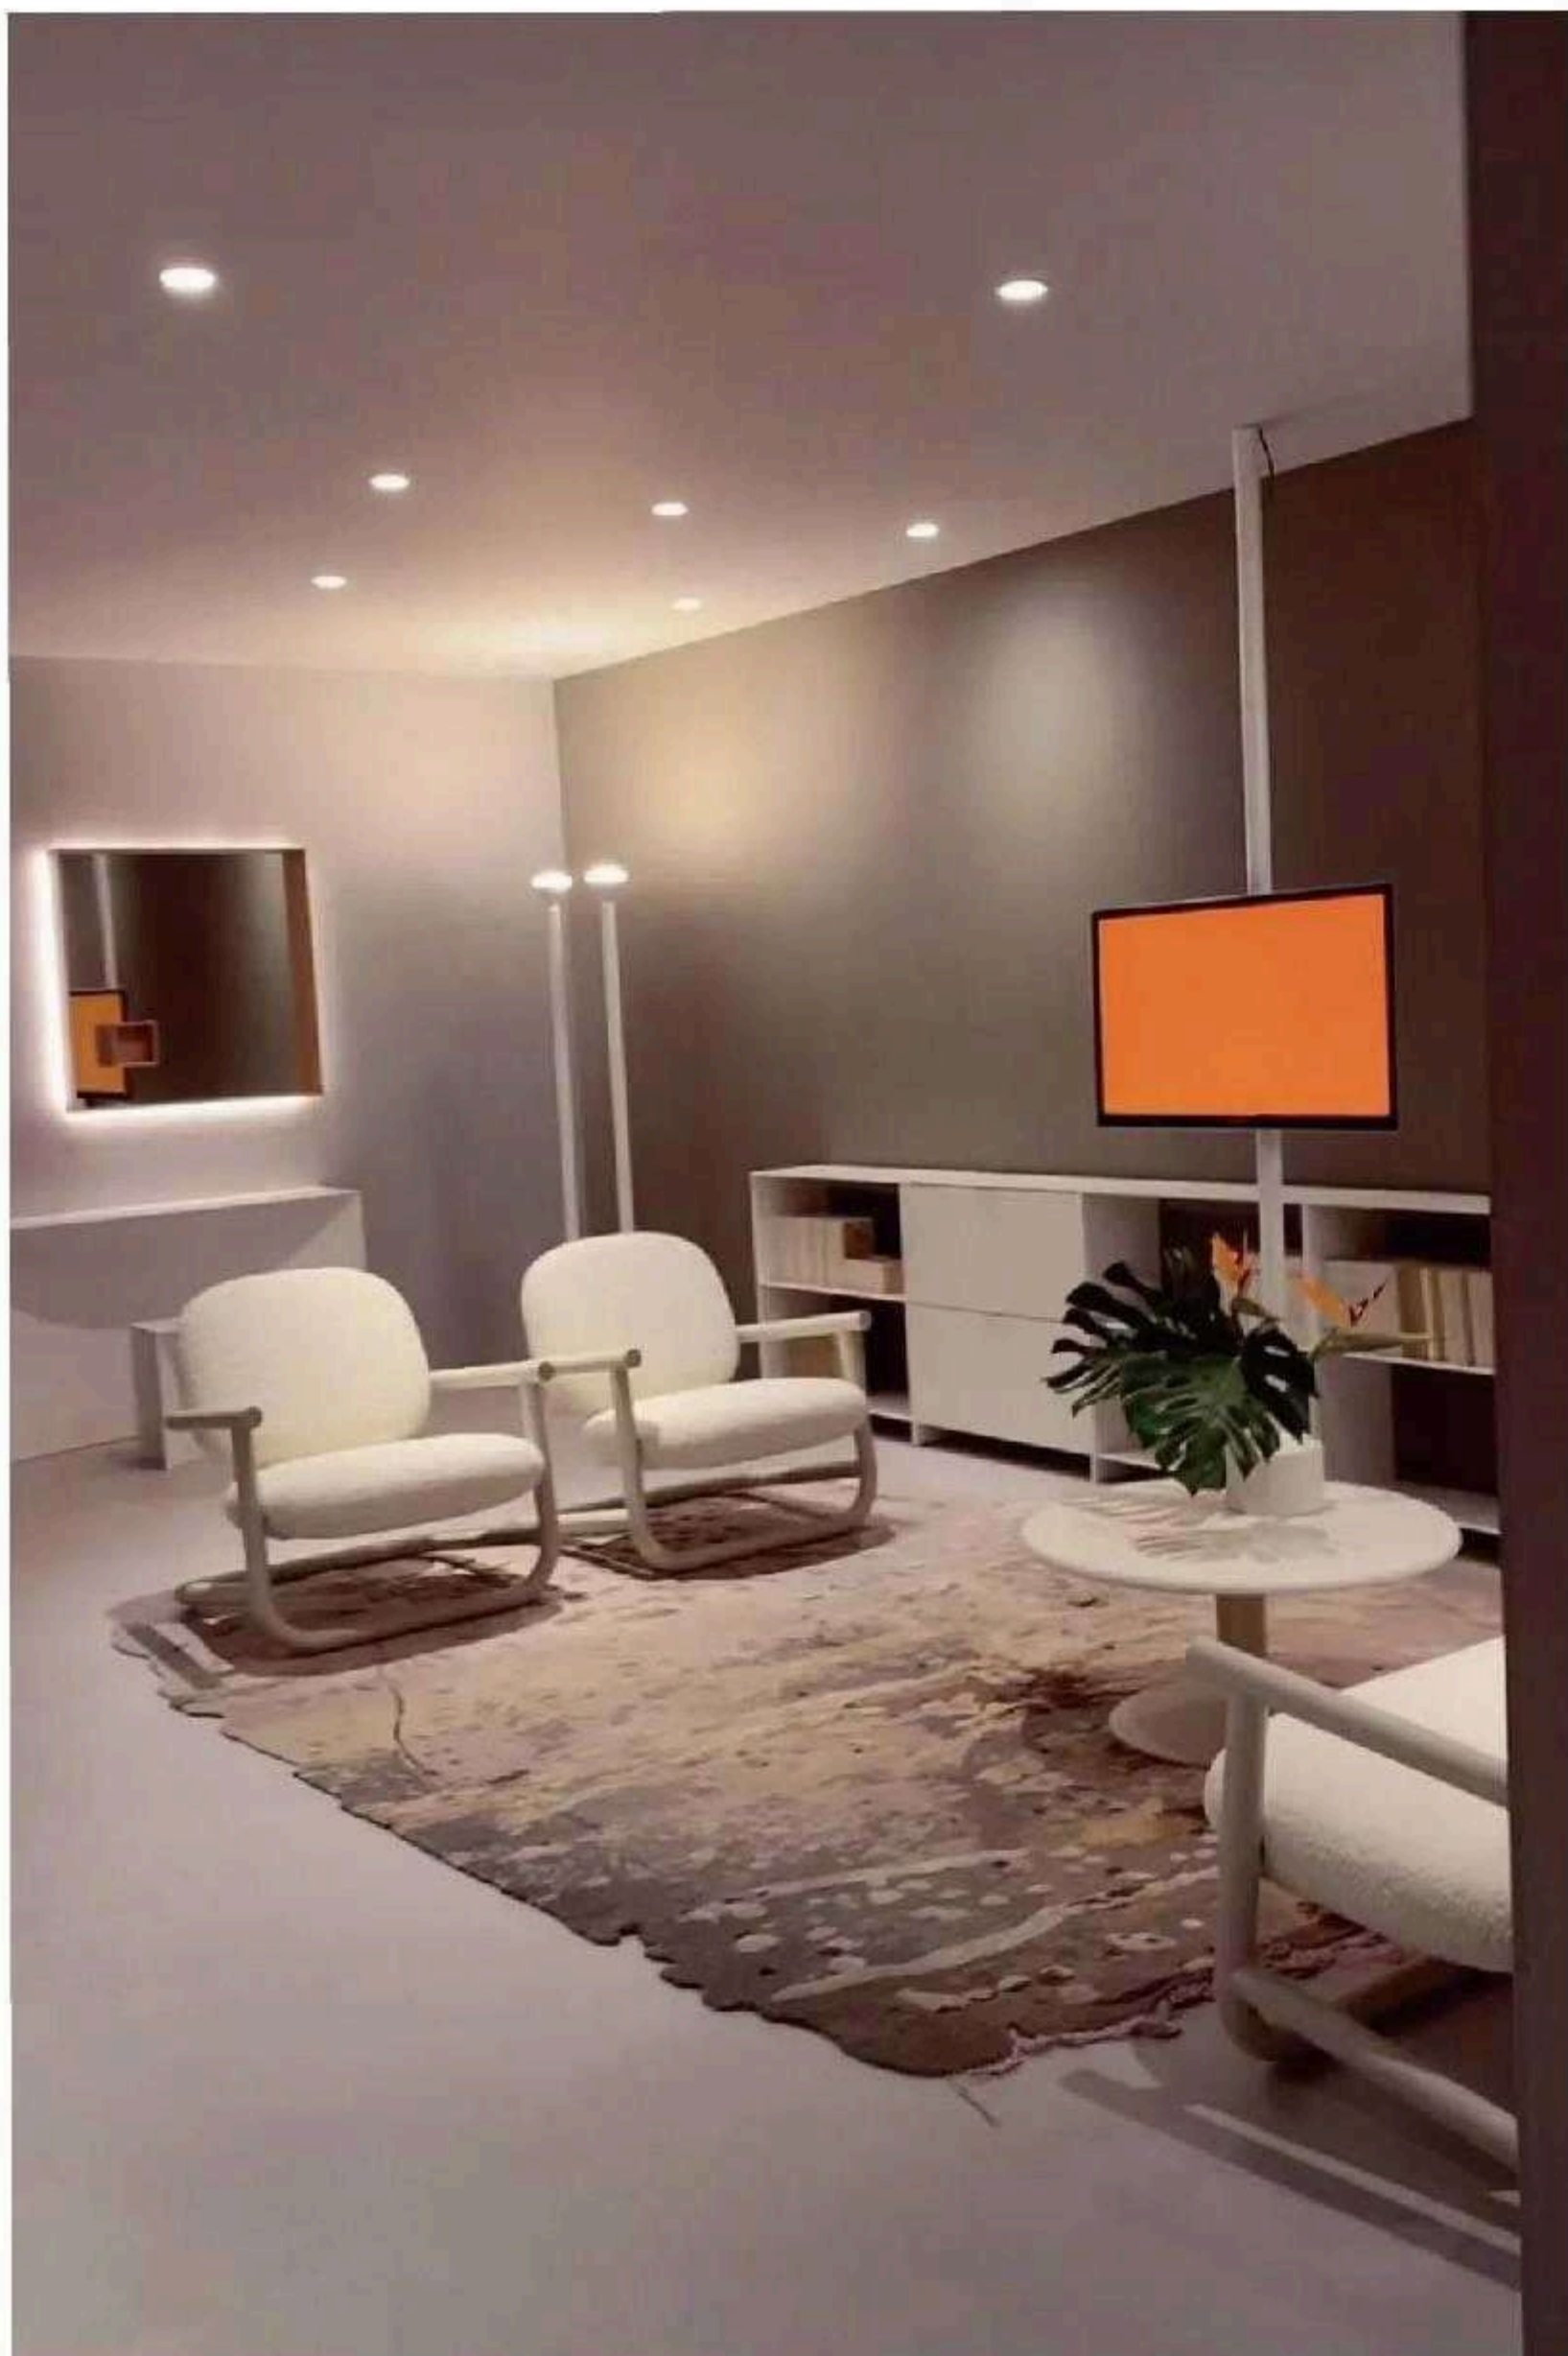

3000K                      4000K                      6500K



DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	CCT 2700K 4100K 6000K	Voltage AC100~240V AC220~240V AC170~250V	25,000H	Voltage AC100~240V AC220~240V AC170~250V	30,000H
----------	--------------------	----------------	----------------------------	--------------------------------	---	---------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
GU11	SY-MN01	3W	25W	240Lm	SMD	φ 35*H50	38°
MR11	SY-MN02	3W	25W	240Lm	SMD	φ 35*H35	38°
GU11	SY-MN03	3W	25W	240Lm	COB	φ 35*H50	38°
MR11	SY-MN04	3W	25W	240Lm	COB	φ 35*H35	38°



## Ceramic+PC/ Ceramic with lens




SY-CM01/SY-CM02



SY-CM03



SY-CM04

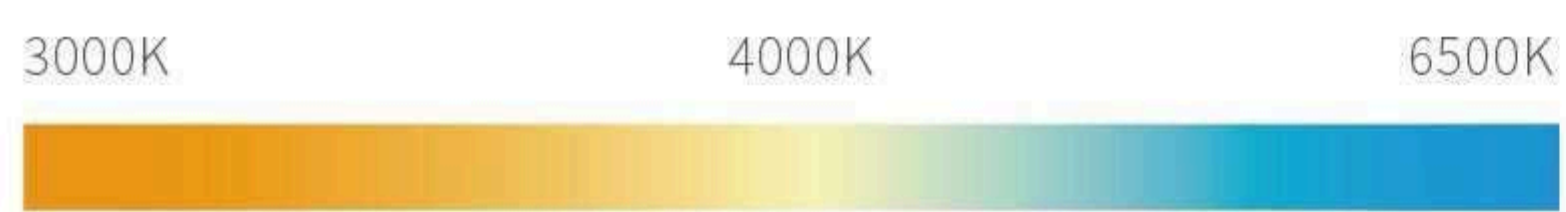

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
LED insert	SY-CM01	5W	40W	450LM	φ 50*H25	120°
LED insert	SY-CM02	7W	50W	630LM	φ 50*H25	120°
LED insert	SY-CM03	5W	37W	400LM	φ 50*H20	38°/ 60°
LED insert	SY-CM04	7W	48W	560LM	φ 50*H20	38°/ 60°
LED insert	SY-CM05	5W	40W	450LM	φ 50*H26	38°/ 60°
LED insert	SY-CM06	7W	50W	630LM	φ 50*H26	38°/ 60°


2023

# LED Classic Bulb

Environmental protection, energy saving.

# LED Classic Bulb

**Plastic+Alu.**

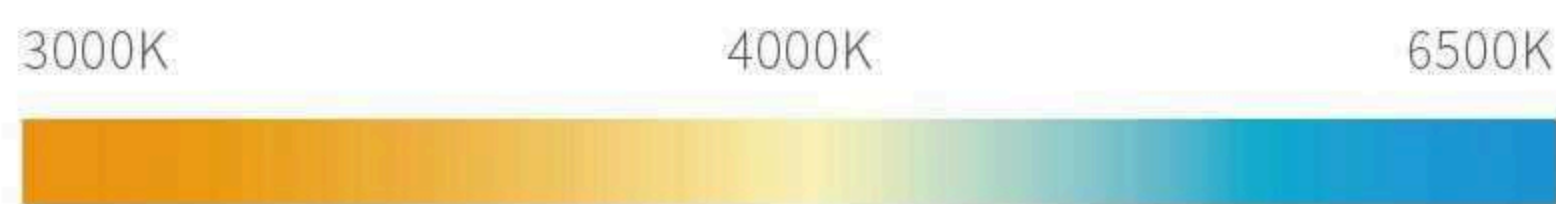

ErP RoHS SAA BSCI

DIMMABLE | 
 Ra > 80  
 Ra > 90 | 
 80~150 LM/W | 
 PF>0.5  
 PF>0.7  
 PF>0.9 | 
 Voltage  
 AC100~240V  
 AC220~240V  
 AC170~250V | 
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A50	SY-A030	5W	40W	400LM	Φ50*H93	200°
A55	SY-A031	7W	50W	600LM	Φ55*H104	200°
A60	SY-A032	7W	50W	600LM	Φ60*H108	200°
A60	SY-A033	9W	60W	820LM	Φ60*H109	200°
A60	SY-A034	10W	65W	935LM	Φ60*H109	200°
A60	SY-A035	12W	70W	1155LM	Φ60*H118	200°
A60	SY-A036	15W	85W	1490LM	Φ60*H121	200°
A60	SY-A037	17W	100W	1700LM	Φ60*H126	200°
A65	SY-A038	12W	70W	1155LM	Φ65*H124	200°
A65	SY-A039	15W	85W	1490LM	Φ65*H124	200°
A67	SY-A040	18W	100W	1820LM	Φ67*H134	180°
A70	SY-A041	15W	85W	1490LM	Φ70*H122	200°
A70	SY-A042	18W	100W	1820LM	Φ70*H122	200°
A80	SY-A043	18W	100W	1820LM	Φ80*H143	200°
A95	SY-A044	20W	120W	2050LM	Φ95*H152	200°
A110	SY-A045	28W	155W	2950LM	Φ110*H203	200°
A120	SY-A046	35W	200W	3750LM	Φ120*H235	200°
A140	SY-A047	45W	250W	4850LM	Φ140*H252	200°
A160	SY-A048	55W	300W	5950LM	Φ160*H278	200°



## Plastic+Alu.



3000K                      4000K                      6500K






ErP RoHS SAA BSCI

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-S016	3W	25W	240LM	Φ37*H99	160°
C37	SY-S017	4W	30W	320LM	Φ37*H99	160°
C37	SY-S018	5W	35W	400LM	Φ37*H99	160°
C37	SY-S019	6W	40W	490LM	Φ37*H99	160°
C37	SY-S020	7W	45W	600LM	Φ37*H106	160°
C37	SY-S021	8W	50W	710LM	Φ37*H110	160°
C37	SY-S023	9W	60W	820LM	Φ37*H110	160°

# LED Classic Bulb

## Plastic/Plastic+Alu.

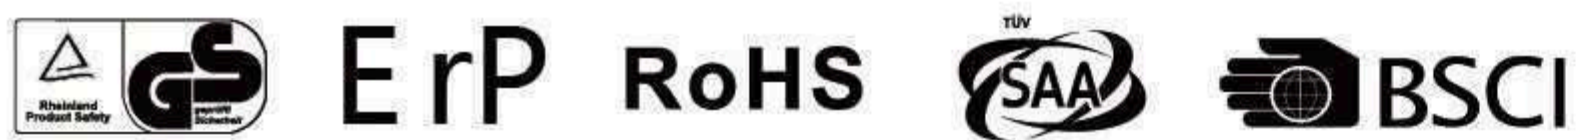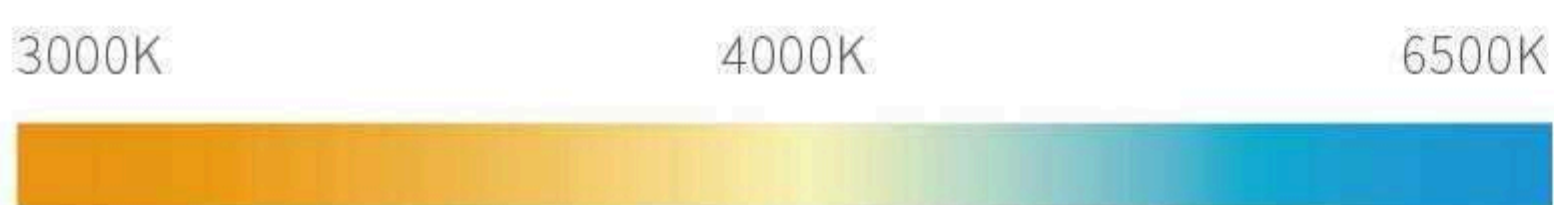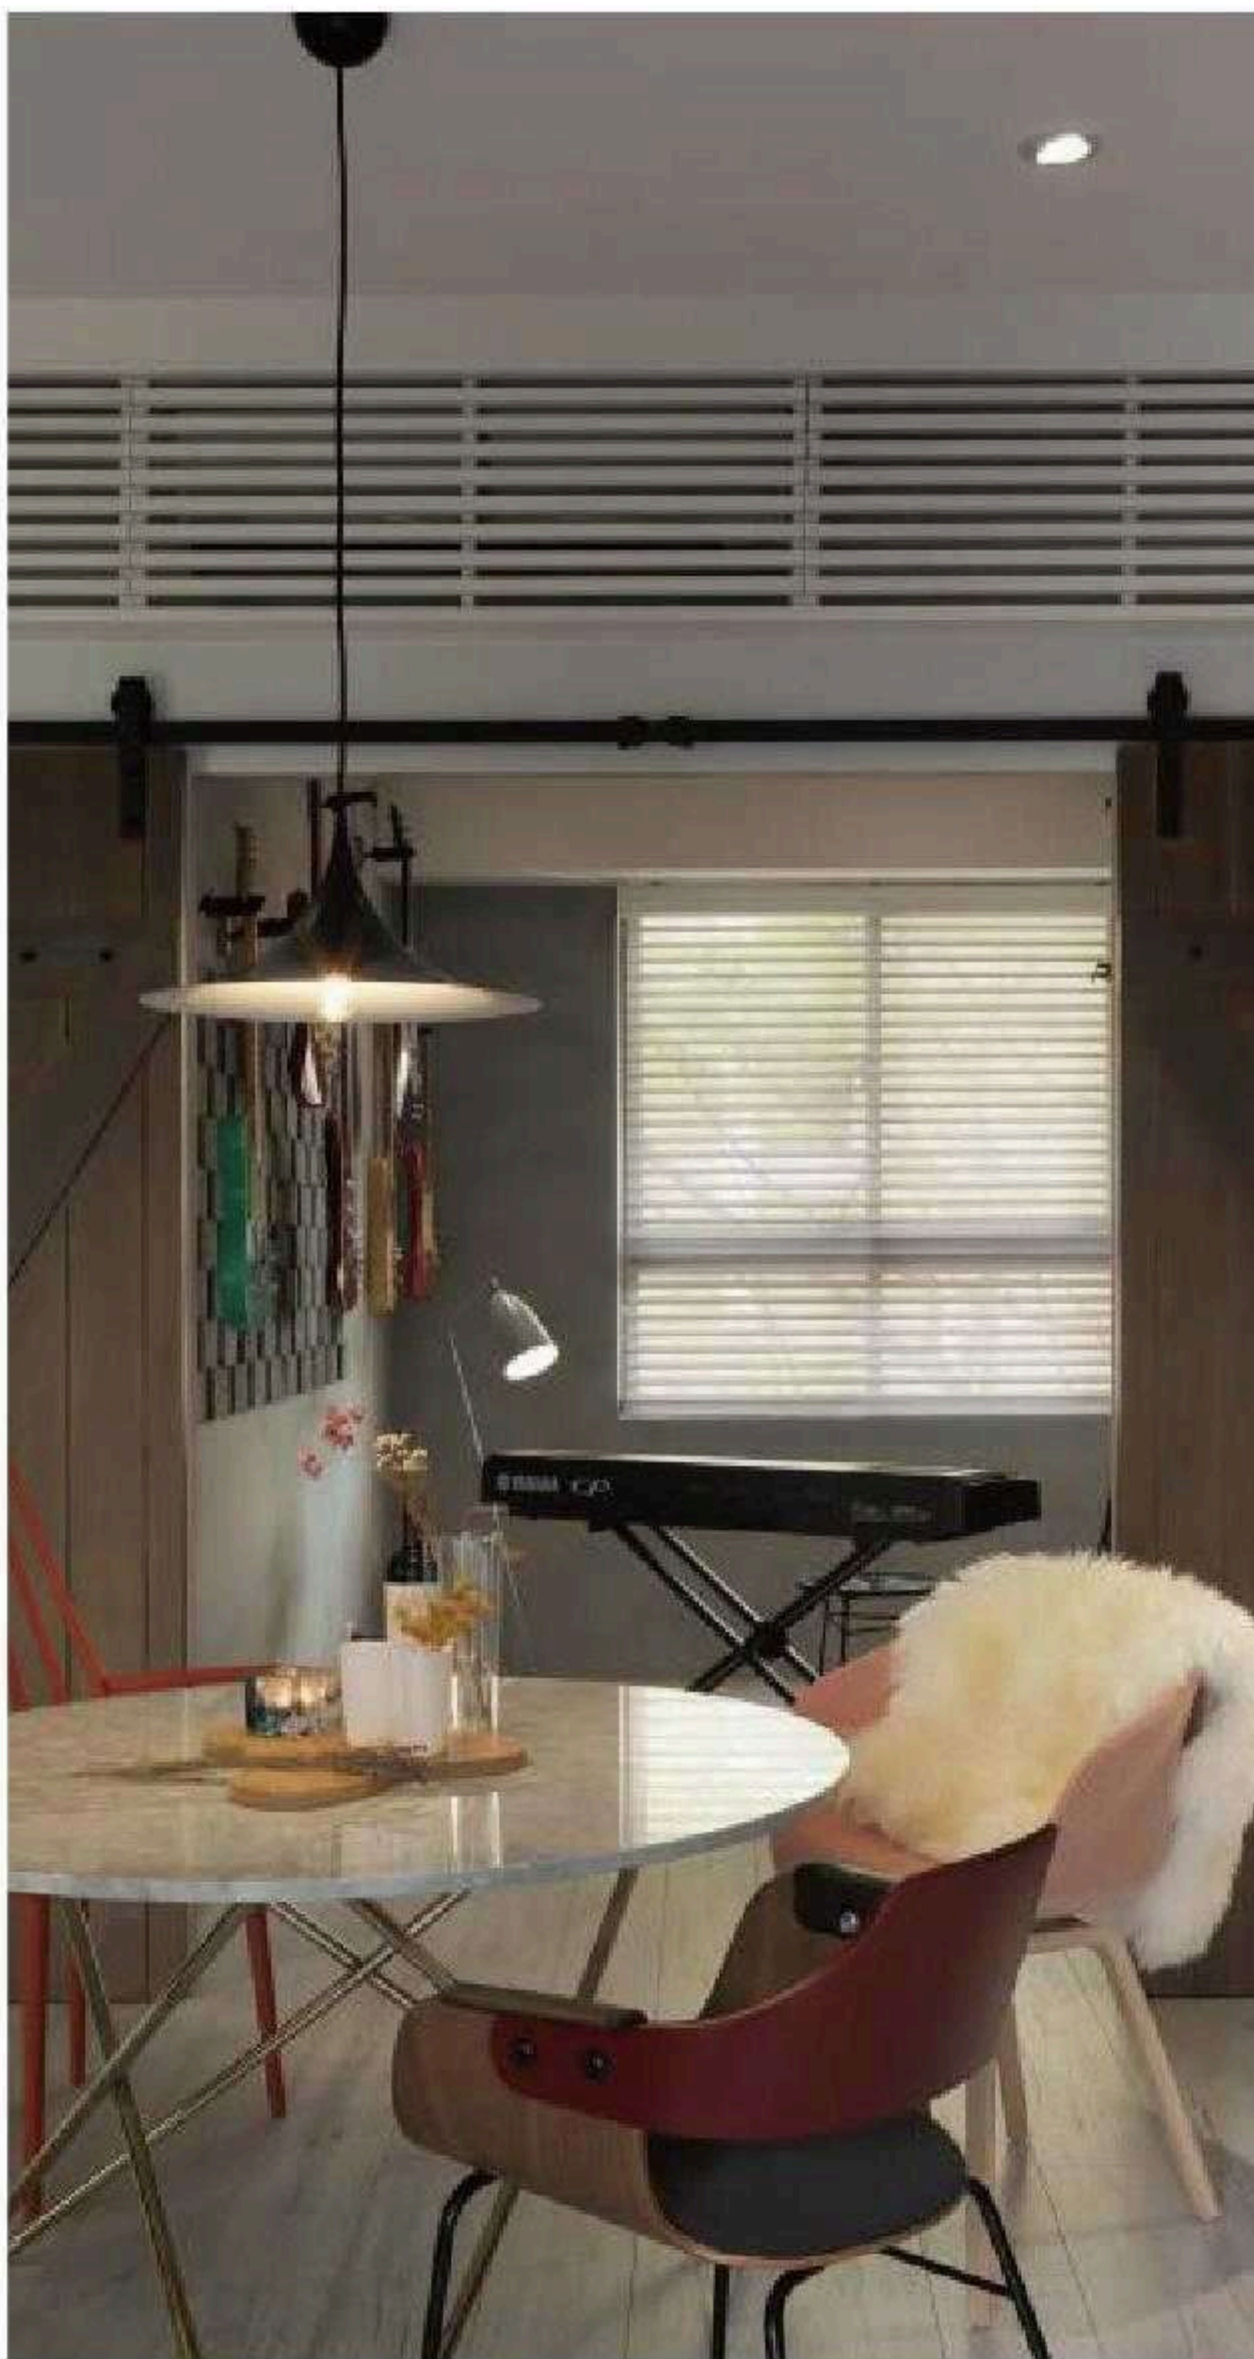

**DIMMABLE**

**Ra > 80**  
**Ra > 90**

**80~150**  
**LM/W**

**PF>0.5**  
**PF>0.7**  
**PF>0.9**

**Voltage**  
AC100~240V  
AC220~240V  
AC170~250V

**25,000H**


Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-S010	3W	25W	240LM	Φ45*H78	160°
G45	SY-S011	4W	30W	320LM	Φ45*H78	160°
G45	SY-S012	5W	35W	400LM	Φ45*H78	160°
G45	SY-S013	6W	40W	490LM	Φ45*H78	160°
G45	SY-S014	7W	45W	600LM	Φ45*H89	160°
G45	SY-S015	8W	50W	710LM	Φ45*H87	160°
G45	SY-S022	9W	60W	820LM	Φ45*H87	160°

# LED Classic Bulb

**3 Years Warranty**

**Plastic+Alu.**

**120lm/w**

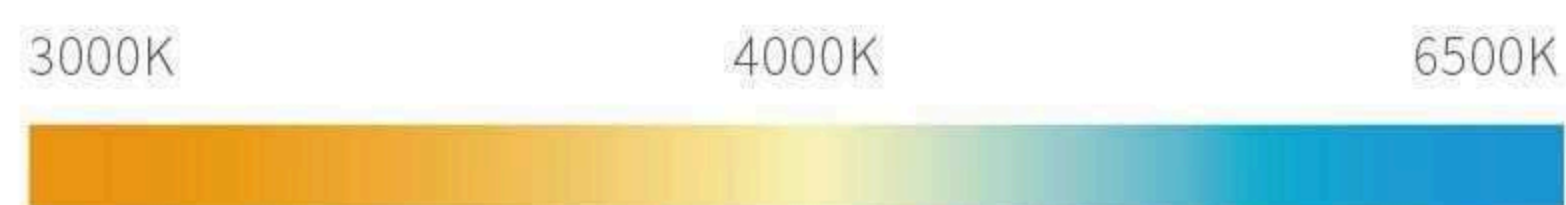

DIMMABLE

Ra > 80  
Ra > 90

80~150  
LM/W

PF>0.5  
PF>0.7  
PF>0.9

Voltage  
AC100~240V  
AC220~240V  
AC170~250V

35,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-HL01	5W	50W	600LM	Φ37*H99	160°
G45	SY-HL02	5W	50W	600LM	Φ45*H78	160°
A60	SY-HL03	5W	50W	600LM	Φ60*H108	200°
A60	SY-HL04	6.5W	55W	780LM	Φ60*H108	200°
A60	SY-HL05	9.5W	70W	1140LM	Φ60*H110	200°
A60	SY-HL06	12W	80W	1440LM	Φ60*H118	200°
A60	SY-HL07	15W	100W	1800LM	Φ60*H118	200°
A65	SY-HL08	15W	100W	1800LM	Φ65*H134	200°



# LED Classic Bulb


**5 Years Warranty**

**Plastic+Alu.**

**140lm/w**



3000K                      4000K                      6500K

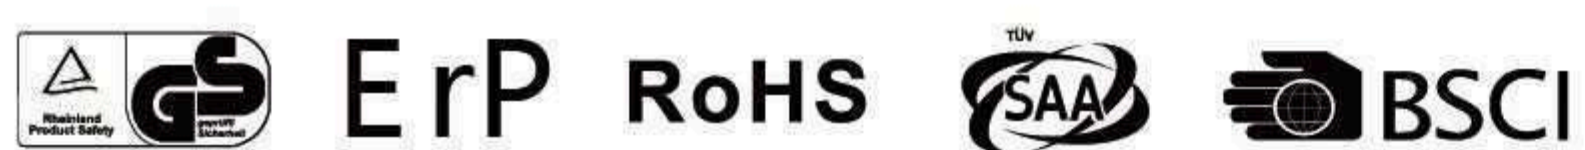



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-HL11	5W	55W	700LM	Φ37*H106	160°
G45	SY-HL12	5W	55W	700LM	Φ45*H89	160°
A60	SY-HL13	5W	55W	700LM	Φ60*H108	200°
A60	SY-HL14	6.5W	65W	910LM	Φ60*H110	200°
A60	SY-HL15	9.5W	75W	1330LM	Φ60*H118	200°
A60	SY-HL16	12W	90W	1680LM	Φ60*H118	200°
A60	SY-HL17	15W	140W	2100LM	Φ60*H118	200°
A65	SY-HL18	15W	140W	2100LM	Φ65*H134	200°

# LED Classic Bulb

**5 Years Warranty**

**Plastic+Alu.**

**160lm/w**

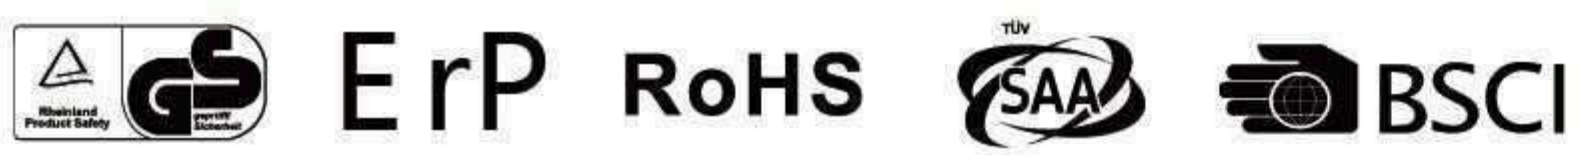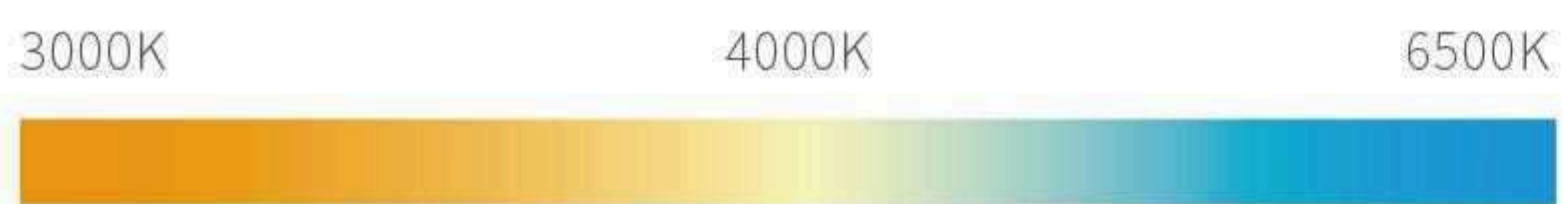

DIMMABLE

Ra > 80  
Ra > 90

80~150  
LM/W

PF>0.5  
PF>0.7  
PF>0.9


Voltage  
AC100~240V  
AC220~240V  
AC170~250V

45,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
C37	SY-HL21	5W	60W	800LM	Φ37*H106	160°
G45	SY-HL22	5W	60W	800LM	Φ45*H89	160°
A60	SY-HL23	5W	60W	800LM	Φ60*H108	200°
A60	SY-HL24	6.5W	70W	1040LM	Φ60*H110	200°
A60	SY-HL25	9.5W	90W	1520LM	Φ60*H118	200°
A60	SY-HL26	12W	110W	1920LM	Φ60*H118	200°
A60	SY-HL27	15W	180W	2400LM	Φ60*H118	200°
A65	SY-HL28	15W	180W	2400LM	Φ65*H134	200°



## Plastic+Die-casting Alu.

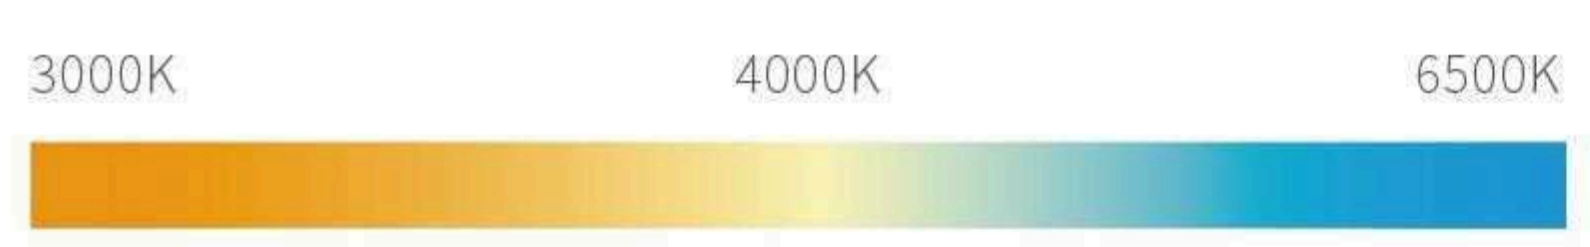


ErP RoHS SAA BSCI

DIMMABLE
Ra > 80  
Ra > 90
80~150 LM/W
PF>0.5  
PF>0.7  
PF>0.9
Voltage  
AC100~240V  
AC220~240V  
AC170~250V
25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	SY-A060	17W	125W	1900LM	Φ60*H127	200°
A70	SY-A061	20W	140W	2100LM	Φ70*H145	200°
A80	SY-A062	24W	190W	2500LM	Φ80*H161	200°


# LED Classic Bulb

## Plastic+Alu.

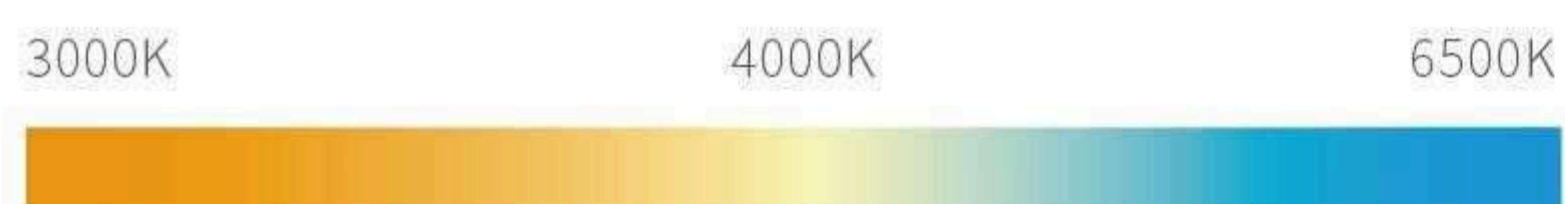

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100-240V AC220-240V AC170-250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G50	SY-G021	5W	40W	500LM	φ 50*H78	270°
G55	SY-G022	6W	50W	600LM	φ 55*H80	270°
G60	SY-G023	7W	55W	700LM	φ 60*H96	270°
G80	SY-G024	12W	70W	1200LM	φ 80*H118	270°
G95	SY-G025	15W	85W	1500LM	φ 95*H139	270°
G120	SY-G026	18W	100W	1800LM	φ 120*H160	270°
G150	SY-G027	24W	150W	2400LM	φ 150*H190	270°

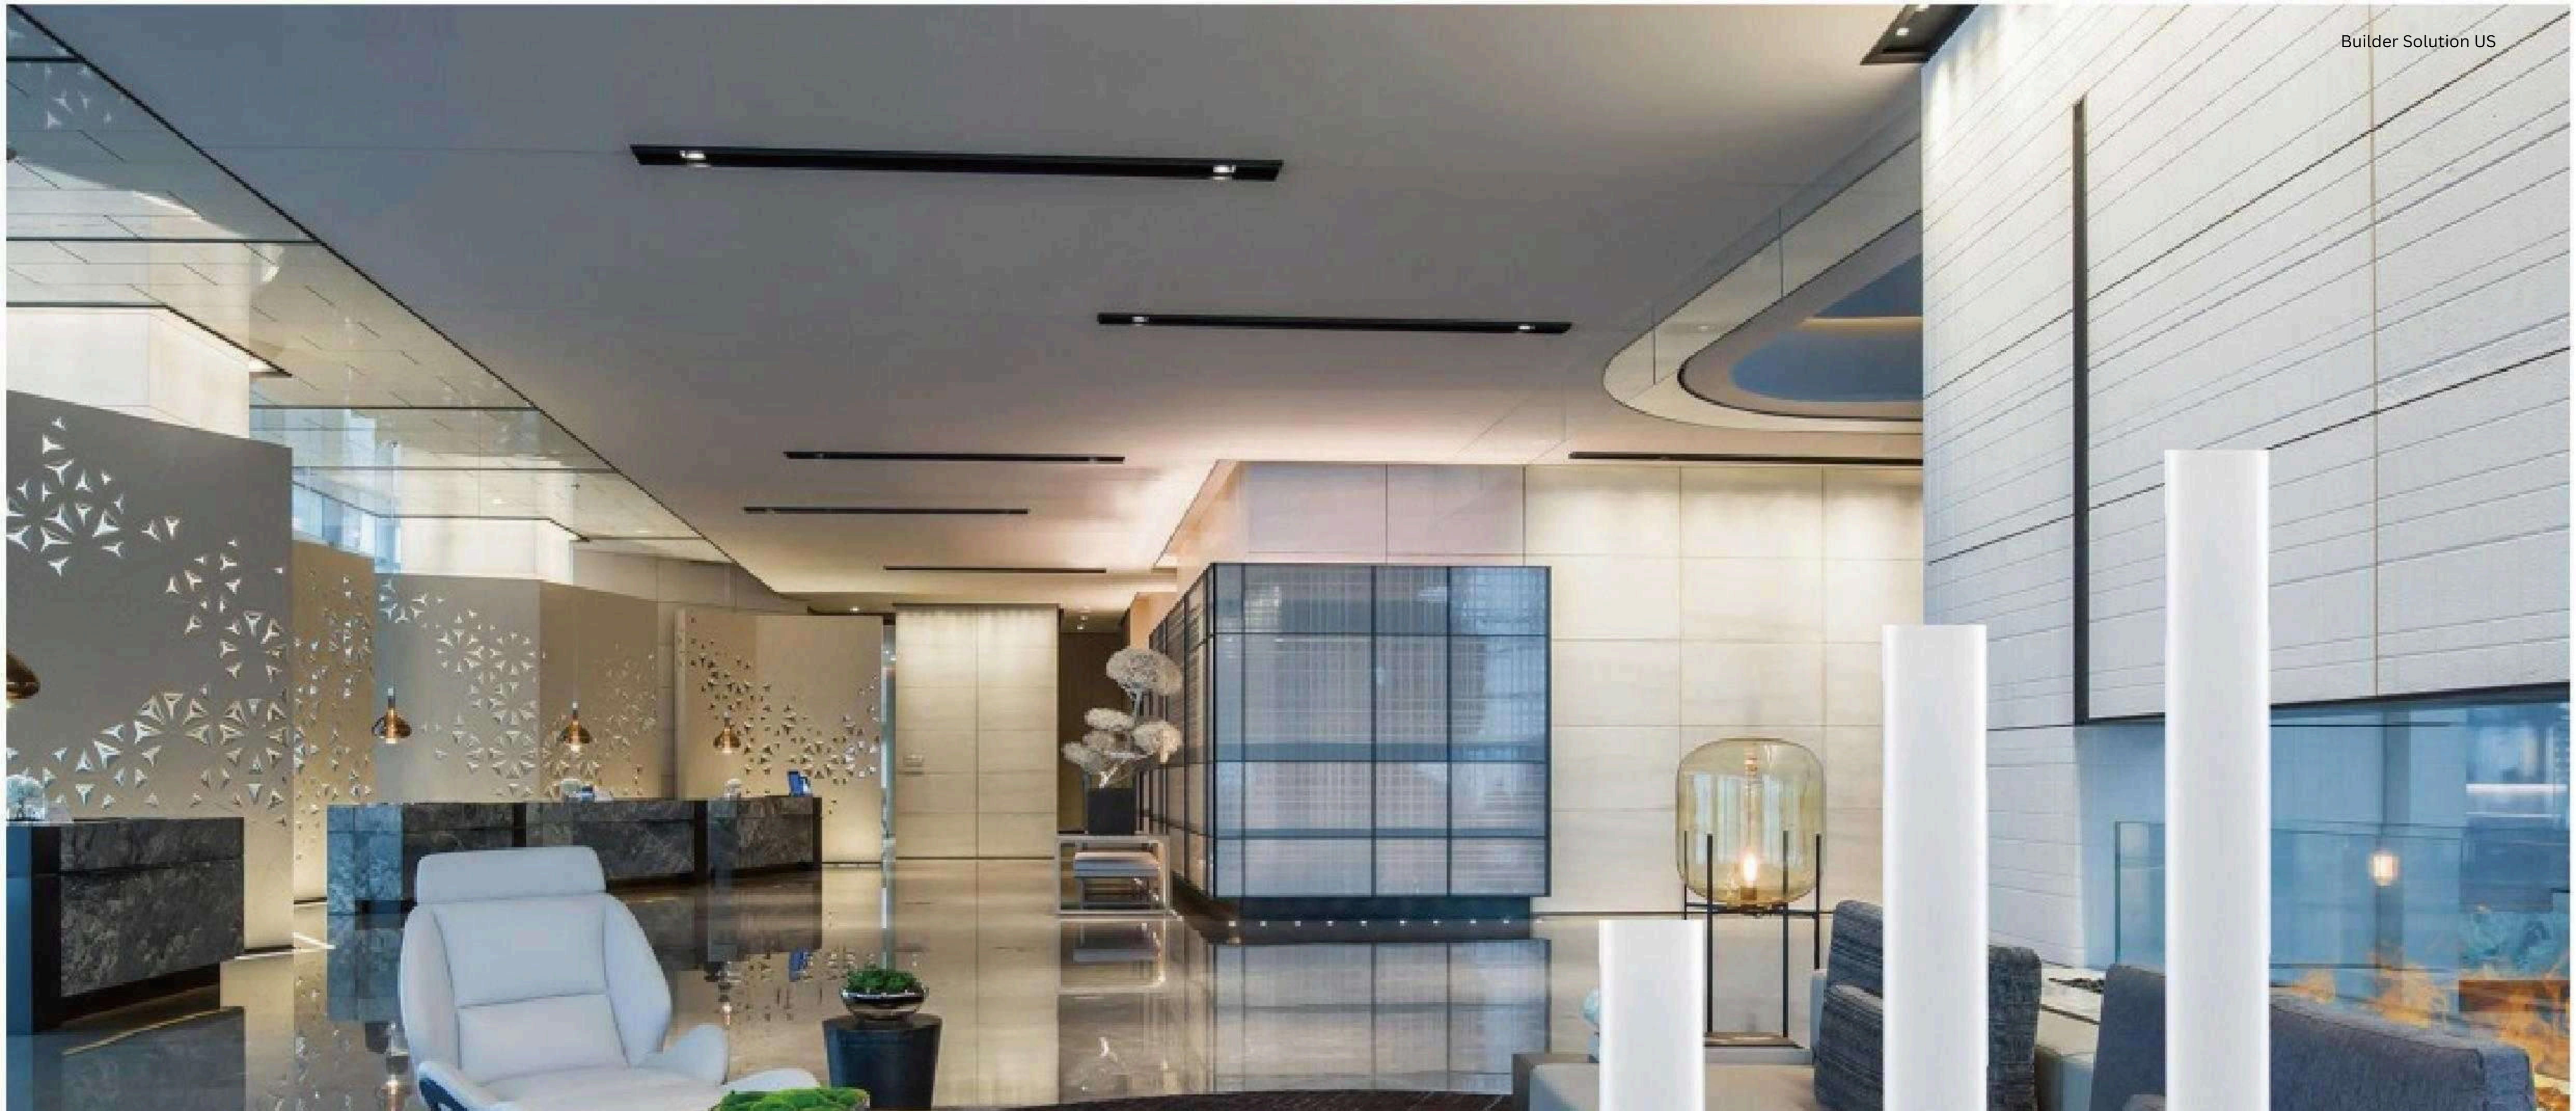

## Plastic+Alu.



SY-TG01



SY-TG02



SY-TG03





SY-TG04




SY-TG05



SY-TG06

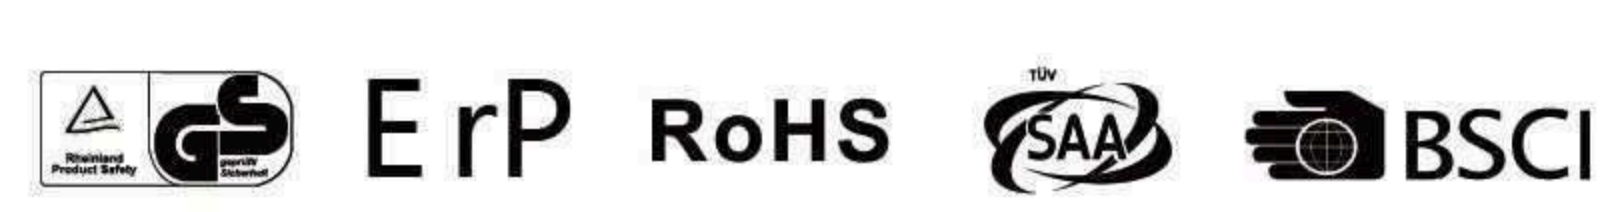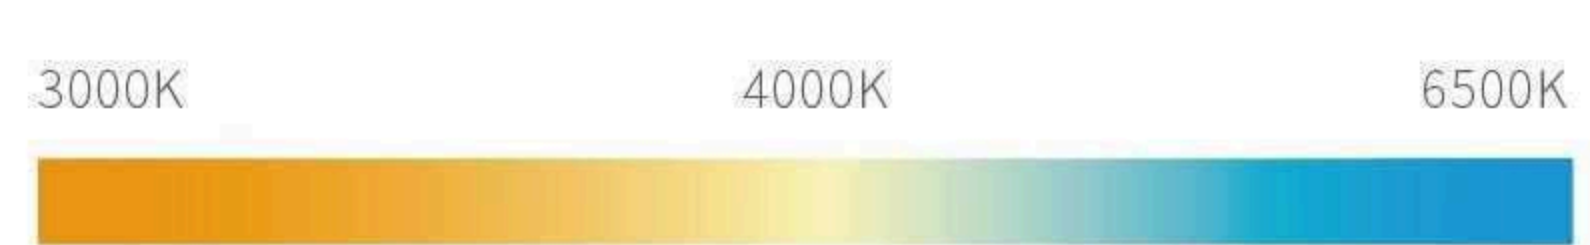


- 
- Ra > 80  
Ra > 90
- 80~150  
LM/W
- PF>0.5  
PF>0.7  
PF>0.9
- Voltage  
AC100~240V  
AC220~240V  
AC170~250V
- 25,000H

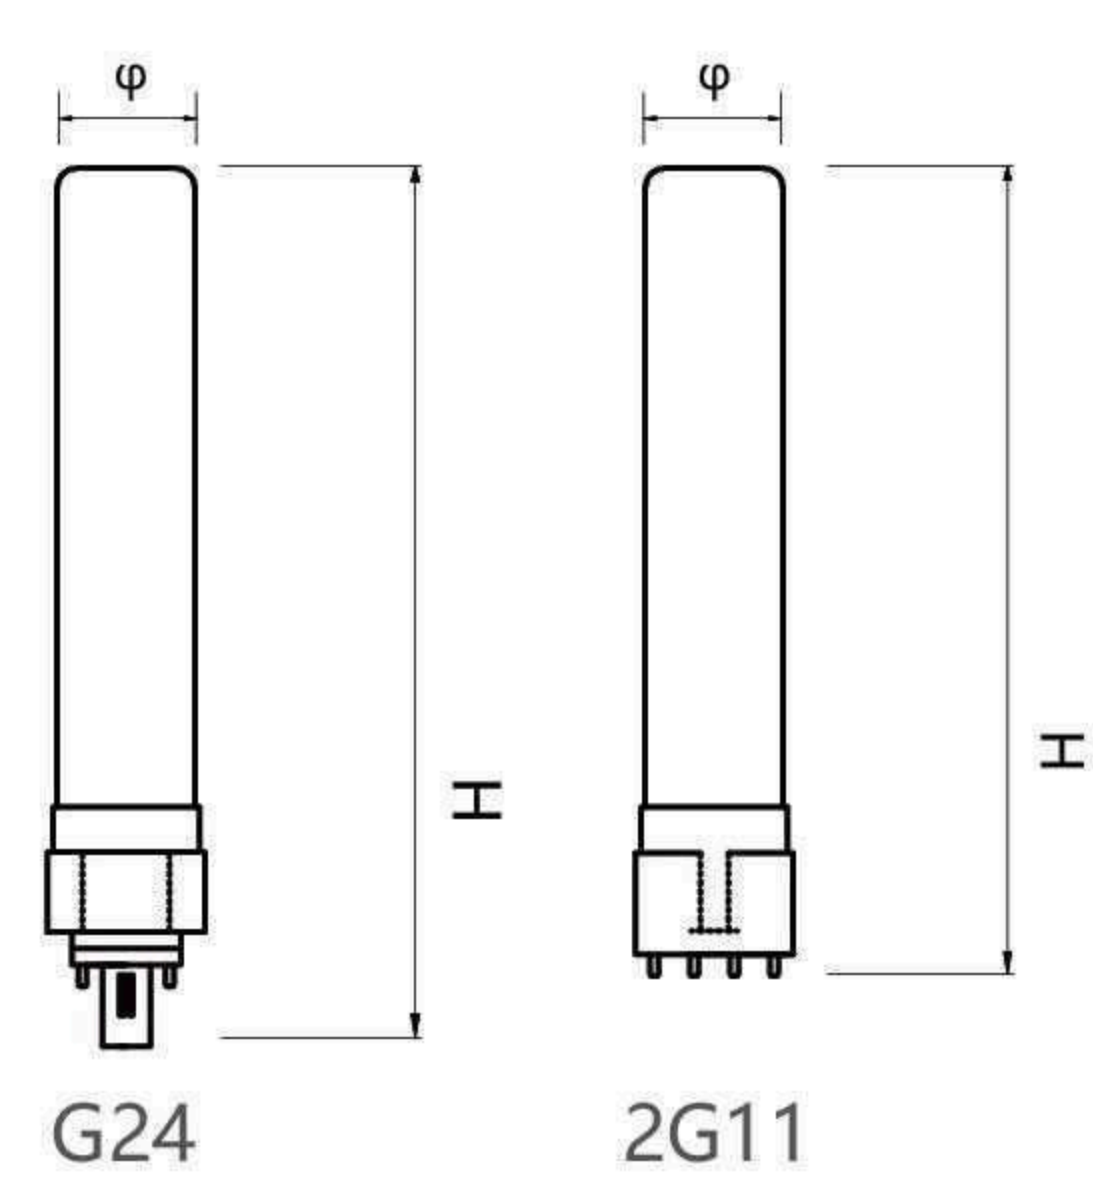

Code	Wattage	Lumen	G24 Size(mm)	Beam Angle	2G11 Size(mm)
SY-TG01	5W	400LM	L44*W34*H177	120°	L44*W24*H160
SY-TG02	8W	710LM	L44*W34*H246	120°	L44*W24*H229
SY-TG03	12W	1155LM	L44*W34*H342	120°	L44*W24*H325
SY-TG04	15W	1490LM	L44*W34*H427	120°	L44*W24*H410
SY-TG05	20W	2050LM	L44*W34*H547	120°	L44*W24*H530
SY-TG06	24W	2490LM	L44*W34*H618	120°	L44*W24*H600

# LED Classic light

## Plastic+Alu.

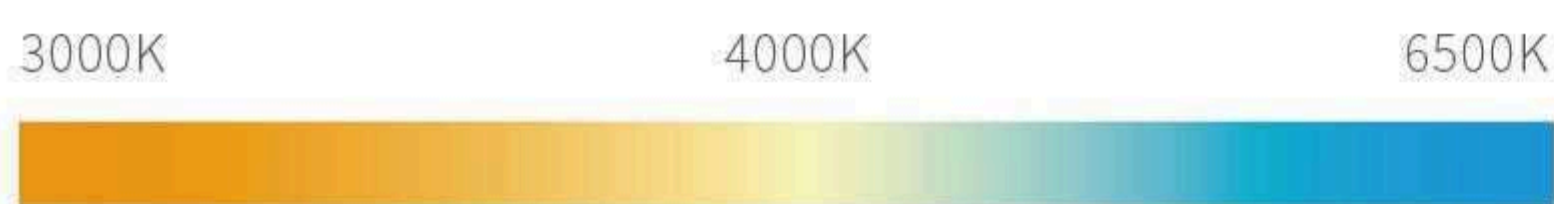


### Product Features

- High efficiency and long lifetime
- Eco-friendly, no mercury, noradiation
- Not for emergency or exit lights

Model	Code	Wattage	Base	Lumen	Size(mm)	Beam Angle
T30	SY-ST01	6W	E27	490LM	Φ 30*H100	160°
T30	SY-ST02	4W	E27	320LM	Φ 30*H143	160°
T30	SY-ST03	4W	E27	320LM	Φ 30*H143	160°
T36	SY-ST04	6W	E14	490LM	Φ 36*H106	160°
T36	SY-ST05	8W	E27	710LM	Φ 36*H122	160°
T36	SY-ST06	8W	G24	710LM	Φ 36*H120	160°
T42	SY-ST07	9W	E14	820LM	Φ 42*H110	160°
T42	SY-ST08	9W	E27	820LM	Φ 42*H110	160°
T45	SY-ST09	12W	E27	1155LM	Φ 45*H138	160°
T45	SY-ST10	12W	G24	1155LM	Φ 45*H137	160°
T50	SY-ST11	15W	E27	1490LM	Φ 50*H146	160°

# LED Classic Bulb

## Die-casting Alu.+PC

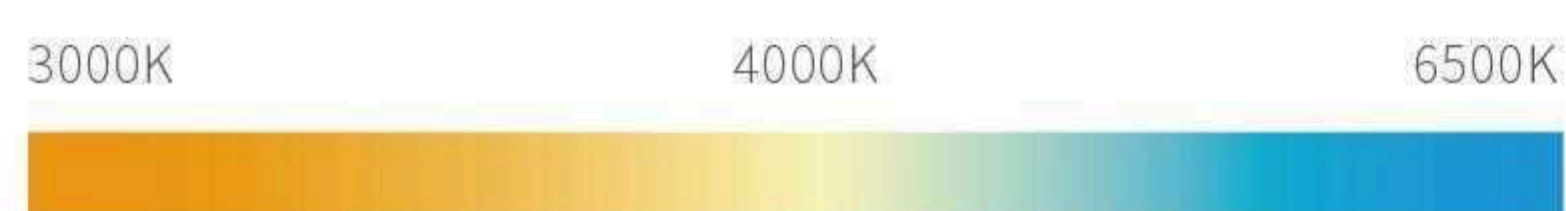

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
T80	SY-HP21	20W	140W	2050LM	Φ80*H150	270°
T100	SY-HP22	30W	160W	3150LM	Φ100*H185	270°
T120	SY-HP23	40W	220W	4250LM	Φ120*H210	270°
T120	SY-HP24	50W	280W	5350LM	Φ120*H230	270°
T140	SY-HP25	60W	350W	6450LM	Φ140*H230	270°
T140	SY-HP26	70W	450W	7550LM	Φ140*H242	270°
T150	SY-HP27	75W	500W	8100LM	Φ150*H260	270°
T160	SY-HP28	100W	650W	10800LM	Φ160*H288	270°

# LED Classic Bulb

## Plastic+Alu.



3000K                      4000K                      6500K



ErP RoHS SAA BSCI


DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~260V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

### Product Features


- High efficiency and long lifetime
- Eco-friendly, no mercury, no radiation
- Not for emergency or exit lights

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
T110	SY-HP35	50W	280W	5350LM	Φ110*H212	270°
T130	SY-HP36	80W	550W	8600LM	Φ130*H252	270°
T150	SY-HP37	100W	650W	10800LM	Φ150*H282	270°
T170	SY-HP38	150W	950W	16300LM	Φ170*H315	270°



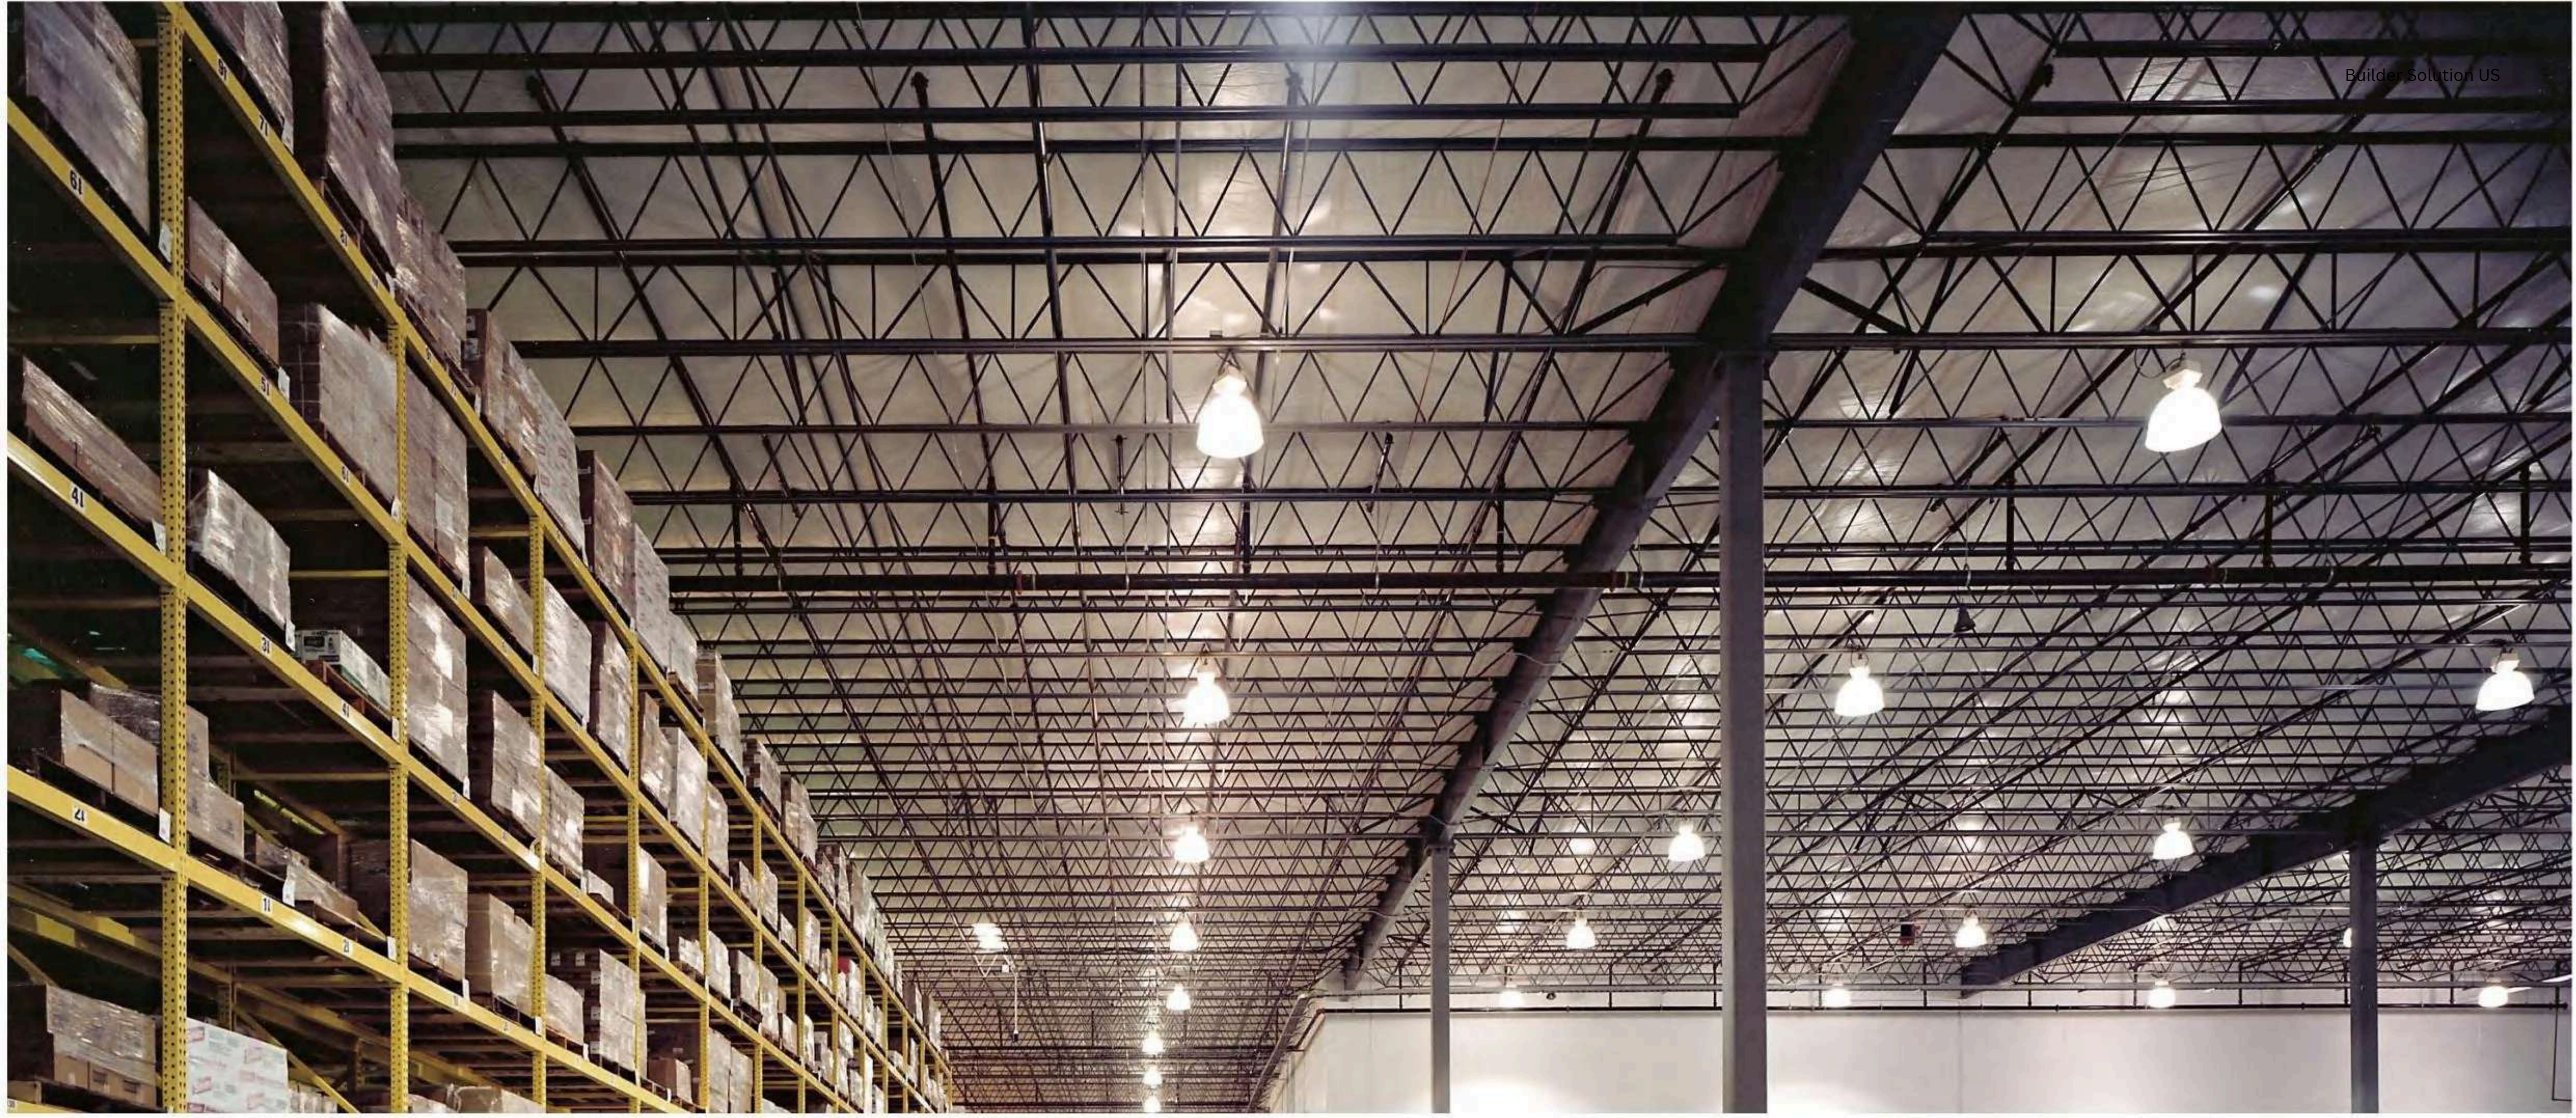

## Plastic+Alu.

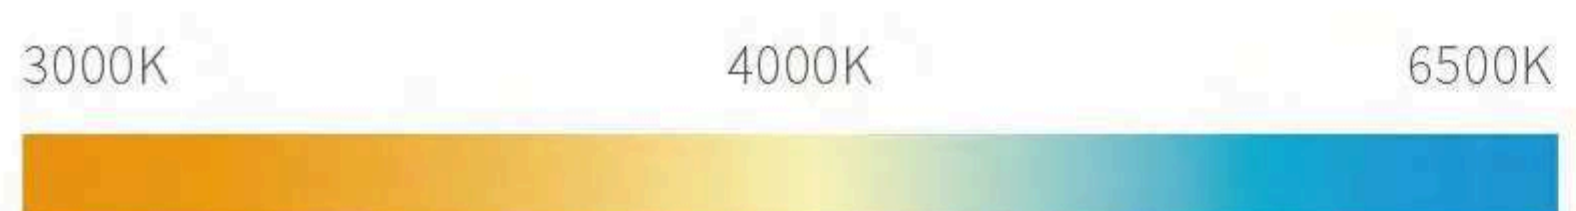

ErP RoHS SAA BSCI


DIMMABLE  
 Ra > 80  
 Ra > 90  
 80~150 LM/W  
 PF>0.5  
 PF>0.7  
 PF>0.9  
 Voltage  
 AC100~240V  
 AC220~240V  
 AC170~250V  
 25,000H



Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
T50	SY-HP09	6W	50W	540LM	Φ50*H98	270°
T60	SY-HP10	12W	65W	1155LM	Φ60*H118	270°
T70	SY-HP11	15W	85W	1490LM	Φ70*H129	270°
T80	SY-HP12	20W	140W	2050LM	Φ80*H148	270°
T100	SY-HP13	30W	160W	3150LM	Φ100*H177	270°
T120	SY-HP14	40W	220W	4250LM	Φ120*H206	270°
T140	SY-HP15	50W	280W	5350LM	Φ140*H236	270°
T160	SY-HP16	60W	350W	6450LM	Φ160*H265	270°
T160L	SY-HP17	70W	450W	7550LM	Φ160*H276	270°



## Plastic+Alu.

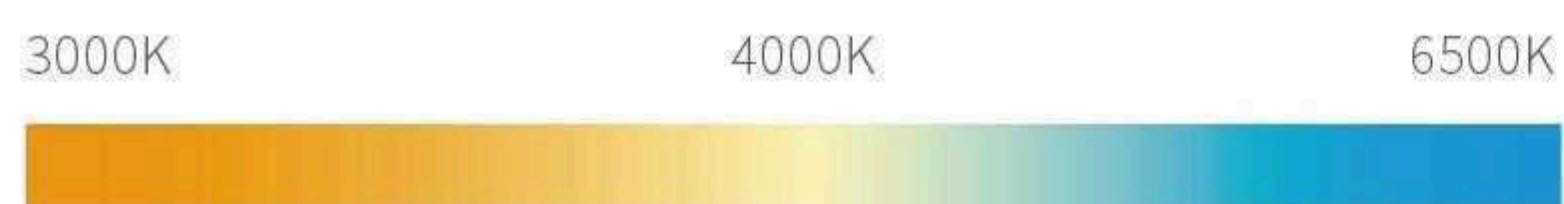


ErP RoHS SAA BSCI

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	Lumen	Size(mm)	Beam Angle
E65	SY-BM11	18W	1800LM	Φ 65*153	160 °
E90	SY-BM12	30W	3000LM	Φ 90*205	160 °
E105	SY-BM13	40W	4000LM	Φ 105*236	160 °
E120	SY-BM14	50W	5000LM	Φ 120*280	160 °



## Plastic+Alu.

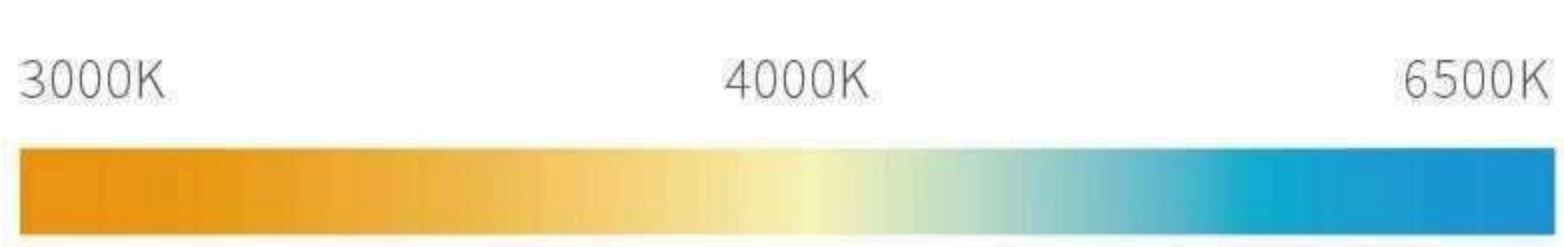

ErP RoHS SAA BSCI

DIMMABLE  
 Ra > 80  
 Ra > 90  
 80~150 LM/W  
 PF>0.5  
 PF>0.7  
 PF>0.9  
 Voltage  
 AC100~240V  
 AC220~240V  
 AC170~260V  
 25,000H

### Product Features

- High efficiency and long lifetime
- Eco-friendly, no mercury, no radiation
- Not for emergency or exit lights

Model	Code	Wattage	Lumen	Size(mm)	Beam Angle
Corn87	SY-BM01	36W	3600LM	Φ 87*235	360 °
Corn94	SY-BM02	54W	5400LM	Φ 94*280	360 °
Corn121	SY-BM03	70W	7000LM	Φ 121*306	360 °

**2024**


# **LED Decorative Bulb**

---

Environmental protection, energy saving.

# LED Decorative Bulb

## Glass

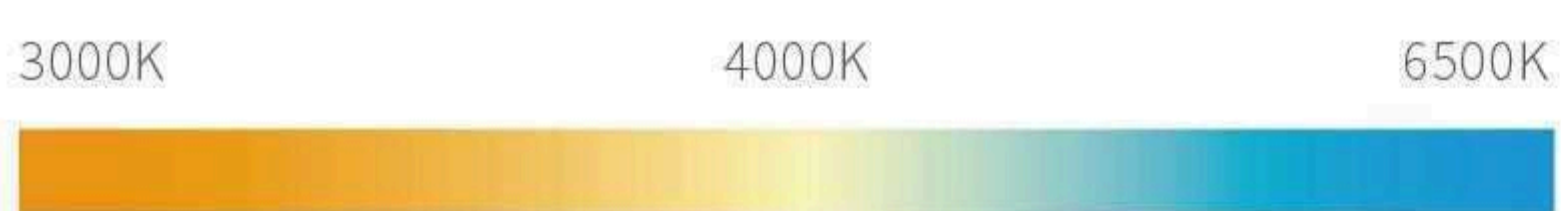


ErP RoHS SAA BSCI

DIMMABLE  
 Ra > 80  
 Ra > 90  
 80~150 LM/W  
 PF>0.5  
 PF>0.7  
 PF>0.9  
 Voltage  
 AC100~240V  
 AC220~240V  
 AC170~250V  
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-F11	2W	21W	200LM	Φ45*75	360°
G45	SY-F12	4W	40W	400LM	Φ45*75	360°
C35/C35L	SY-F13	2W	21W	200LM	Φ35*97/115	360°
C35/C35L	SY-F14	4W	40W	400LM	Φ35*97/115	360°
A60	SY-F15	6W	60W	600LM	Φ60*108	360°
A60	SY-F16	8W	80W	800LM	Φ60*108	360°
ST64	SY-F17	8W	80W	800LM	Φ64*142	360°
G80	SY-F18	10W	100W	1000LM	Φ80*120	360°
G95	SY-F19	10W	100W	1000LM	Φ95*135	360°
G125	SY-F20	10W	100W	1000LM	Φ125*175	360°

# LED Decorative Bulb

## Glass

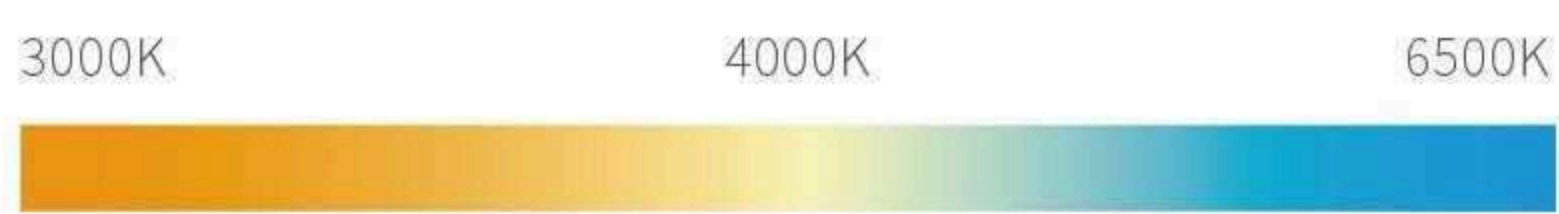

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-FG11	2W	21W	200LM	Φ45*75	360°
G45	SY-FG12	4W	40W	400LM	Φ45*75	360°
C35/C35L	SY-FG13	2W	21W	200LM	Φ35*97/115	360°
C35/C35L	SY-FG14	4W	40W	400LM	Φ35*97/115	360°
A60	SY-FG15	6W	60W	600LM	Φ60*108	360°
A60	SY-FG16	8W	80W	800LM	Φ60*108	360°
ST64	SY-FG17	8W	80W	800LM	Φ64*142	360°
G80	SY-FG18	10W	100W	1000LM	Φ80*120	360°
G95	SY-FG19	10W	100W	1000LM	Φ95*135	360°
G125	SY-FG20	10W	100W	1000LM	Φ125*175	360°



## Glass



3000K                      4000K                      6500K




 DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage: AC100-240V AC220-240V AC170-250V	 25,000H
---	--------------------	----------------	----------------------------	--	--

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
G45	SY-B011	2W	21W	200LM	Φ 45*75	360°
G45	SY-B012	4W	40W	400LM	Φ 45*75	360°
C35/C35L	SY-B013	2W	21W	200LM	Φ 35*97/115	360°
C35/C35L	SY-B014	4W	40W	400LM	Φ 35*97/115	360°
A60	SY-B015	6W	60W	600LM	Φ 60*108	360°
A60	SY-B016	8W	80W	800LM	Φ 60*108	360°



## Glass

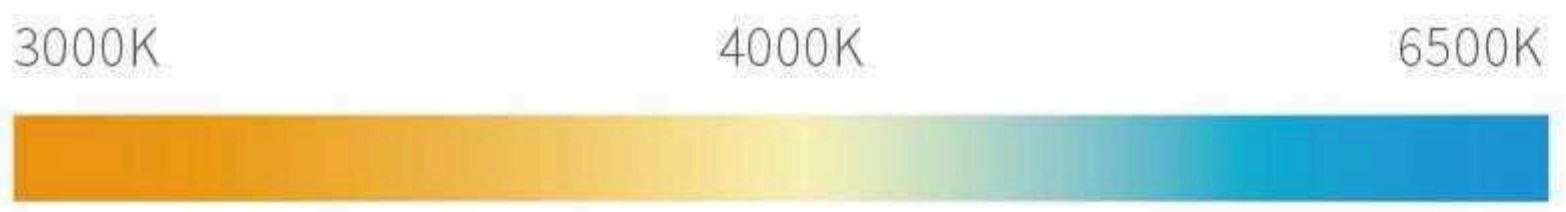

ErP RoHS SAA BSCI

DIMMABLE
Ra > 80  
Ra > 90
80~150 LM/W
PF>0.5  
PF>0.7  
PF>0.9
Voltage  
AC100~240V  
AC220~240V  
AC170~260V
25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	SYF-A60	4W	40W	320LM	Φ 60*108	360 °
ST64	SYS-ST64	4W	40W	320LM	Φ 64*142	360 °
G95	SYS-G95	4W	40W	320LM	Φ 95*135	360 °



# LED Colorful Bulb




A60



G45

## Plastic+Alu.

3000K                      4000K                      6500K

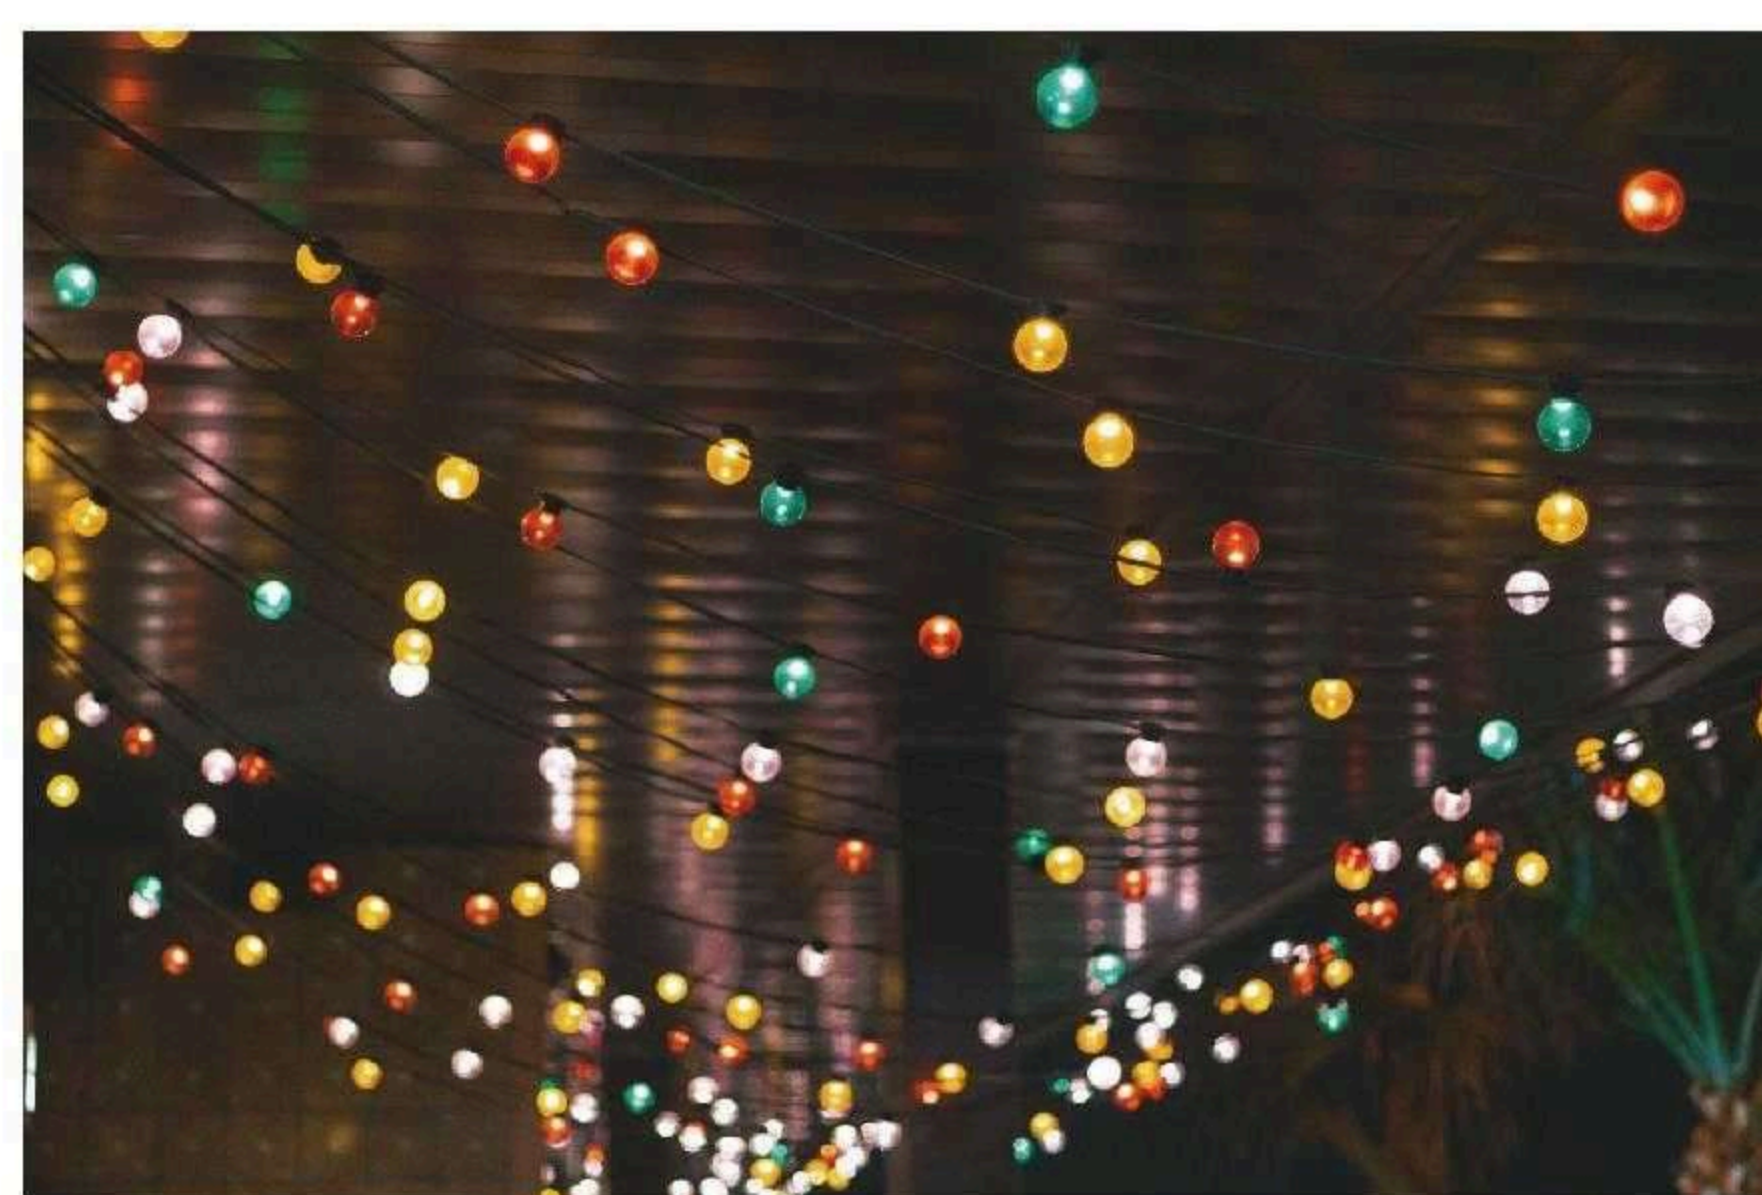

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
A60	A60-B22-1W	1W	10W	55LM	Φ60*103	360°
G45	G45-E27-1W	1W	10W	55LM	Φ45*69	360°


# LED Ceiling Bulb



## Plastic

### Product Features

- High efficiency and long lifetime
- Eco-friendly, no mercury, noradiation
- Not for emergency or exit lights

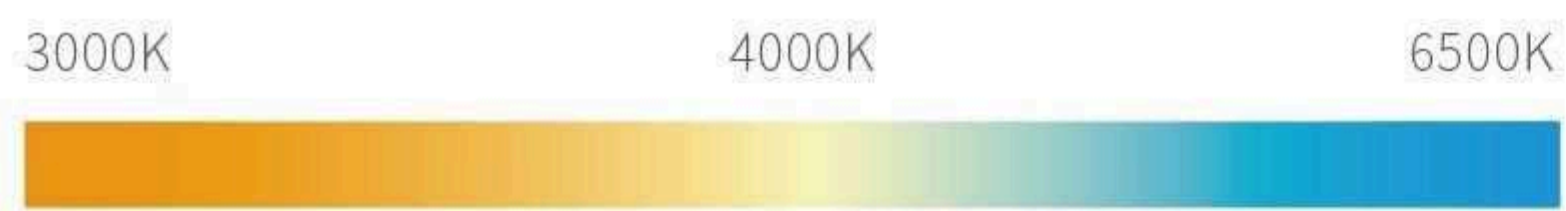

DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
R150	SYUFO-01	18W	100W	1820LM	Φ 150*96	120°
R220	SYUFO-02	24W	135W	2490LM	Φ 220*121	120°
R260	SYUFO-03	36W	240W	3650LM	Φ 260*123	120°

2024

# LED Spotlight

Environmental protection, energy saving.

# LED Spotlight



R39



R50



R63



R80

## Plastic+Alu.

### Application

- Decorative--Living room, Kitchen, Bedroom, etc.
- Operating temperature:-20°C~40°C
- Not for emergency or exit lights



3000K                      4000K                      6500K



DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
R39	SY-R011	3W	25W	240LM	Φ 39*68	120°
R50	SY-R012	5W	35W	400LM	Φ 50*85	120°
R63	SY-R013	8W	50W	640LM	Φ 63*101	120°
R80	SY-R014	9W	55W	720LM	Φ 80*112	120°

# LED Spotlight

**Plastic+Alu.**

3000K      4000K      6500K

ErP RoHS SAA BSCI

DIMMABLE   Ra > 80 / Ra > 90   80~150 LM/W   PF>0.5 / PF>0.7 / PF>0.9   Voltage AC100~240V / AC220~240V / AC170~250V   25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P021	8W	60W	720LM	Φ 63*H82	12°/24°/38°
PAR30	SY-P022	12W	80W	1080LM	Φ 95*H95	12°/24°/38°
PAR38	SY-P023	16W	110W	1440LM	Φ 120*H128	12°/24°/38°

**Plastic+Alu.**

3000K      4000K      6500K

ErP RoHS SAA BSCI

DIMMABLE   Ra > 80 / Ra > 90   80~150 LM/W   PF>0.5 / PF>0.7 / PF>0.9   Voltage AC100~240V / AC220~240V / AC170~250V   25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P021	8W	60W	720LM	Φ 63*H82	12°/24°/38°
PAR30	SY-P022	12W	80W	1080LM	Φ 95*H95	12°/24°/38°
PAR38	SY-P023	16W	110W	1440LM	Φ 120*H128	12°/24°/38°

# LED Spotlight

## Plastic+Alu.

3000K 4000K 6500K

ErP RoHS SAA BSCI

DIMMABLE Ra > 80 Ra > 90 80~150 LM/W PF>0.5 PF>0.7 PF>0.9 Voltage AC100~240V AC220~240V AC170~250V 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P041	8W	60W	720LM	Φ 63*H82	110°
PAR30	SY-P042	12W	80W	1080LM	Φ 95*H95	110°
PAR38	SY-P043	16W	110W	1440LM	Φ 120*H128	110°

## Plastic+Alu.

3000K 4000K 6500K

ErP RoHS SAA BSCI

DIMMABLE Ra > 80 Ra > 90 80~150 LM/W PF>0.5 PF>0.7 PF>0.9 Voltage AC100~240V AC220~240V AC170~250V 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
BR20	SY-BR11	8W	60W	720LM	Φ 63*H98	120°
BR30	SY-BR12	12W	80W	1080LM	Φ 95*H131	120°
BR38	SY-BR13	16W	110W	1440LM	Φ 120*H152	120°

# LED Spotlight

## Plastic+Alu.



3000K      4000K      6500K



ErP RoHS SAA BSCI

DIMMABLE    Ra > 80  
Ra > 90    80~150 LM/W    PF>0.5  
PF>0.7  
PF>0.9    Voltage AC100~240V  
AC220~240V  
AC170~250V    25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P021	8W	60W	720LM	Φ 63*H82	12°/24°/38°
PAR30	SY-P022	12W	80W	1080LM	Φ 95*H95	12°/24°/38°
PAR38	SY-P023	16W	110W	1440LM	Φ 120*H128	12°/24°/38°

## Plastic+Alu.



3000K      4000K      6500K




ErP RoHS SAA BSCI

DIMMABLE    Ra > 80  
Ra > 90    80~150 LM/W    PF>0.5  
PF>0.7  
PF>0.9    Voltage AC100~240V  
AC220~240V  
AC170~250V    25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
PAR20	SY-P011	8W	60W	720LM	Φ 63*H82	38°
PAR30	SY-P012	12W	80W	1080LM	Φ 95*H95	38°
PAR38	SY-P013	16W	110W	1440LM	Φ 120*H128	38°



**Ceramic with lens**  
**Plastic with lens**

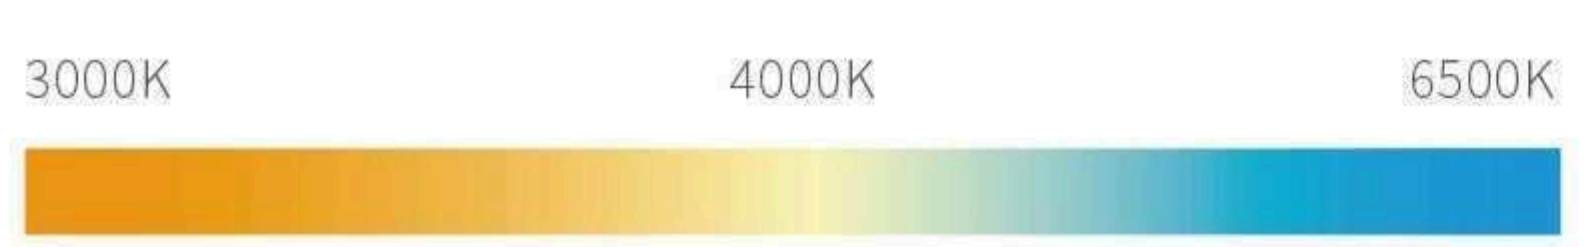

ErP RoHS SAA BSCI

- DIMMABLE
- Ra > 80  
Ra > 90
- 80~150 LM/W
- PF>0.5  
PF>0.7  
PF>0.9
- Voltage  
AC100~240V  
AC220~240V  
AC170~250V
- 25,000H




COB

Model	Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
GU10	SY-GS01	6W	58W	480LM	COB	φ 50*H56	12/24°
GU10	SY-GS02	7W	65W	700LM	COB	φ 50*H56	12/24°
GU10	SY-GS03	8W	70W	800LM	COB	φ 50*H56	12/24°




# LED Spotlight

## Alu.+PC cover

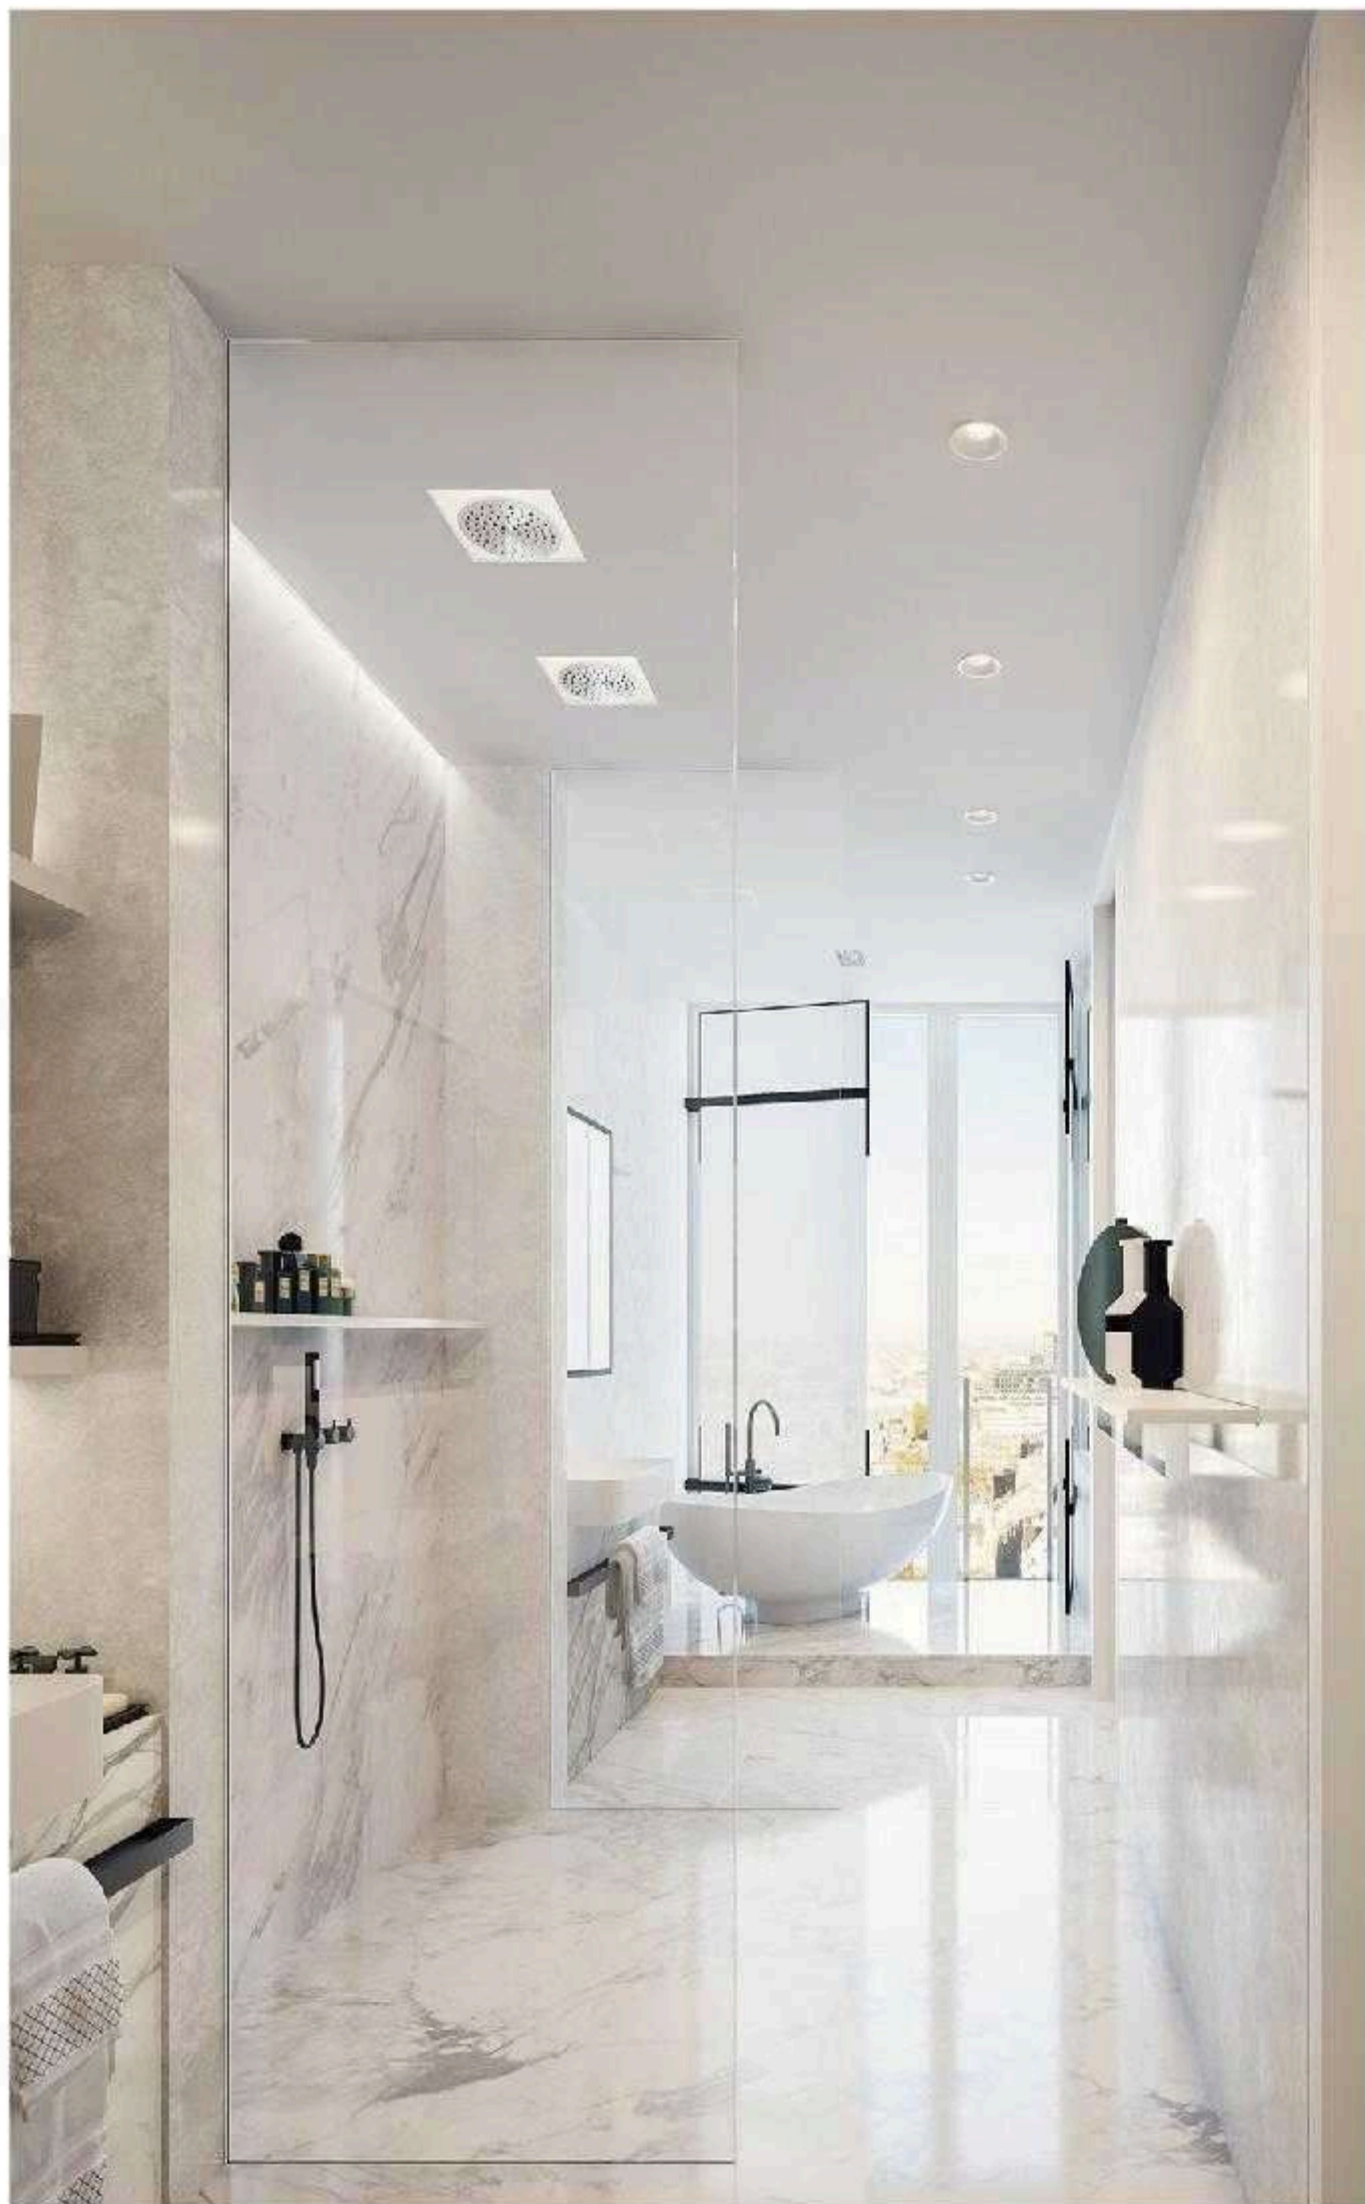


3000K                      4000K                      6500K

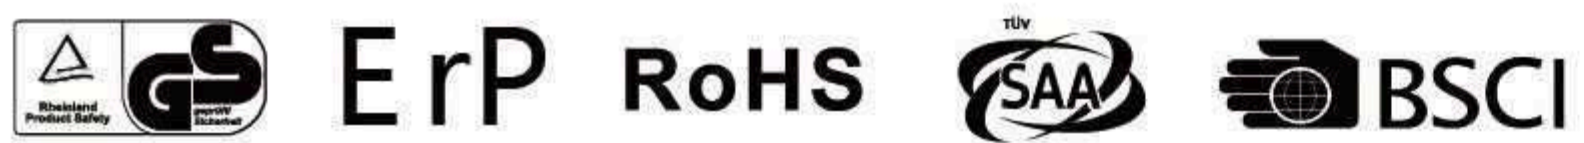

Model	Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
GU10	SY-YT01	5W	40W	450LM	SMD	Φ 50*H56	120°
GU10	SY-YT02	6W	45W	540LM	SMD	Φ 50*H56	120°
GU10	SY-YT03	7W	55W	630LM	SMD	Φ 50*H56	120°
GU10	SY-YT04	5W	40W	450LM	SMD	Φ 50*H56	24°/38°/ 60°
GU10	SY-YT05	6W	45W	540LM	SMD	Φ 50*H56	24°/38°/ 60°
GU10	SY-YT06	7W	55W	630LM	SMD	Φ 50*H56	24°/38 / 60
MR16	SY-YT07	5W	40W	450LM	SMD	Φ 50*H50	120°
MR16	SY-YT08	6W	45W	540LM	SMD	Φ 50*H50	120°
MR16	SY-YT09	7W	55W	630LM	SMD	Φ 50*H50	120°
MR16	SY-YT10	5W	40W	450LM	SMD	Φ 50*H50	24°/38°/ 60°
MR16	SY-YT11	6W	45W	540LM	SMD	Φ 50*H50	24°/38°/ 60°
MR16	SY-YT12	7W	55W	630LM	SMD	Φ 50*H50	24°/38°/60°


# LED Spotlight

**Die-casting Alu./  
Plastic+Alu.**

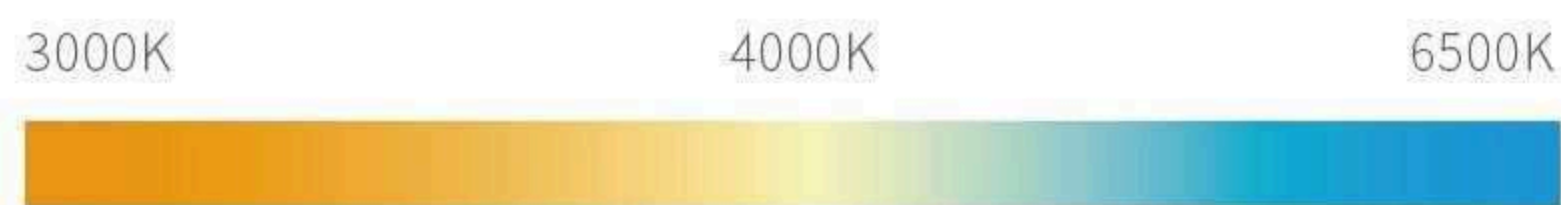


DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~250V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
SY-FL01	5W	37W	400LM	SMD	Φ 50*H56	120°
SY-FL02	6W	43W	480LM	SMD	Φ 50*H56	120°
SY-FL03	7W	50W	560LM	SMD	Φ 50*H56	120°
SY-FL04	8W	55W	640LM	SMD	Φ 50*H56	120°
SY-FL05	5W	40W	450LM	COB	Φ 50*H56	38°/60°/120°
SY-FL06	6W	47W	540LM	COB	Φ 50*H56	38°/60°/120°
SY-FL07	7W	53W	630LM	COB	Φ 50*H56	38°/60°/120°
SY-FL08	8W	60W	720LM	COB	Φ 50*H56	38°/60°/120°
SY-GS01	5W	37W	400LM	SMD	Φ 50*H56	120°
SY-GS02	6W	43W	480LM	SMD	Φ 50*H56	120°
SY-GS03	7W	50W	560LM	SMD	Φ 50*H56	120°

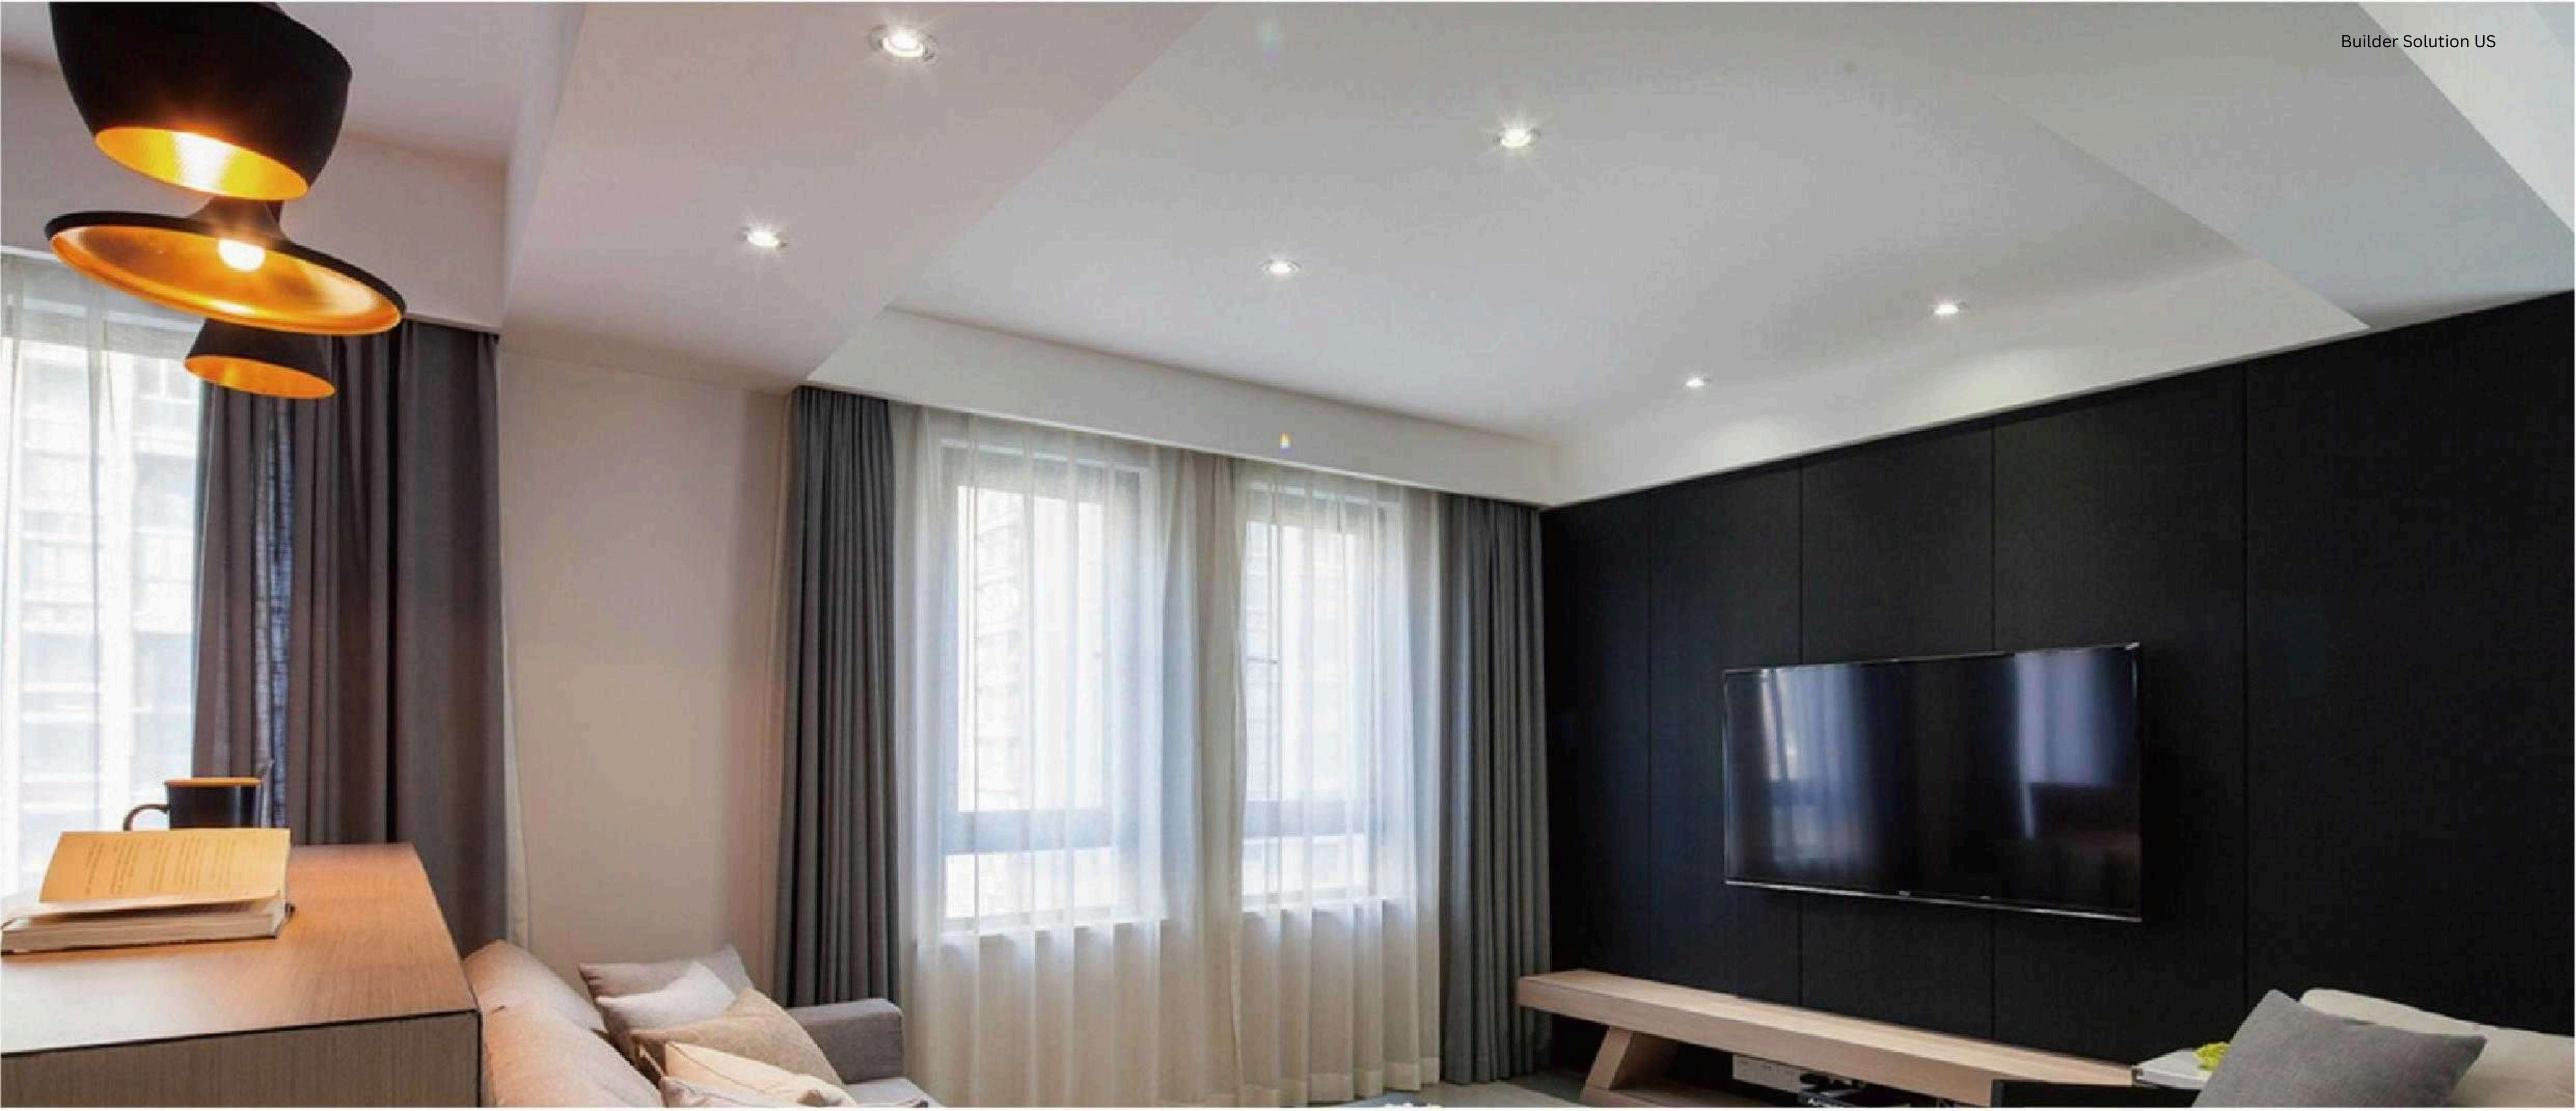

## Die-casting Alu.

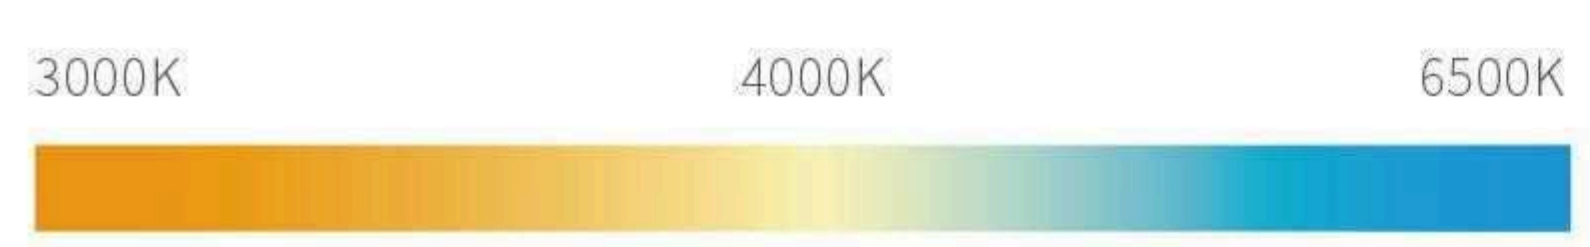


ErP RoHS SAA BSCI

DIMMABLE
Ra > 80  
Ra > 90
80~150 LM/W
PF>0.5  
PF>0.7  
PF>0.9
Voltage  
AC100-240V  
AC220-240V  
AC170-250V
25,000H

Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
SY-FH01	7W	53W	630LM	COB	GU10	φ 50*H57	38°/60°
SY-FH02	7W	53W	630LM	COB	MR16	φ 50*H50	38°/60°
SY-FH03	7W	53W	630LM	COB	GU10	φ 50*H57	38°/60°
SY-FH04	7W	53W	630LM	COB	MR16	φ 50*H50	38°/60°



## Glass

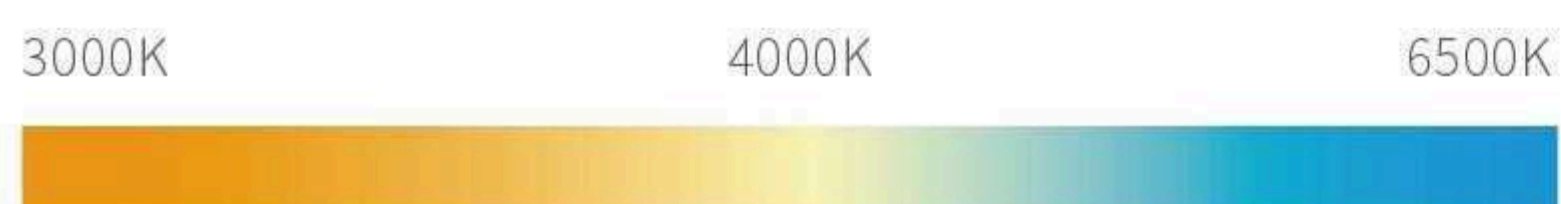

ErP RoHS SAA BSCI


DIMMABLE
Ra > 80  
Ra > 90
80~150 LM/W
PF>0.5  
PF>0.7  
PF>0.9
Voltage  
AC100~240V  
AC220~240V  
AC170~250V
25,000H



Code	Wattage	EQ-Watts	Lumen	LED	Size(mm)	Beam Angle
SY-BL01	3W	25W	240LM	COB	φ 50*H57	38°/60°/120°
SY-BL02	4W	30W	320LM	SMD	φ 50*H57	120°
SY-BL03	5W	37W	400LM	SMD	φ 50*H57	120°

# LED Spotlight


## Glass/Plastic

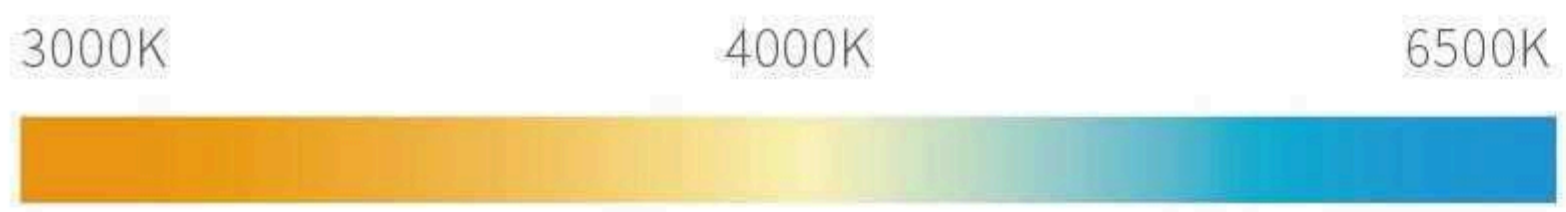

ErP RoHS SAA BSCI

DIMMABLE
Ra > 80  
Ra > 90
80~150 LM/W
PF>0.5  
PF>0.7  
PF>0.9
Voltage  
AC100~240V  
AC220~240V  
AC170~250V
25,000H

Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
SY-MN011	2W	15W	160Lm	SMD	MR11	φ 35*H35	38°
SY-MN012	2W	15W	160Lm	SMD	GU10	φ 35*H50	38°
SY-MN013	2W	15W	160Lm	SMD	MR11	φ 35*H35	38°
SY-MN014	2W	15W	160Lm	SMD	GU10	φ 35*H50	38°

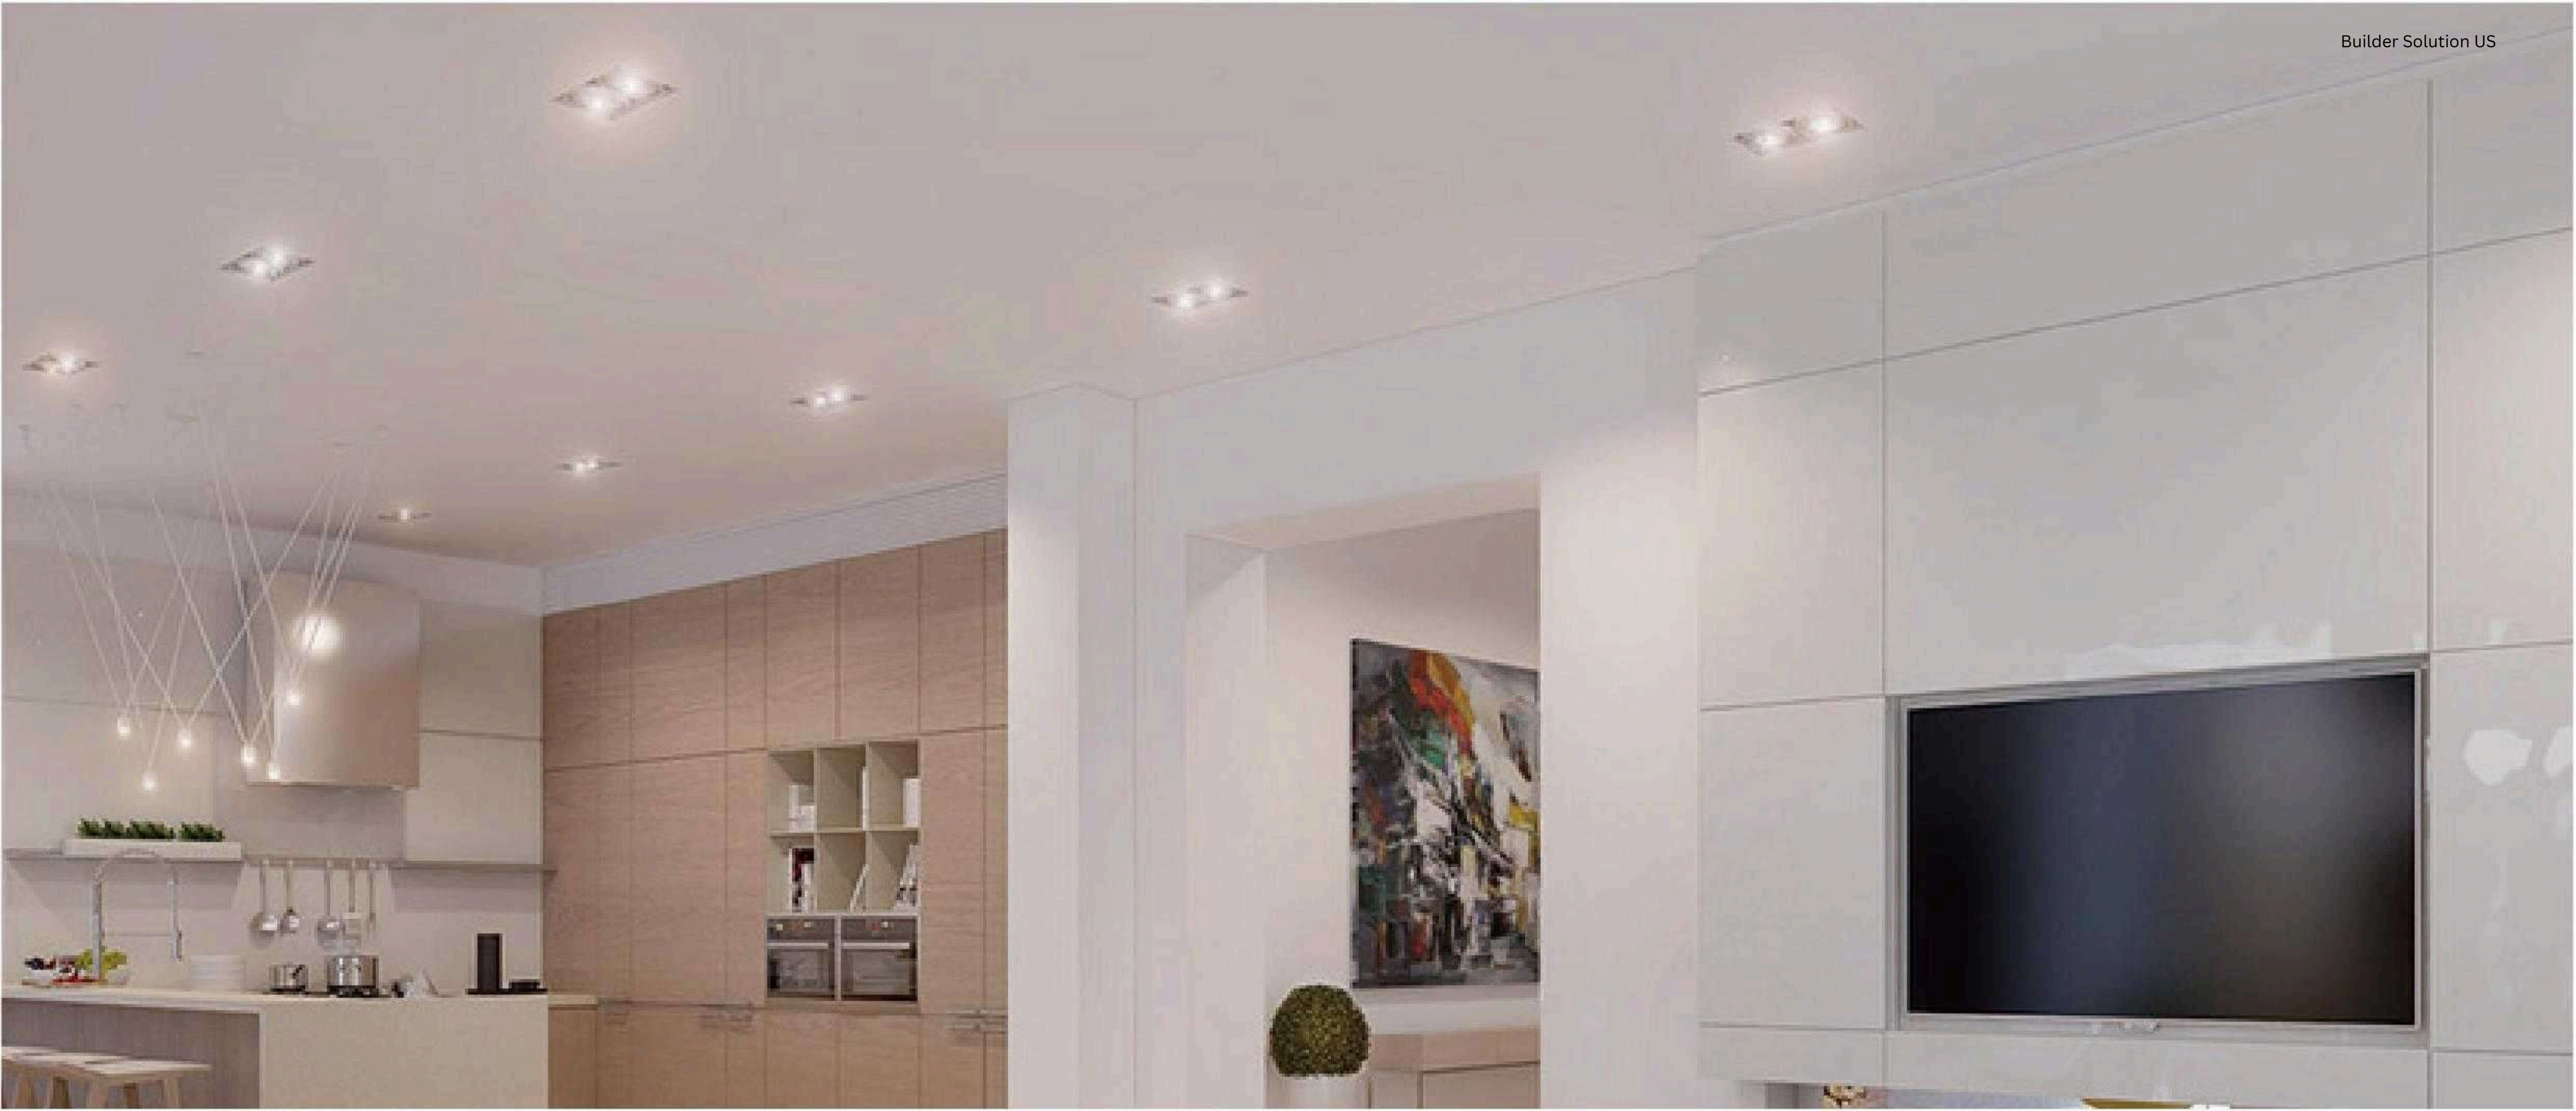

**Plastic+Alu./  
Die-casting Alu.**



3000K                      4000K                      6500K




DIMMABLE	Ra > 80 Ra > 90	80~150 LM/W	PF>0.5 PF>0.7 PF>0.9	Voltage AC100~240V AC220~240V AC170~260V	25,000H
----------	--------------------	----------------	----------------------------	---	---------

Model	Code	Wattage	EQ-Watts	Lumen(Φuse)	LED	Base	Size(mm)	Beam Angle
AR111	SY-AR030	8W	48W	850LM	COB	GU10	Φ 111*H65	12°/24°/40°
AR111	SY-AR031	12W	85W	1100LM	COB	GU10	Φ 111*H65	12°/24°/40°
AR111	SY-AR032	15W	100W	1350LM	COB	GU10	Φ 111*H65	12°/24°/40°

# LED Spotlight

## Plastic+Alu.

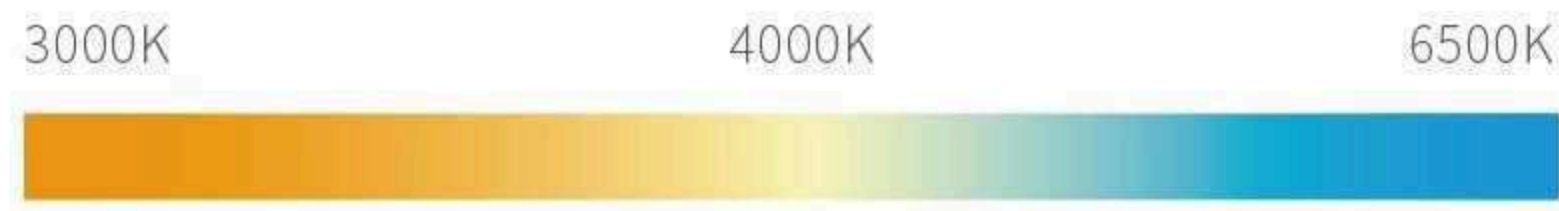


ErP RoHS SAA BSCI

DIMMABLE  
 Ra > 80  
 Ra > 90  
 80~150 LM/W  
 PF>0.5  
 PF>0.7  
 PF>0.9  
 Voltage  
 AC100~240V  
 AC220~240V  
 AC170~250V  
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
AR111	SY-AR013	12W	80W	1080LM	SMD	G53	φ 111*H65	36°
AR111	SY-AR014	15W	100W	1350LM	SMD	G53	φ 111*H65	36°

## Plastic+Alu.

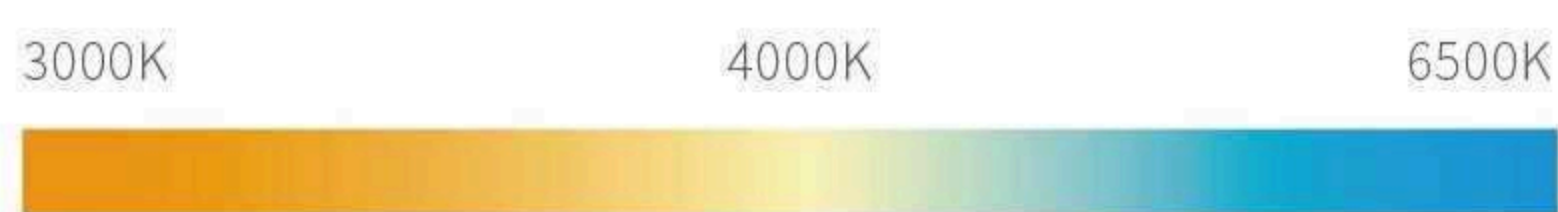

ErP RoHS SAA BSCI

DIMMABLE  
 Ra > 80  
 Ra > 90  
 80~150 LM/W  
 PF>0.5  
 PF>0.7  
 PF>0.9  
 Voltage  
 AC100~240V  
 AC220~240V  
 AC170~250V  
 25,000H


Model	Code	Wattage	EQ-Watts	Lumen	LED	Base	Size(mm)	Beam Angle
AR111	SY-AR011	12W	80W	1080LM	SMD	GU10	φ 111*H65	36°
AR111	SY-AR012	15W	100W	1350LM	SMD	GU10	φ 111*H65	36°
AR111	SY-AR021	12W	80W	1080LM	COB	GU10	φ 111*H65	36°
AR111	SY-AR022	15W	100W	1350LM	COB	GU10	φ 111*H65	36°



**Plastic/  
Die-casting Alu.**



GX53

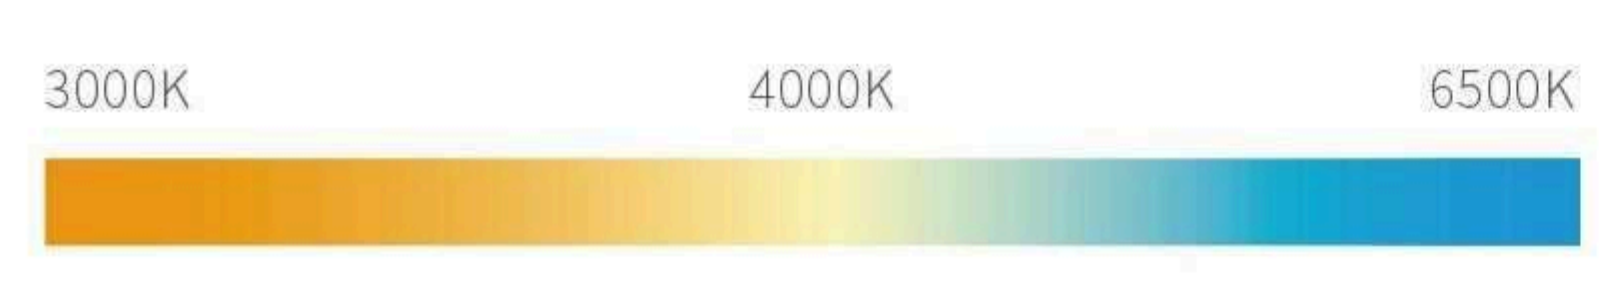



















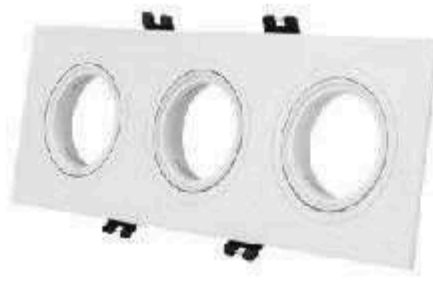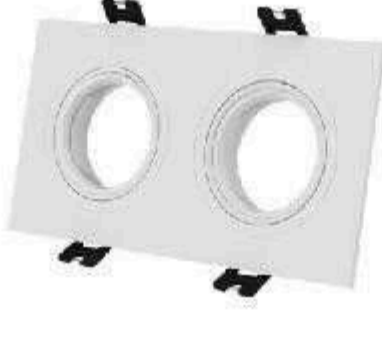












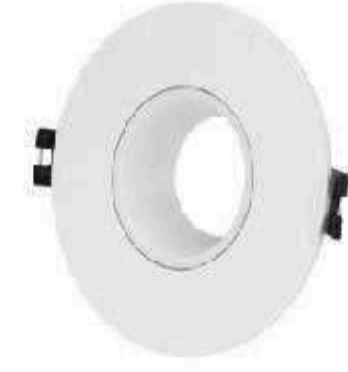










ErP RoHS SAA BSCI

DIMMABLE    
 Ra > 80  
Ra > 90    
 80~150 LM/W    
 PF>0.5  
PF>0.7  
PF>0.9    
 Voltage  
AC100-240V  
AC220-240V  
AC170-250V    
 25,000H

Model	Code	Wattage	EQ-Watts	Lumen	Size(mm)	Beam Angle
GX53	SY-CG001	4W	30W	320LM	Φ 74*24	120°
GX53	SY-CG002	6W	40W	480LM	Φ 74*24	120°
GX53	SY-CG003	9W	60W	720LM	Φ 74*24	120°
GX53	SY-CG004	10W	60W	800LM	Φ 74*24	120°
GX53	SY-CG005	12W	75W	960LM	Φ 74*24	120°



# List of accessories



# 2024 G4 G9

Environmental protection, energy saving.




Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size		
1	G9-P-005	3W	350lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
	G9-P-006	3.4W	400lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
	G9-P-007	3.5W	410lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
2	G9-P-009	4W	470lm	0.4	G9	Ra > 80	220-240V	19x56mm	
	G9-P-010	4.8W	550lm	0.4	G9	Ra > 80	220-240V	19x56mm	
3	G9-P-011	4.8W	638lm	0.4	G9	Ra > 80	220-240V	19x56mm	
4	G9-P-012	3.3W	410lm	0.4	G9	Ra > 80	220-240V	19x59mm	
5	G9-P-013	3.8W	470lm	0.4	G9	Ra > 80	220-240V	19x59mm	




Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size		
6	G9-P-001	3.5W	320lm	0.4	G9	Ra > 80	220-240V	16.5x50mm	
7	G9-P-002	3W	350lm	0.4	G9	Ra > 80	220-240V	16x50mm	
	G9-DIM-001	3W	300lm	0.4	G9	Ra > 80	220-240V	16x50mm	
8	G9-P-014	3.5W	400lm	0.4	G9	Ra > 80	220-240V	17x53mm	
	G9-DIM-004	3.5W	400lm	0.4	G9	Ra > 80	220-240V	17x53mm	
9	G9-P-015	5.5W	600lm	0.4	G9	Ra > 80	220-240V	19x60mm	
	G9-DIM-005	4W	450lm	0.4	G9	Ra > 80	220-240V	19x60mm	
10	G9-P-016	6.5W	700lm	0.4	G9	Ra > 80	220-240V	23x66mm	
	G9-DIM-006	5W	550lm	0.4	G9	Ra > 80	220-240V	23x66mm	



Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size	
11	G9-G-001	2W	200lm	0.4	G9	Ra > 80	220-240V	13.3x50mm
12	G9-G-002	4W	470lm	0.4	G9	Ra > 80	220-240V	14.5x60mm
13	G9-G-003	4.5W	550lm	0.4	G9	Ra > 80	220-240V	14.5x60mm
14	G9-P-004	2.5W	200lm	0.4	G9	Ra > 80	220-240V	16x48mm
15	G9-P-017	2W	220lm	0.4	G9	Ra > 80	220-240V	15.5x44.5mm

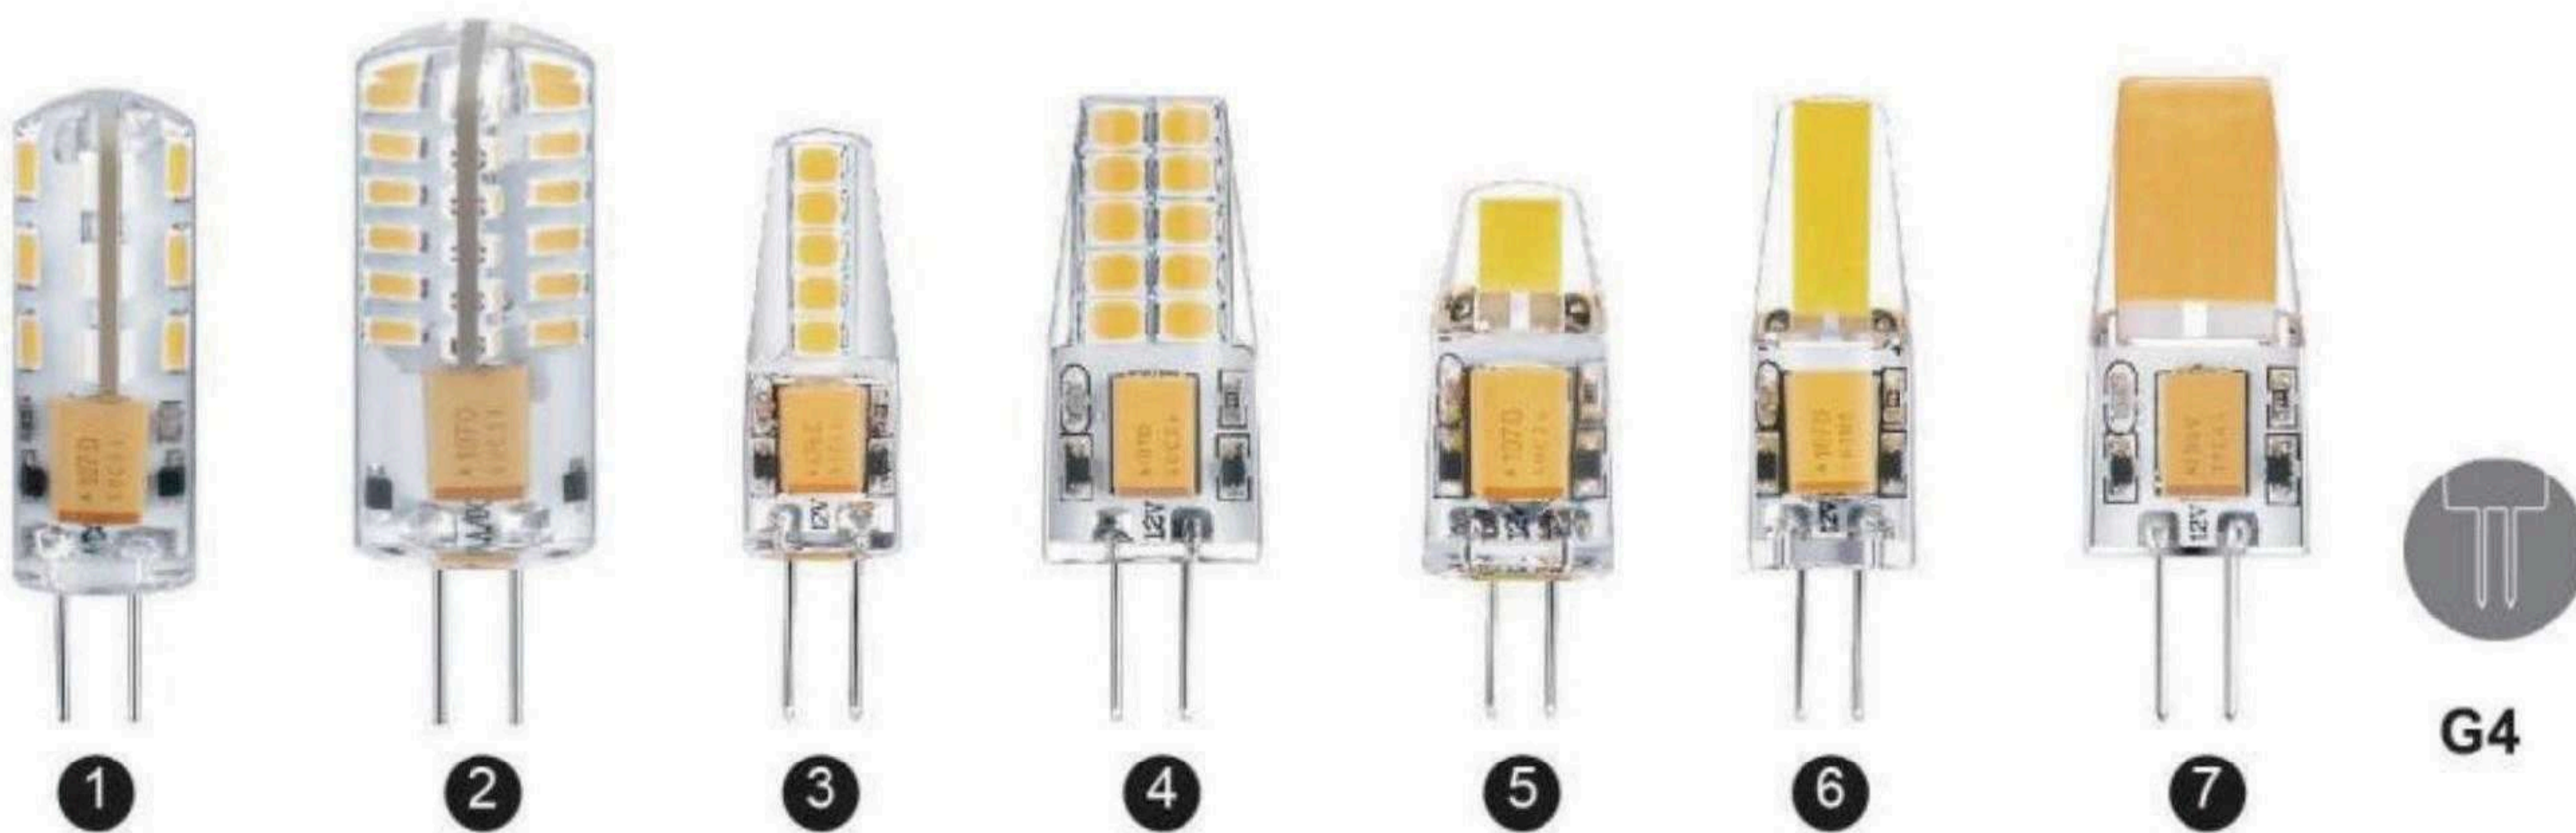

Item No.	Watt	Lumen	PF(AC)	Base	CRI	Voltage	Size	
1	G4-S-001	1.2W	100lm	0.7	G4	Ra > 80	AC/DC12V	10x36mm
2	G4-S-002	1.8W	150lm	0.7	G4	Ra > 80	AC/DC12V	13x36mm
3	G4-S-003	2W	200lm	0.7	G4	Ra > 80	AC/DC12V	10.5x37mm
4	G4-S-004	2.5W	250lm	0.7	G4	Ra > 80	AC/DC12V	12.5x37mm
5	G4-S-0705	1.2W	90lm	0.7	G4	Ra > 80	AC/DC12V	9.6x30.5mm
6	G4-S-1505	1.5W	150lm	0.7	G4	Ra > 80	AC/DC12V	9.6x37mm
7	G4-S-1508	2.5W	250lm	0.7	G4	Ra > 80	AC/DC12V	12.5x37.5mm

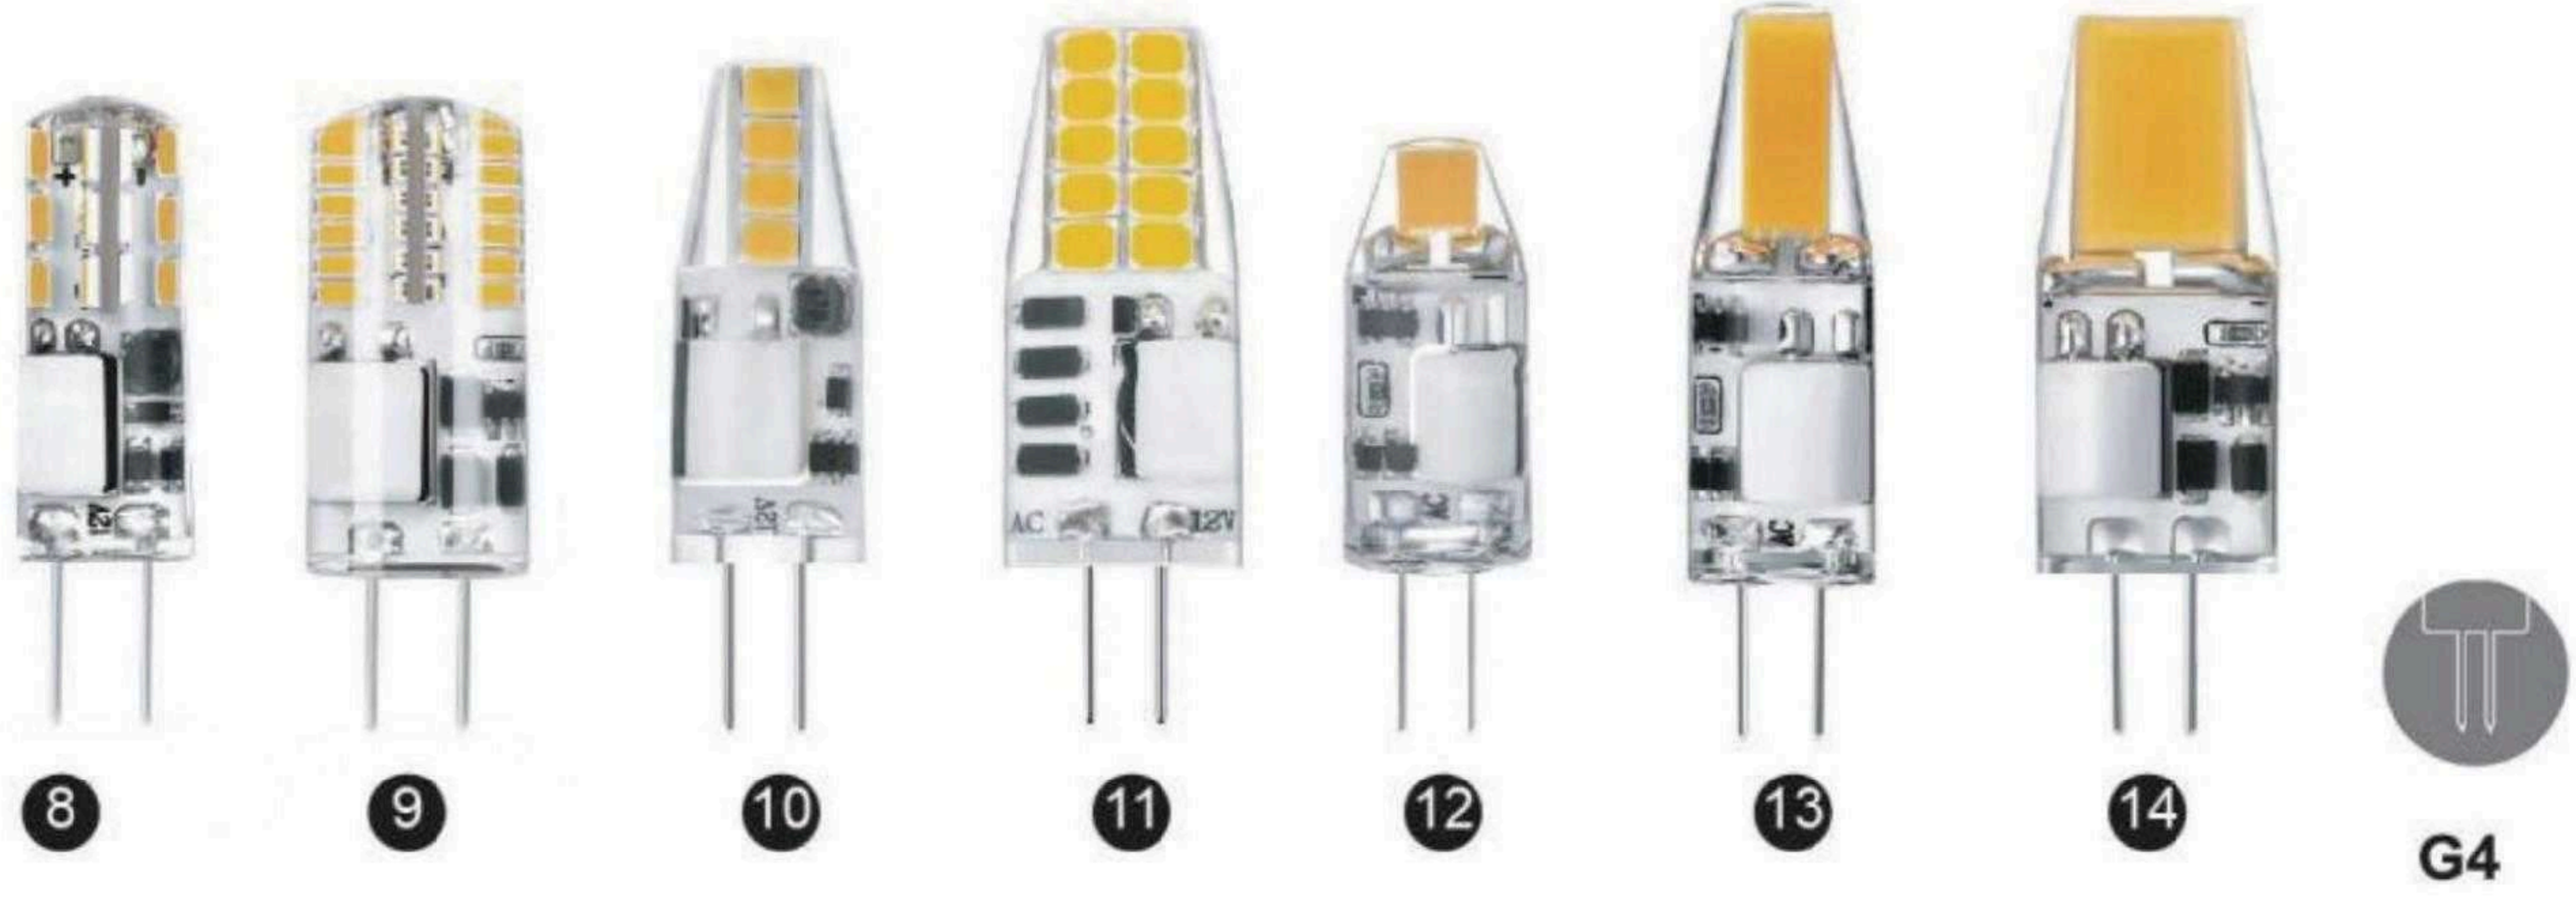

Item No.	Watt	Lumen	PF(AC)	Base	CRI	Voltage	Size		
8	G4-S-001C	1.1W	90lm	0.7	G4	Ra > 80	AC/DC12V	10x36mm	
9	G4-S-002C	1.8W	150lm	0.7	G4	Ra > 80	AC/DC12V	13x36mm	
10	G4-S-008C	1.5W	150lm	0.7	G4	Ra > 80	AC/DC12V	11x38mm	
11	G4-S-009C	2W	200lm	0.7	G4	Ra > 80	AC/DC12V	13.5x41.3mm	
12	G4-S-0705C	1.2W	100lm	0.7	G4	Ra > 80	AC/DC12V	11x34mm	
13	G4-S-1505C	1.5W	150lm	0.7	G4	Ra > 80	AC/DC12V	11x41.3mm	
14	G4-S-1508C	2W	220lm	0.7	G4	Ra > 80	AC/DC12V	13.5x41.3mm	



Item No.	Watt	Lumen	PF(AC)	Base	CRI	Voltage	Size		
15	G4-P-001	1W	85lm	0.7	G4	Ra > 80	AC/DC12V	11x33mm	
16	G4-P-007	1.2W	110lm	0.7	G4	Ra > 80	AC/DC12V	12x32mm	
17	G4-P-008	1.8W	150lm	0.7	G4	Ra > 80	AC/DC12V	16x44mm	
18	G4-P-009	1.3W	130lm	0.7	G4	Ra > 80	AC/DC12V	12x39mm	
19	G4-P-003	3W	350lm	0.7	G4	Ra > 80	AC/DC12V	16x44mm	



Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-C1-5W	5W	550lm	0.5	Ra > 80	220-240V	15x78mm
R7S-C1-9W	9W	1000lm	0.5	Ra > 80	220-240V	15x118mm

Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-A2-5.5W	5.5W	550lm	0.5	Ra > 80	220-240V	23x78mm
R7S-A2-10W	10W	1055lm	0.5	Ra > 80	220-240V	23x118mm

Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-A1-7W	7W	806lm	0.5	Ra > 80	175-250V	29x78mm
R7S-A1-8W	8W	1055lm	0.5	Ra > 80	175-250V	29x78mm

R7S-A1-9W	9W	1055lm	0.5	Ra > 80	175-250V	29x118mm
R7S-A1-14W	14W	1521lm	0.5	Ra > 80	175-250V	29x118mm
R7S-A1-16W	16W	2100lm	0.5	Ra > 80	175-250V	29x118mm

R7S-A1-D-8W	8W	1055lm	0.5	Ra > 80	220-240V	29x78mm
R7S-A1-D-12W	12W	1521lm	0.5	Ra > 80	220-240V	29x118mm
R7S-A1-D-16W	16W	2100lm	0.5	Ra > 80	220-240V	29x118mm

Item No.	Watt	Lumen	PF	CRI	Voltage	Size
R7S-G1-4W	4W	470lm	0.7	Ra > 80	220-240V	13.3x78mm
R7S-G1-7W	7W	806lm	0.7	Ra > 80	220-240V	13.3x118mm
R7S-G1-8W	8W	1055lm	0.7	Ra > 80	220-240V	13.3x118mm



E14



1



2



3



4



5



6

Item No.	Watt	Lumen	PF	Base	CRI	Voltage	Size
----------	------	-------	----	------	-----	---------	------

1	E14-P-001	3W	350lm	0.4	E14	Ra > 80	220-240V	16x50mm	
2	E14-P-002	3W	320lm	0.4	E14	Ra > 80	100-265V	15.5x51mm	
3	E14-P-003	5W	470lm	0.4	E14	Ra > 80	220-240V	18.3x68mm	
4	E14-P-007	1.7W	130lm	0.4	E14	Ra > 80	220-240V	18x52mm	
5	E14-P-008	1.8W	180lm	0.4	E14	Ra > 80	220-240V	25x59mm	
6	E14-G-001	1.7W	130lm	0.4	E14	Ra > 80	220-240V	23x50mm	

# 2024 Ceiling Light

Environmental protection, energy saving.

# IP65 Ceiling Light

---

## IP65 Ceiling Light



STYCLR01-SYCLR03C

**CCT**  
■ 3000K  
■ 4000K  
□ 6000K

**25,000H**

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC170-265V


**IP65**

Code	Watt	Luminous Flux	Beagm Angle	Size (mm)	IP	Material
SYCLR01	18W	1620lm		Φ 230*H60		
SYCLR03	36W	3300lm		Φ 320*H65		
SYCLR01S	18W	1620lm		Φ 230*H60		
SYCLR03S	36W	3300lm		Φ 320*H65		
SYCLR013C	18W	1620lm	120°	Φ 230*H60	65	Plastic
SYCLR033C	36W	3300lm		Φ 320*H65		
SYCLR01C	18W	1620lm		Φ 230*H60		
SYCLR03C	36W	3300lm		Φ 320*H65		




# IP65 Ceiling Light

## Multi color available

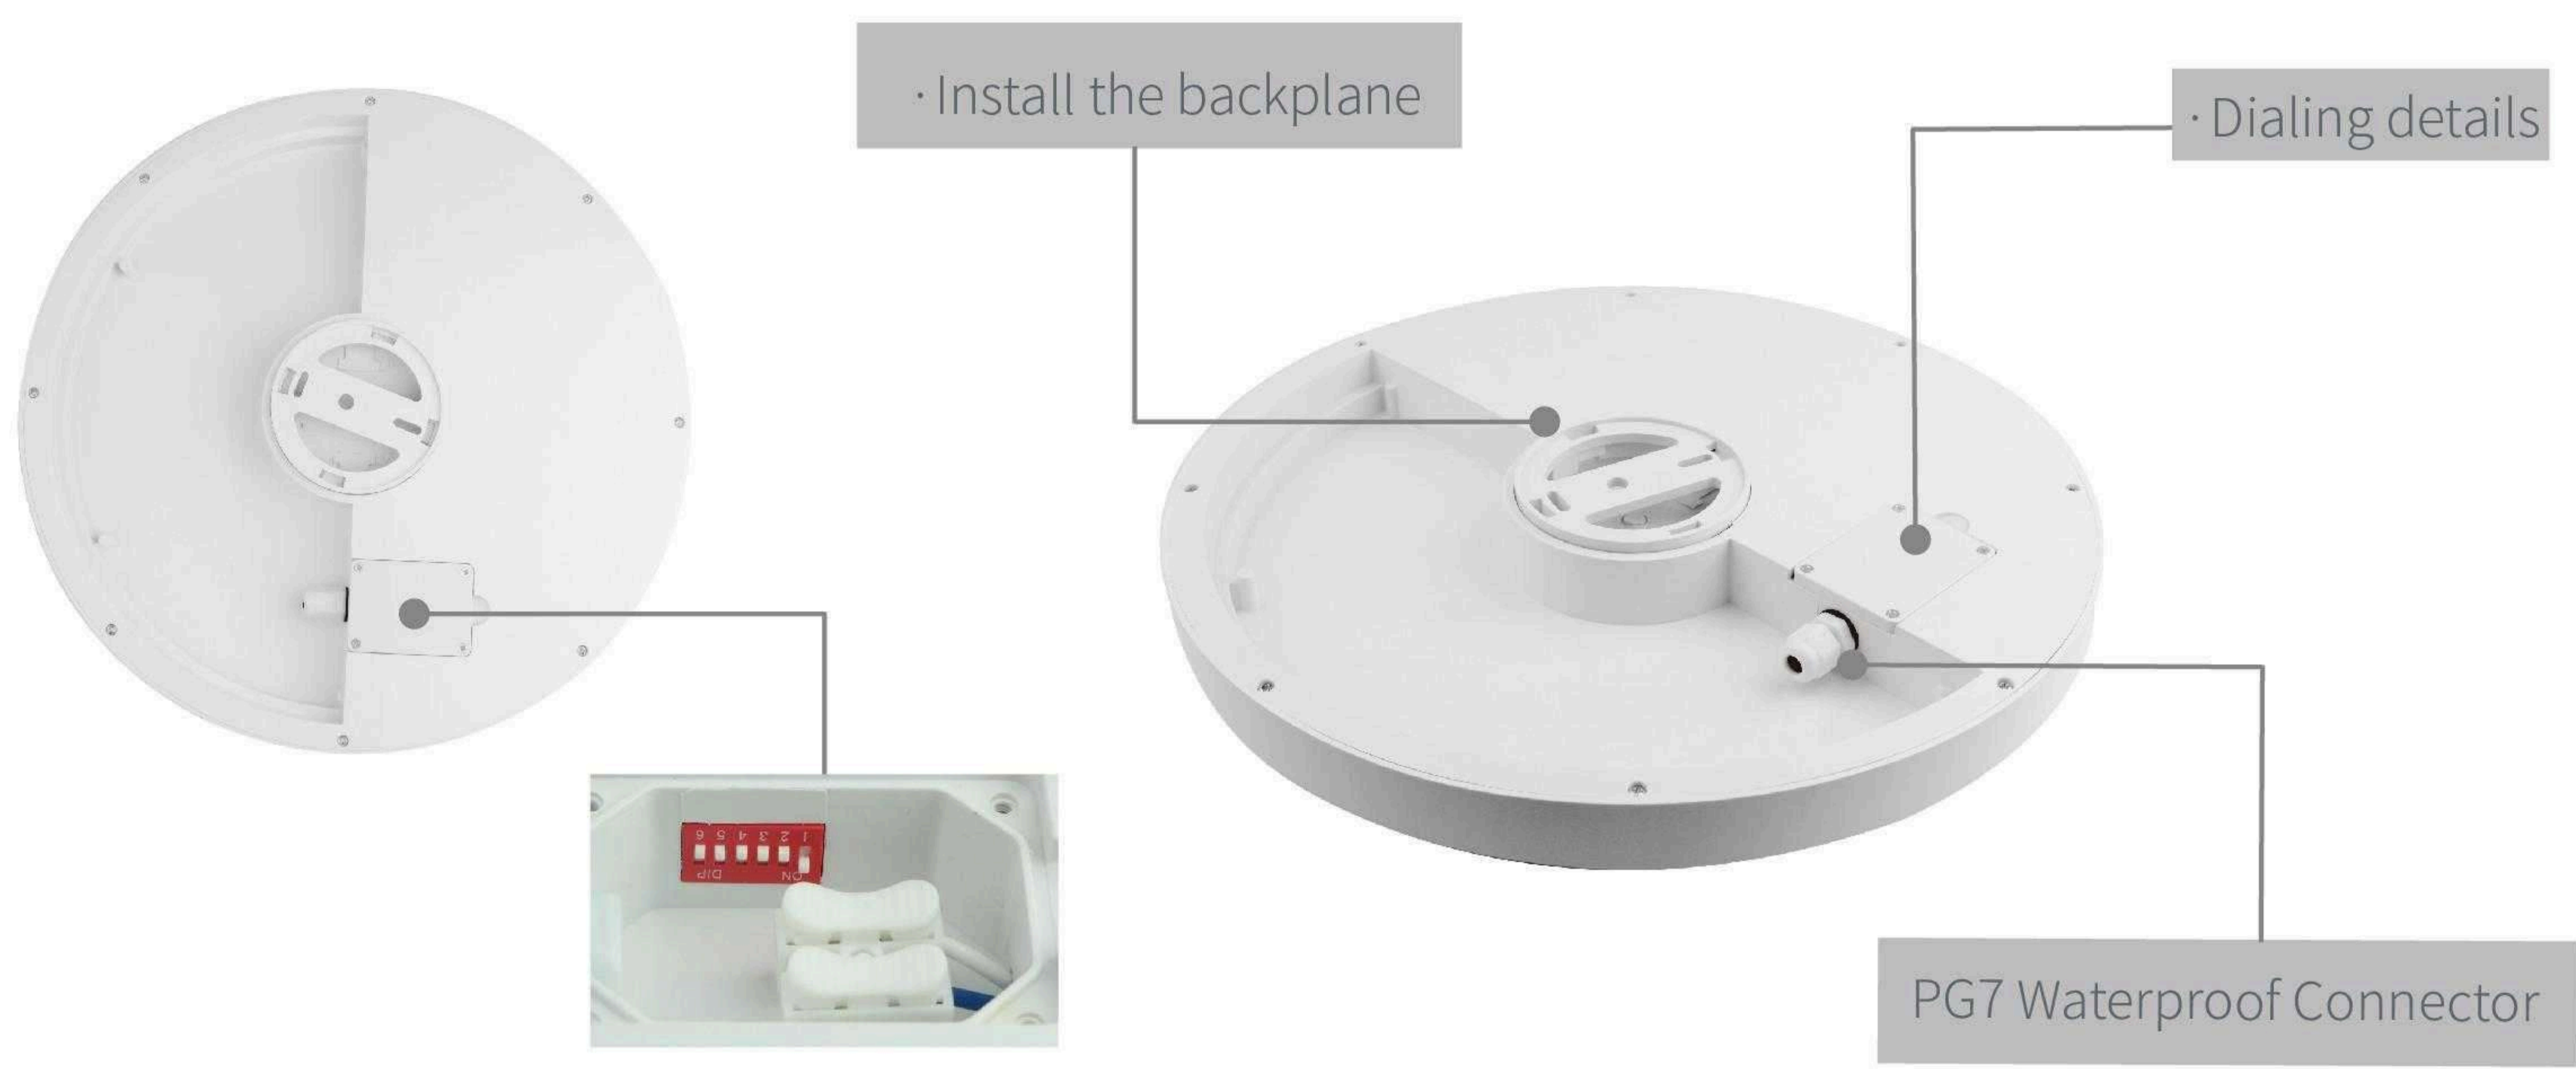


## Three versions available

3-step CCT change

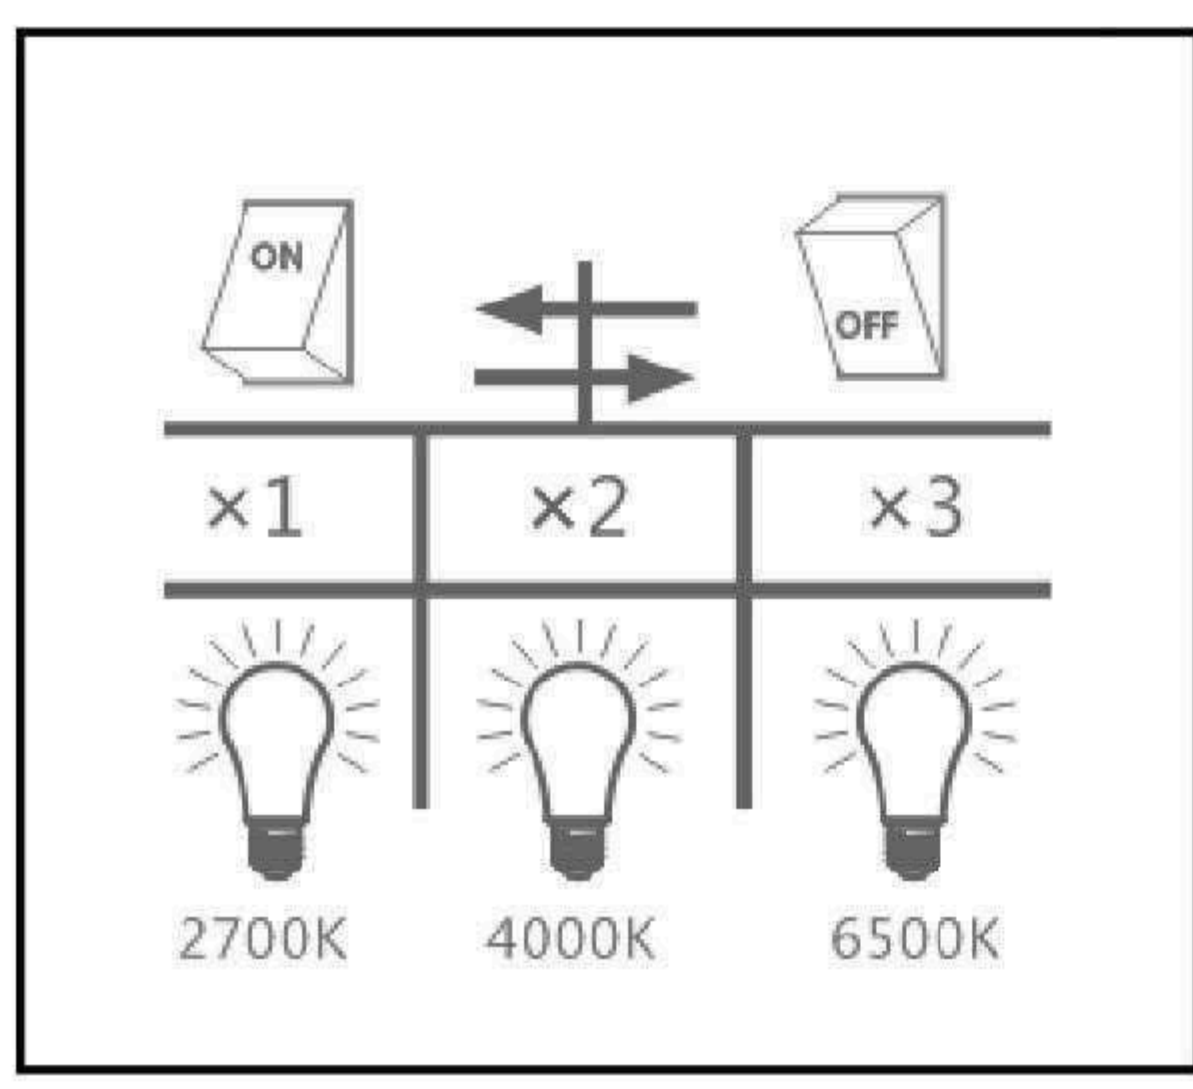


Version A

CCT Switch change

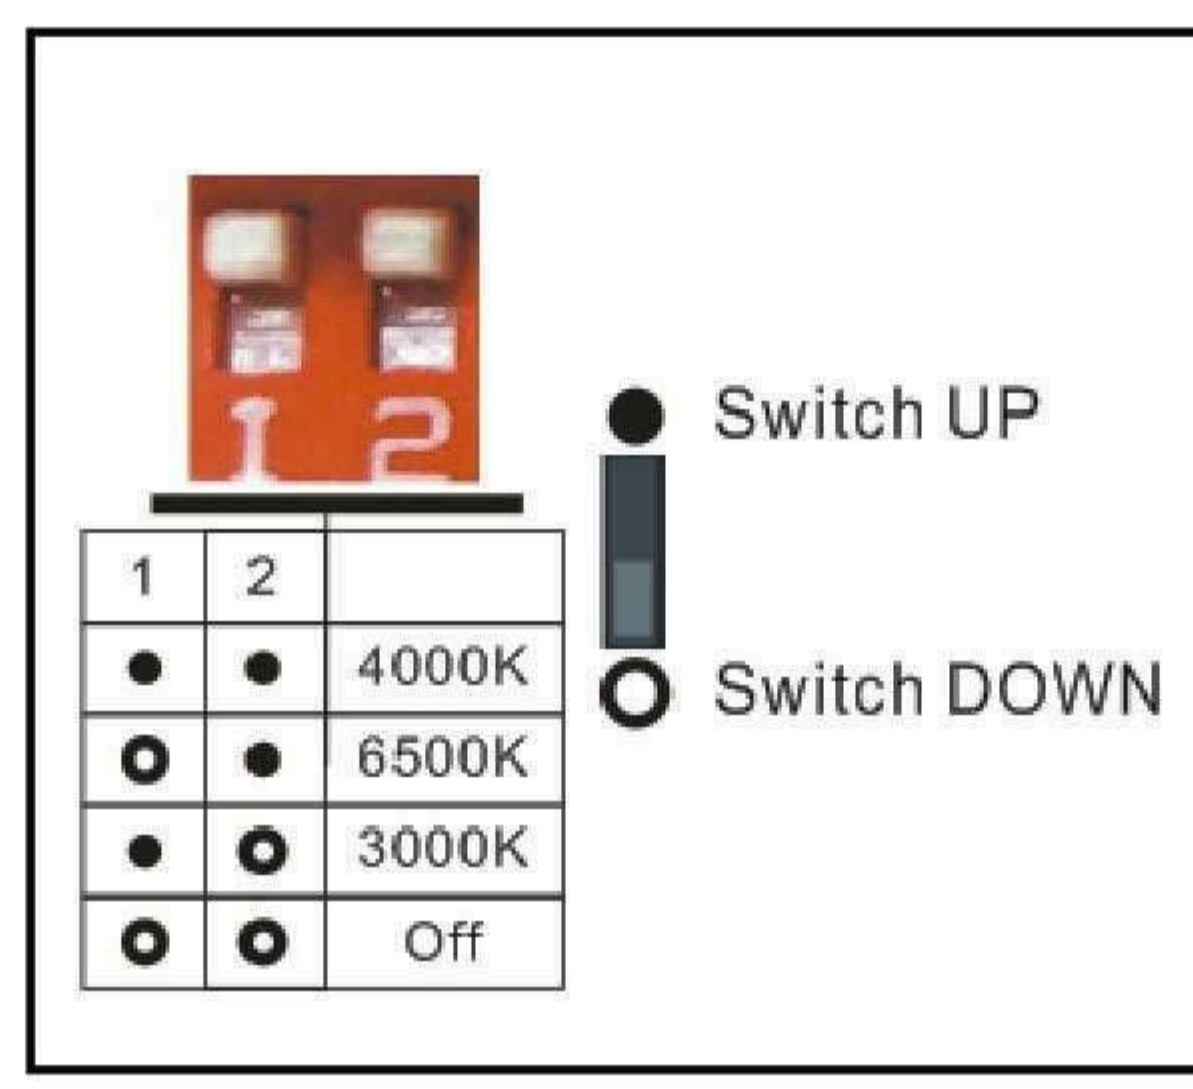

Version B



Microwave sensor

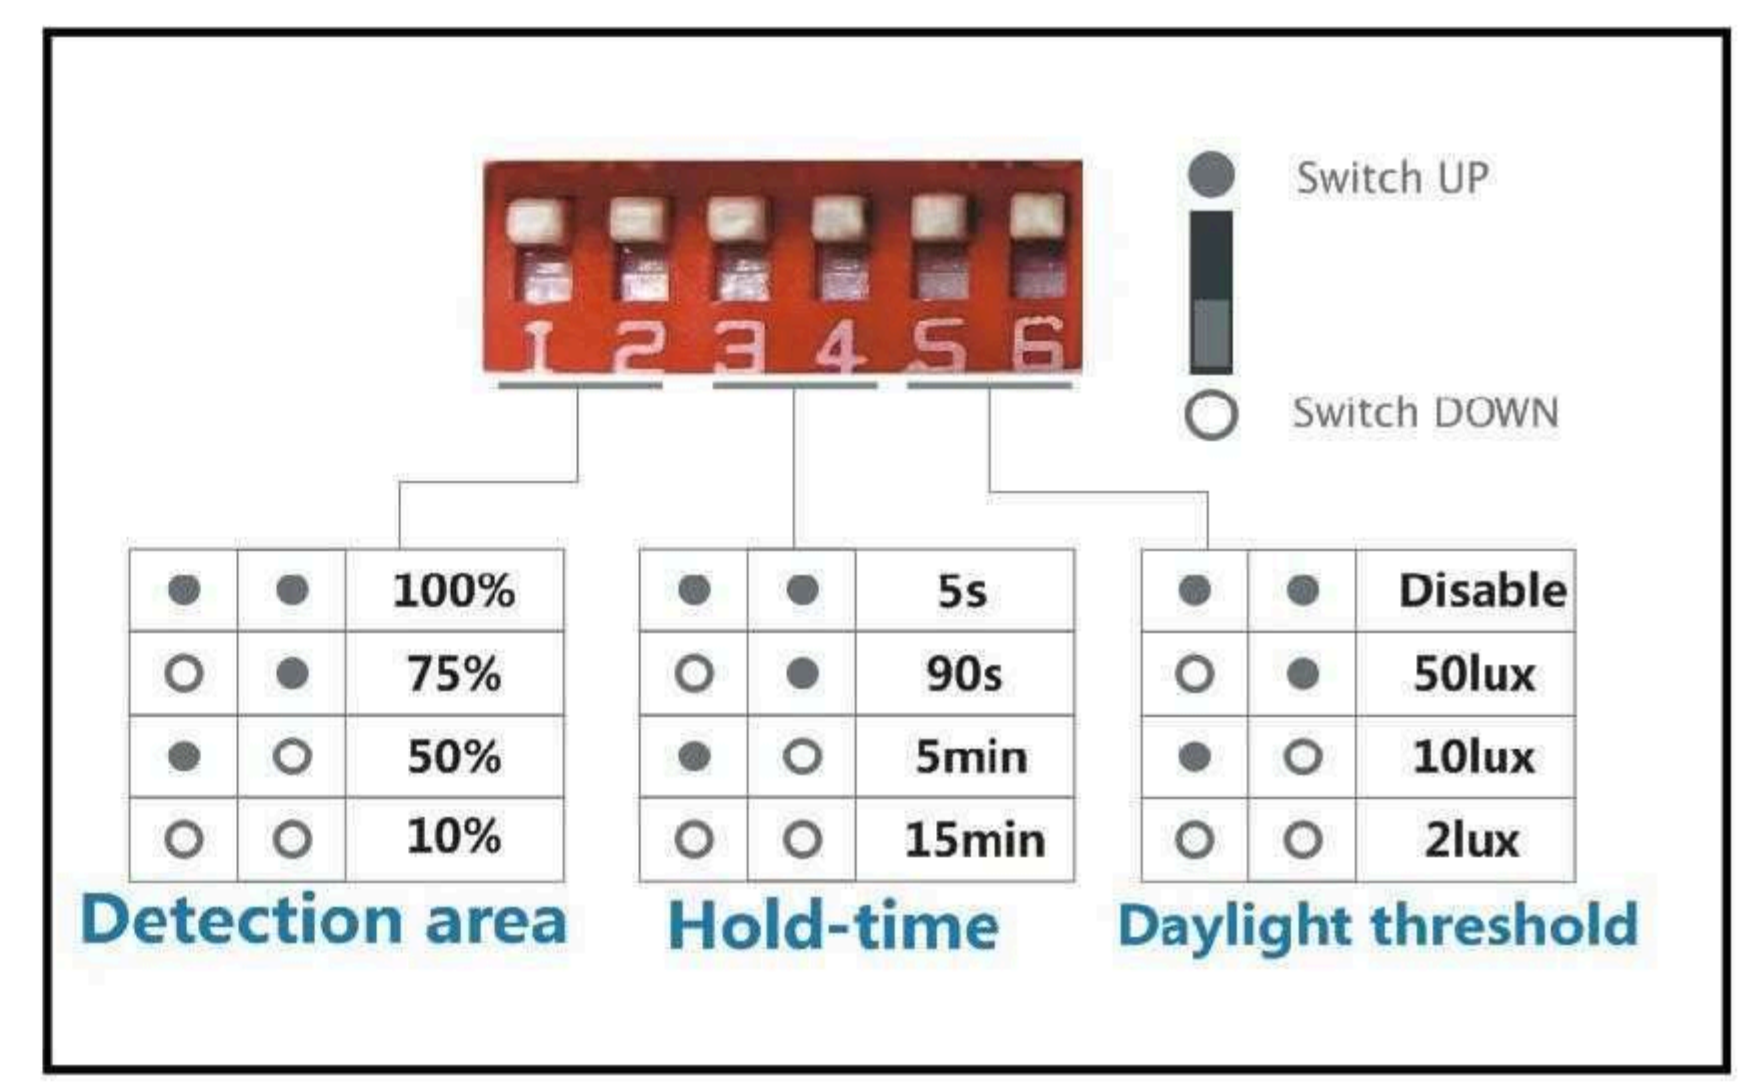

Version C


# IP54 Ceiling Light

## Detail analysis

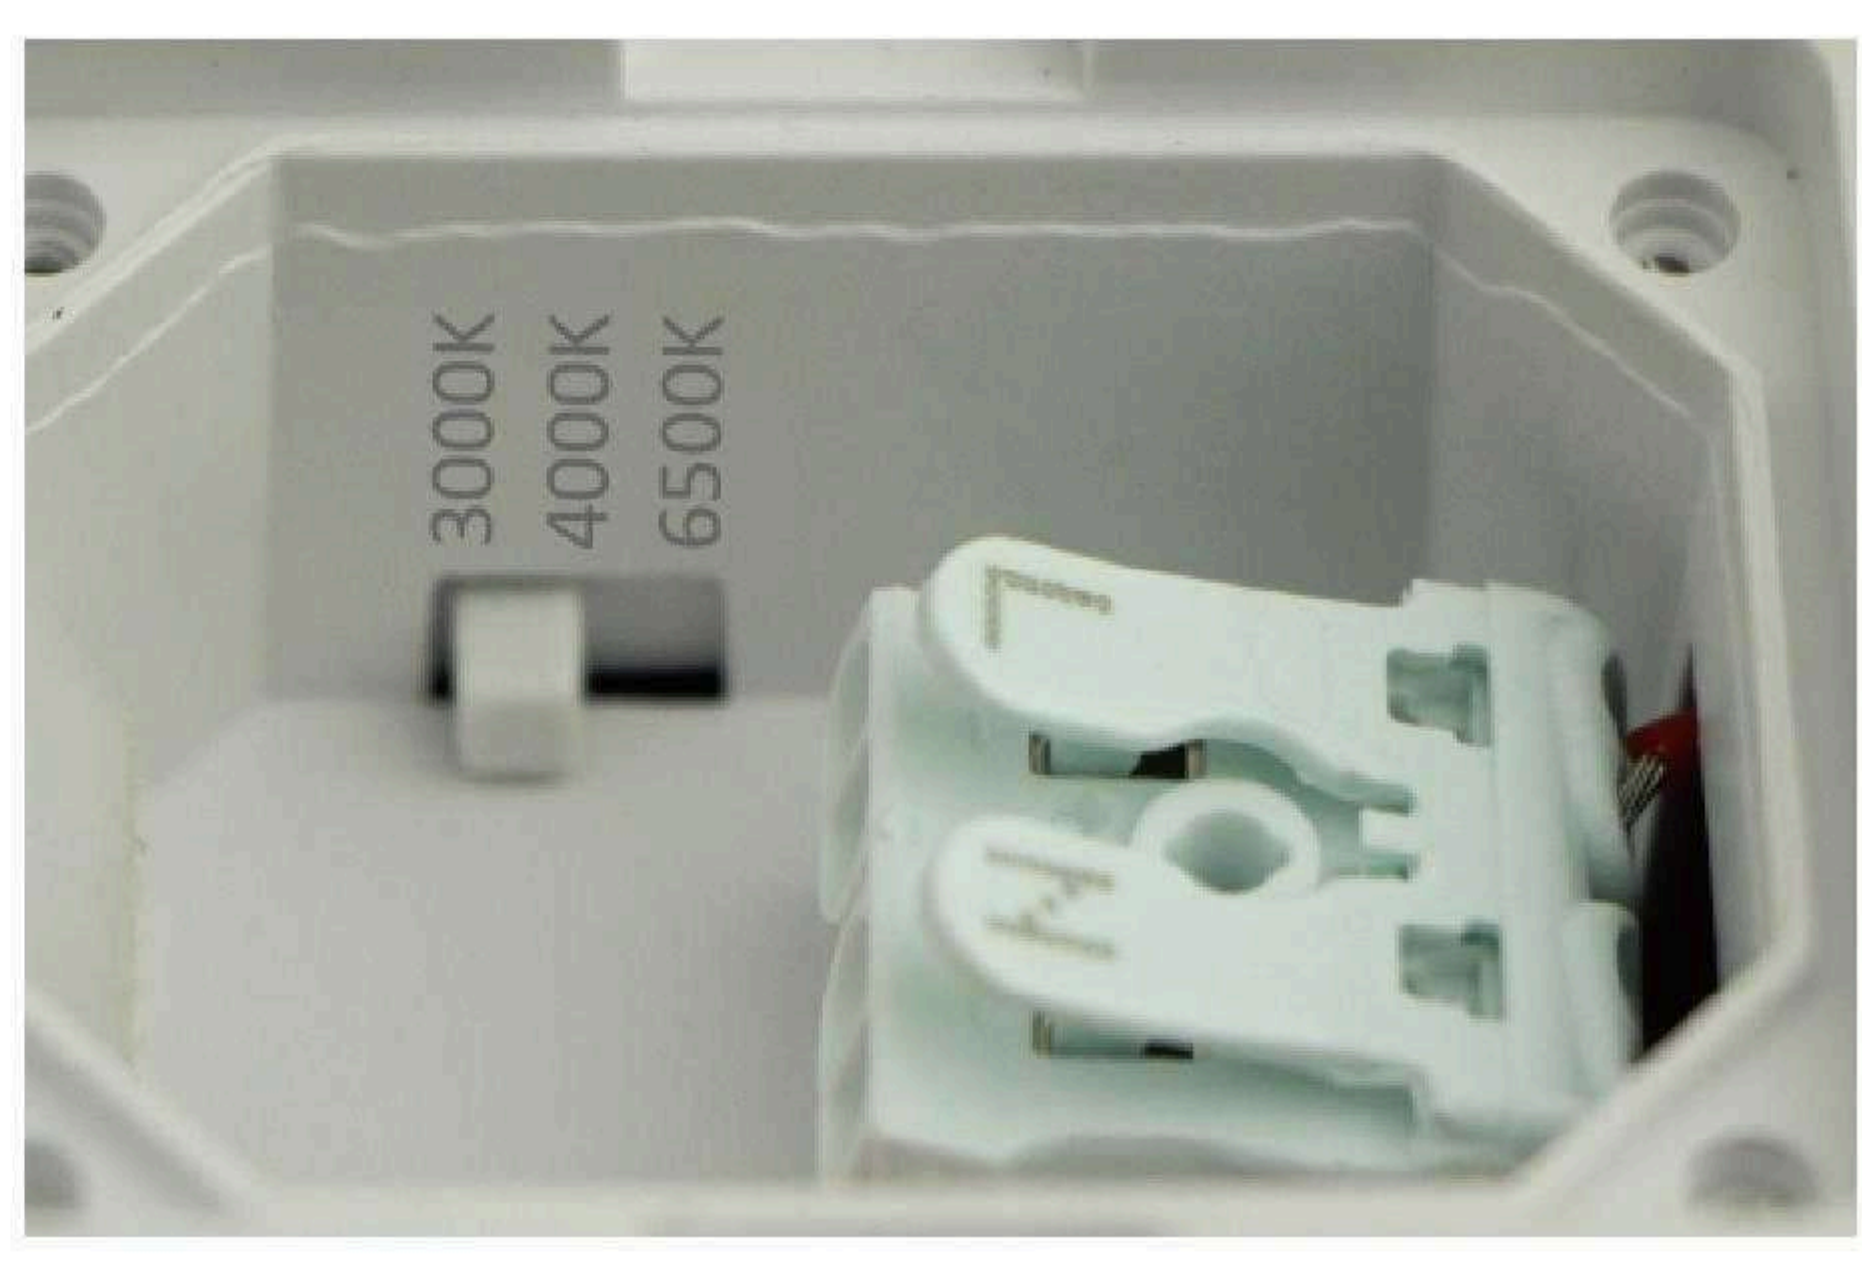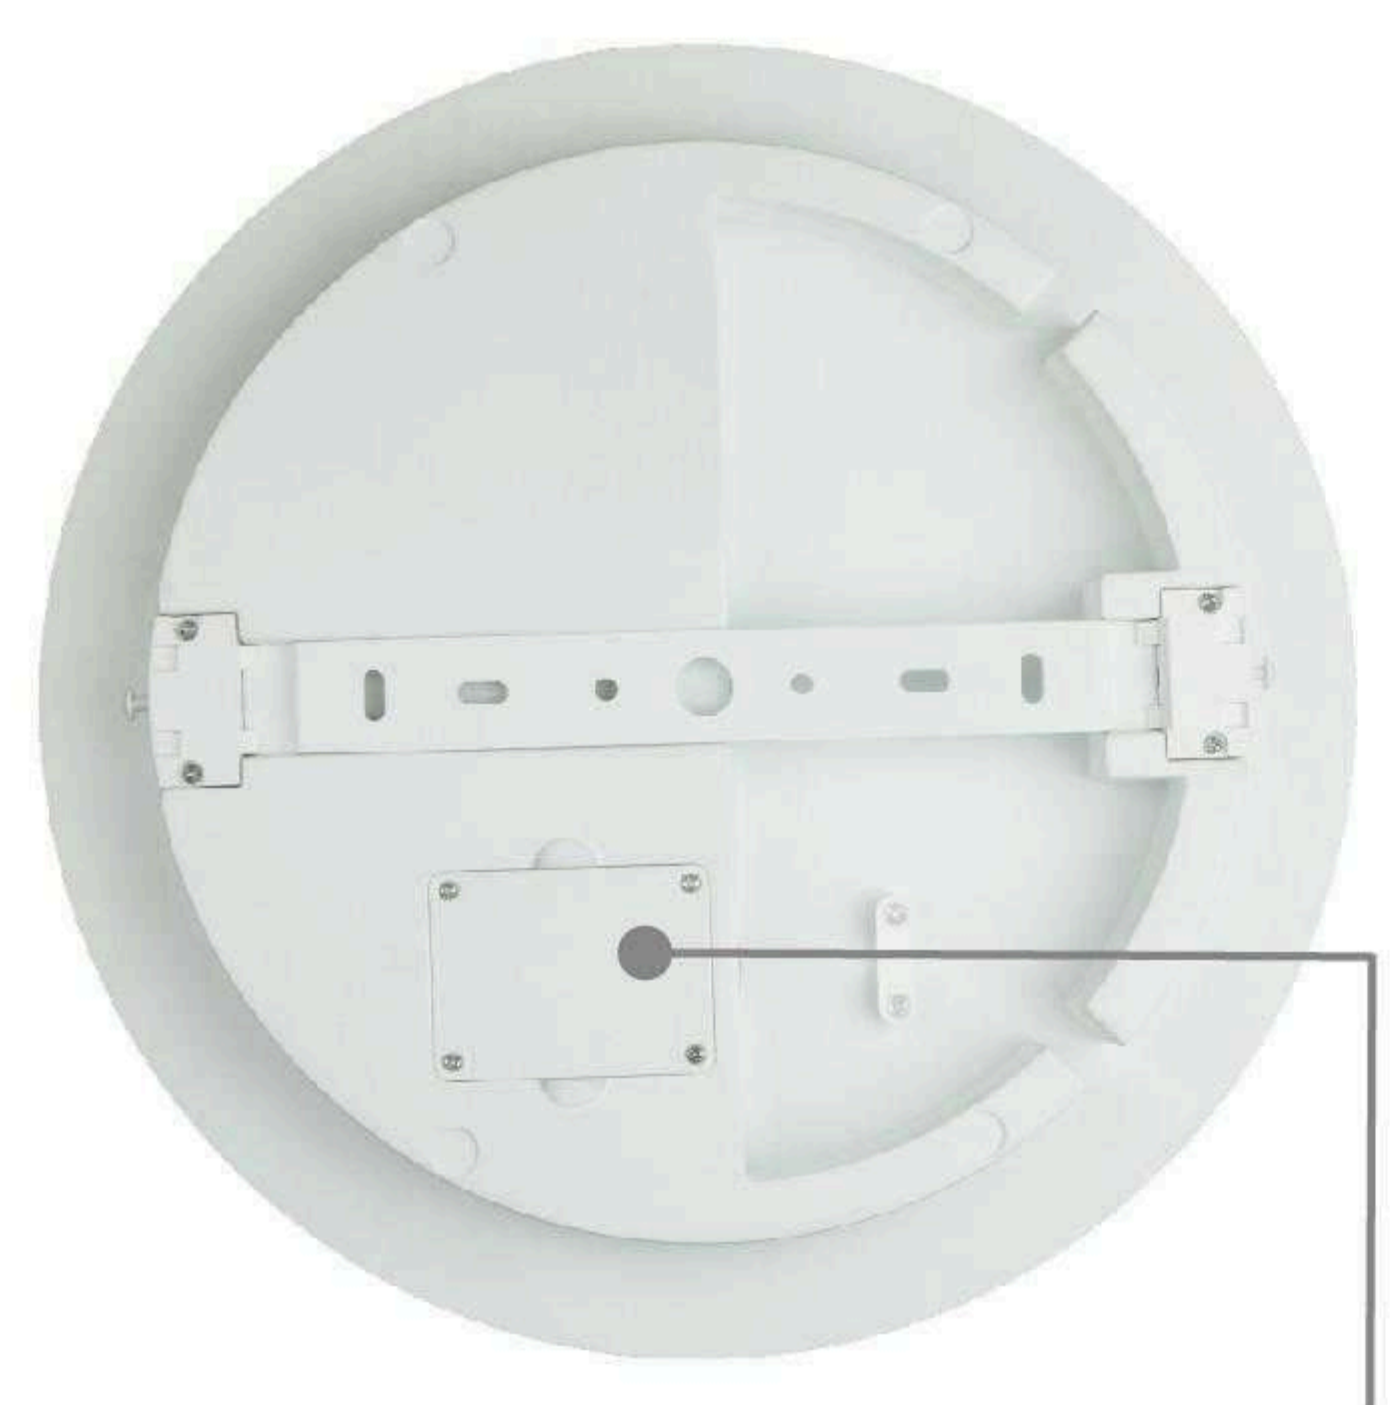

· details


## Easy installation

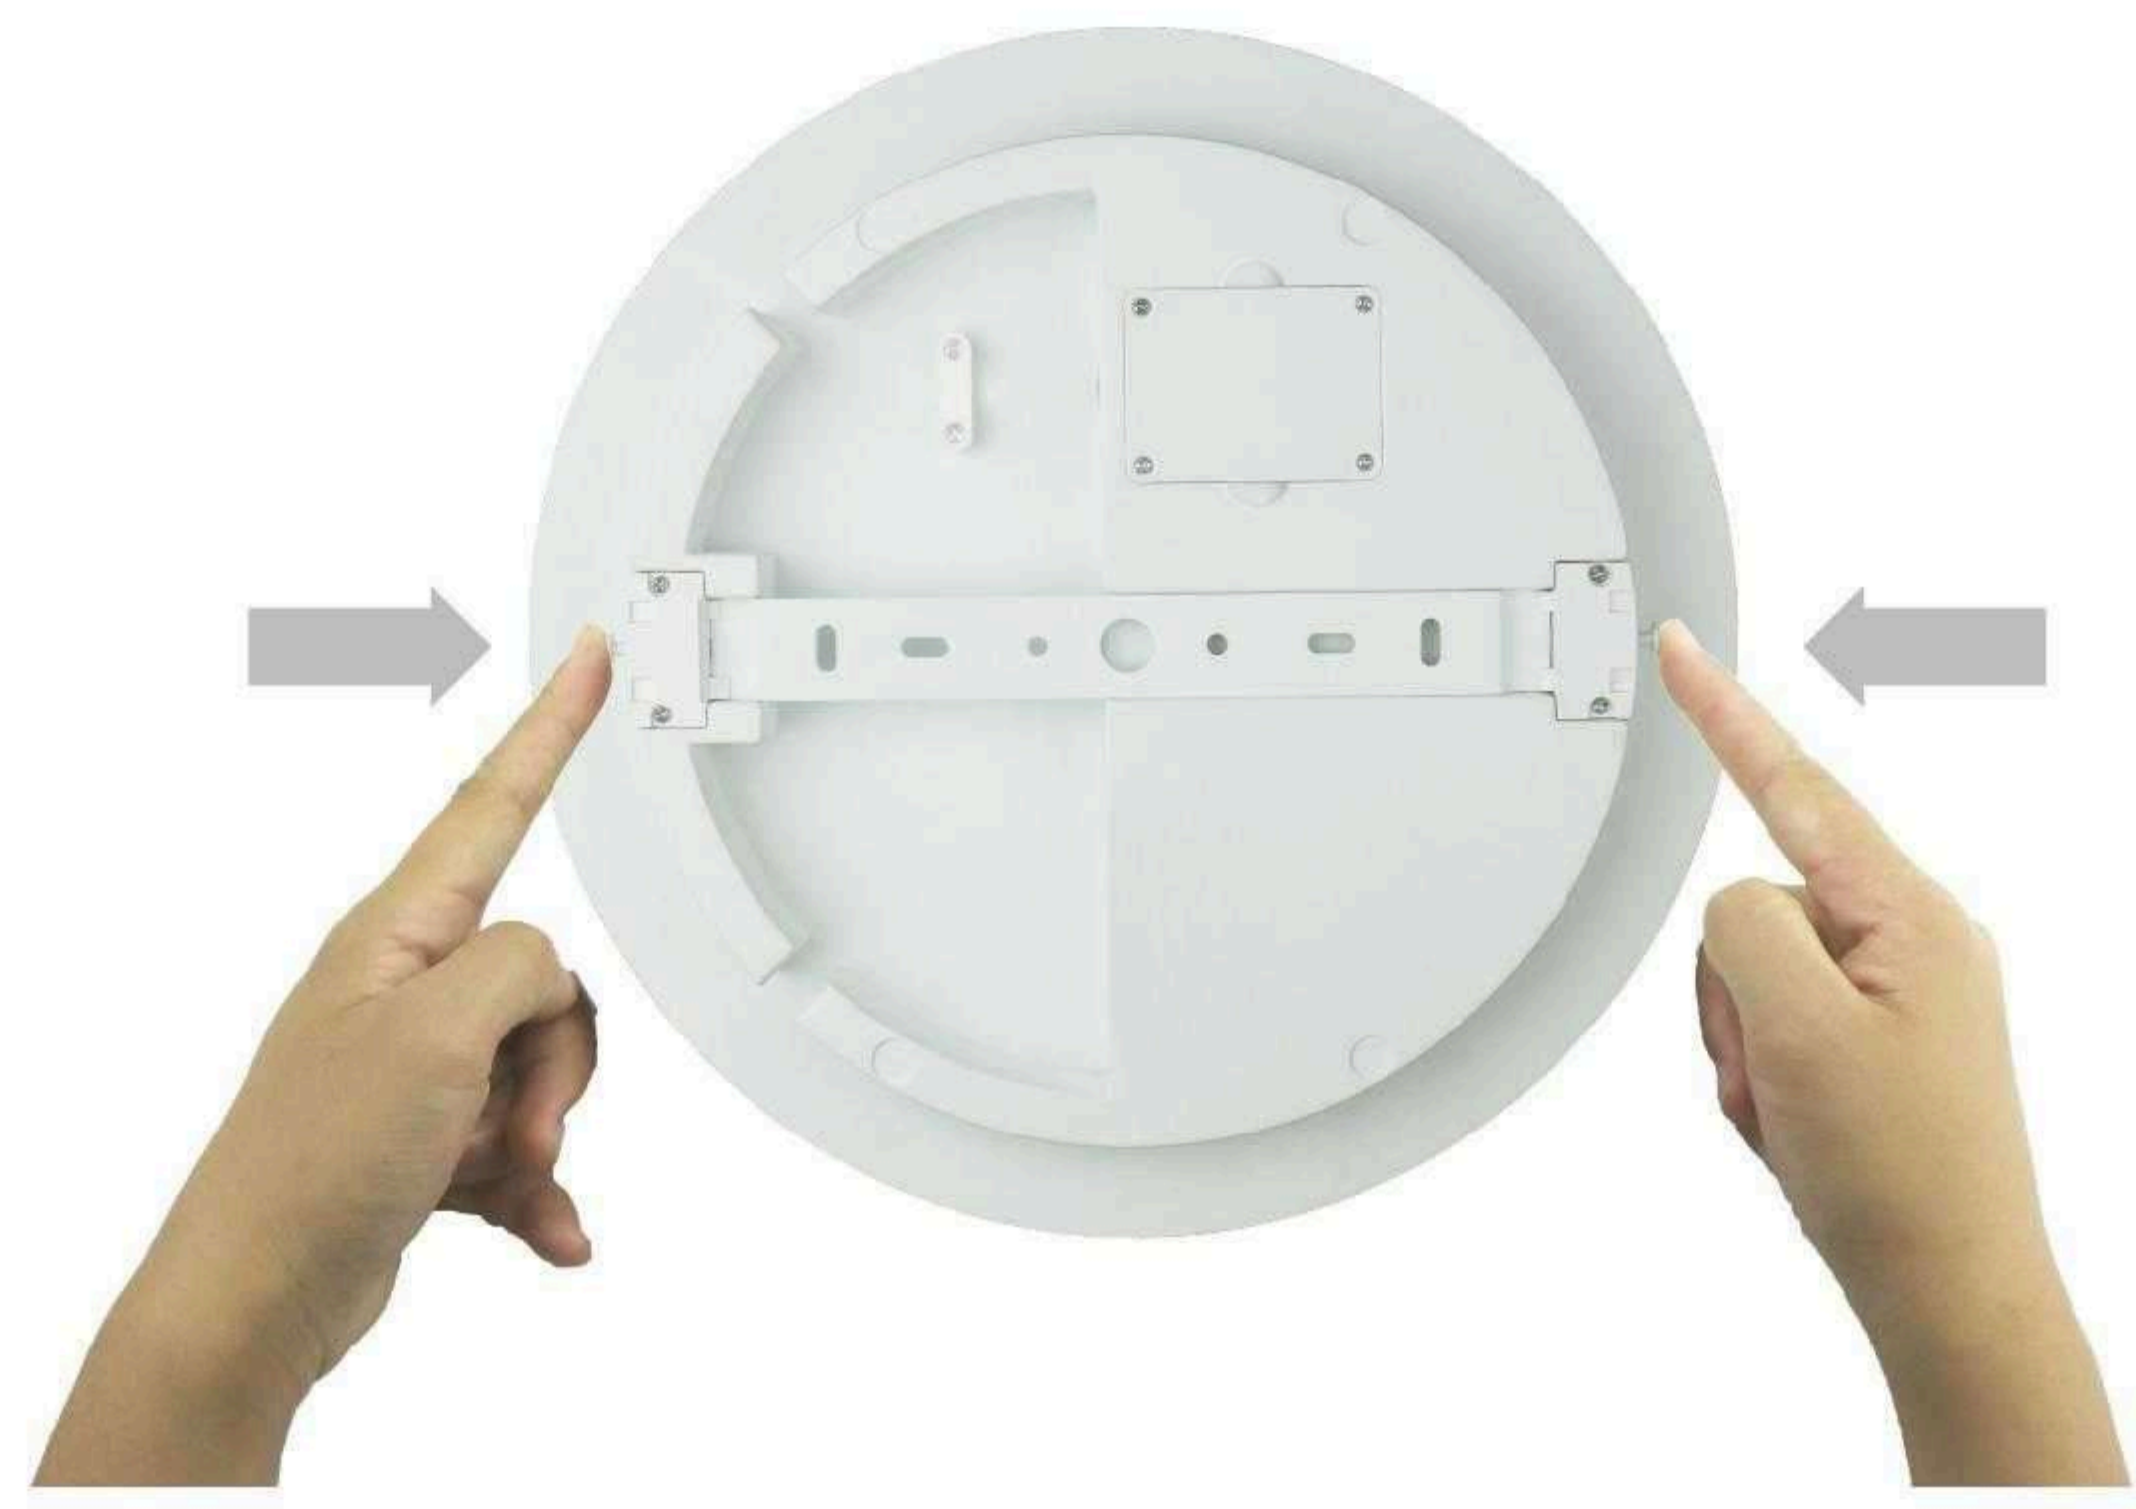

Step1

Step2

Step3

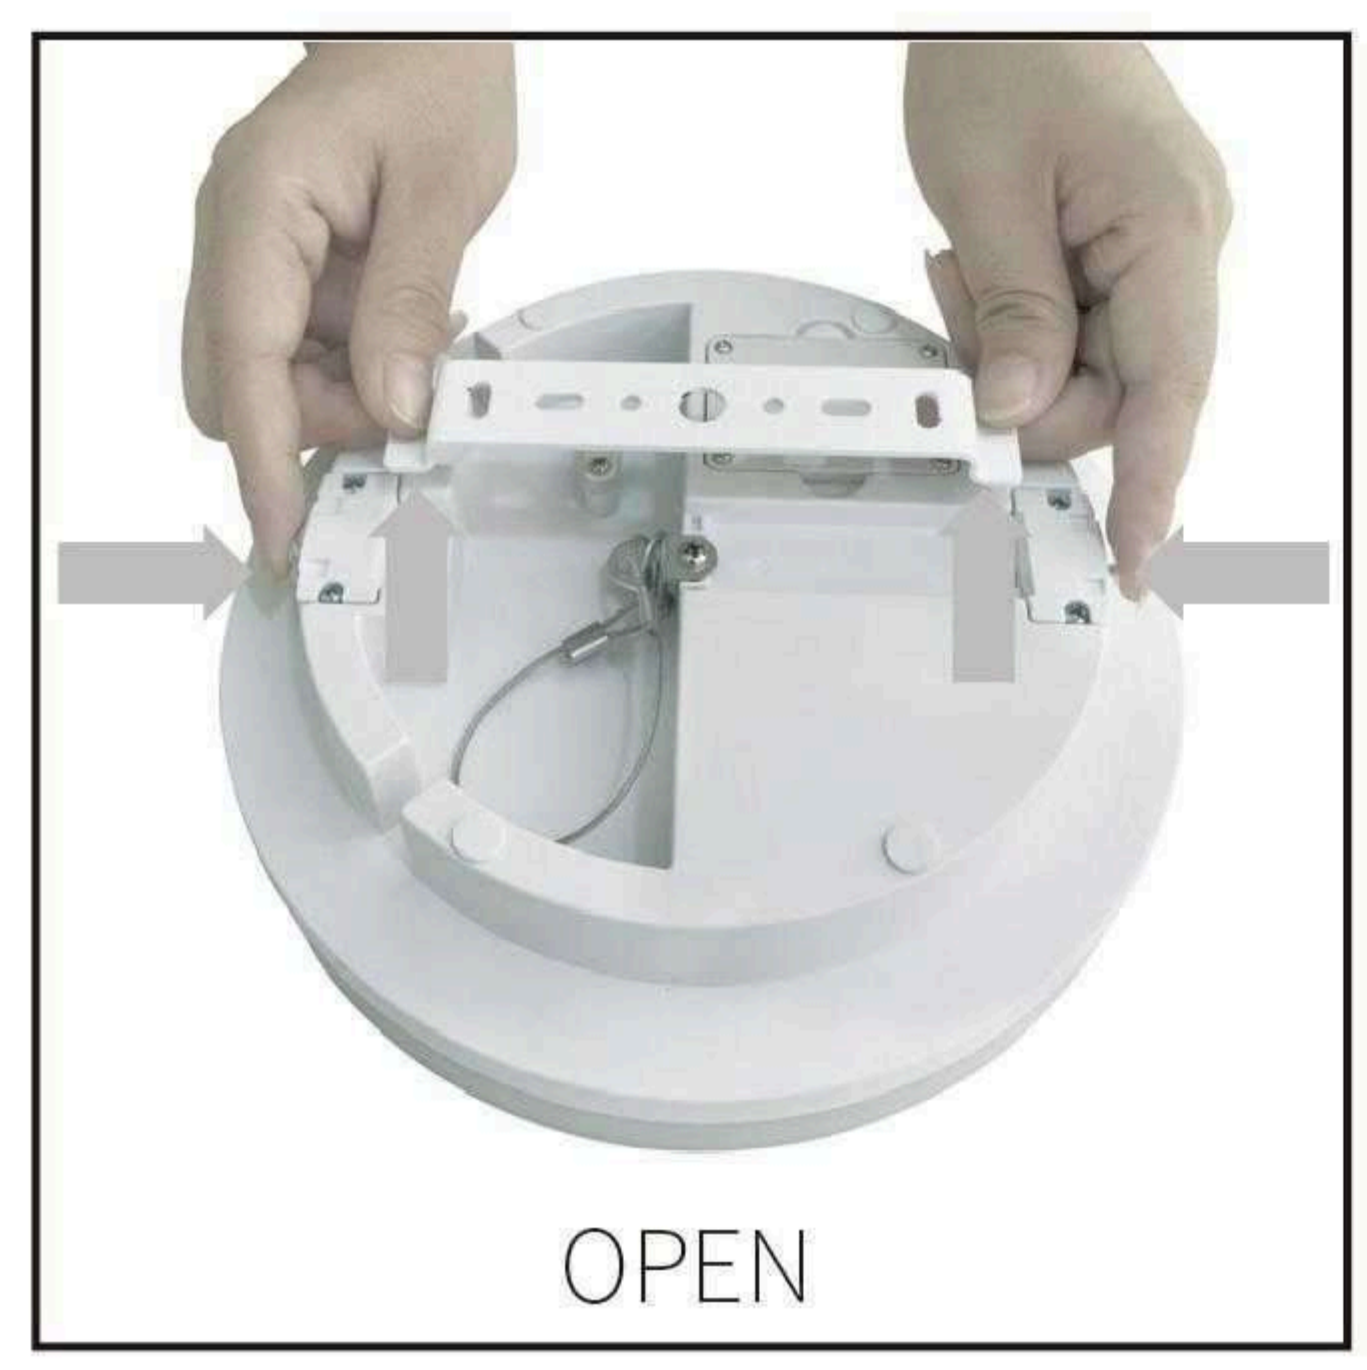


# IP54 Ceiling Light

## LED Ceiling Light




SYBH(01)-SYBH CCT(03)

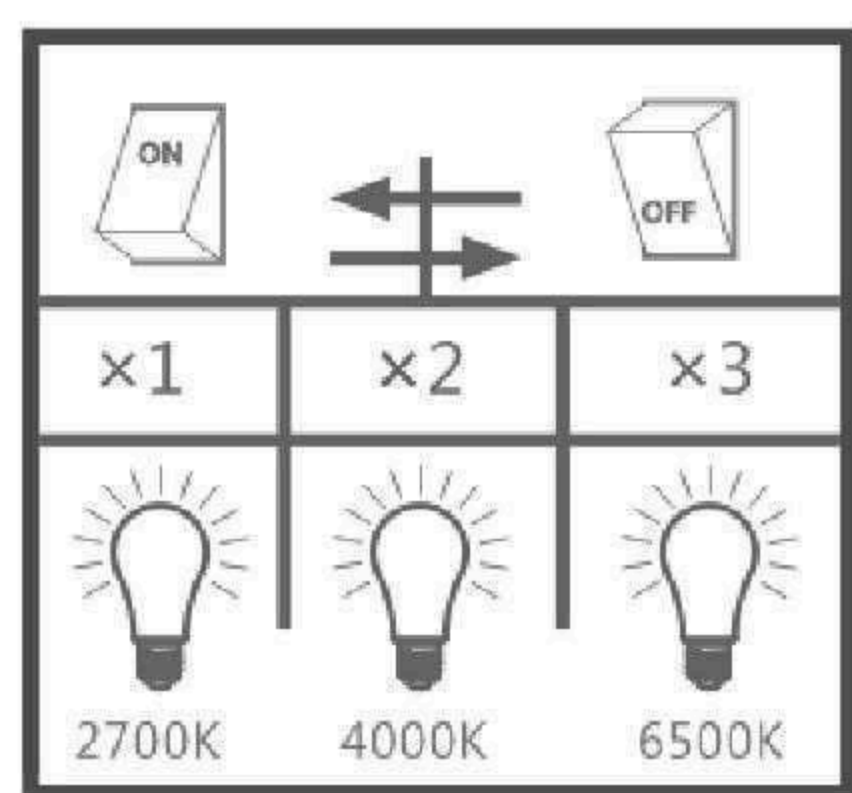

CCT CONTROL

· Install the backplane

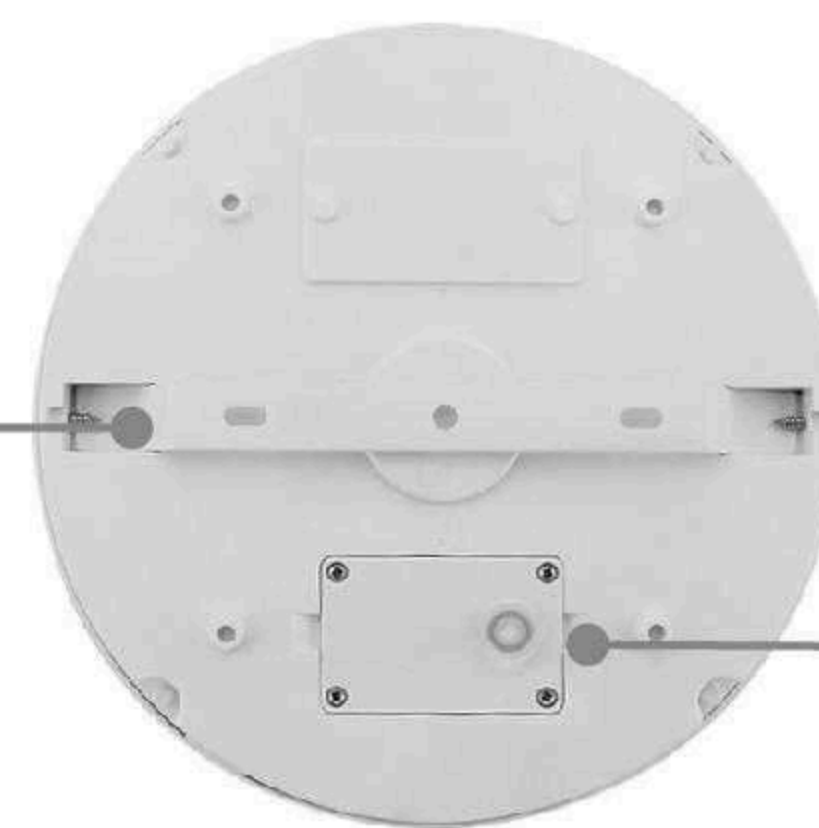

· Waterproof

**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7**  
**PF>0.9**

**AC170-265V**

**IP65**


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
Circular 12W	SYBH-01	12W	1332lm	120°	φ 180*H65		
Circular 18W	SYBH-02	18W	1998lm		φ 220*H65	65	Plastic
Circular 24W	SYBH-03	24W	2712lm		φ 280*H65		
Stepless adjusted 12W	SYBH CCT-01	12W	1332lm		φ 180*H65		
Stepless adjusted 18W	SYBH CCT-02	18W	1998lm		φ 220*H65	65	Plastic
Stepless adjusted 24W	SYBH CCT-03	24W	2712lm		φ 280*H65		



## LED Ceiling Light



SYBHET(01)-SYBHER(03)

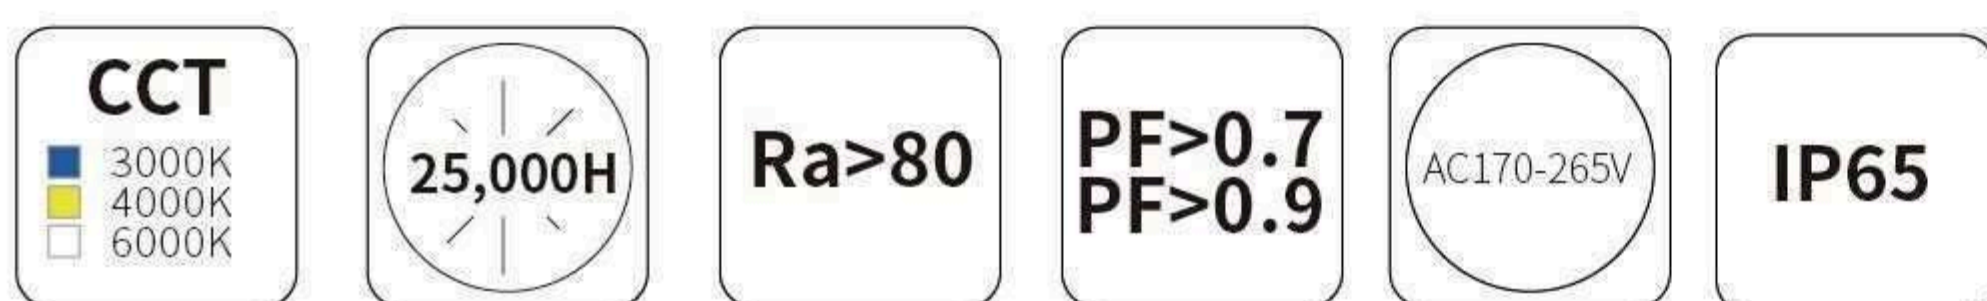




Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
Ellipse 8W	SYBHET-01	8W	640lm	120°	L155*W80*H55	65	Plastic
Ellipse 12W	SYBHET-02	12W	960lm		L174*W87*55		
Ellipse 15W	SYBHET-03	15W	1200lm		L198*W98*H55		
Circular 8W	SYBHER-01	8W	640lm		φ 140*H55		
Circular 12W	SYBHER-02	12W	960lm		φ 155*H55		
Circular 15W	SYBHER-03	15W	1200lm		φ 174*H55		

# CCT Down Light

## CCT Down Light



SYDLR6CCT~SYDLS12CCT




Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
SYDLR5CCT	5W	400LM	30°	Φ90*H52mm	/	PC
SYDLR7CCT	7W	560LM				
SYDLR9CCT	9W	720LM				
SYDLR12CCT	12W	1000LM				
SYDLS5CCT	5W	400LM				
SYDLS7CCT	7W	560LM				
SYDLS9CCT	9W	720LM				
SYDLS12CCT	12W	1000LM				

# ICCT Down Light



SYDLRB5CCT~SYDLSB12CCT

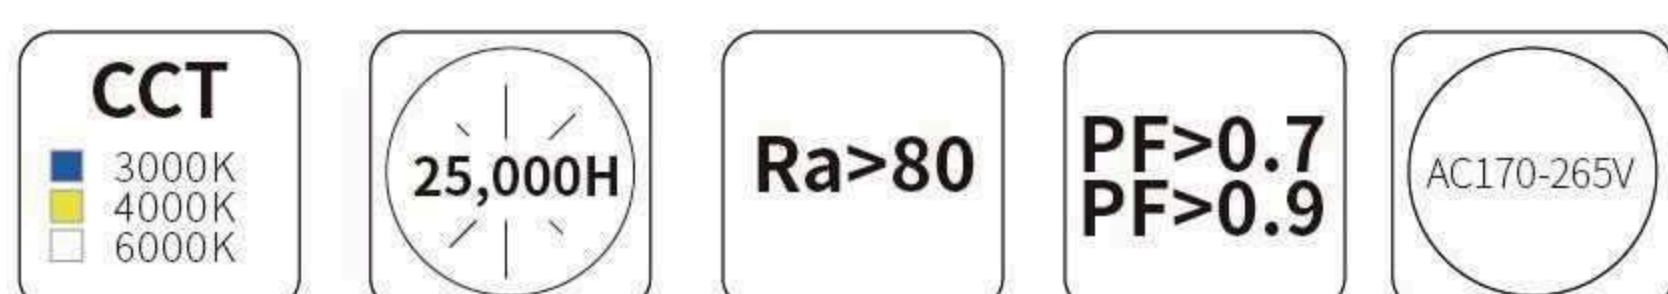

Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
SYDLRB5CCT	5W	400LM		Φ90*H52mm		
SYDLRB7CCT	7W	560LM		Φ90*H52mm		
SYDLRB9CCT	9W	720LM		Φ115*H53mm		
SYDLRB12CCT	12W	1000LM	30°	Φ115*H53mm	/	PC
SYDLSB5CCT	5W	400LM		Φ90*H52mm		
SYDLSB7CCT	7W	560LM		Φ90*H52mm		
SYDLSB9CCT	9W	720LM		Φ115*H53mm		
SYDLSB12CCT	12W	1000LM		Φ115*H53mm		

## Detail analysis



# 2024 TRI-Proof Light

Environmental protection, energy saving.

# Tri-Proof Light

## 4028 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W



**CCT**  
■ 3000K  
■ 4000K  
□ 6000K

**25,000H**

**Ra>80**

**PF>0.7  
PF>0.9**

AC170-265V

**IP65**


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
4028	SY-4028-A-06	18W	2160LM	120°	>80	L660*W43*H31	PC
	SY-4028-B-06						
	SY-4028-C-06						
	SY-4028-A-12	36W	4320LM			L1260*W43*H31	
	SY-4028-B-12						
	SY-4028-C-12						
	SY-4028-A-15	45W	5400LM			L1560*W43*H31	
	SY-4028-B-15						
	SY-4028-C-15						



# Tri-Proof Light

## 5532 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W


**CCT**  
3000K  
4000K  
6000K
**25,000H**
**Ra>80**
**PF>0.7  
PF>0.9**
**AC170-265V**
**IP65**




Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
5532	SY-5532-A-06	18W	2160LM	120°	>80	L650*W58*H36	PC
	SY-5532-B-06						
	SY-5532-C-06						
	SY-5532-A-12	36W	4320LM			L1250*W58*H36	
	SY-5532-B-12						
	SY-5532-C-12						
	SY-5532-A-15	45W	5400LM			L1550*W58*H36	
	SY-5532-B-15						
SY-5532-C-15							

## 7233 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

**CCT**  
3000K  
4000K  
6000K
**25,000H**
**Ra>80**
**PF>0.7  
PF>0.9**
**AC170-265V**
**IP65**




Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
7233	SY-7233-A-06-20W	20W	2400LM	120°	>80	L665*W75*H35mm	PC
	SY-7233-B-06-20W						
	SY-7233-C-06-20W						
	SY-7233-A-12-40W	40W	4800LM			L1265*W75*H35mm	
	SY-7233-B-12-40W						
	SY-7233-C-12-40W						
	SY-7233-A-15-50W	50W	6000LM			L1565*W75*H35mm	
	SY-7233-B-15-50W						
SY-7233-C-15-50W							

# Tri-Proof Light

## 8348L Tri-Proof Light

OPTIONS: 120LM/W 140LM/W 160LM/W



**HOT!**  
**160LM/W**



**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7  
PF>0.9**

AC170-265V


**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348L	SY-8348L-A-06-30W	30W	3600LM	120°	>80	L610*W83*H48mm	PC
	SY-8348L-A-06-40W	40W	4800LM				
	SY-8348L-A-12-60W	60W	7200LM				
	SY-8348L-A-12-70W	70W	8400LM				
	SY-8348L-A-15-80W	80W	9600LM				
	SY-8348L-A-15-90W	90W	10800LM				
	SY-8348L-B-06-30W	30W	3600LM				
	SY-8348L-B-06-40W	40W	4800LM				
	SY-8348L-B-12-60W	60W	7200LM				
	SY-8348L-B-12-70W	70W	8400LM				
	SY-8348L-B-15-80W	80W	9600LM				
	SY-8348L-B-15-90W	90W	10800LM				
	SY-8348L-C-06-30W	30W	3600LM				
	SY-8348L-C-06-40W	40W	4800LM				
	SY-8348L-C-12-60W	60W	7200LM				
	SY-8348L-C-12-70W	70W	8400LM				
	SY-8348L-C-15-80W	80W	9600LM				
	SY-8348L-C-15-90W	90W	10800LM				

# Tri-Proof Light


## 8348W Tri-Proof Light

OPTIONS: 120LM/W 140LM/W 160LM/W


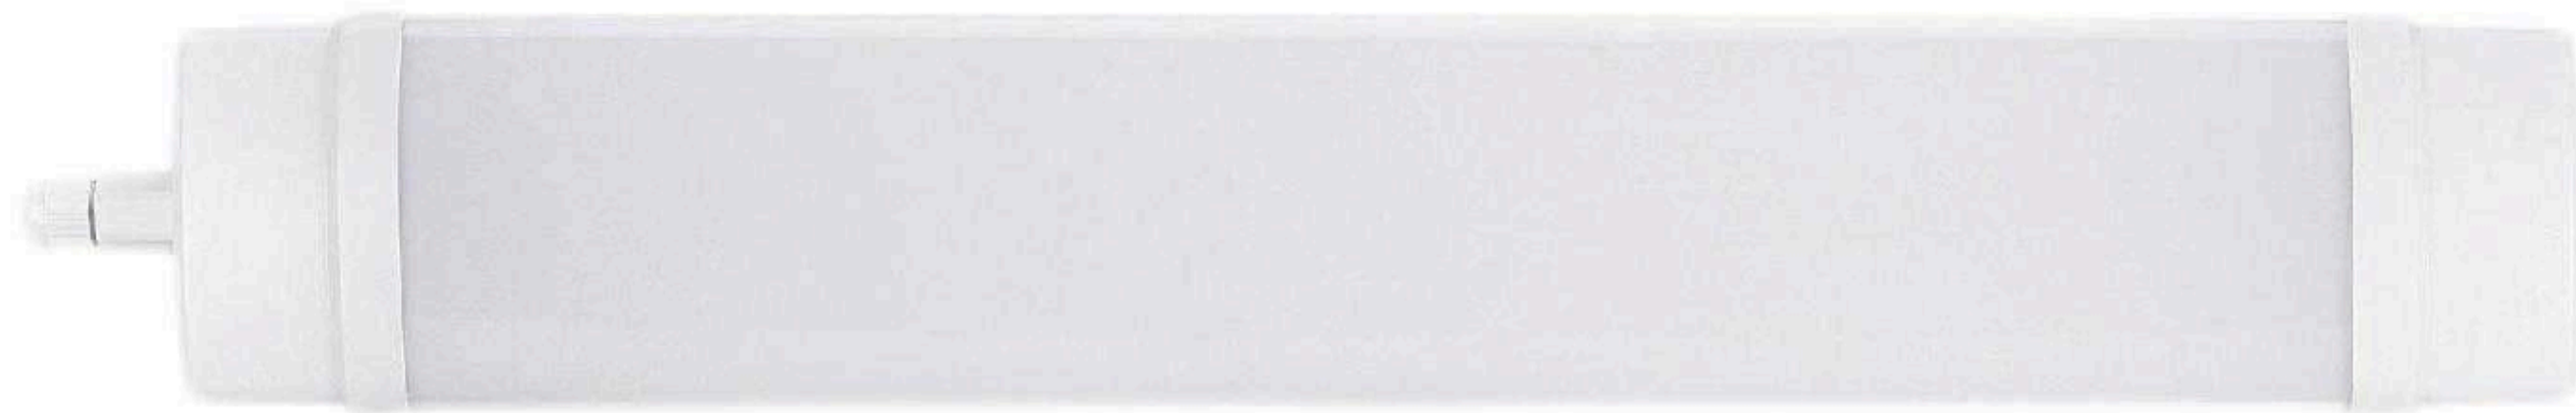


B

**HOT!**  
**160LM/W**

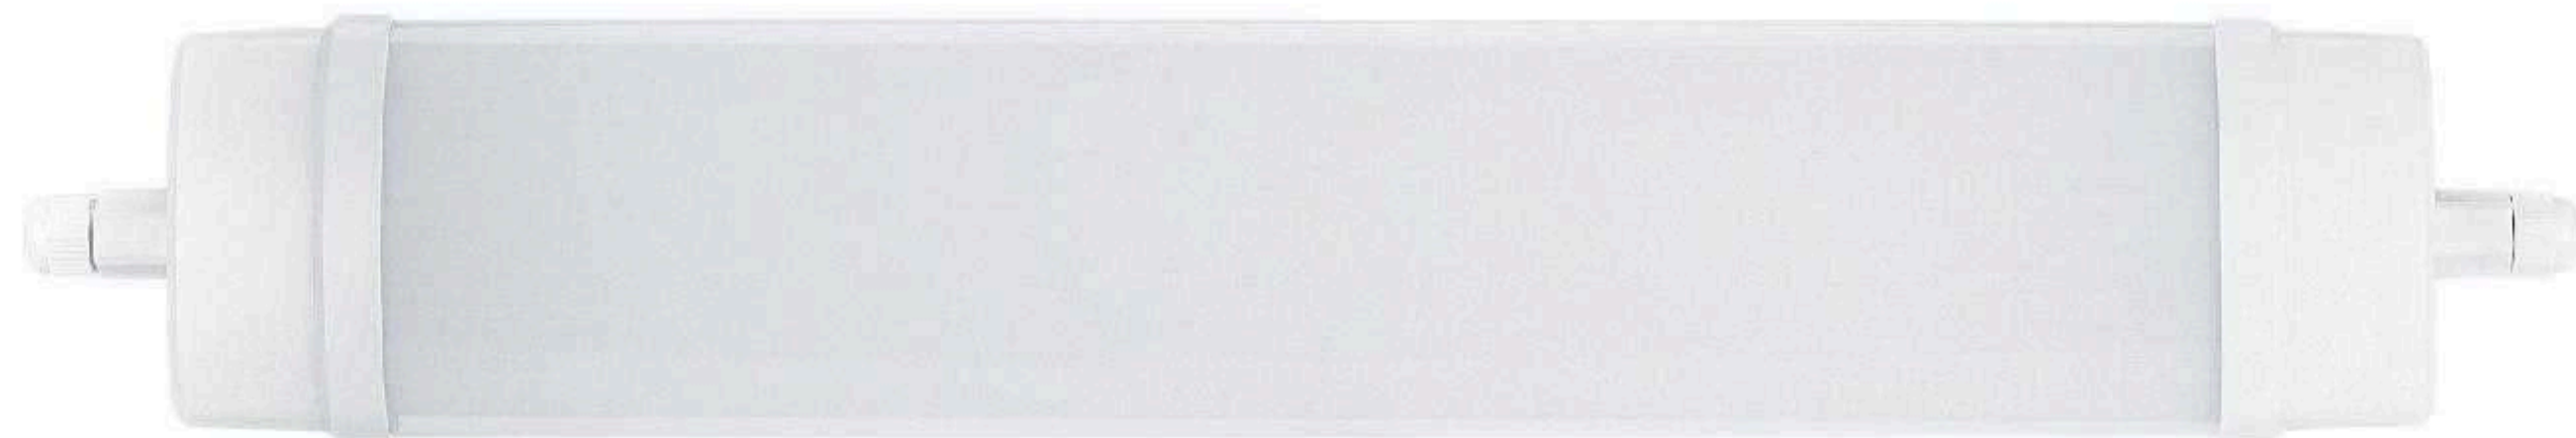

C

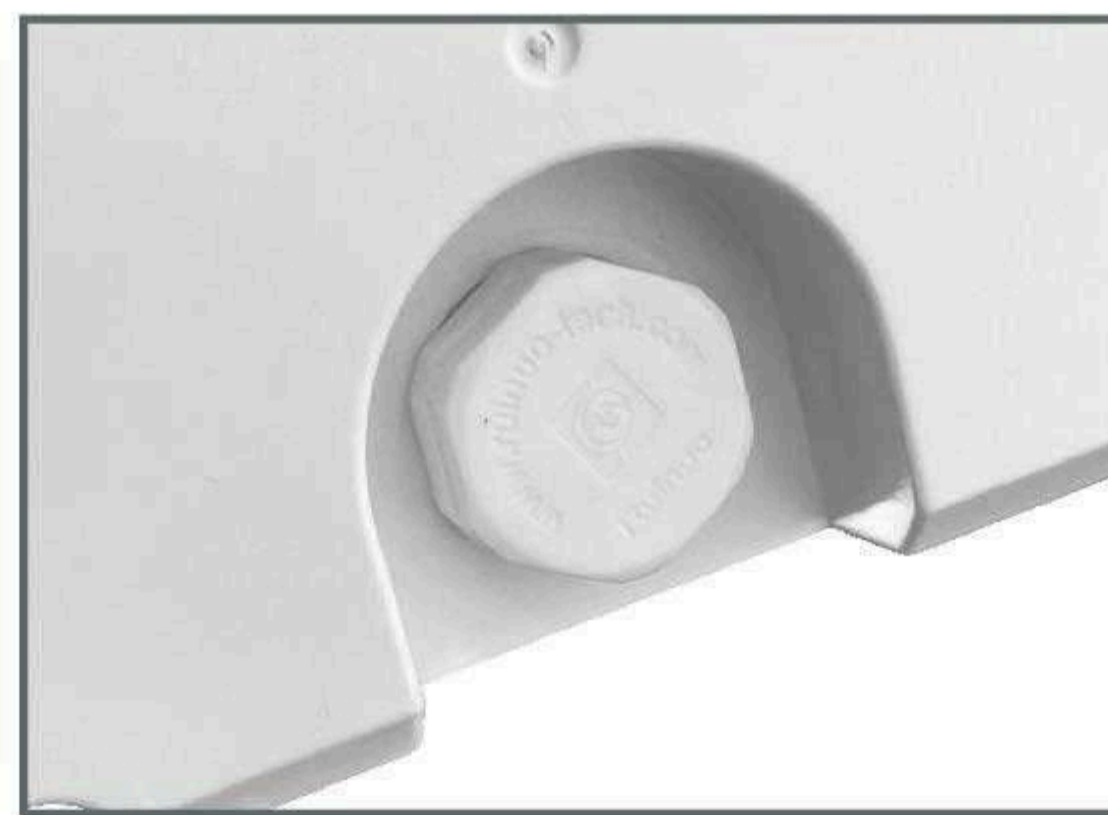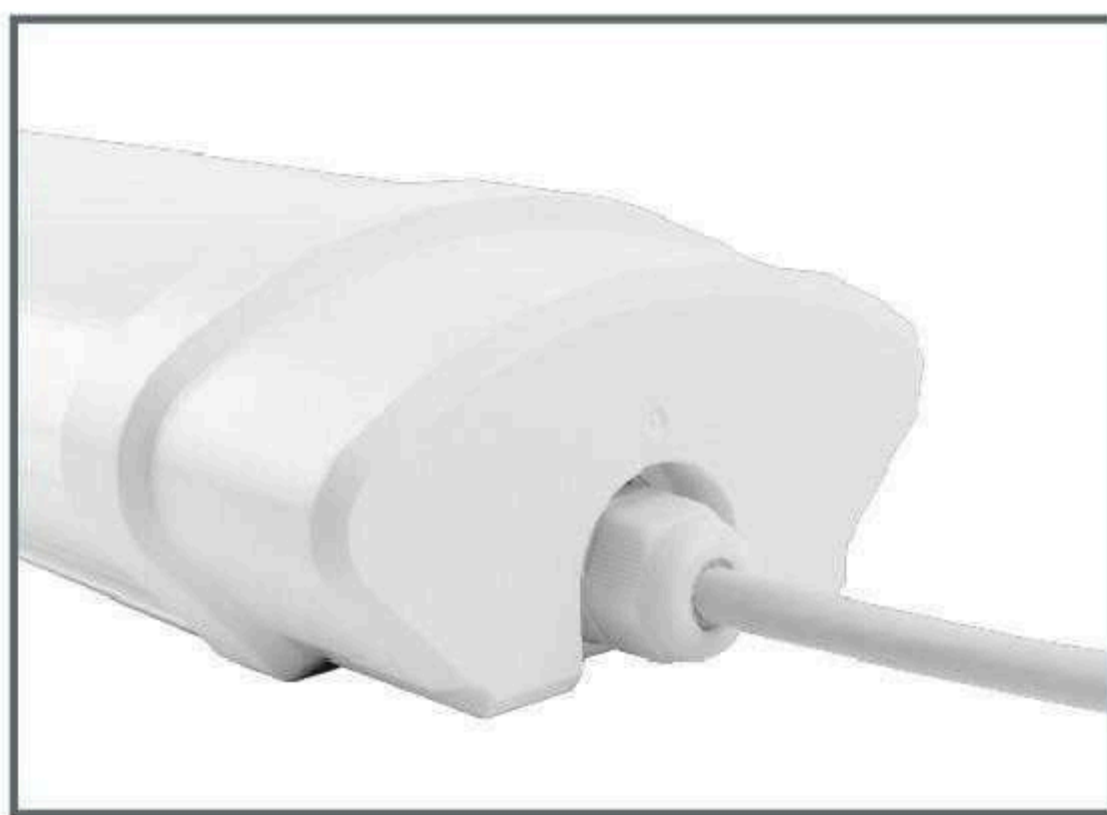




**CCT**  
3000K  
4000K  
6000K
**25,000H**
**Ra>80**
**PF>0.7**  
**PF>0.9**
**AC170-265V**
**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348W	SY-8348W-A-12-60W	60W	7200LM	120°	>80	L1210*W116*H60mm	PC
	SY-8348W-A-12-70W	70W	8400LM				
	SY-8348W-A-12-80W	80W	9600LM				
	SY-8348W-A-15-90W	90W	10800LM			L1510*W116*H60mm	
	SY-8348W-A-15-100W	100W	12000LM				
	SY-8348W-B-12-60W	60W	7200LM				
	SY-8348W-B-12-70W	70W	8400LM			L1240*W116*H60mm	
	SY-8348W-B-12-80W	80W	9600LM				
	SY-8348W-B-15-90W	90W	10800LM				
	SY-8348W-B-15-100W	100W	12000LM			L1540*W116*H60mm	
	SY-8348W-C-12-60W	60W	7200LM				
	SY-8348W-C-12-70W	70W	8400LM				
	SY-8348W-C-12-80W	80W	9600LM				
	SY-8348W-C-15-90W	90W	10800LM				
	SY-8348W-C-15-100W	100W	12000LM			L1580*W116*H60mm	

# Tri-Proof Light

## 8377 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

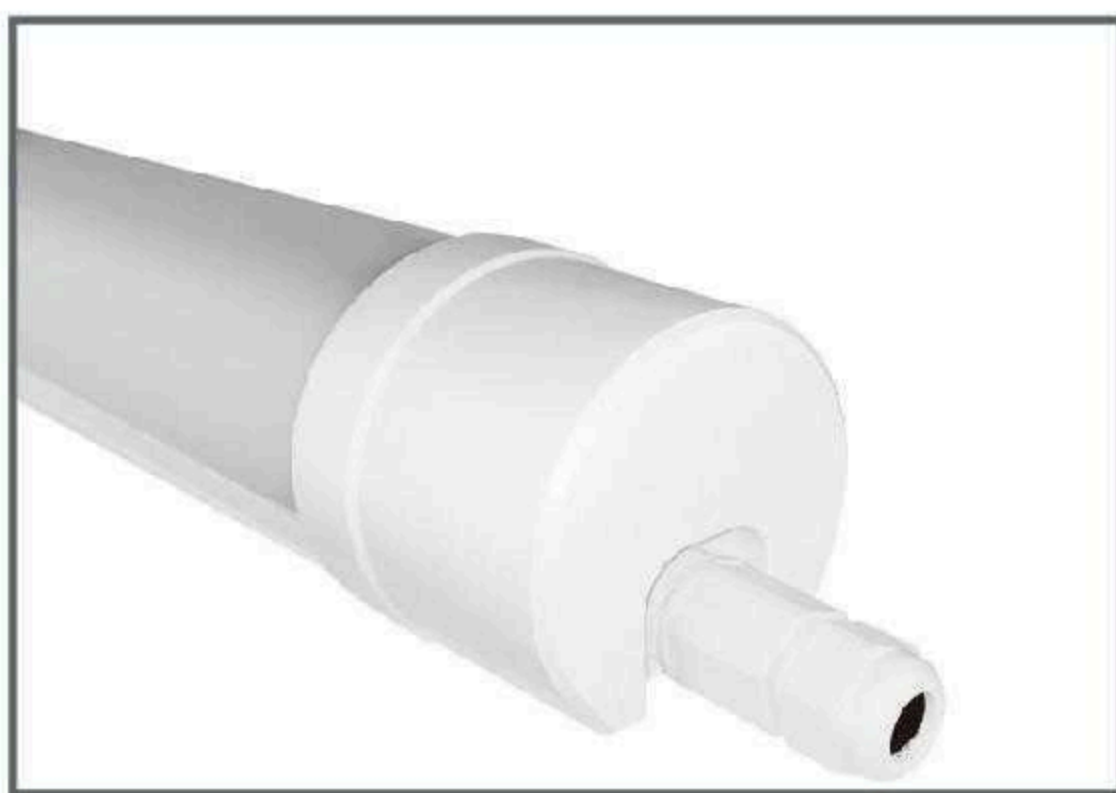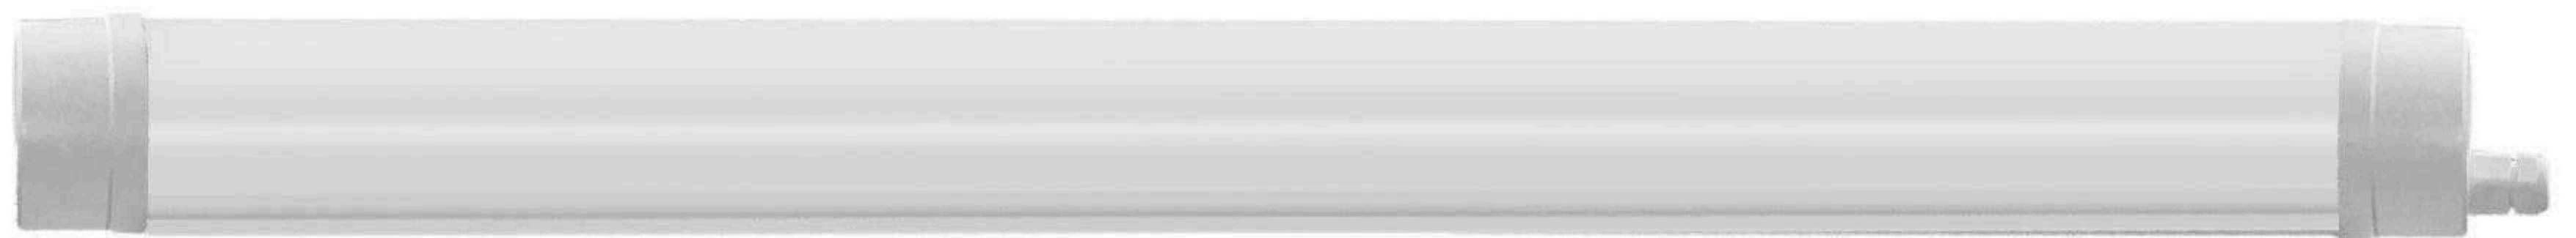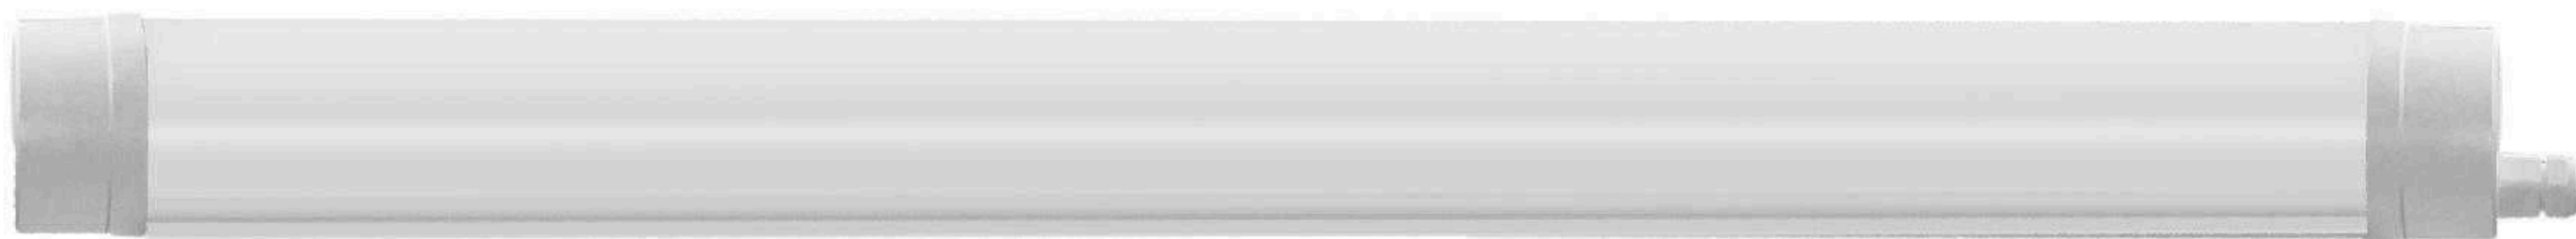

**CCT**  
 3000K  
 4000K  
 6000K

25,000H

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC170-265V




**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8377	SY-8377-A-12-40W	40W	4800LM	180°	>80	L1215*W83*H77mm	PC
	SY-8377-A-12-60W	60W	7200LM				
	SY-8377-A-15-70W	70W	8400LM			L1515*W83*H77mm	
	SY-8377-B-12-40W	40W	4800LM			L1215*W83*H77mm	
	SY-8377-B-12-60W	60W	7200LM			L1215*W83*H77mm	
	SY-8377-B-15-70W	70W	8400LM			L1515*W83*H77mm	
	SY-8377-C-12-40W	40W	4800LM			L1215*W83*H77mm	
	SY-8377-C-12-60W	60W	7200LM			L1215*W83*H77mm	
SY-8377-C-15-70W	70W	8400LM	L1515*W83*H77mm				

# Tri-Proof Light

## 8970 Tri-Proof Light

**OPTIONS: 120LM/W 140LM/W**

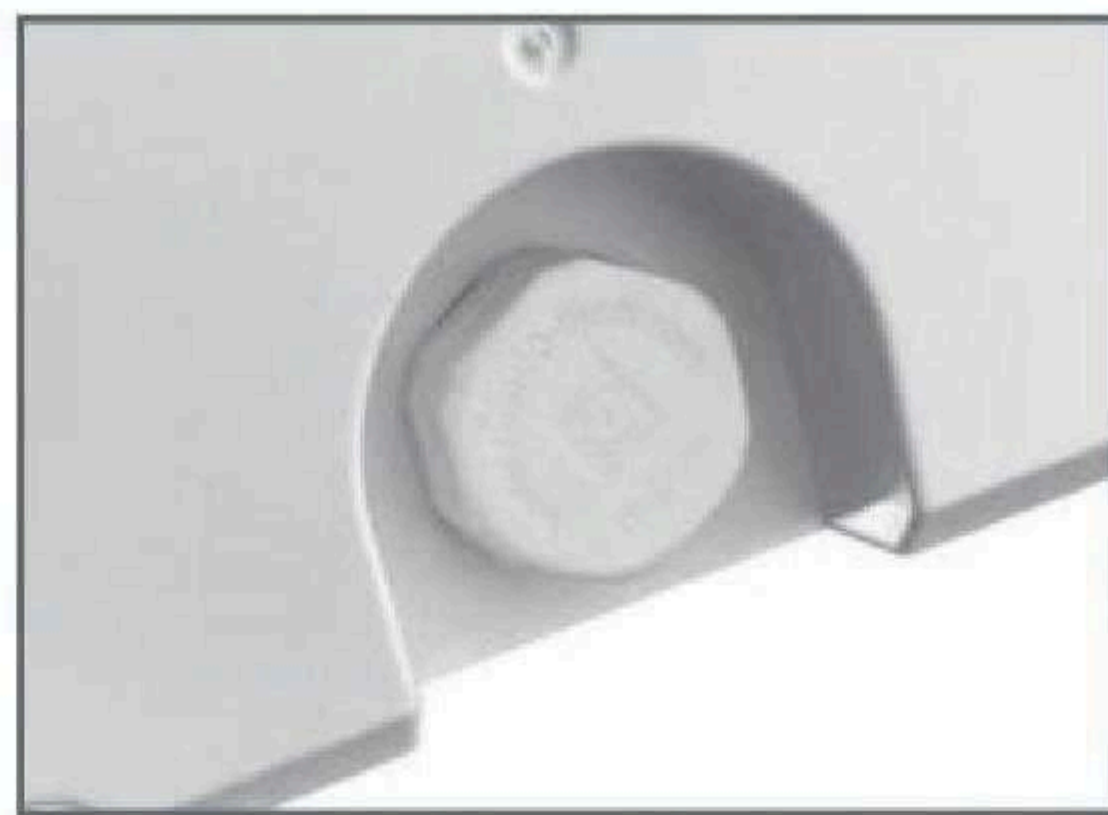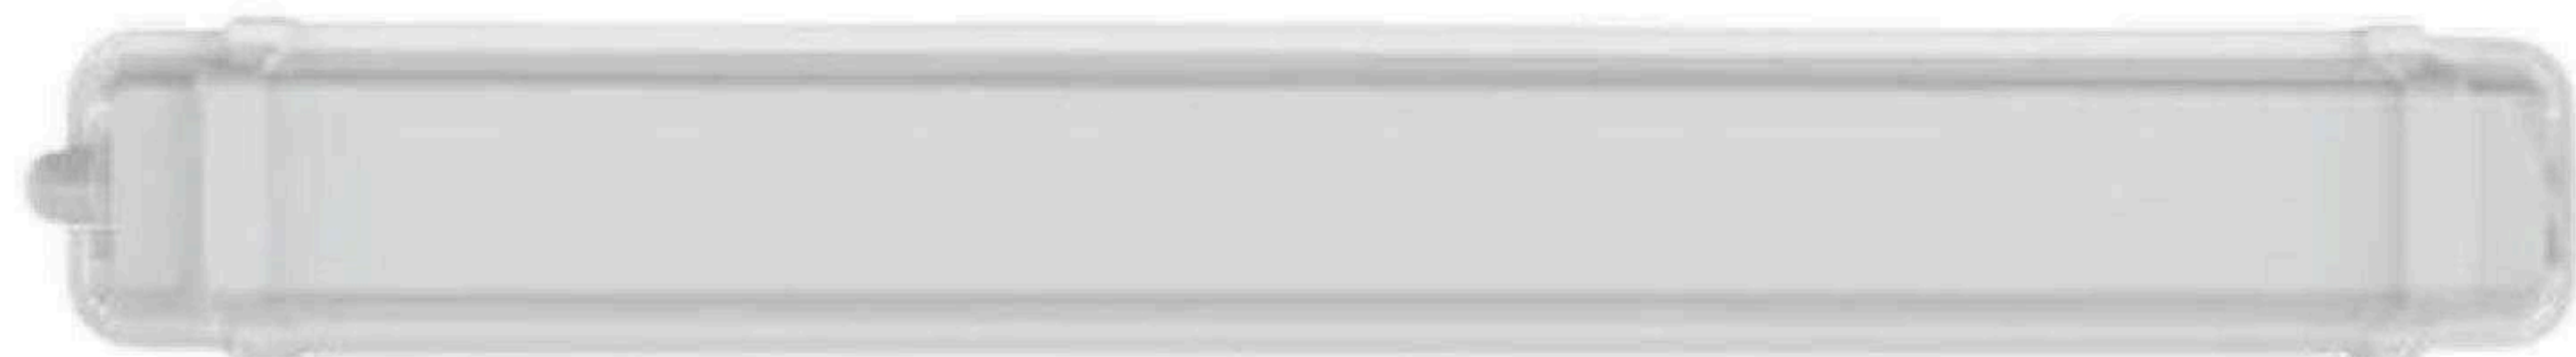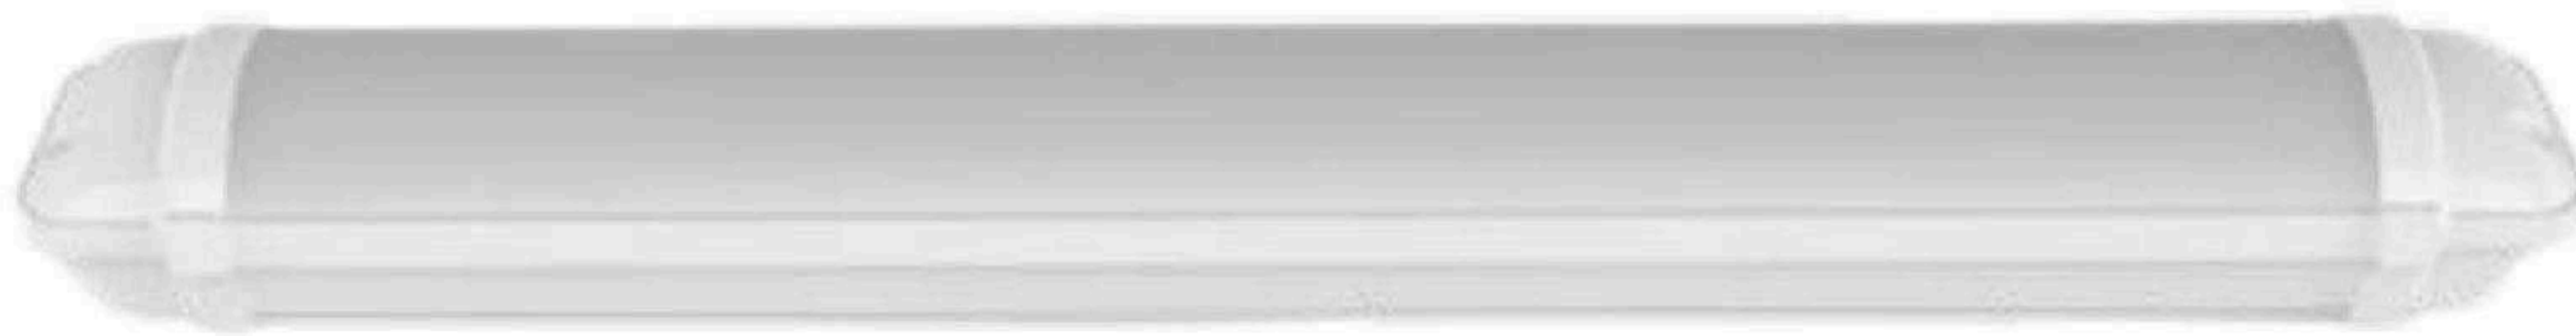

**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7  
PF>0.9**

**AC170-265V**


**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size ( mm )	Material
	SY-8970-A-06-40W						
	SY-8970-B-06-40W	40W	4800LM			L660*W89*H70mm	
	SY-8970-C-06-40W						
	SY-8970-A-12-80W						
8970	SY-8970-B-12-80W	80W	9600LM	120°	>80	L1270*W89*H70mm	PC
	SY-8970-C-12-80W						
	SY-8970-A-15-100W						
	SY-8970-B-15-100W	100W	12000LM			L1570*W89*H70mm	
	SY-8970-C-15-100W						

# Tri-Proof Light

## 1645 Tri-Proof Light


OPTIONS: 120LM/W 140LM/W

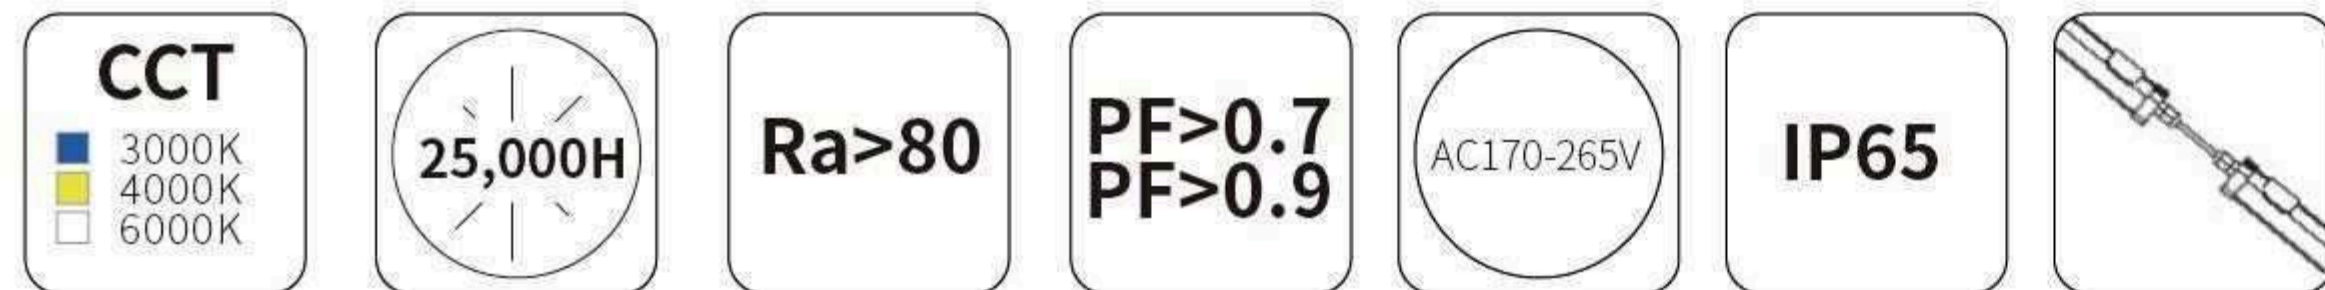

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
1645	SY-1645-A-12	70W	8400LM	120°	>80	L1210*W119*H48mm	PC
	SY-1645-A-15	90W	10800LM			L1510*W119*H48mm	
	SY-1645-B-12	70W	8400LM			L1210*W119*H48mm	
	SY-1645-B-15	90W	10800LM			L1510*W119*H48mm	
	SY-1645-C-12	70W	8400LM			L1210*W119*H48mm	
	SY-1645-C-15	90W	10800LM			L1510*W119*H48mm	

## 8348S Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

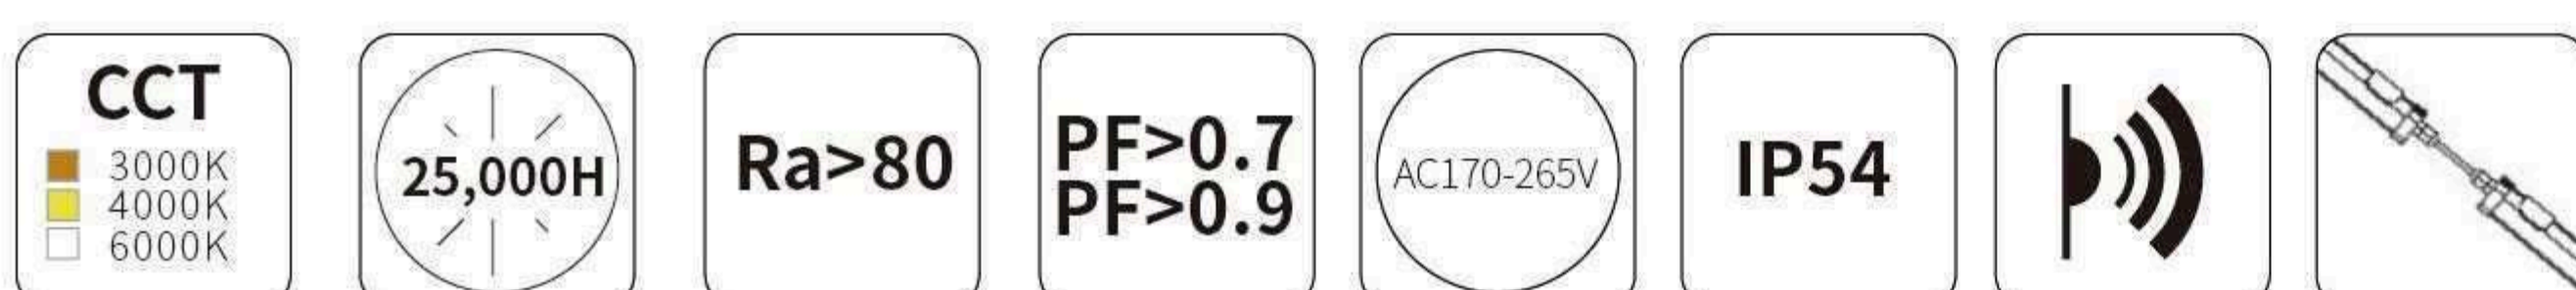


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348S	SY-8348S-A-06-18W	18W	2160LM	120°	>80	L610*W83*H60mm	PC
	SY-8348S-A-12-24W	24W	2880LM			L1210*W83*H60mm	
	SY-8348S-A-12-36W	36W	4320LM			L1210*W83*H60mm	
	SY-8348S-B-06-18W	18W	2160LM			L640*W83*H60mm	
	SY-8348S-B-12-24W	24W	2880LM			L1240*W83*H60mm	
	SY-8348S-B-12-36W	36W	4320LM			L1240*W83*H60mm	
	SY-8348S-C-06-18W	18W	2160LM			L680*W83*H60mm	
	SY-8348S-C-12-24W	24W	2880LM			L1280*W83*H60mm	
	SY-8348S-C-12-36W	36W	4320LM			L1280*W83*H60mm	

# Tri-Proof Light

## 5933 Tri-Proof Light

**OPTIONS: 120LM/W 140LM/W**

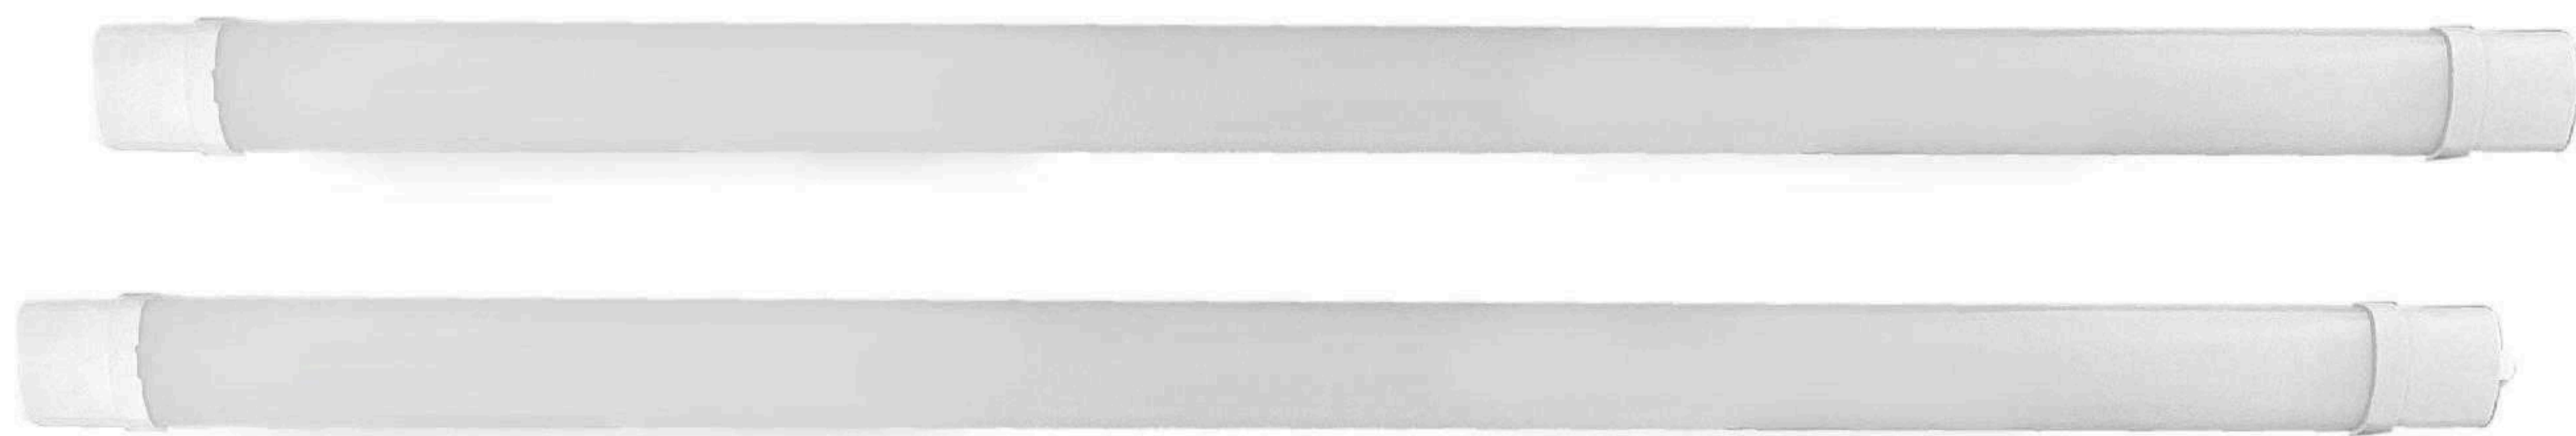

**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC220-240V


**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
	SY-5933-A-12						
	SY-5933-B-12	36W	4320LM			L1230*W59*H33	
	SY-5933-C-12						
5933	SY-5933-A-12						
	SY-5933-B-12	60W	7200LM	120°	>80	L1230*W59*H33	PC
	SY-5933-C-12						
	SY-5933-A-15						
	SY-5933-B-15	70W	8400LM			L1530*W59*H33	
	SY-5933-C-15						

# Tri-Proof Light

## 5863 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

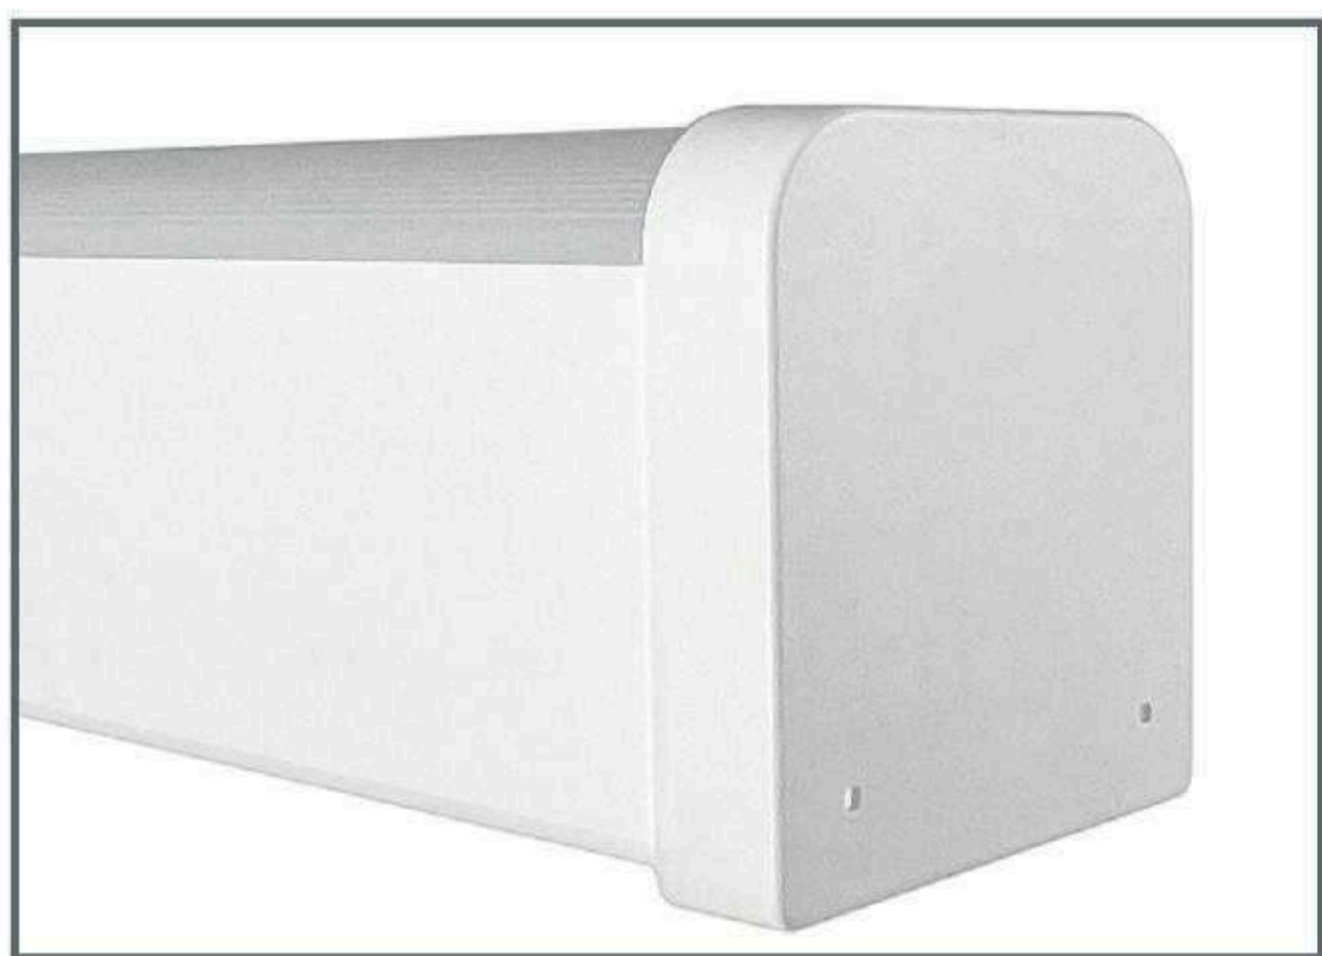

**CCT**

- 3000K
- 4000K
- 6000K

25,000H

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC170-265V

**IP54**


Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
5863	SY-5863 -A-12-60W CCT	60W	7200LM	120°	>80	L1225*W58*H63mm	PC
	SY-5863 -A-12-70W CCT	70W	8400LM			L1225*W58*H63mm	
	SY-5863 -A-15-70W CCT	70W	8400LM			L1525*W58*H63mm	
	SY-5863 -A-15-80W CCT	80W	9600LM			L1525*W58*H63mm	
	SY-5863 -A-15-90W CCT	90W	10800LM			L1525*W58*H63mm	



# Tri-Proof Light

## 8348M Tri-Proof Light

OPTIONS: 120LM/W 140LM/W 160LM/W

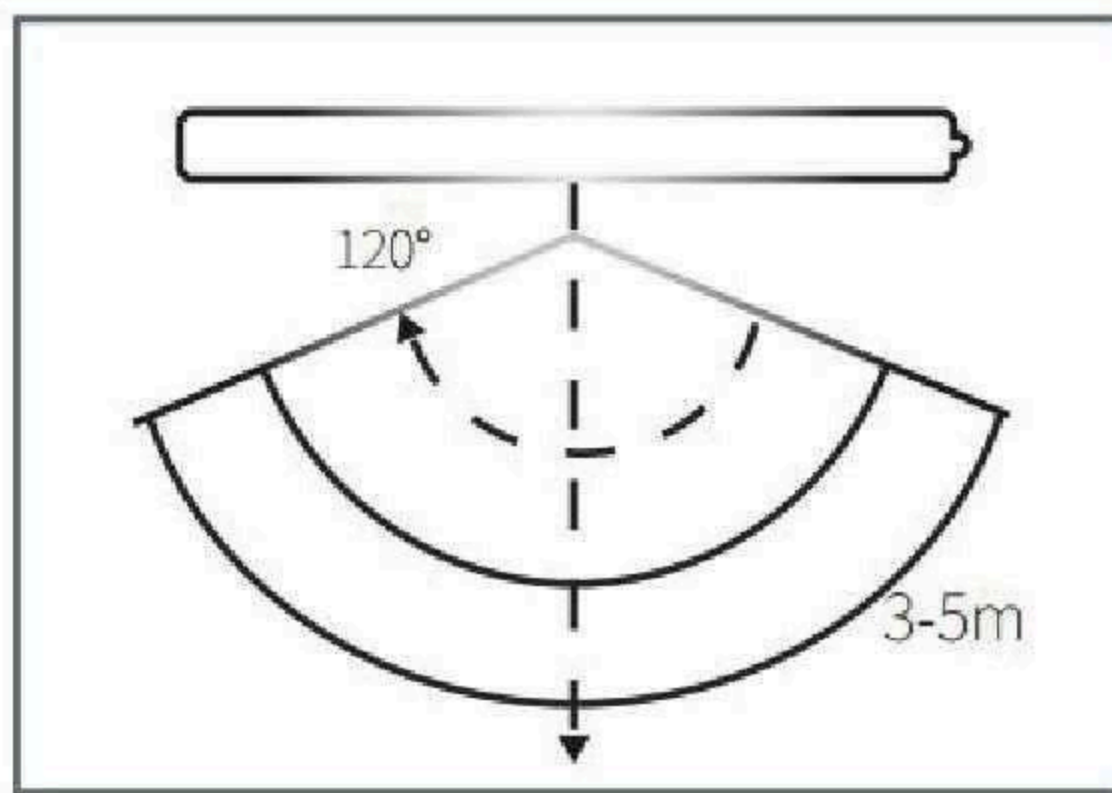






**CCT**  
3000K  
4000K  
6000K
**25,000H**
**Ra>80**
**PF>0.7**  
**PF>0.9**
**AC170-265V**
**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
8348M	SY-8348M-A-06-18W	18W	2160LM	120°	>80	L610*W83*H48mm	PC
	SY-8348M-A-06-24W	24W	2640LM			L610*W83*H48mm	
	SY-8348M-A-12-36W	36W	4320LM			L610*W83*H48mm	
	SY-8348M-A-12-45W	45W	4950LM			L1210*W83*H48mm	
	SY-8348M-B-06-18W	18W	2160LM			L1210*W83*H48mm	
	SY-8348M-B-06-24W	24W	2640LM			L640*W83*H48mm	
	SY-8348M-B-12-36W	36W	4320LM			L640*W83*H48mm	
	SY-8348M-B-12-45W	45W	4950LM			L1240*W83*H48mm	
	SY-8348M-C-06-18W	18W	2160LM			L1240*W83*H48mm	
	SY-8348M-C-06-24W	24W	2640LM			L680*W83*H48mm	
	SY-8348M-C-12-36W	36W	4320LM			L680*W83*H48mm	
	SY-8348M-C-12-36W	36W	4320LM			L1280*W83*H48mm	
	SY-8348M-C-12-45W	45W	4950LM			L1280*W83*H48mm	

# Tri-Proof Light

---



## APPLICATION areas

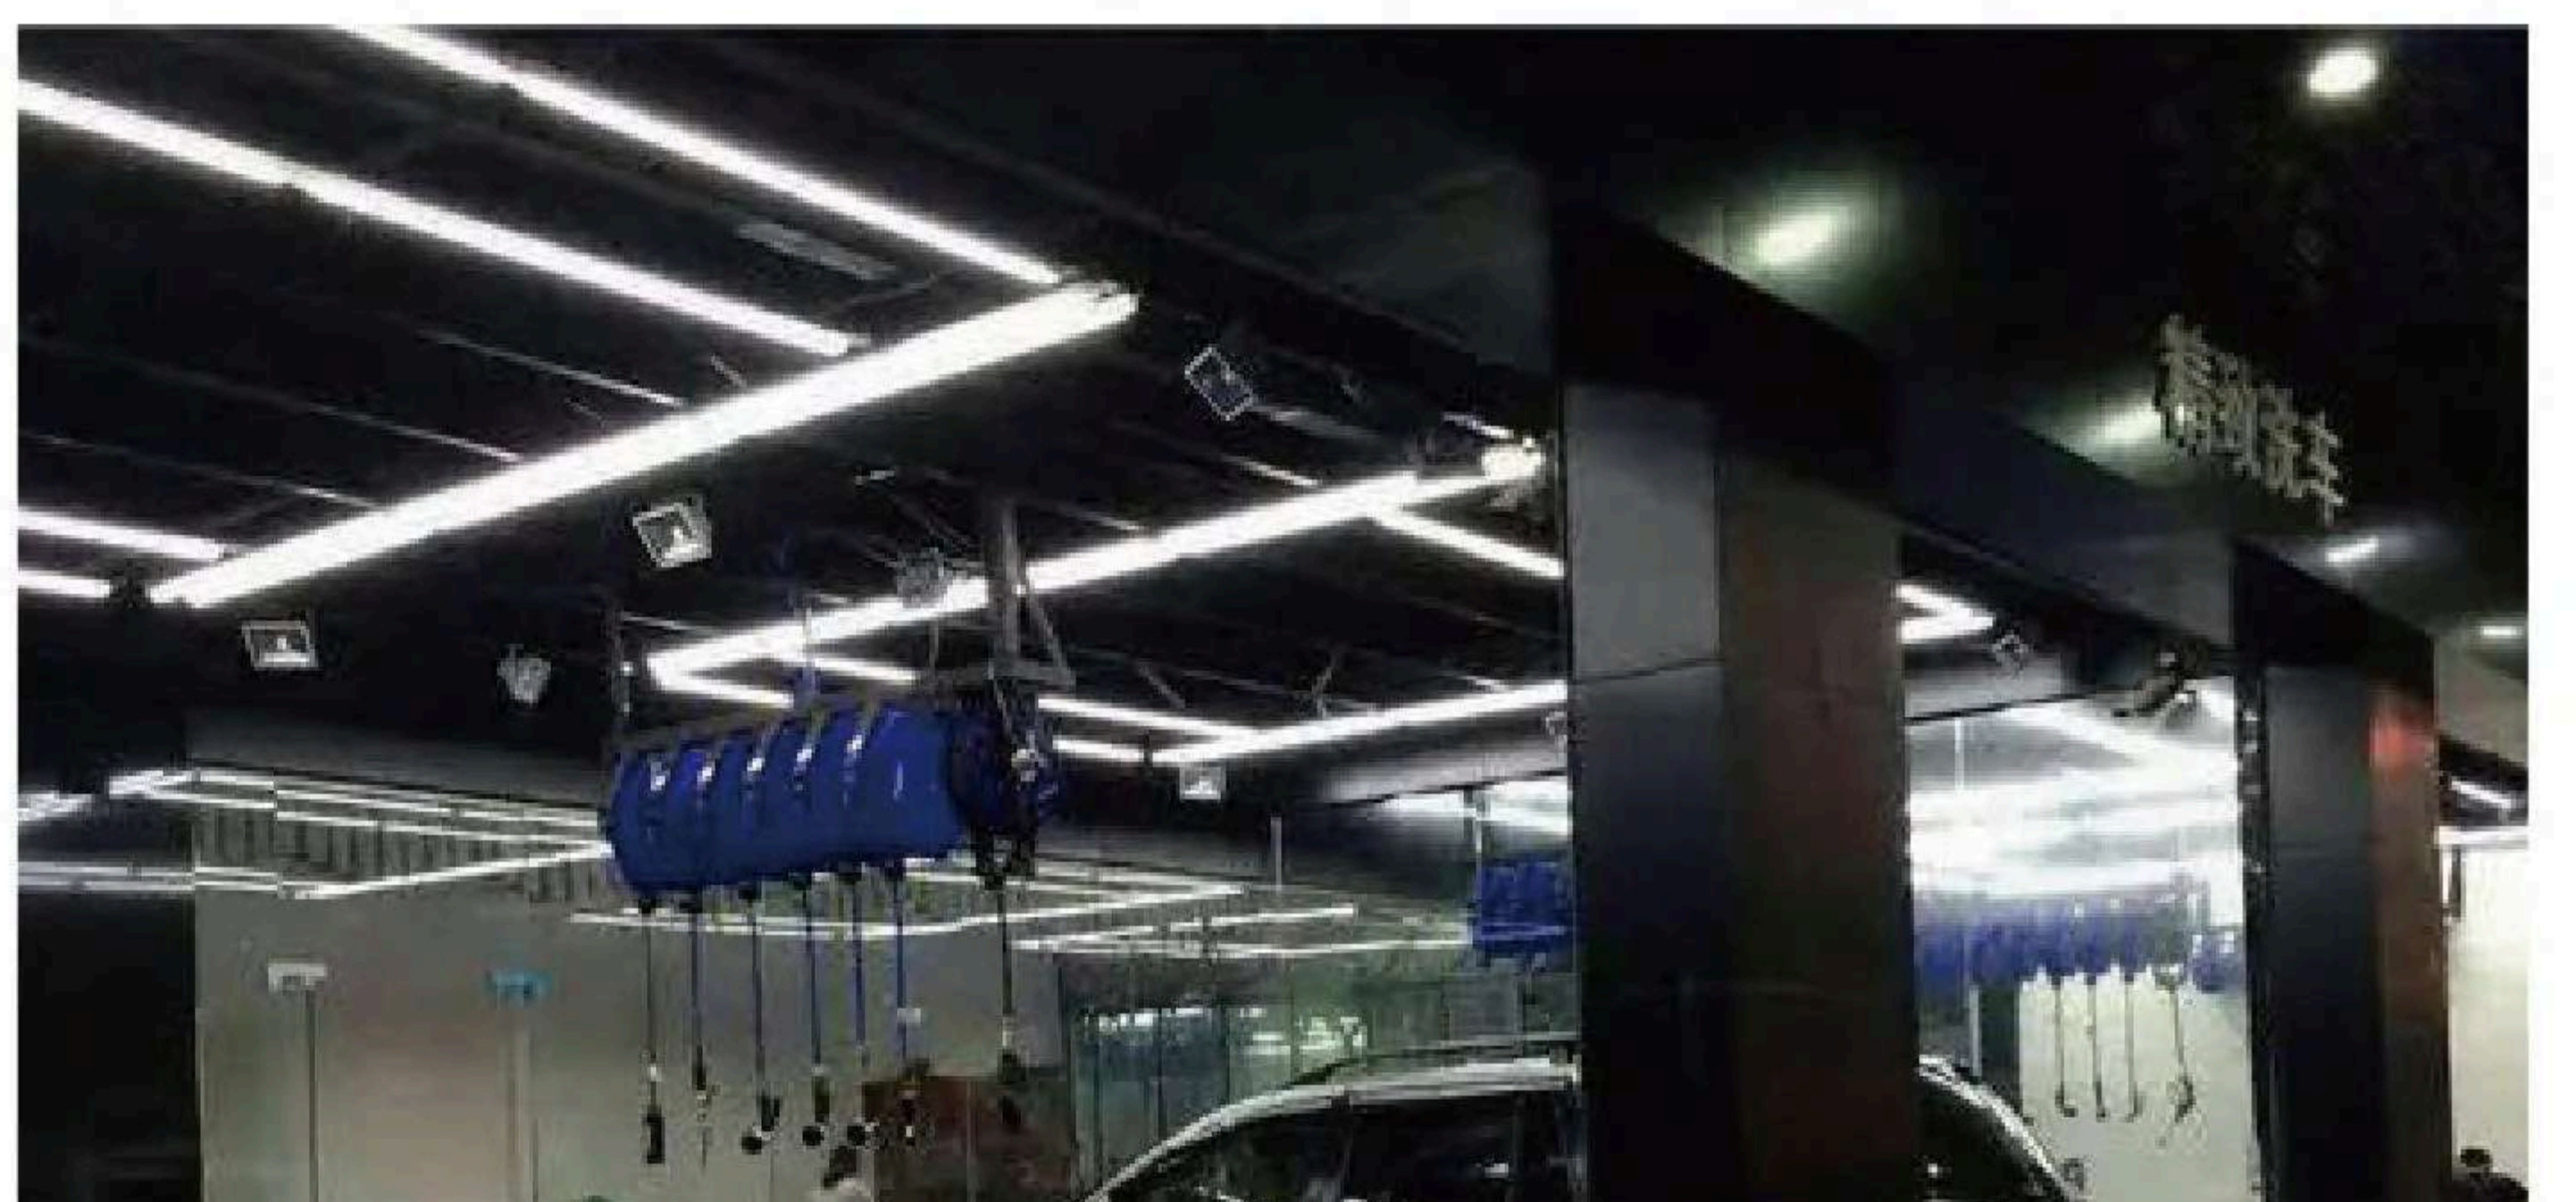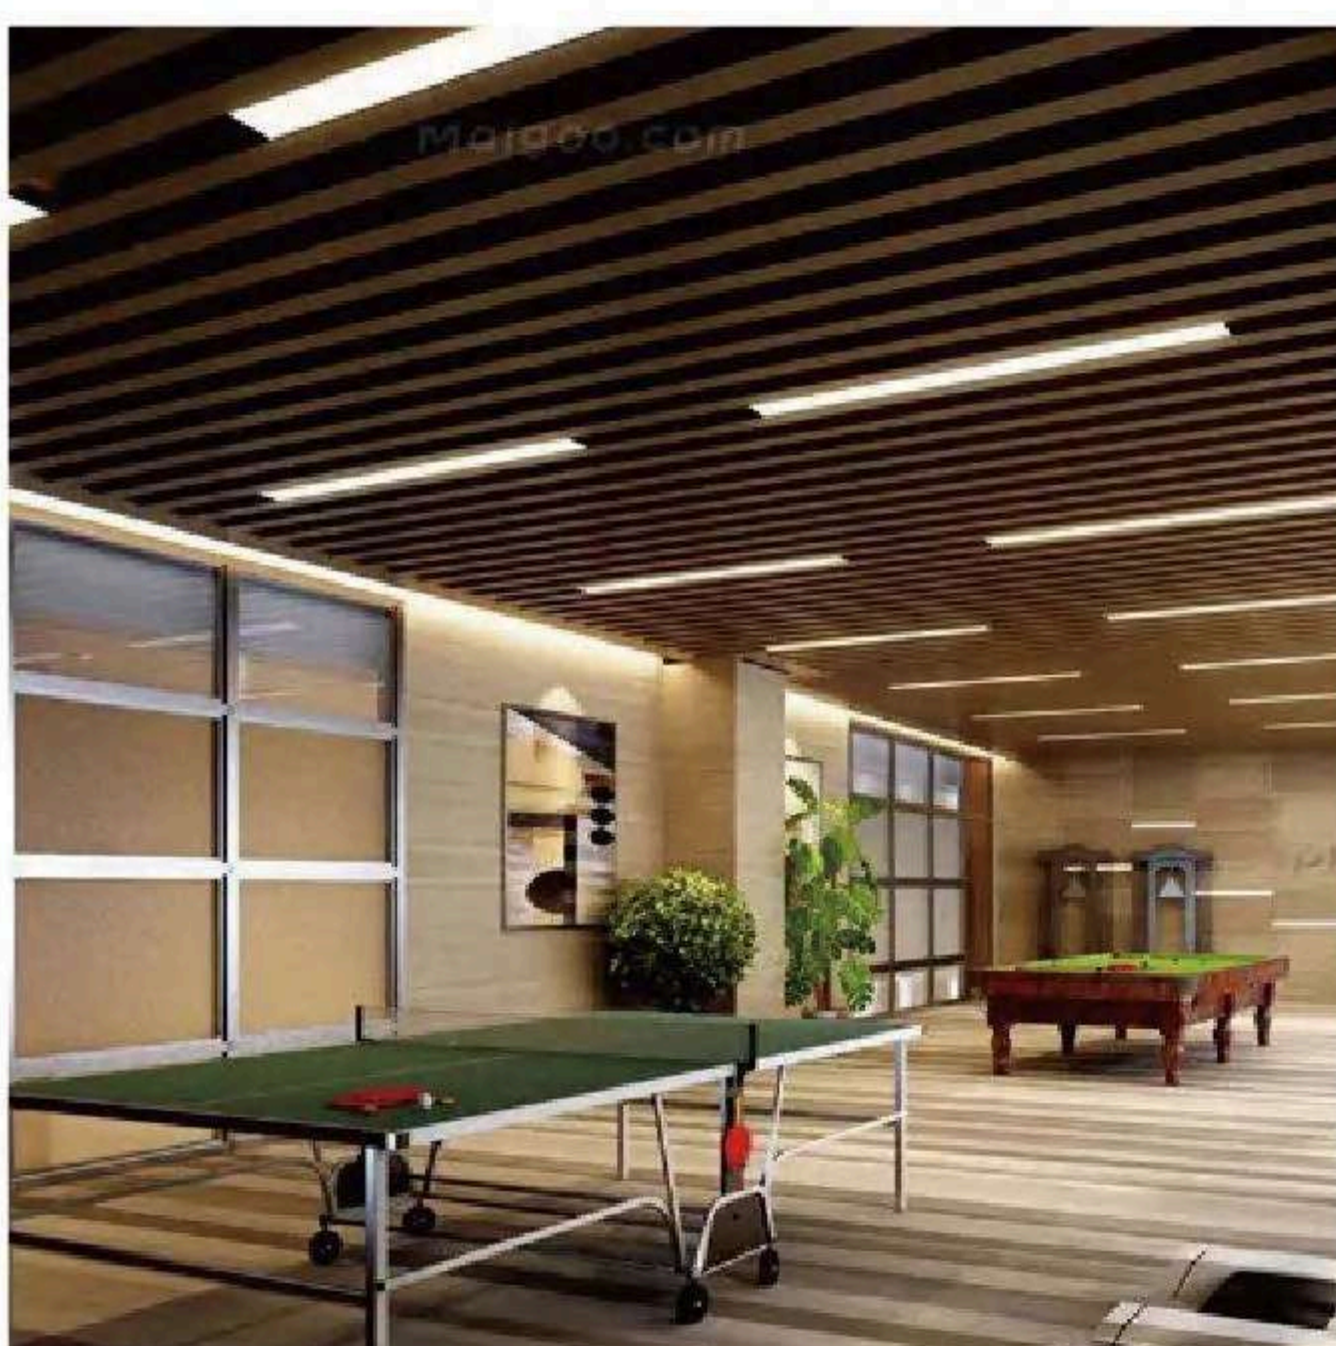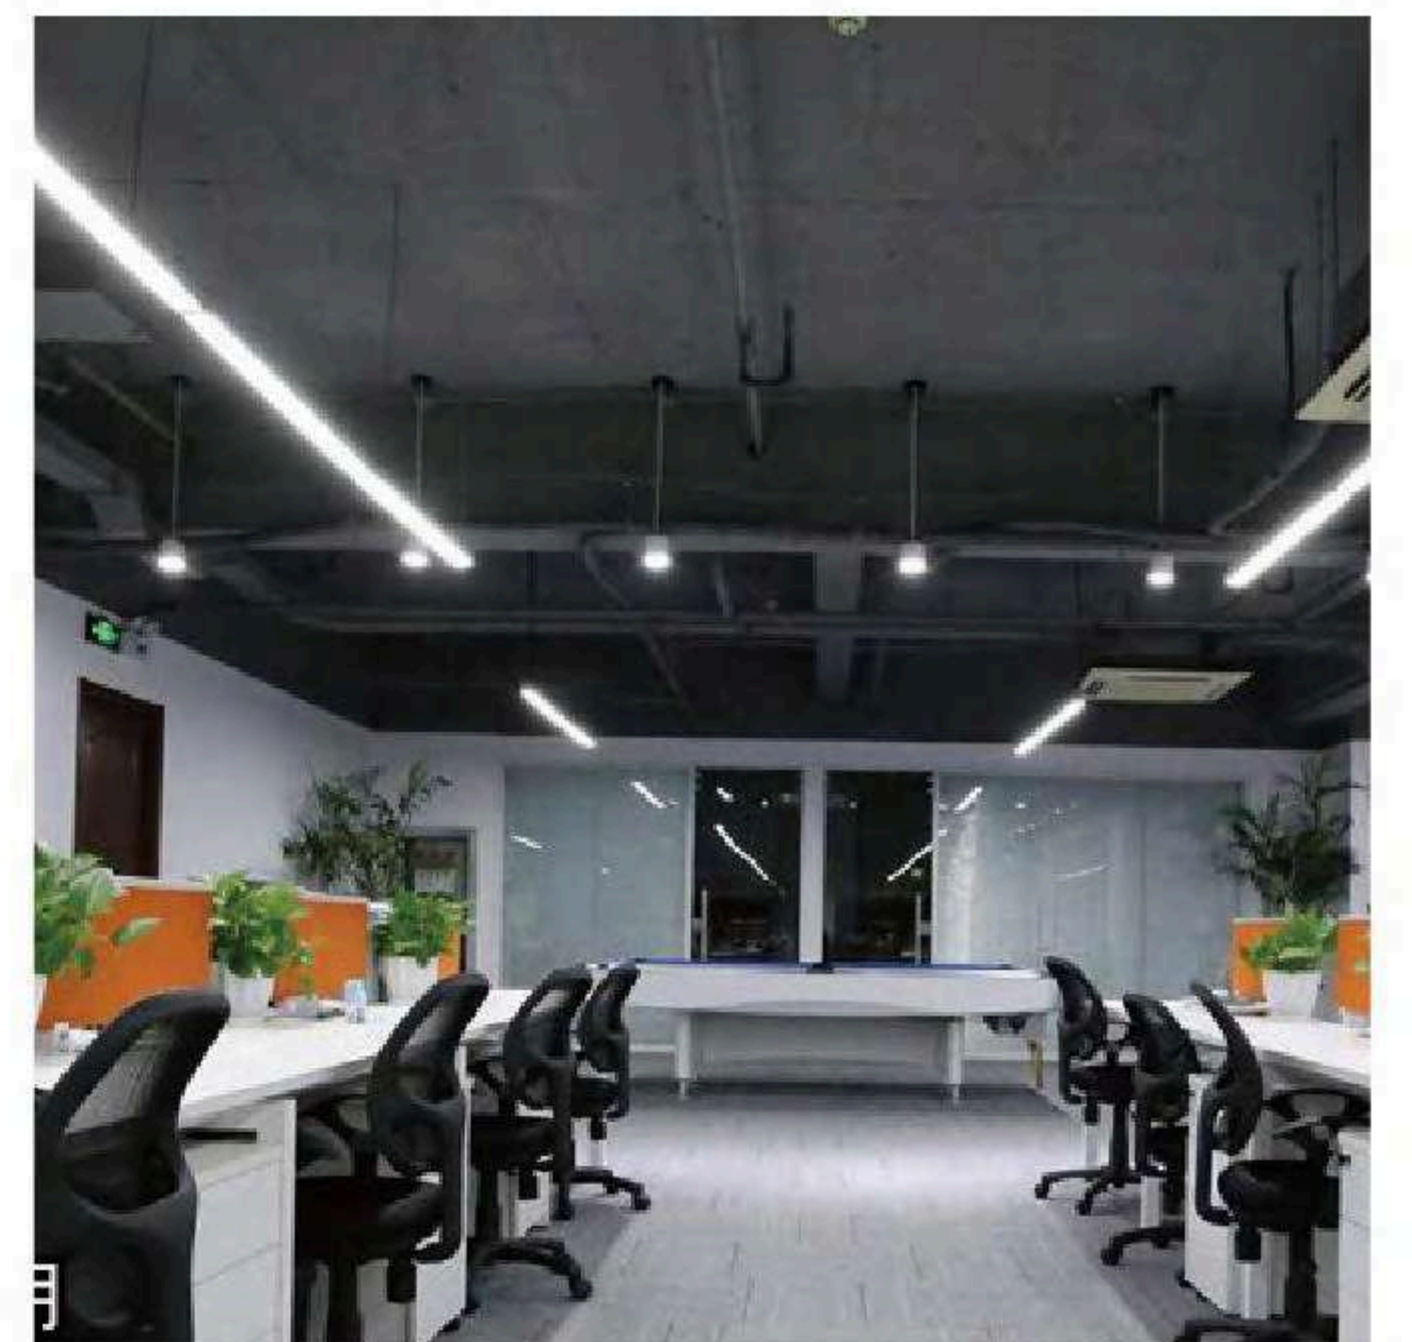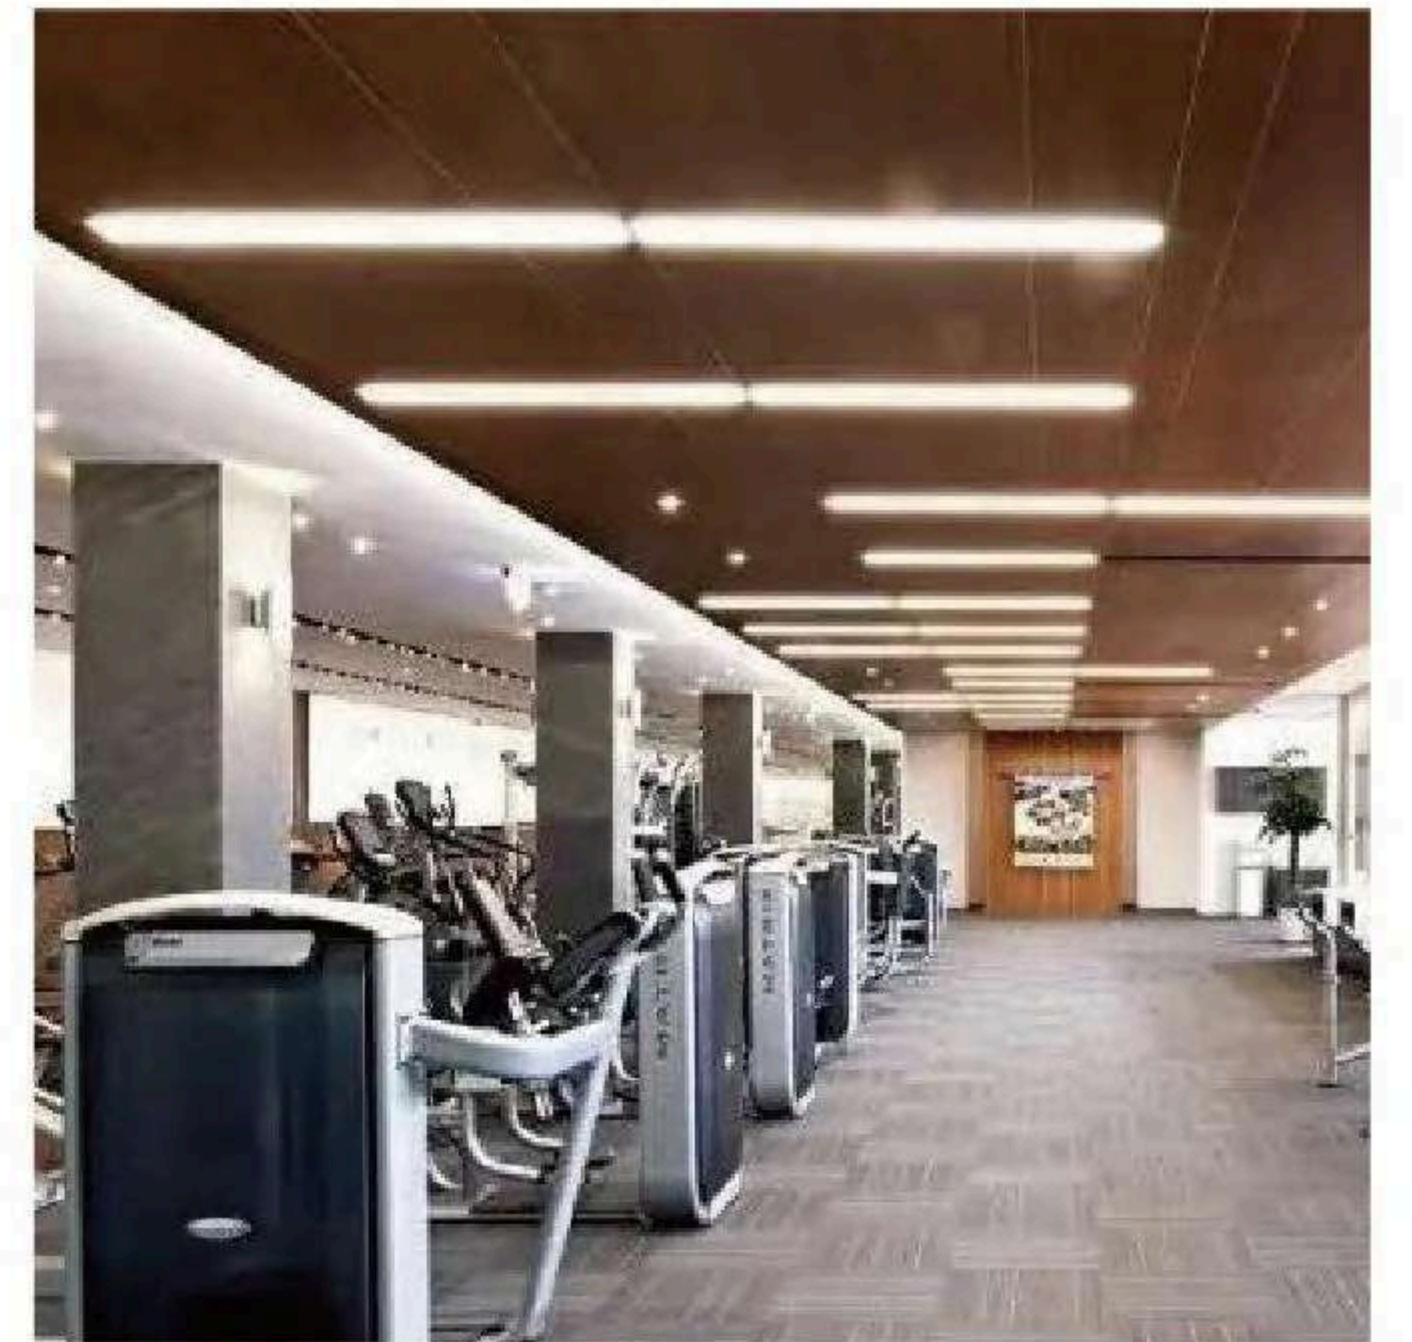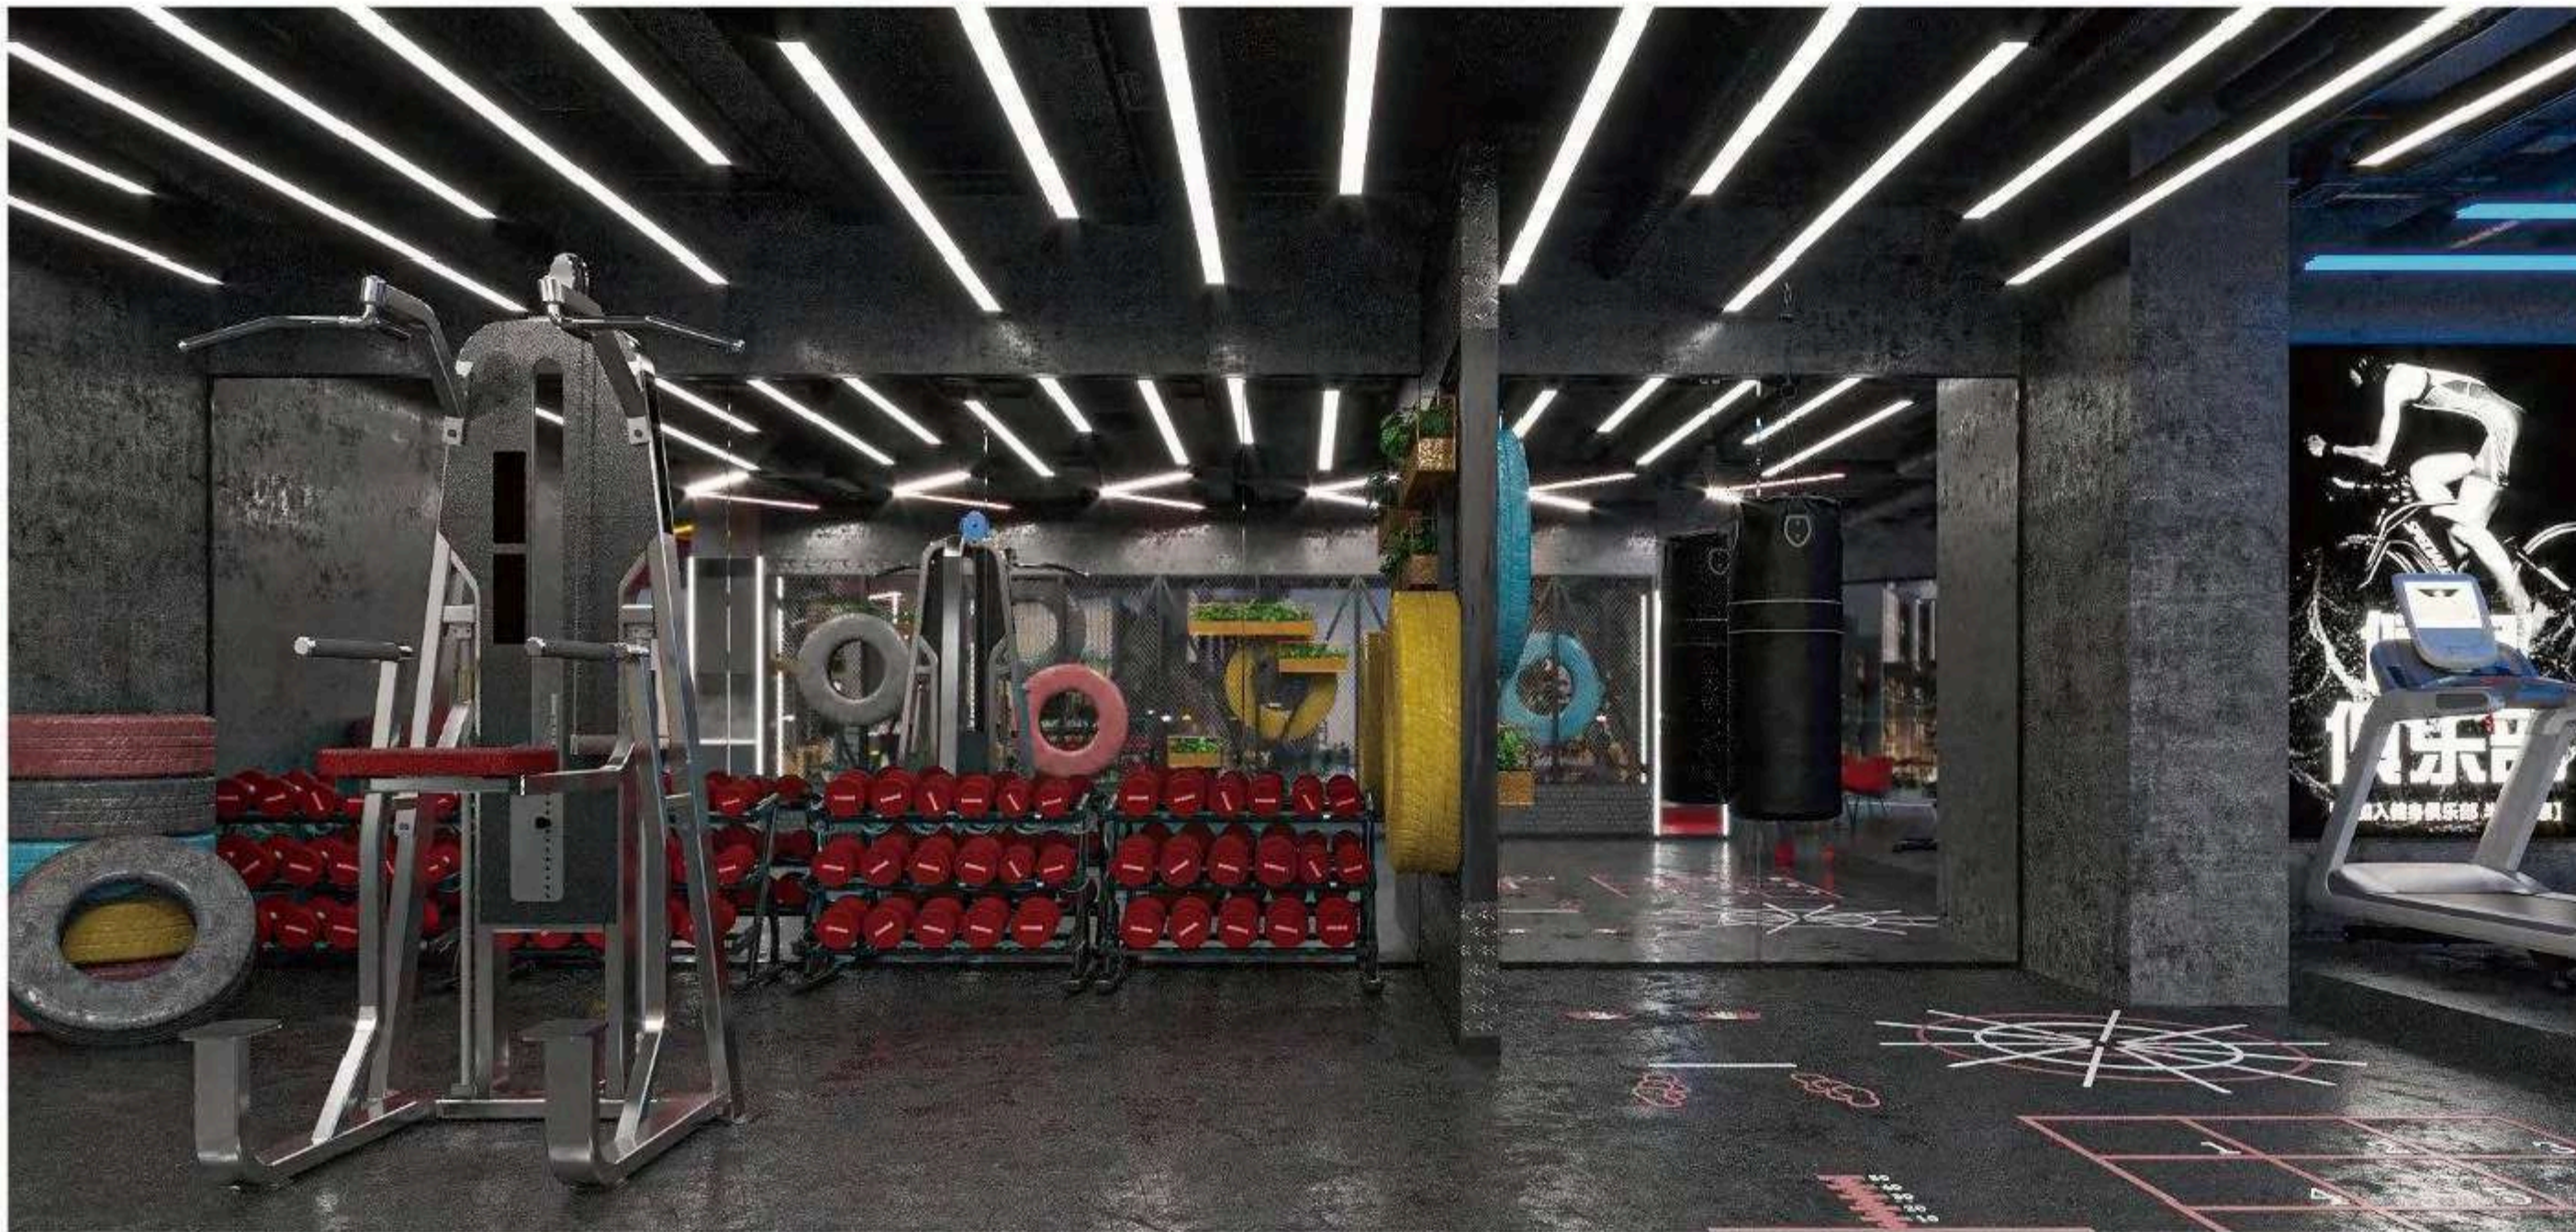

# Tri-Proof Light

## 6052 Tri-Proof Light

OPTIONS: 120LM/W 140LM/W

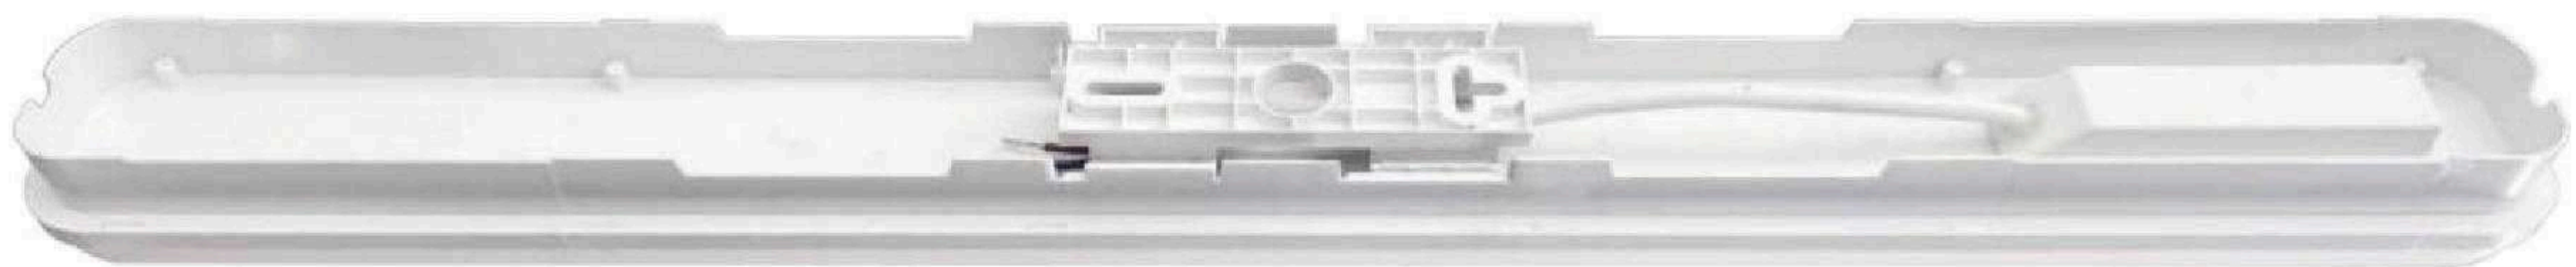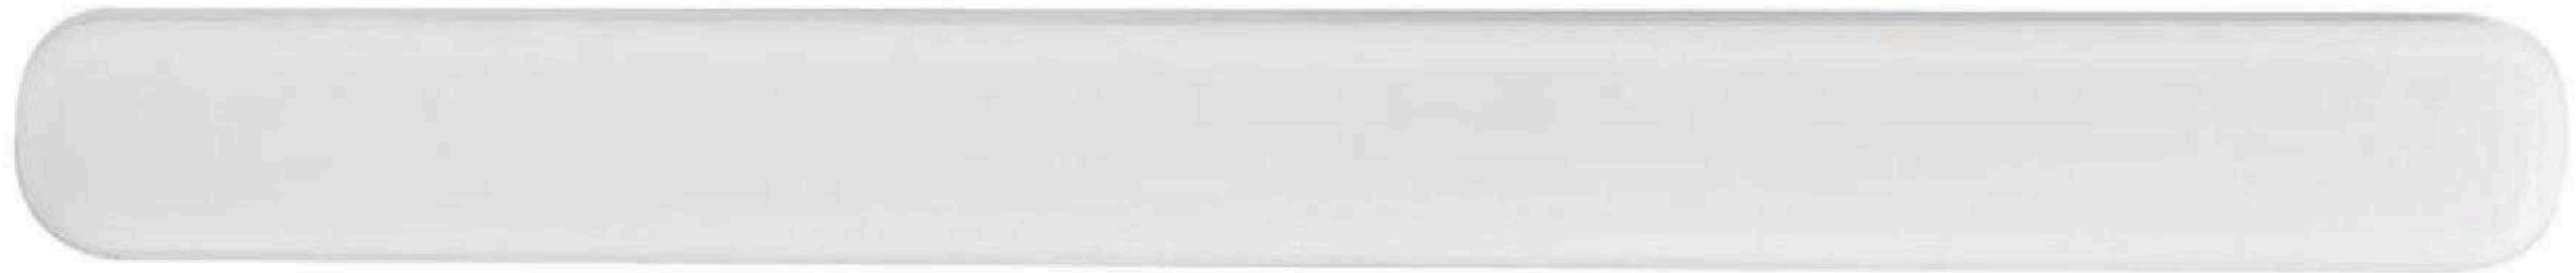

**CCT**  
3000K  
4000K  
6000K

25,000H

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC170-265V

**IP54**

Model	Code	Watt	Luminous Flux	Beam Angle	CRI	Size (mm)	Material
6052	SY-6052-25W NW	25W	3000LM	120°	>80	L600*W60*H52mm	PC
	SY-6052-25W CW	25W	3000LM	120°		L600*W60*H52mm	
	SY-6052-50W NW	50W	6000LM	120°		L1200*W60*H52mm	
	SY-6052-50W CW	50W	6000LM	360°		L1200*W60*H52mm	


2024

# Linear Batten Light

Environmental protection, energy saving.

# T5 Fixture Lamp

## T5 Fixture Lamp

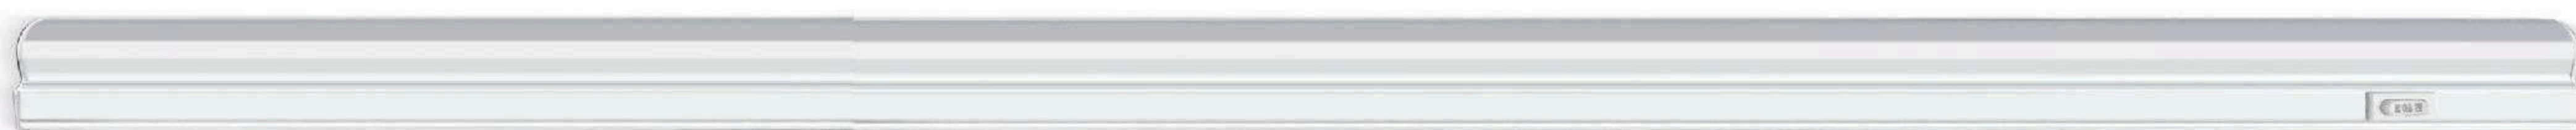

**CCT**  
■ 3000K  
■ 4000K  
□ 6000K

**25,000H**

**Ra>80**


**PF>0.7  
PF>0.9**

**AC170-265V**

Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
SY-T5-03 4W CCT	4W	400LM		Φ313*28*36		
SY-T5-06 8W CCT	8W	800LM		Φ573*28*36		
SY-T5-09 12W CCT	12W	1200LM	120°	Φ873*28*36	/	PC
SY-T5-12 16W CCT	16W	1700LM		Φ1173*28*36		

# T5 Fixture Lamp

## T5 installation

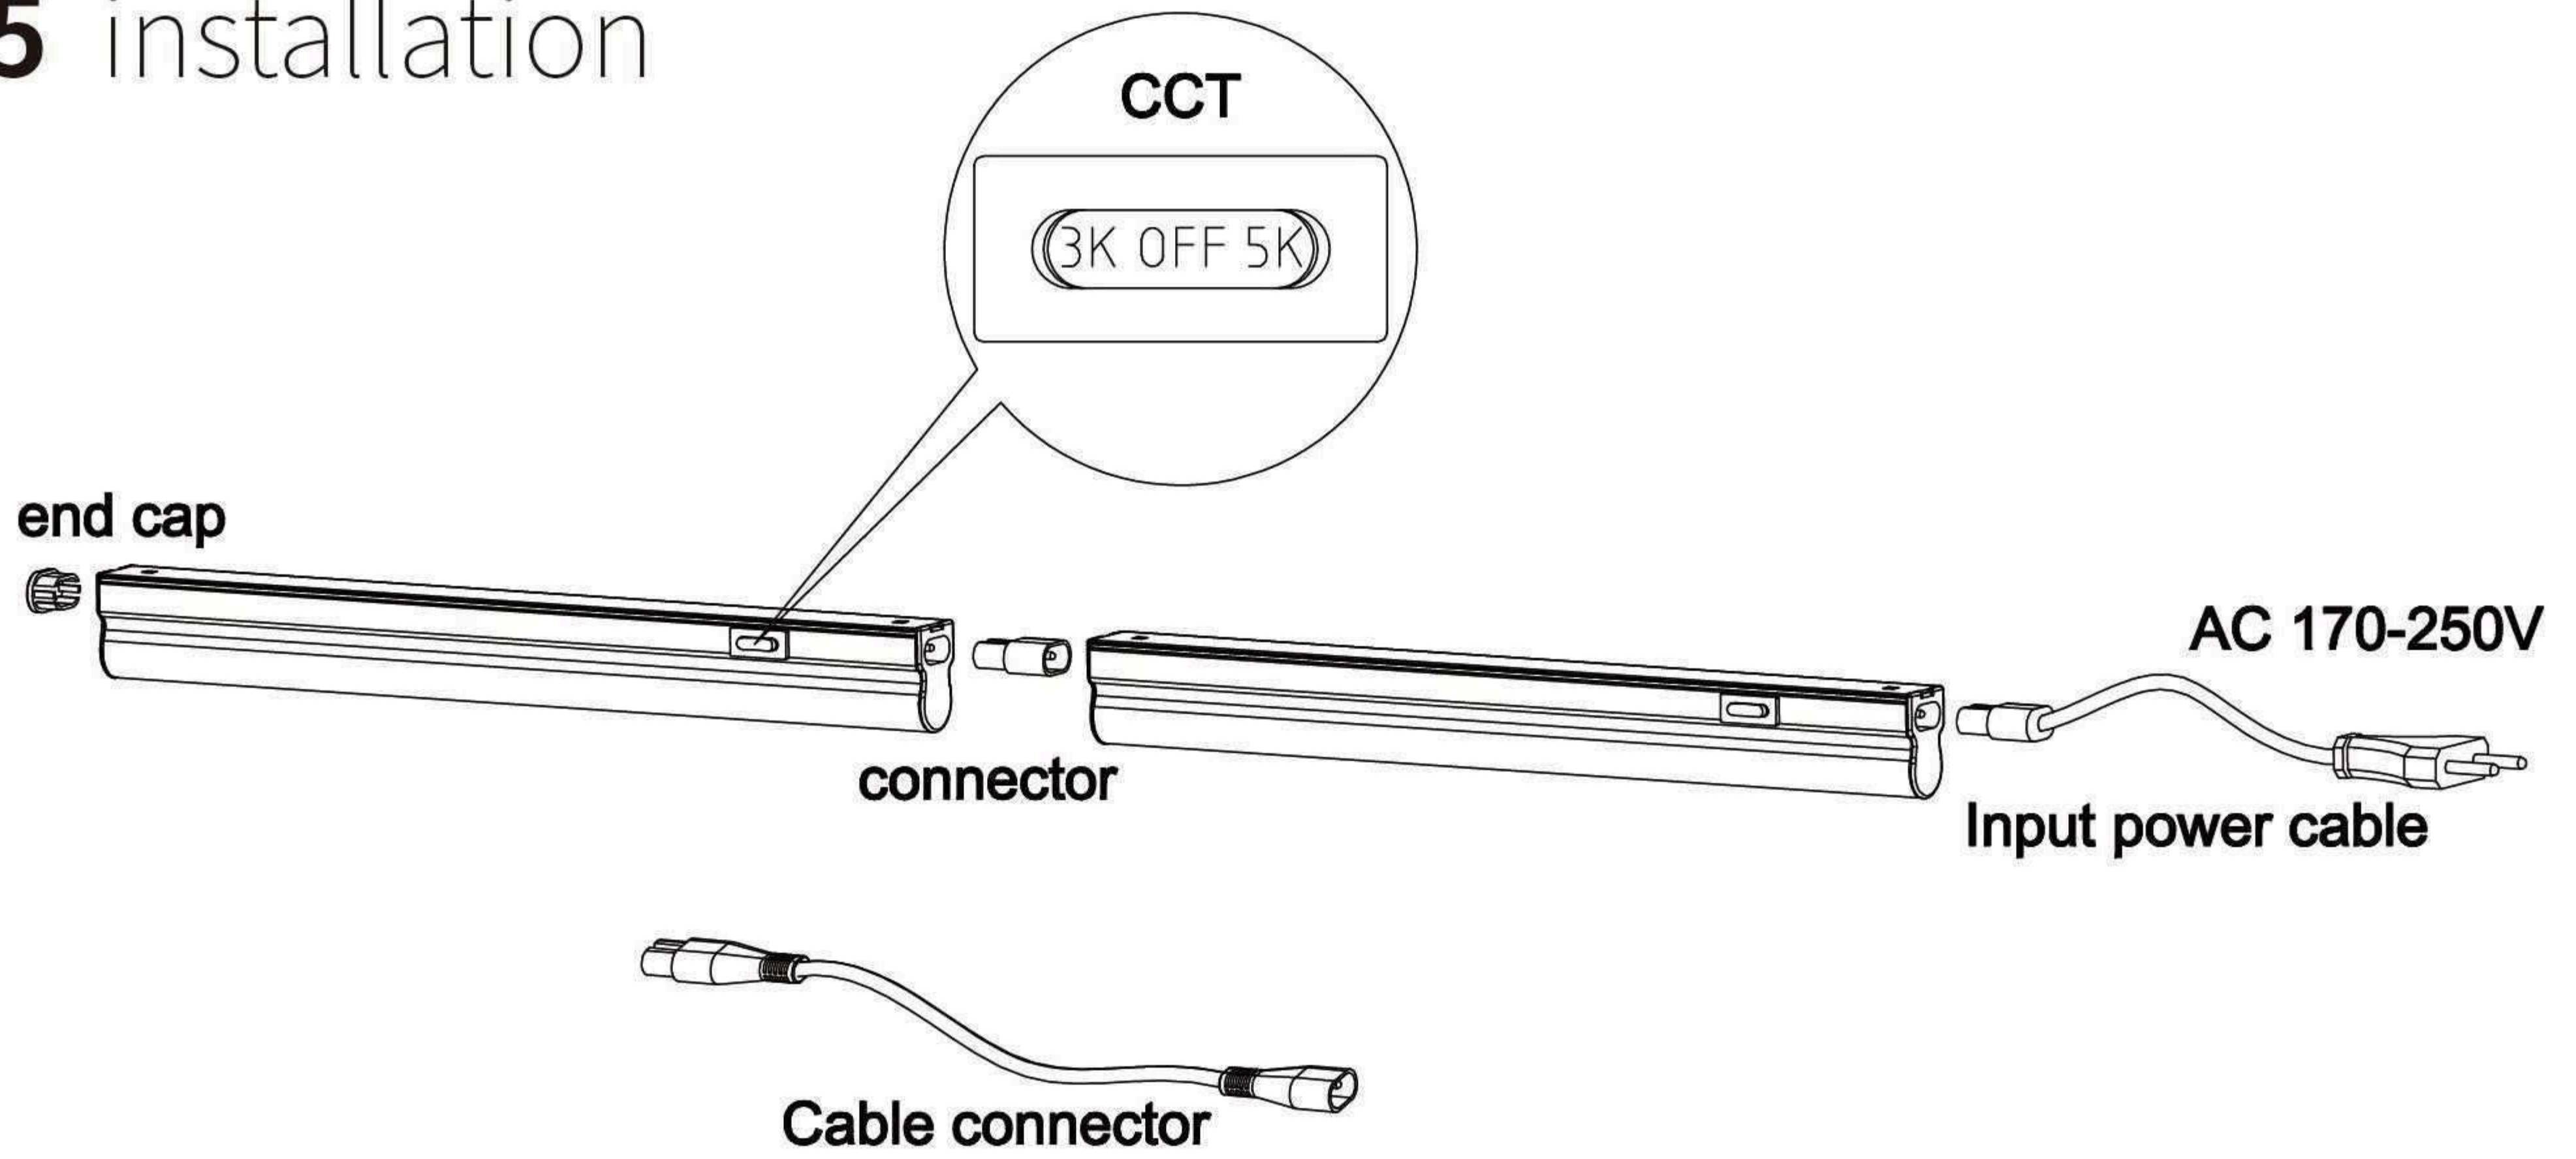

## T5 spare part list

### Spare part picture



### Description

a:Connector(1PCS)

b:Brackets(2PCS)

c:One metre PVC input power cabel[(one end with EU plug,another end with female connector)](1PCS)

d:25cm PVC cable connetor[(one end with male connector, another end with female connector)](1PCS)

e:Outlet end cap(1PCS)

f:Screws(2PCS)

# LED Linear Batten Light

## LED Linear Batten Light



STTPS01

**CCT**

- 3000K
- 4000K
- 6000K

25,000H

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC170-265V


Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
0.3M Linear Light	STTPS01-01	10W	900lm		L300*W75*H24		
0.6M Linear Light	STTPS01-02	18W	1620lm		L600*W75*H24		
0.9M Linear Light	STTPS01-03	27W	2430lm	120°	L900*W75*H24	44	Aluminum & Plastic
1.2M Linear Light	STTPS01-04	36W	3240lm		L1200*W75*H24		
1.5M Linear Light	STTPS01-05	48W	4320lm		L1500*W75*H24		



## LED Linear Batten Light



STTPS02

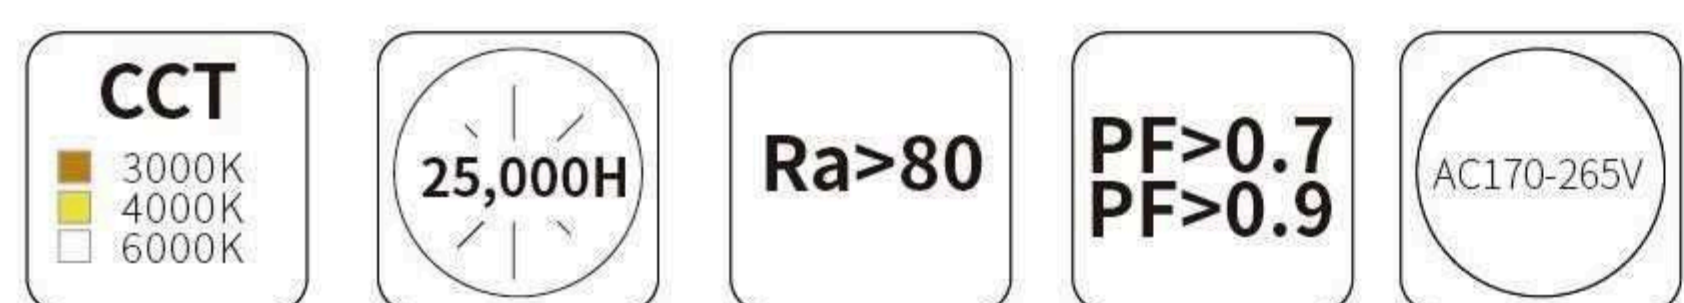

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
0.3M Linear Light	STTPS02-01	10W	900lm		L300*W75*H24		
0.6M Linear Light	STTPS02-02	18W	1620lm		L600*W75*H24		
0.9M Linear Light	STTPS02-03	27W	2430lm	120°	L900*W75*H24	44	Plastic
1.2M Linear Light	STTPS02-04	36W	3240lm		L1200*W75*H24		
1.5M Linear Light	STTPS02-05	48W	4320lm		L1500*W75*H24		





**2024**

# **LED Flood Light**

---

**Environmental protection, energy saving.**

# LED Flood Light

## LED Flood Light




SY6010-SY6100

<b>CCT</b> <input type="checkbox"/> 3000K <input checked="" type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<b>25,000H</b>	<b>Ra&gt;80</b>	<b>PF&gt;0.7</b> <b>PF&gt;0.9</b>	<b>AC220-240V</b>	<b>IP65</b>
---	----------------	-----------------	--------------------------------------	-------------------	-------------

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
CK10W	SY6010	10W	1200lm		L98*W76*H20		
CK 20W	SY6020	20W	2400lm		L133*W97*H21.5		
CK 30W	SY6030	30W	3600lm	120°	L168*W120*H22.5	65	die-casting aluminum
CK 50W	SY6050	50W	6000lm		L213*W168*H24		
CK 100W	SY6100	100W	12000lm		L282*W222*H25		

# LED Flood Light

## Embedded infrared induction

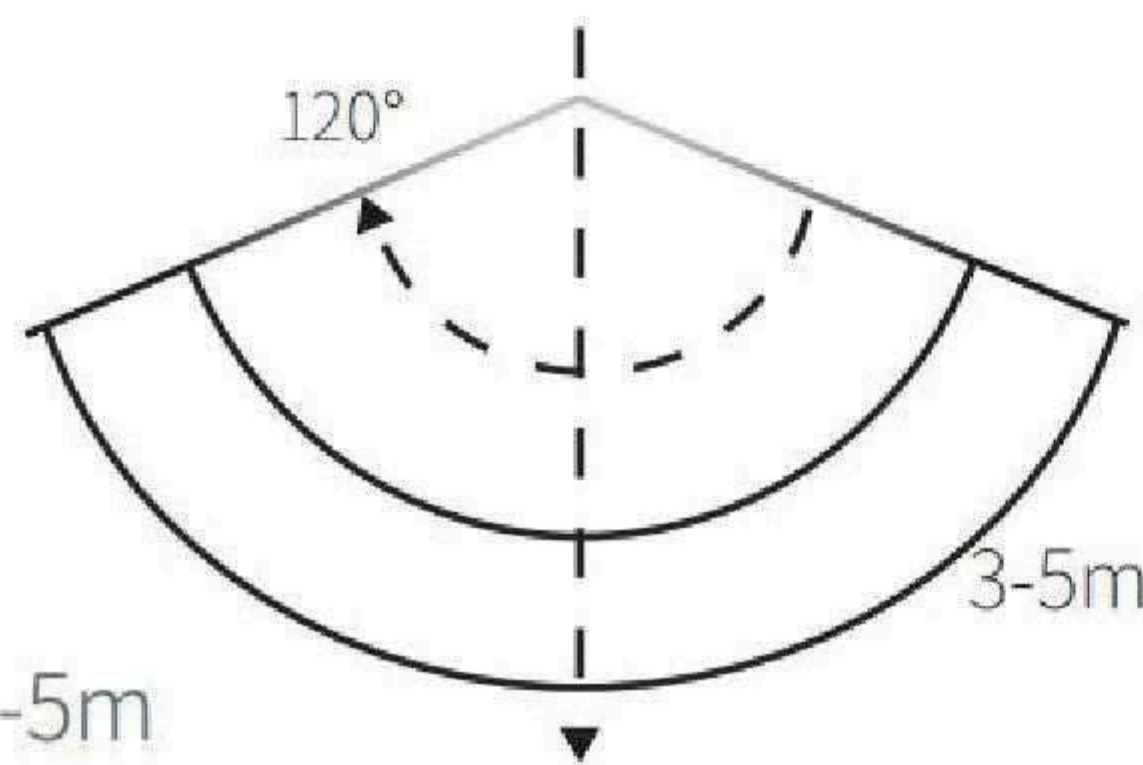

- Sensing distance: 3-5m
- Induction angle: 120°

**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7**  
**PF>0.9**

**AC220-240V**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
CK10W With IR	SY6010S	10W	1200lm		L90*W148*H20		
CK 20W With IR	SY6020S	20W	2400lm		L133*W169*H21.5		
CK 30W With IR	SY6030S	30W	3600lm	120°	L168*W192*H22.5	65	die-casting aluminum
CK 50W With IR	SY6050S	50W	6000lm		L213*W240*H24		
CK 100W With IR	SY6100S	100W	12000lm		L282*W294*H25		

# LED Flood Light



SY7010-SY7300



**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7  
PF>0.9**

AC220-240V

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
BK10W	SY7010	10W	1000lm	120°	L93*W103*H24	65	die-casting aluminum
BK 20W	SY7020	20W	2000lm		L132*W160*H26		
BK 30W	SY7030	30W	3000lm		L132*W160*H26		
BK 50W	SY7050	50W	5000lm		L170*W206*H33		
BK 100W	SY7100	100W	10000lm		L210*W270*H33		
BK 150W	SY7150	150W	15000lm		L280*W380*H35		
BK 200W	SY7200	200W	20000lm		L280*W380*H35		
BK 300W	SY7300	300W	30000lm		L335*W445*H45		

# LED Flood Light

## LED Flood Light



SY5010—SY5100



**CCT**  
3000K  
4000K  
6000K

25,000H

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC170-265V


**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
EK10W	SY5010	10W	1000lm		L70*W90*H22		
EK 20W	SY5020	20W	2000lm		L88*W125*H25		
EK 30W	SY5030	30W	3000lm	120°	L110*W159*H30	65	die-casting aluminum
EK 50W	SY5050	50W	5000lm		L161*W206*H30		
EK 100W	SY5100	100W	10000lm		L211*W270*H30		

# LED Flood Light



SY5010—SY5100

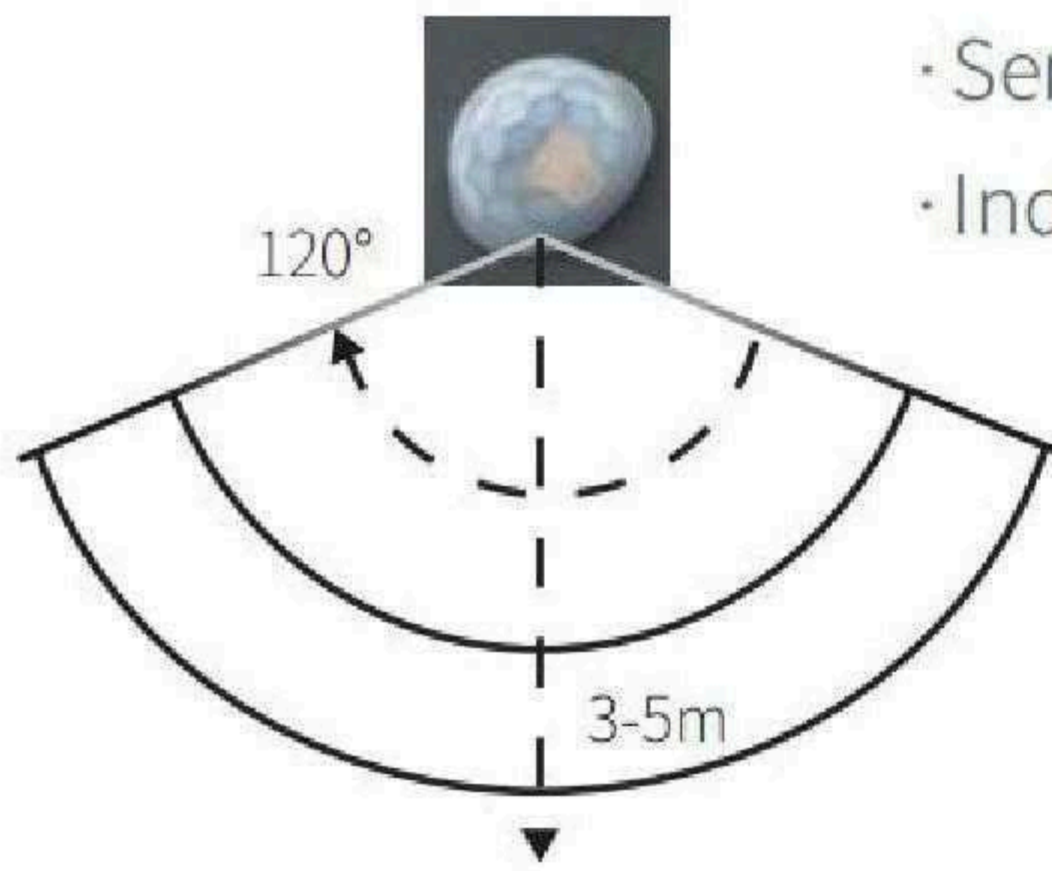

- Sensing distance: 3-5m
- Induction angle: 120°



**CCT**  
3000K  
4000K  
6000K

25,000H

**Ra>80**

**PF>0.7  
PF>0.9**

AC220-240V

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
EK 10W With IR	SY5010S	10W	1000lm		L90*W145*H22		
EK 20W With IR	SY5020S	20W	2000lm		L125*W163*H25		
EK 30W With IR	SY5030S	30W	3000lm	120°	L159*W185*H30	65	die-casting aluminum
EK 50W With IR	SY5050S	50W	5000lm		L206*W236*H30		
EK 100W With IR	SY5100S	100W	10000lm		L270*W286*H30		

# LED Flood Light

## LED Flood Light



SY9010-SY9050

**CCT**  
3000K  
4000K  
6000K

25,000H

**Ra>80**

**PF>0.7  
PF>0.9**

AC220-240V

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
PZ 10W	SY9010	10W	1000lm	120°	L161*W140*H47	65	die-casting aluminum
PZ 20W	SY9020	20W	2000lm		L193*W170*H47		
PZ 30W	SY9030	30W	3000lm		L219*W195*H47		
PZ 50W	SY9050	50W	5000lm		L264*W235*H49		

# LED Flood Light



SY9010S-SY9050S



**CCT**  
 3000K  
 4000K  
 6000K

**Ra>80**

**PF>0.7**  
**PF>0.9**

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
PZ 10W With IR	SY9010S	10W	1000lm	120°	L161*W140*H47	65	die-casting aluminum
PZ 20W With IR	SY9020S	20W	2000lm		L193*W170*H47		
PZ 30W With IR	SY9030S	30W	3000lm		L219*W195*H47		
PZ 50W With IR	SY9050S	50W	5000lm		L264*W235*H49		



# LED Flood Light

# LED Flood Light



SY9010M-SY9050M

<b>CCT</b> 3000K 4000K 6000K	<b>25,000H</b>	<b>Ra&gt;80</b>	<b>PF&gt;0.7</b> <b>PF&gt;0.9</b>	<b>AC220-240V</b>		<b>IP65</b>
---------------------------------------	----------------	-----------------	--------------------------------------	-------------------	--	-------------

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
PZ 10W With MS	SY9010M	10W	1000lm	120°	L161*W140*H47	65	die-casting aluminum
PZ 20W With MS	SY9020M	20W	2000lm		L193*W170*H47		
PZ 30W With MS	SY9030M	30W	3000lm		L219*W195*H47		
PZ 50W With MS	SY9050M	50W	5000lm		L264*W235*H49		

# LED Flood Light



SYDL205-SYDL240



<b>CCT</b> <input type="checkbox"/> 3000K <input checked="" type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<b>25,000H</b>	<b>Ra&gt;80</b>	<b>PF&gt;0.7</b> <b>PF&gt;0.9</b>	<b>AC220-240V</b>	<b>IP65</b>
---	----------------	-----------------	--------------------------------------	-------------------	-------------

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
DL II 50W	SYDL205	50W	5000lm	60°/90°	L255*W190*H42		
DL II 100W	SYDL210	100W	10000lm	60°/90°	L312*W232*H52		
DL II 150W	SYDL215	150W	15000lm	60°/90°	L375*W275*H52	65	die-casting aluminum
DL II 200W	SYDL220	200W	20000lm	60°/90°	L428*W310*H52		
DL II 300W	SYDL230	300W	30000lm	60°/90°	L495*W345*H88		
DL II 400W	SYDL240	400W	40000lm	60°/90°	L595*W380*H88		

# LED Flood Light

## LED Flood Light



SY8010-SY8050



**CCT**

- 3000K
- 4000K
- 6000K

25,000H

**Ra>80**

**PF>0.7**  
**PF>0.9**

AC220-240V

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
HBK 10W	SY8010	10W	1000lm	120°	L133*W120*H30	65	die-casting aluminum
HBK 20W	SY8020	20W	2000lm		L159*W160*H30		
HBK 30W	SY8030	30W	3000lm		L192*W190*H30		
HBK 50W	SY8050	50W	5000lm		L288*W255*H31		

# LED Flood Light



SY8010S-SY8050S

**CCT**  
3000K  
4000K  
6000K
**25,000H**
**Ra>80**
**PF>0.7**  
**PF>0.9**
**AC220-240V**

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
HBK 10W With IR	SY8010S	10W	1000lm	120°	L133*W120*H30	65	die-casting aluminum
HBK 20W With IR	SY8020S	20W	2000lm		L159*W160*H30		
HBK 30W With IR	SY8030S	30W	3000lm		L192*W190*H30		
HBK 50W With IR	SY8050S	50W	5000lm		L288*W255*H31		

# LED Flood Light



SYOK10-SYOK300

<b>CCT</b> 3000K 4000K 6000K	<b>25,000H</b>	<b>Ra&gt;80</b>	<b>PF&gt;0.7</b> <b>PF&gt;0.9</b>	<b>AC220-240V</b>	<b>IP65</b>
---------------------------------------	----------------	-----------------	--------------------------------------	-------------------	-------------

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
OK 10W	SYOK10	10W	1000lm	120°	L104*W25*H70	65	die-casting aluminum
OK 20W	SYOK20	20W	2000lm		L130*W28*H90		
OK 30W	SYOK30	30W	3000lm		L165*W30*H115		
OK 50W	SYOK50	50W	5000lm		L210*W30*H140		
OK 100W	SYOK100	100W	10000lm		L280*W35*H195		
OK 150W	SYOK150	150W	15000lm		L330*W35*H221		
OK 200W	SYOK200	200W	20000lm		L363*W35*H252		
OK 300W	SYOK300	300W	30000lm		L420*W35*H291		

# LED Flood Light



SYFK10—SYFK200



**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7**  
**PF>0.9**

**AC220-240V**

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
FK 10W	SYFK10	10W	1000lm		L80*W48*H115		
FK 20W	SYFK20	20W	2000lm		L90*W48*H130		
FK 30W	SYFK30	30W	3000lm		L115*W48*H130		
FK 50W	SYFK50	50W	5000lm	120°	L140*W55*H200	65	die-casting aluminum
FK 100W	SYFK100	100W	10000lm		L165*W55*H240		
FK 150W	SYFK150	150W	15000lm		L200*W55*H290		
FK 200W	SYFK200	200W	20000lm		L230*W60*H330		

# LED Flood Light



SYFK10S—SYFK100S



**CCT**  
3000K  
4000K  
6000K

**25,000H**

**Ra>80**

**PF>0.7  
PF>0.9**

**AC220-240V**

**IP65**

Model	Code	Watt	Luminous Flux	Beam Angle	Size (mm)	IP	Material
FK 10W With IR	SYFK10S	10W	1000lm		L115*W55*H145		
FK 20W With IR	SYFK20S	20W	2000lm		L130*W55*H155		
FK 30W With IR	SYFK30S	30W	3000lm	120°	L165*W55*H175	65	die-casting aluminum
FK 50W With IR	SYFK50S	50W	5000lm		L200*W55*H205		
FK 100W With IR	SYFK100S	100W	10000lm		L220*W55*H240		

# 2024 SMART Light String

Environmental protection, energy saving.



# SMART Light String

## APPLICATION ADVANTAGE OF OUR PRODUCTS



home

FULL CONTROL



mine



EASY CONNECTION



BLUETOOTH MESH TECHNOLOGY

The image displays two smartphone screens showing the control interface for a Smart W&B WL 10W R... light string. The left screen features a circular CCT Change slider and a Dimmable slider. The right screen features a circular Choose Color wheel and two Dimmable sliders. A 'more' button with a right-pointing arrow is located between the two screens.

Smart W&B WL 10W R...

白光 彩光 场景 音乐律动

CCT Change

Dimmable

Choose Color


Dimmable

more



# SMART Light String

---

## APPLICATION AREAS

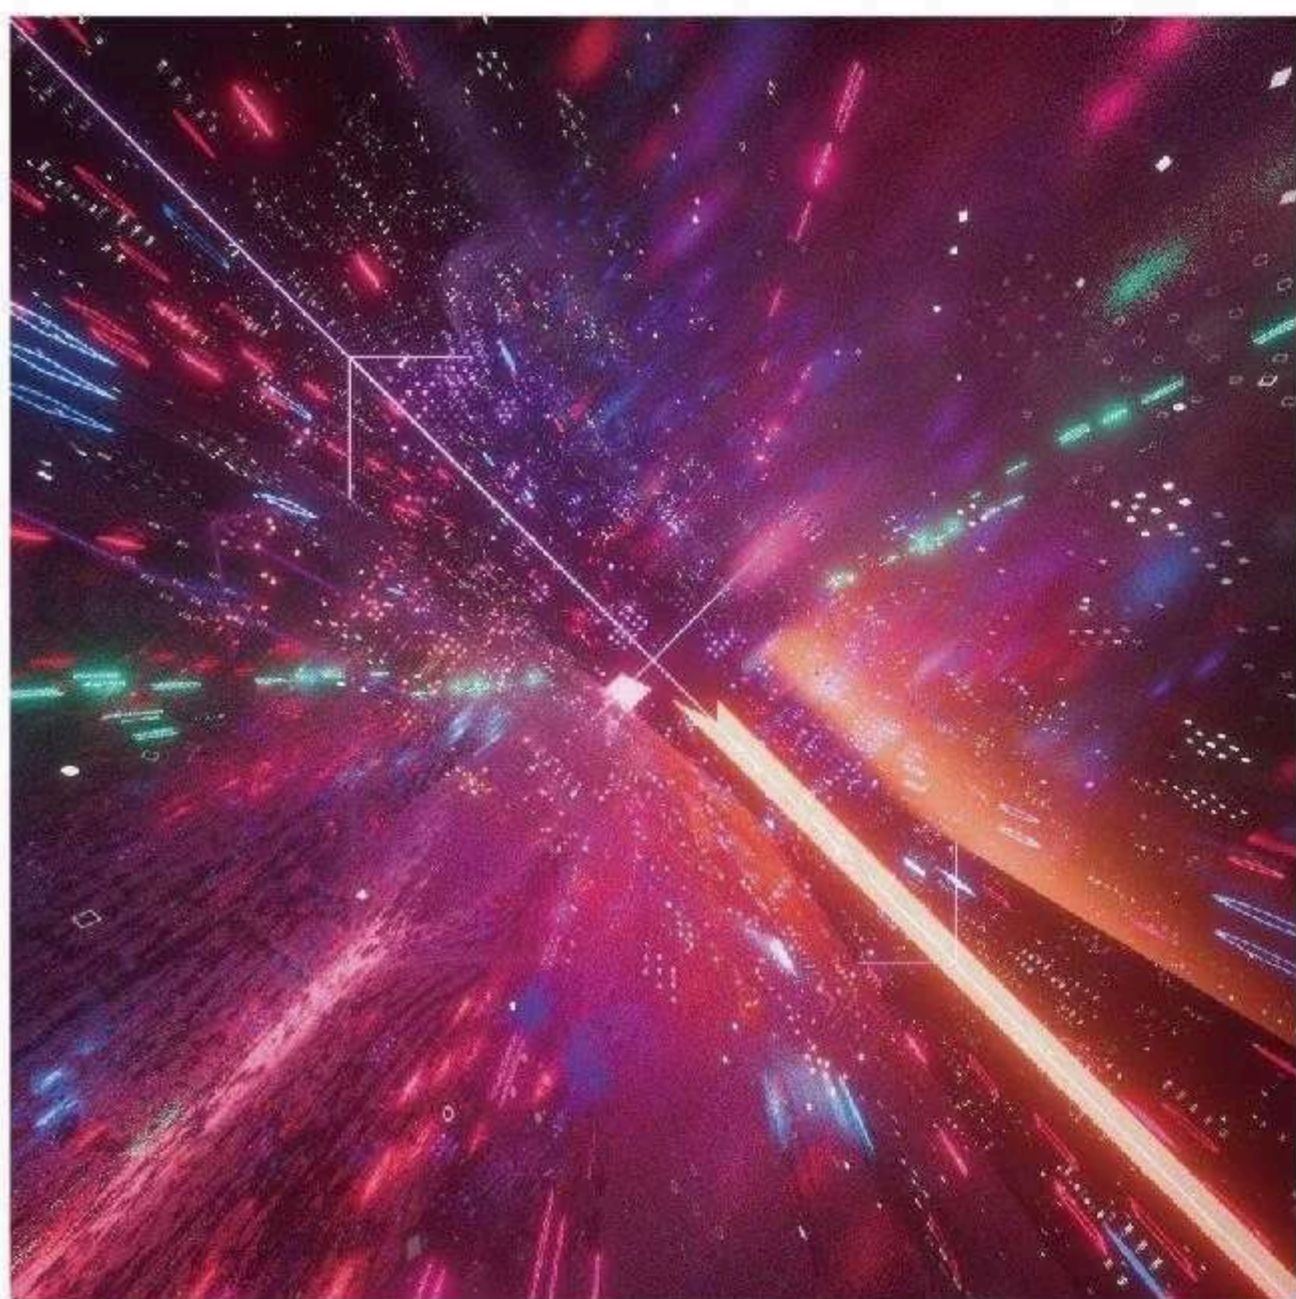

APPLICATION  
AREAS  
LIGHTS&LIFE

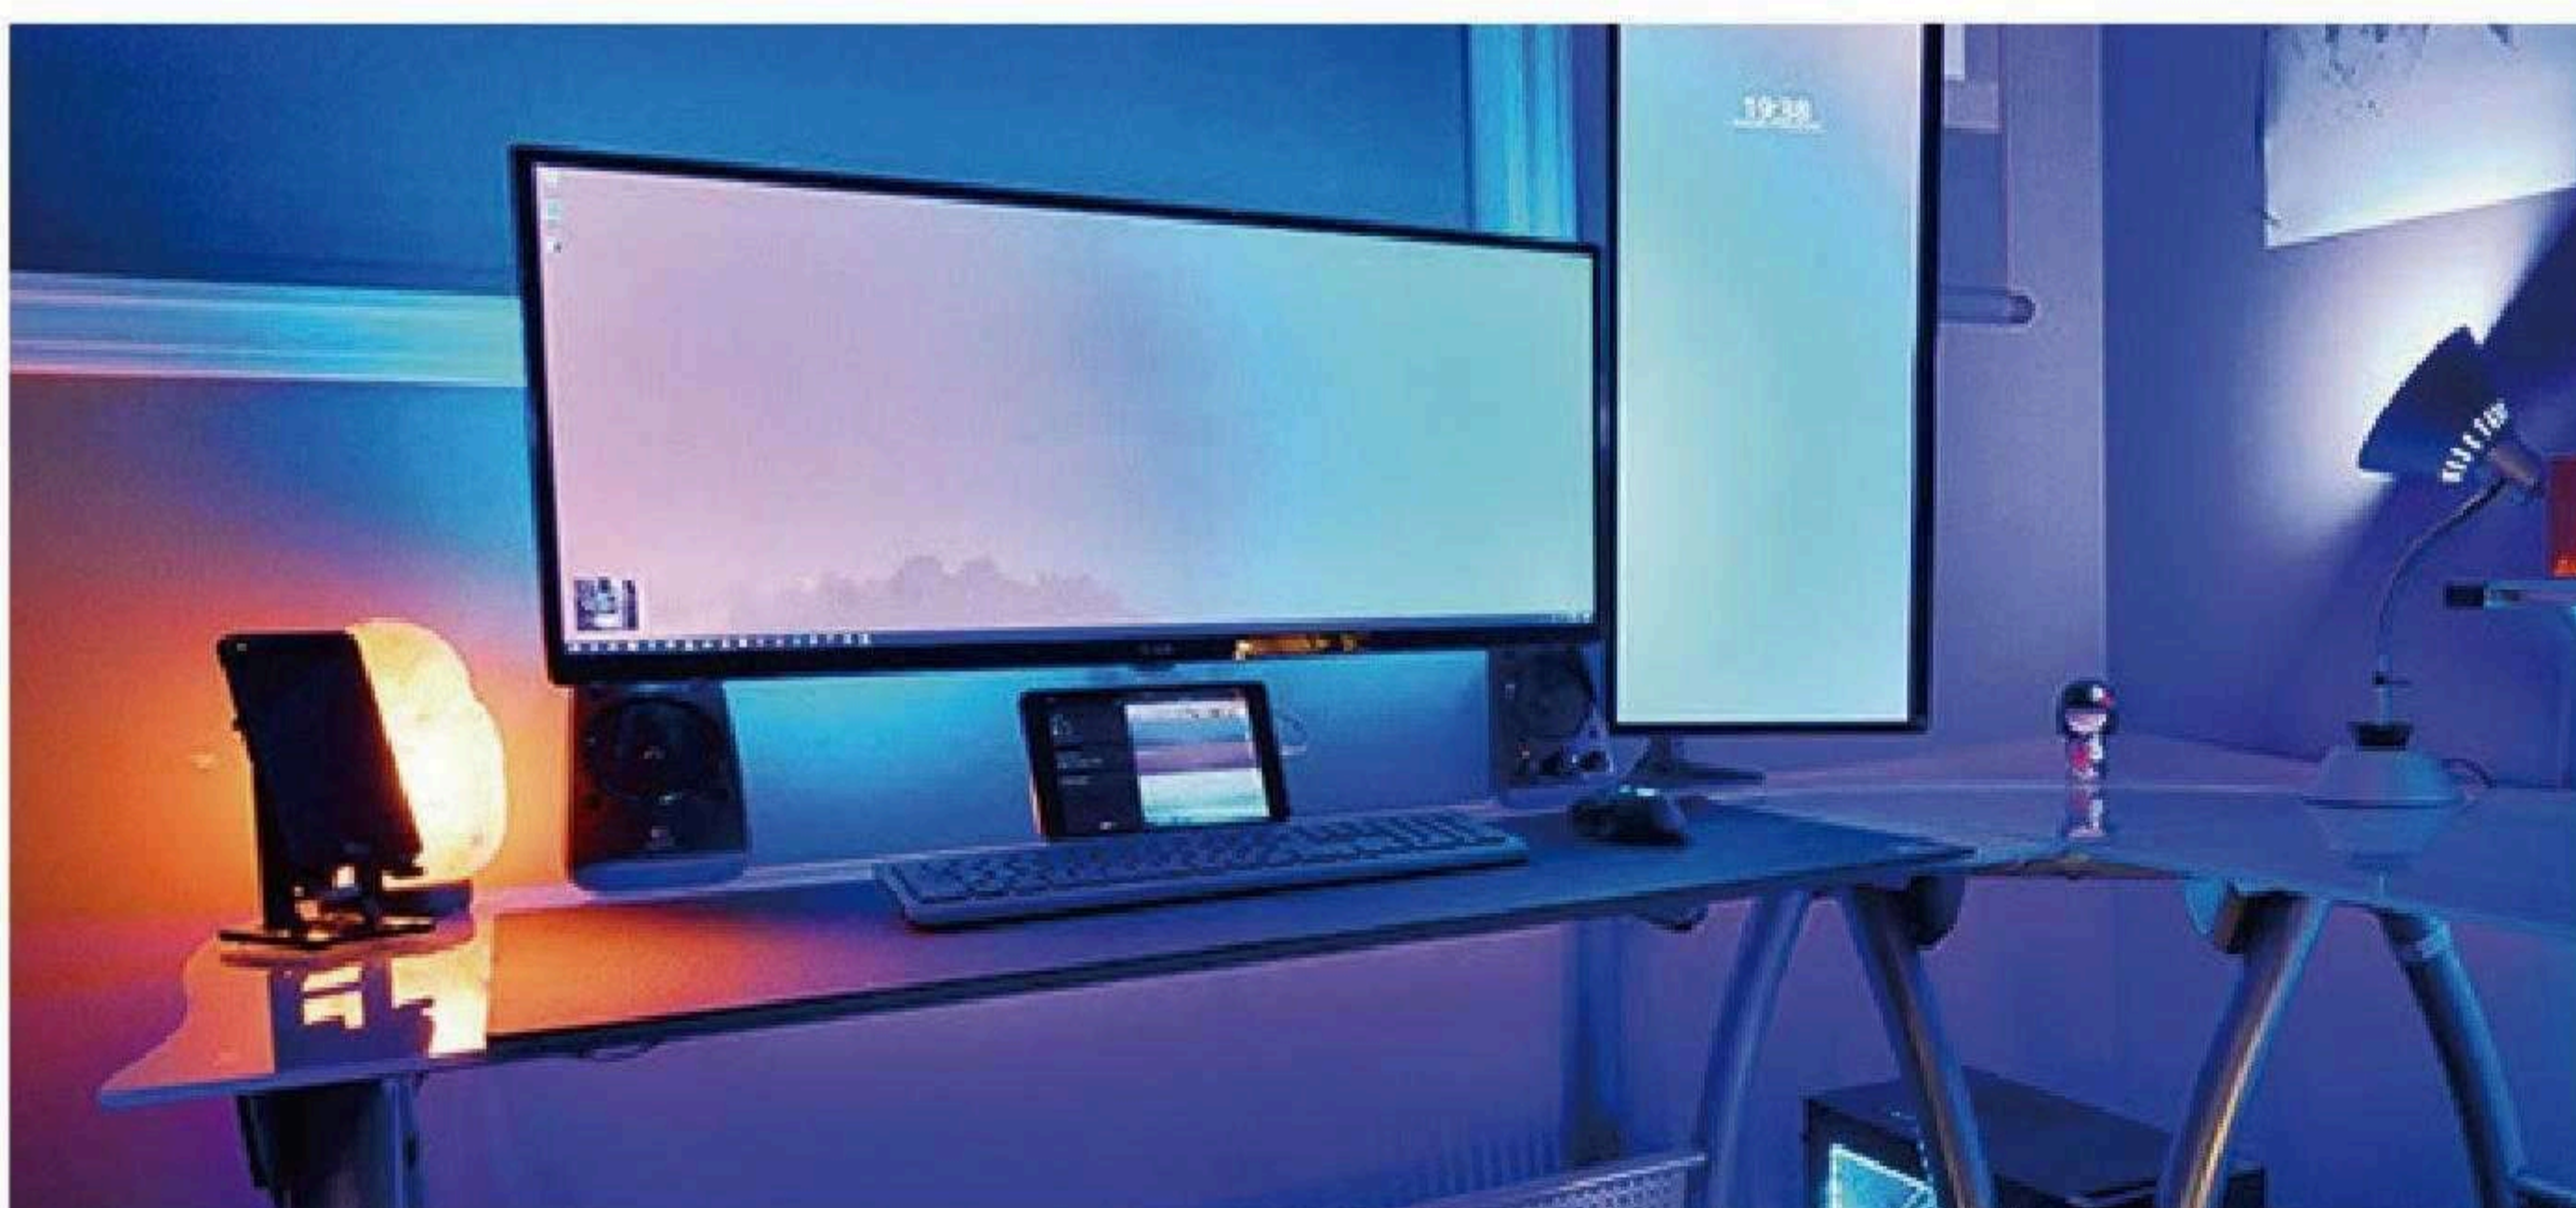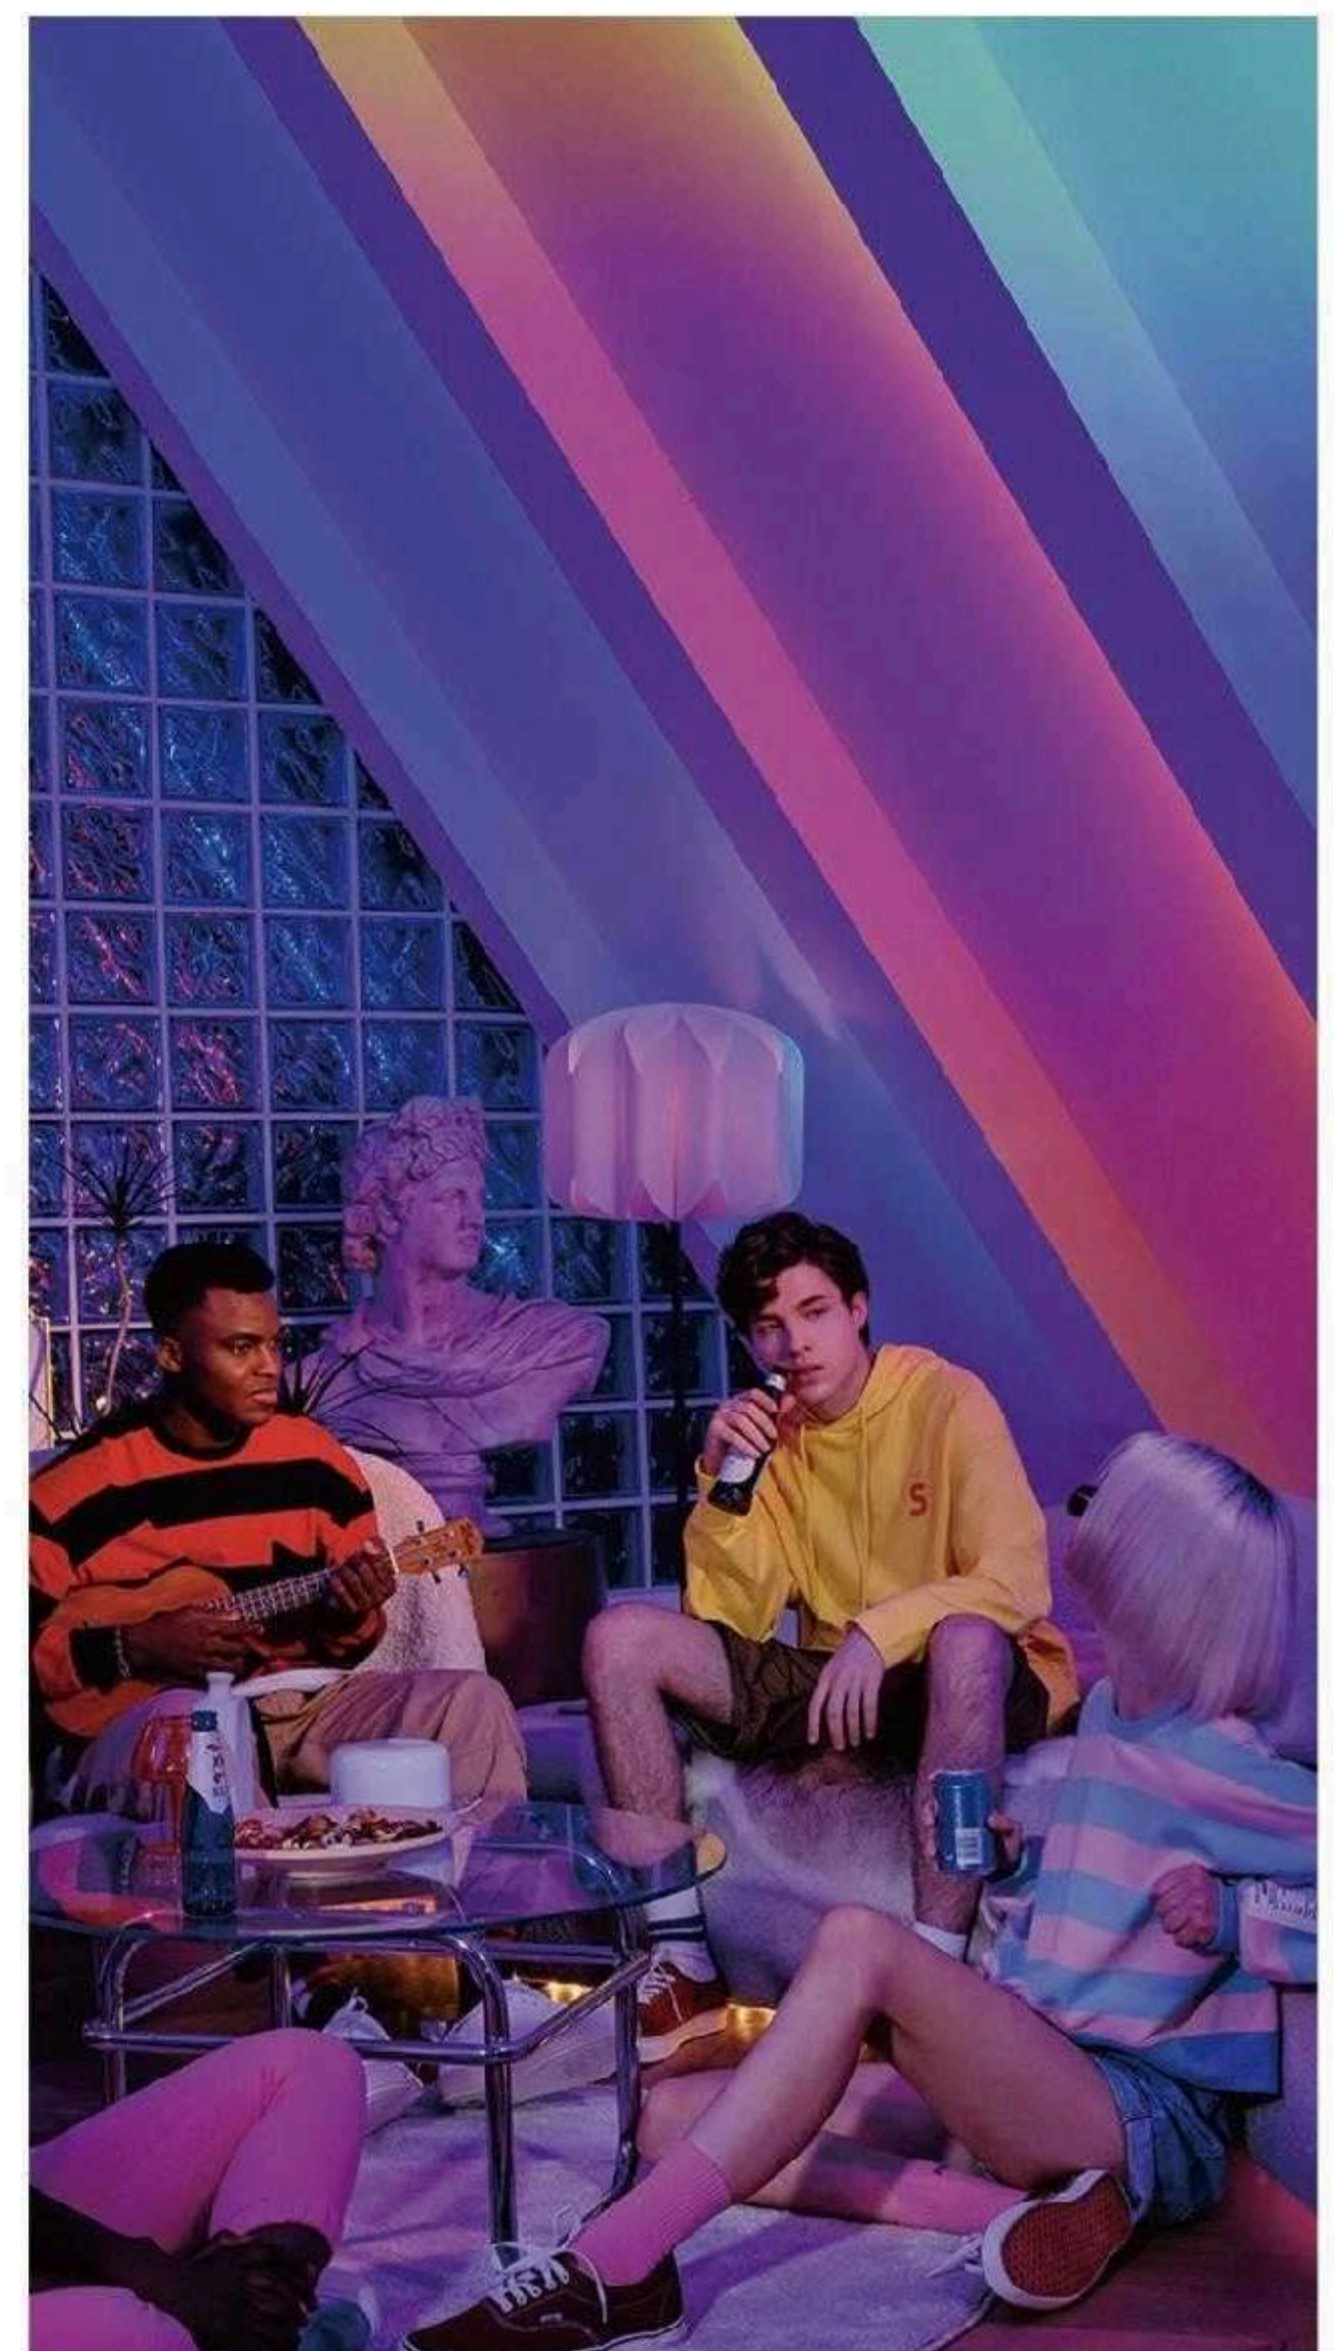

# SMART Light String

Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700-6500K Turnable
Cable	H05VV-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H05RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H07RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> 21996 3/C 22AWG



Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H05RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H07RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> 21996 3/C 20AWG

Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H05RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H07RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> 21996 3/C 22AWG






## 2.4GHz Wi-Fi + Bluetooth



Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700K
Cable	H05W-F 2X0.75mm <sup>2</sup> /2X1.0mm <sup>2</sup> H05RN-F 2X0.75mm <sup>2</sup> /2X1.0mm <sup>2</sup> 21996 2/C

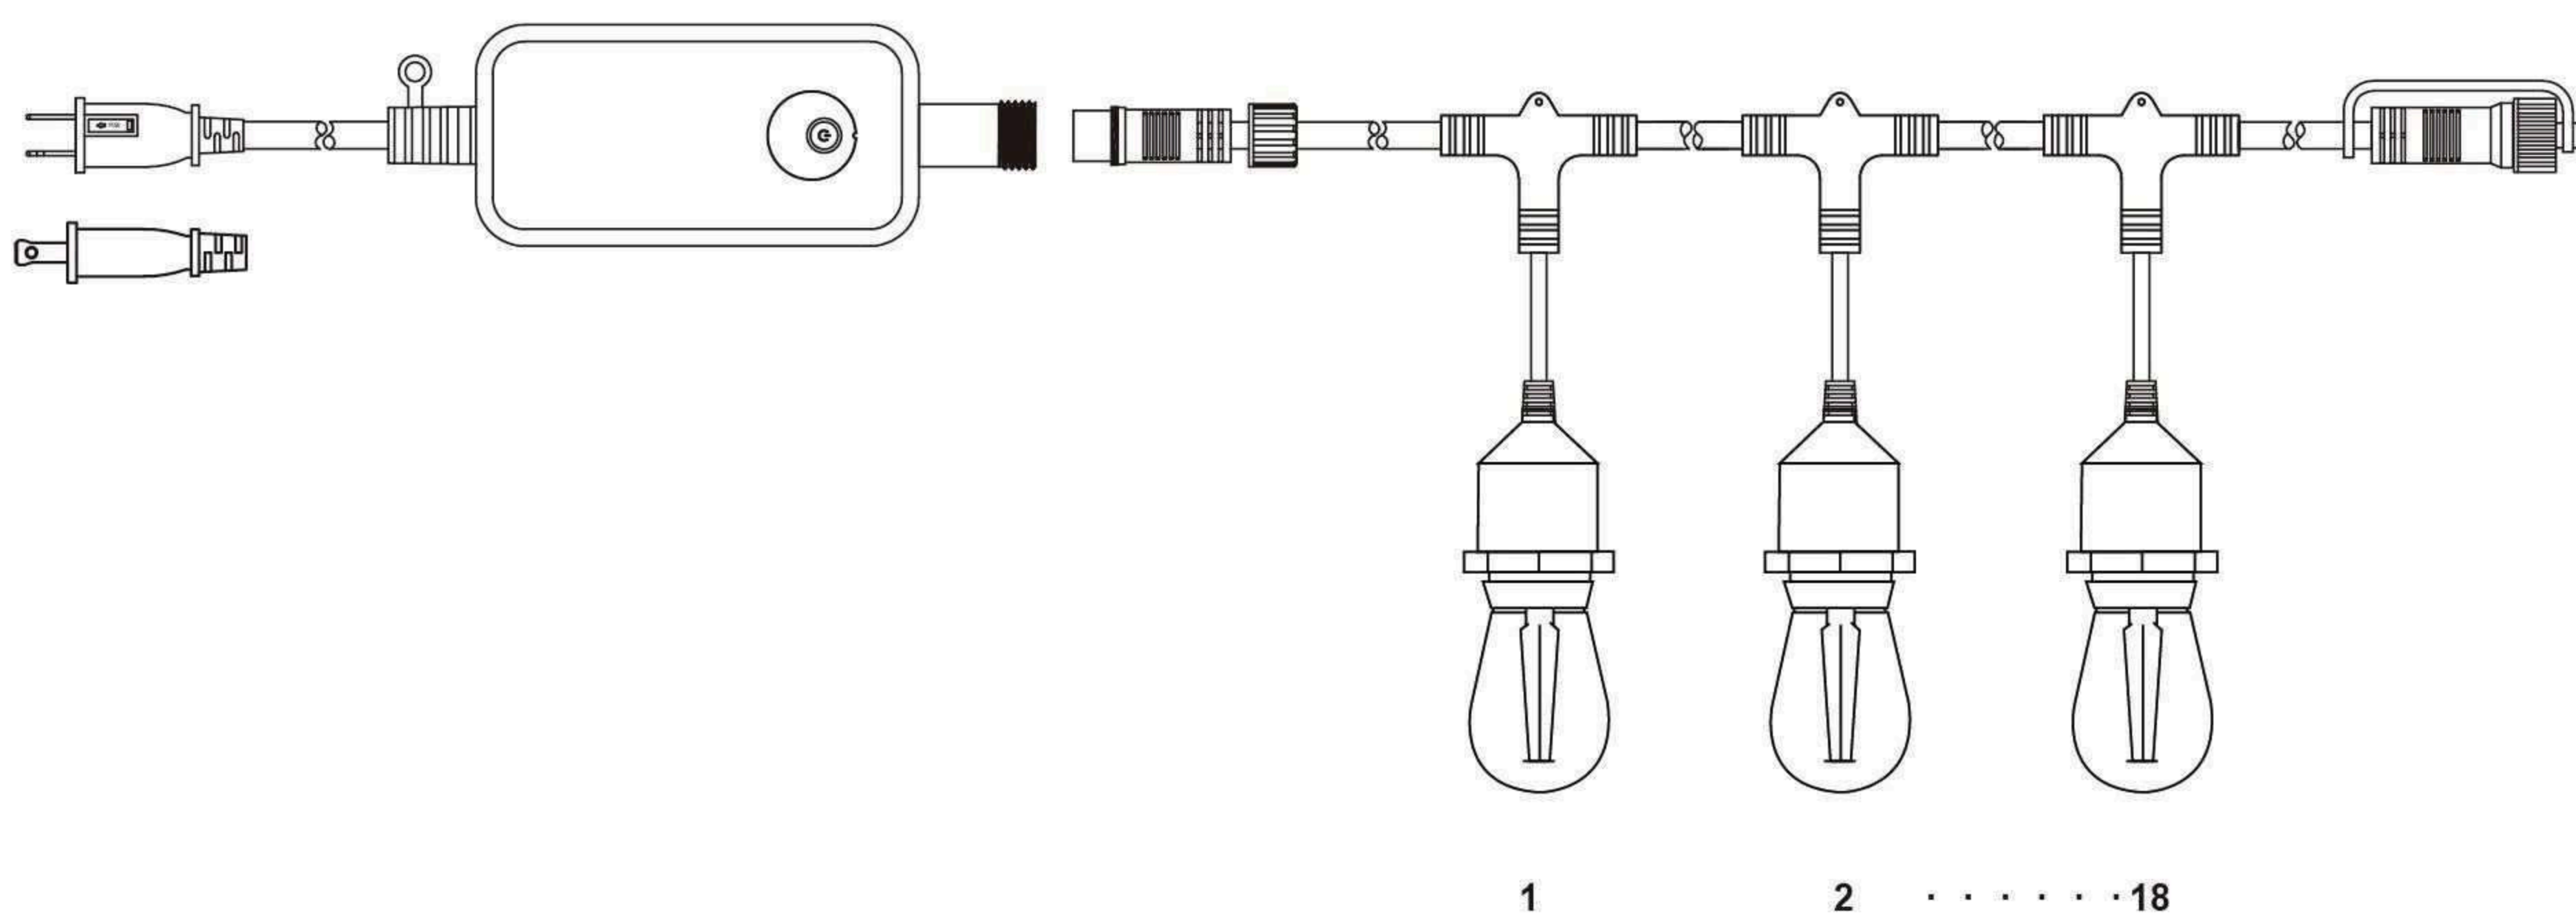

Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700K
Cable	H05W-F 2X0.75mm <sup>2</sup> /2X1.0mm <sup>2</sup> H05RN-F 2X0.75mm <sup>2</sup> /2X1.0mm <sup>2</sup> 21996 2/C 20AWG






## 2.4GHz Wi-Fi + Bluetooth




Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	2700-6500K Turnable
Cable	H05VV-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H05RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H07RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> 21996 3/C 20AWG

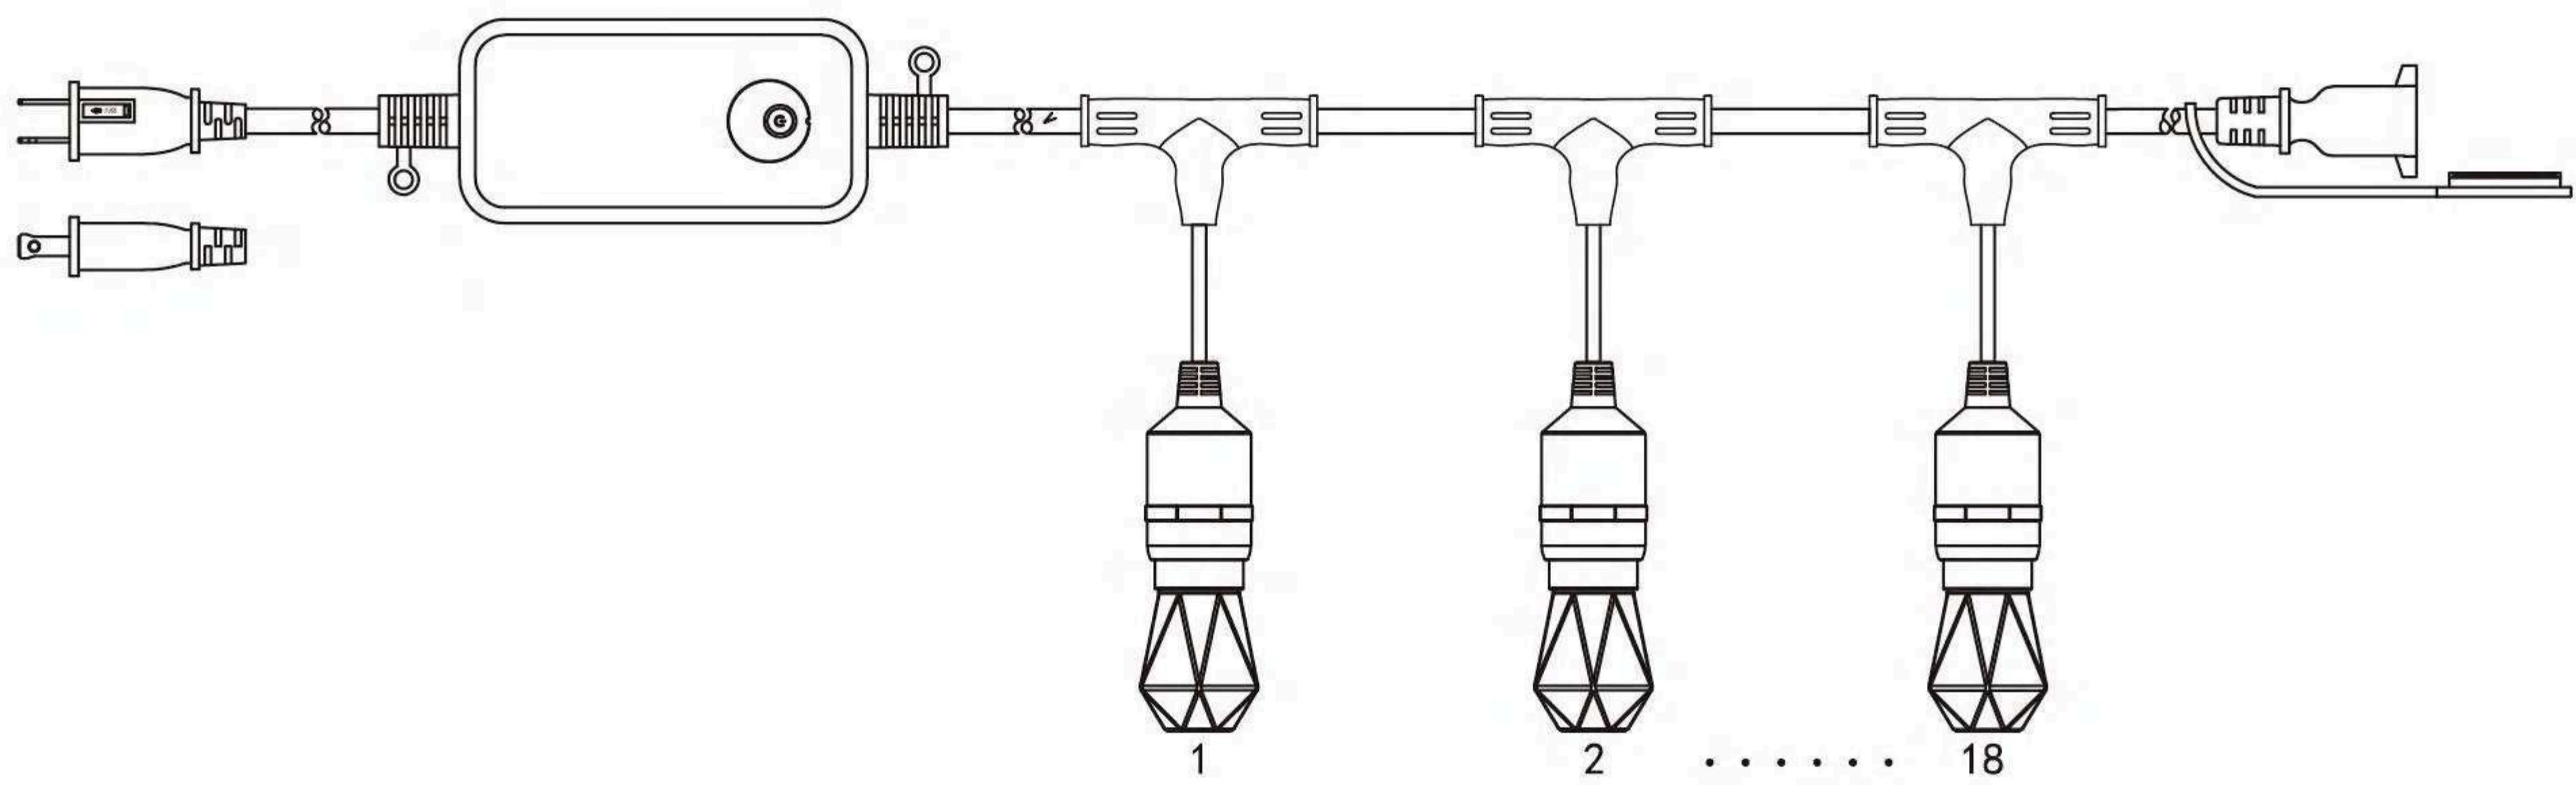


Voltage	Input 100-240V, 50/60Hz Output 12V DC
Adapter	12W 24W 36W 48W (option)
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05W-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H05RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> H07RN-F 3X0.75mm <sup>2</sup> /3X1.0mm <sup>2</sup> 21996 3/C 20AWG

# SMART Light String

## 2.4GHz Wi-Fi +Bluetooth

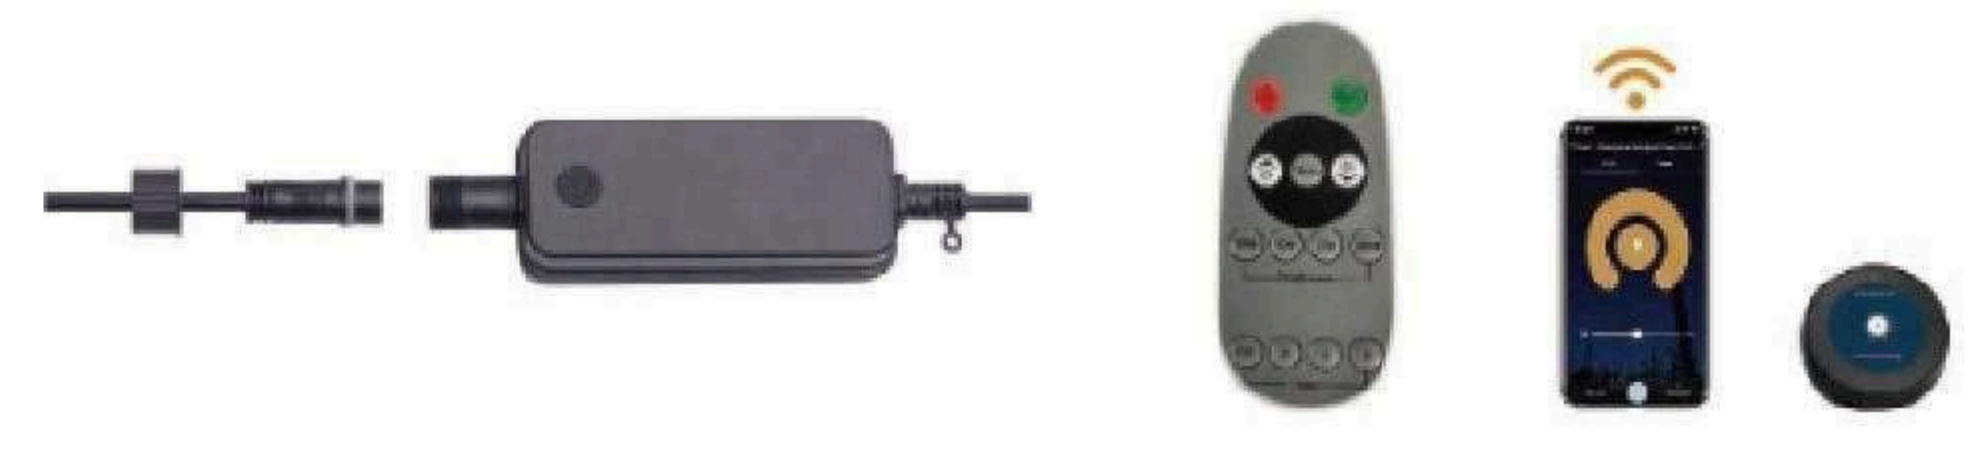

Voltage	Input 100-240V, 50/60Hz Output 5V DC
Adapter	12W Max connected 432W
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 5X0.75mm <sup>2</sup> /5X1.0mm <sup>2</sup> H05RN-F 5X0.75mm <sup>2</sup> /5X1.0mm <sup>2</sup> H07RN-F 5X0.75mm <sup>2</sup> /5X1.0mm <sup>2</sup> 21996 5/C 22AWG or SJTW 5/C 18AWG

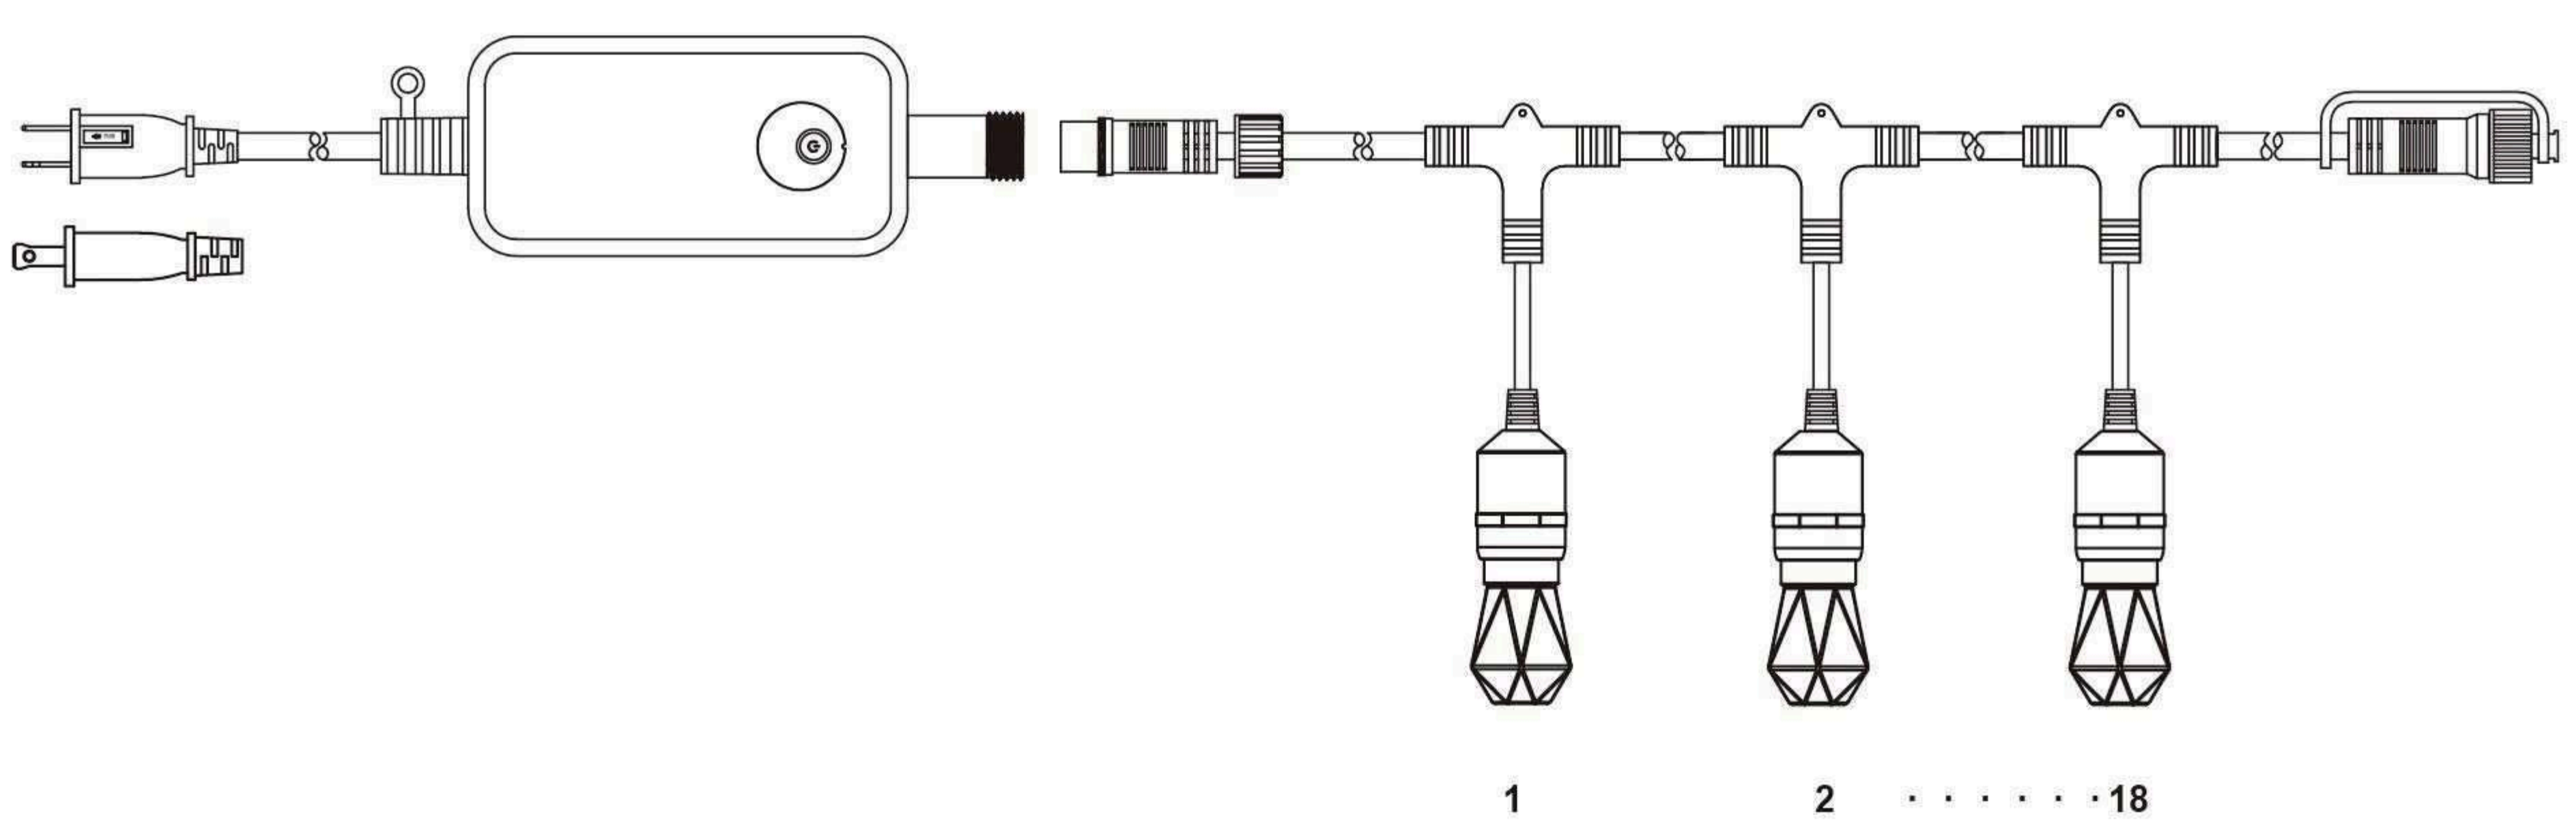

Voltage	Input 100-240V, 50/60Hz Output 5V DC
Adapter	12W Max connected 432W
IP Rating	IP65
Bulb	0.5W
Light color	RGB/RGBW
Cable	H05VV-F 5X0.75mm <sup>2</sup> /5X1.0mm <sup>2</sup> H05RN-F 5X0.75mm <sup>2</sup> /5X1.0mm <sup>2</sup> H07RN-F 5X0.75mm <sup>2</sup> /5X1.0mm <sup>2</sup> 21996 5/C 22AWG or SJTW 5/C 18AWG



2024

# SMART Lawn Lamp

Environmental protection, energy saving.

# Make your outdoor life

Control your smart wall light right from your smartphone!

“Alexa, turn on wall lights”




## SMARTER






# SMART Lawn Lamp

## Double-headed lawn lamp

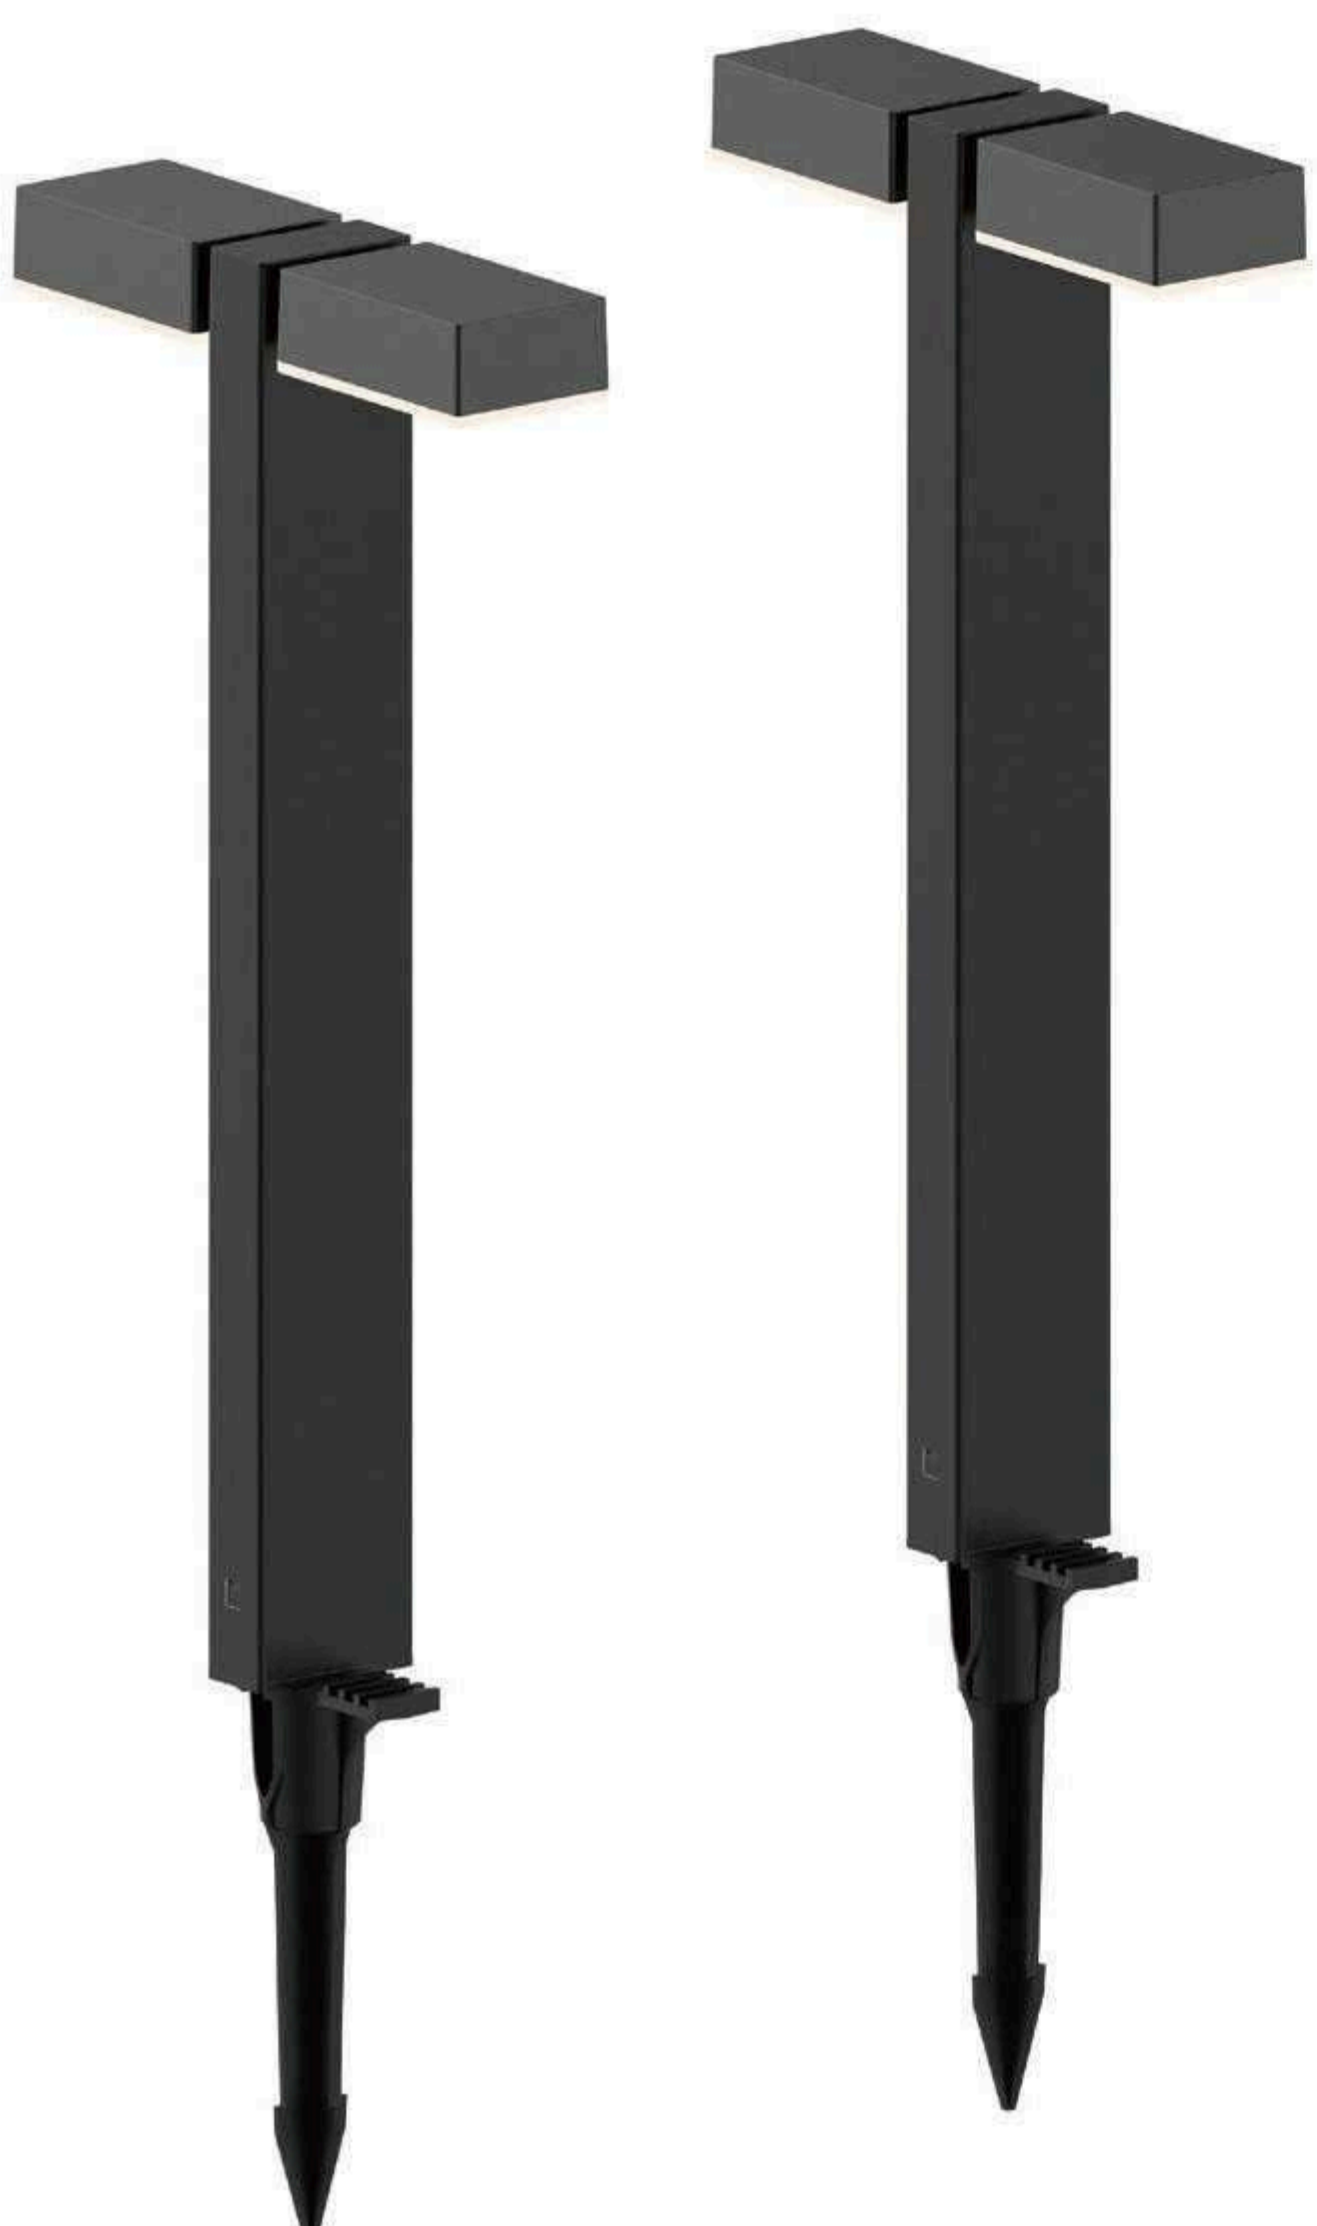


2.4GHz Wi-Fi +Bluetooth/ Bluetooth SIGmesh

Voltage	:	Input 100-240V 50/60Hz
	:	Output 24V DC
Adapter	:	36W
IP Rating	:	IP65
Bulb	:	6W
Light color	:	RGB/RGBW

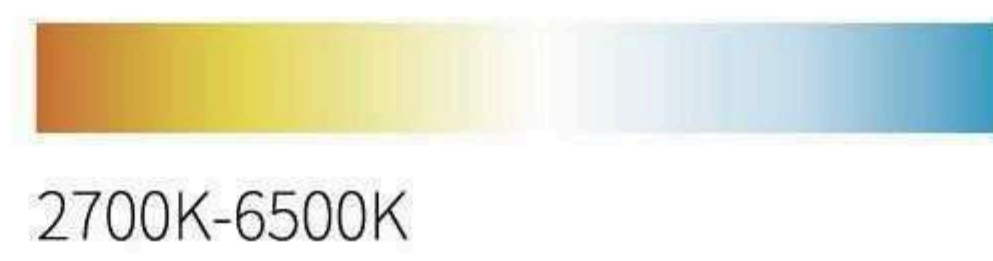


2700K-6500K

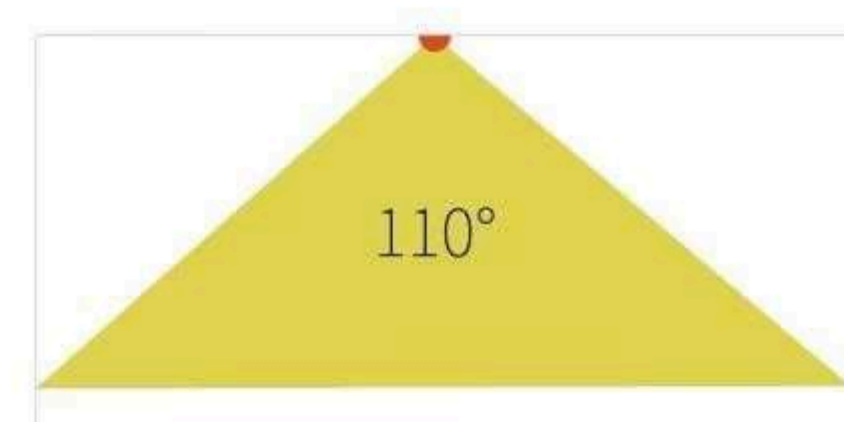

## SCENCE



- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft. Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft. Extension Cable

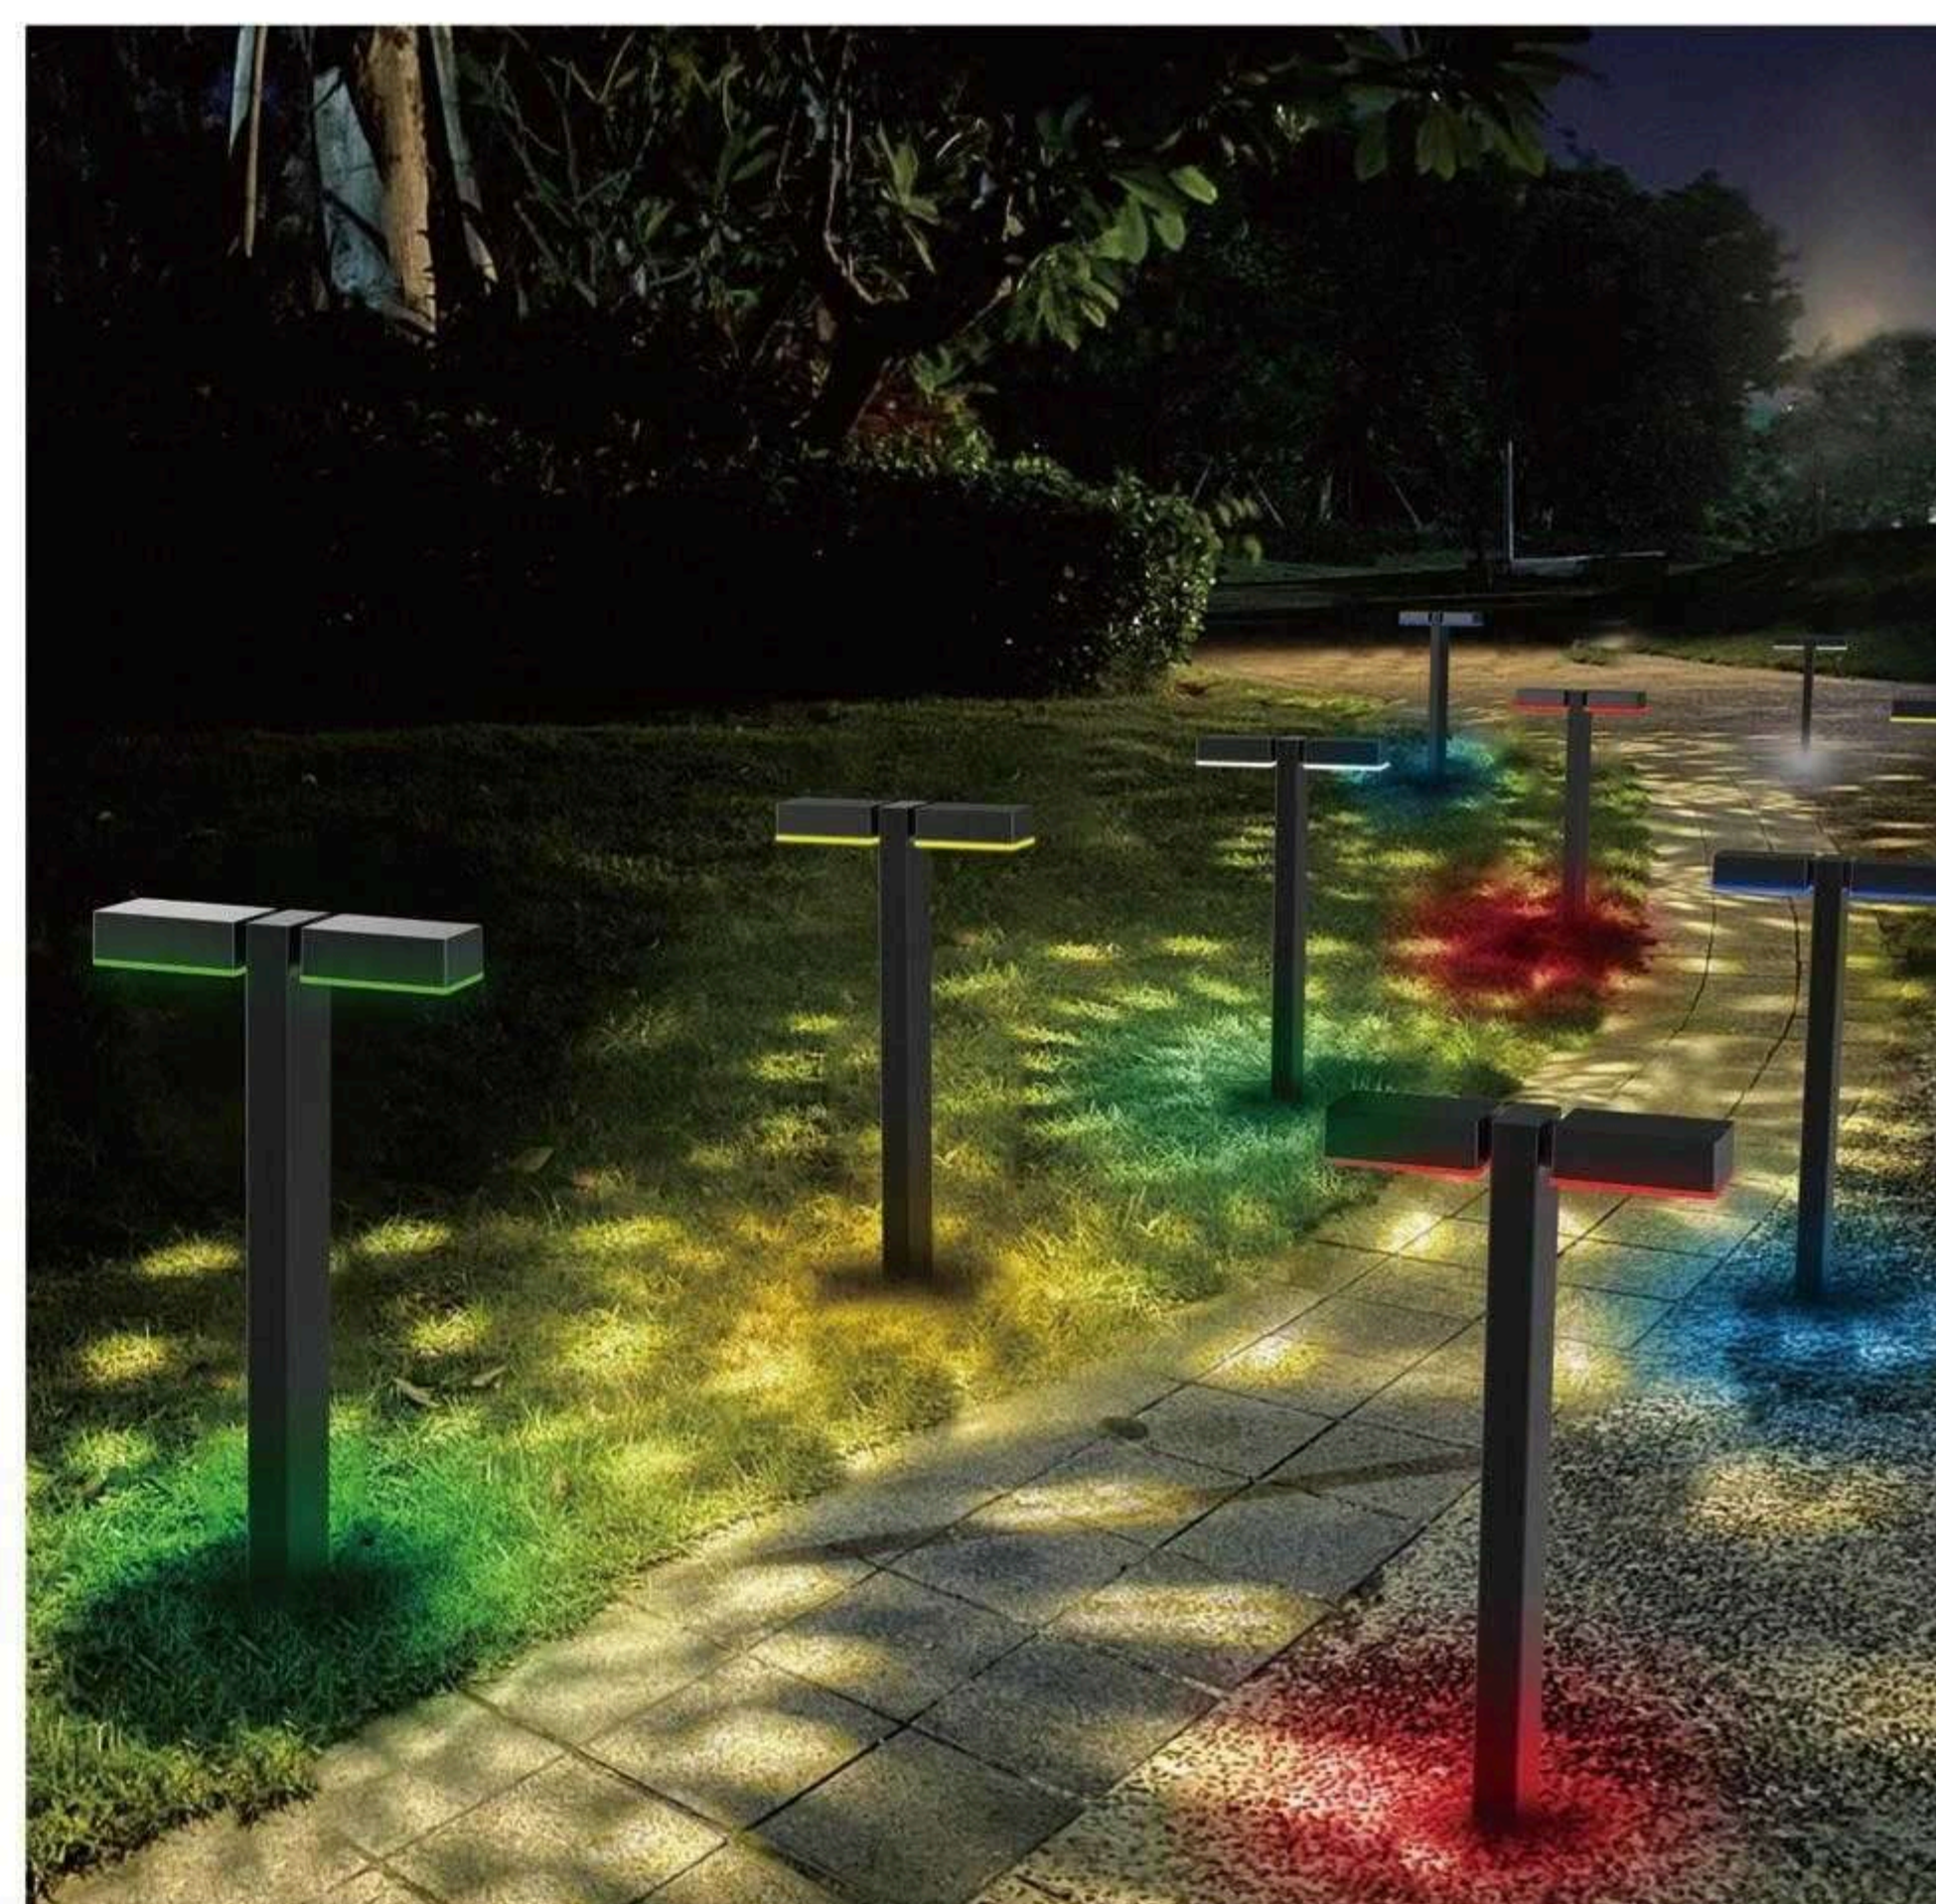

# SMART Lawn Lamp

## Basic lawn lamp




2.4GHz Wi-Fi +Bluetooth/ Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	6W
Light color	RGB/RGBW



2700K-6500K

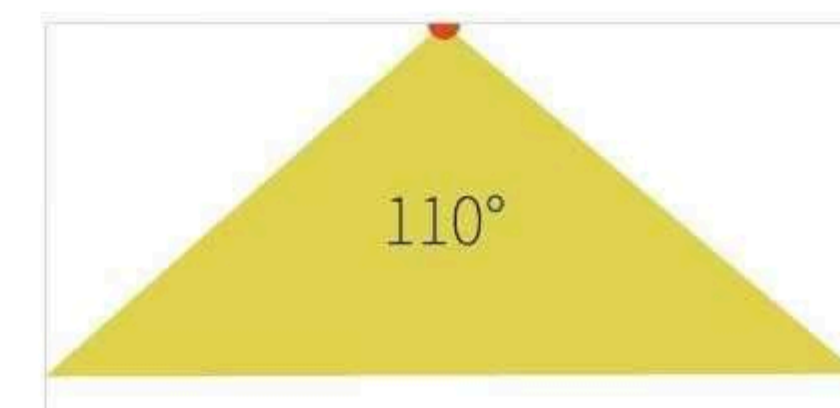

- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft. Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft. Extension Cable



# SMART Lawn Lamp

## Classic lawn lamp




2.4GHz Wi-Fi +Bluetooth /Bluetooth SIGmesh

Voltage	:	Input 100-240V 50/60Hz
	:	Output 24V DC
Adapter	:	36W
IP Rating	:	IP65
Bulb	:	6W
Light color	:	RGB/RGBW




2700K-6500K

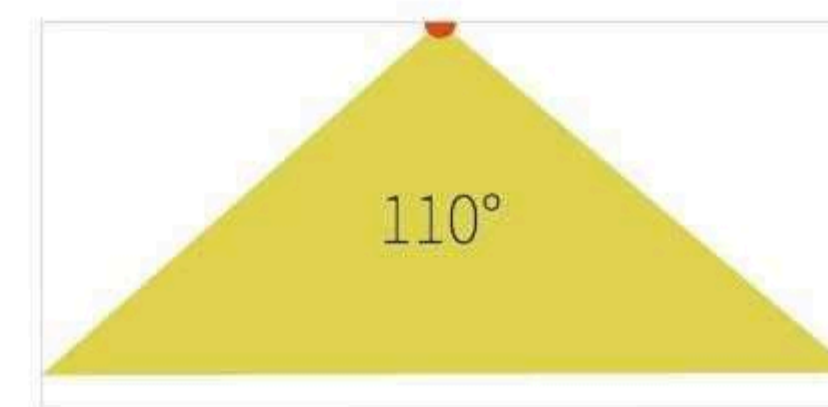

## SCENCE



- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft.Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft.Extension Cable

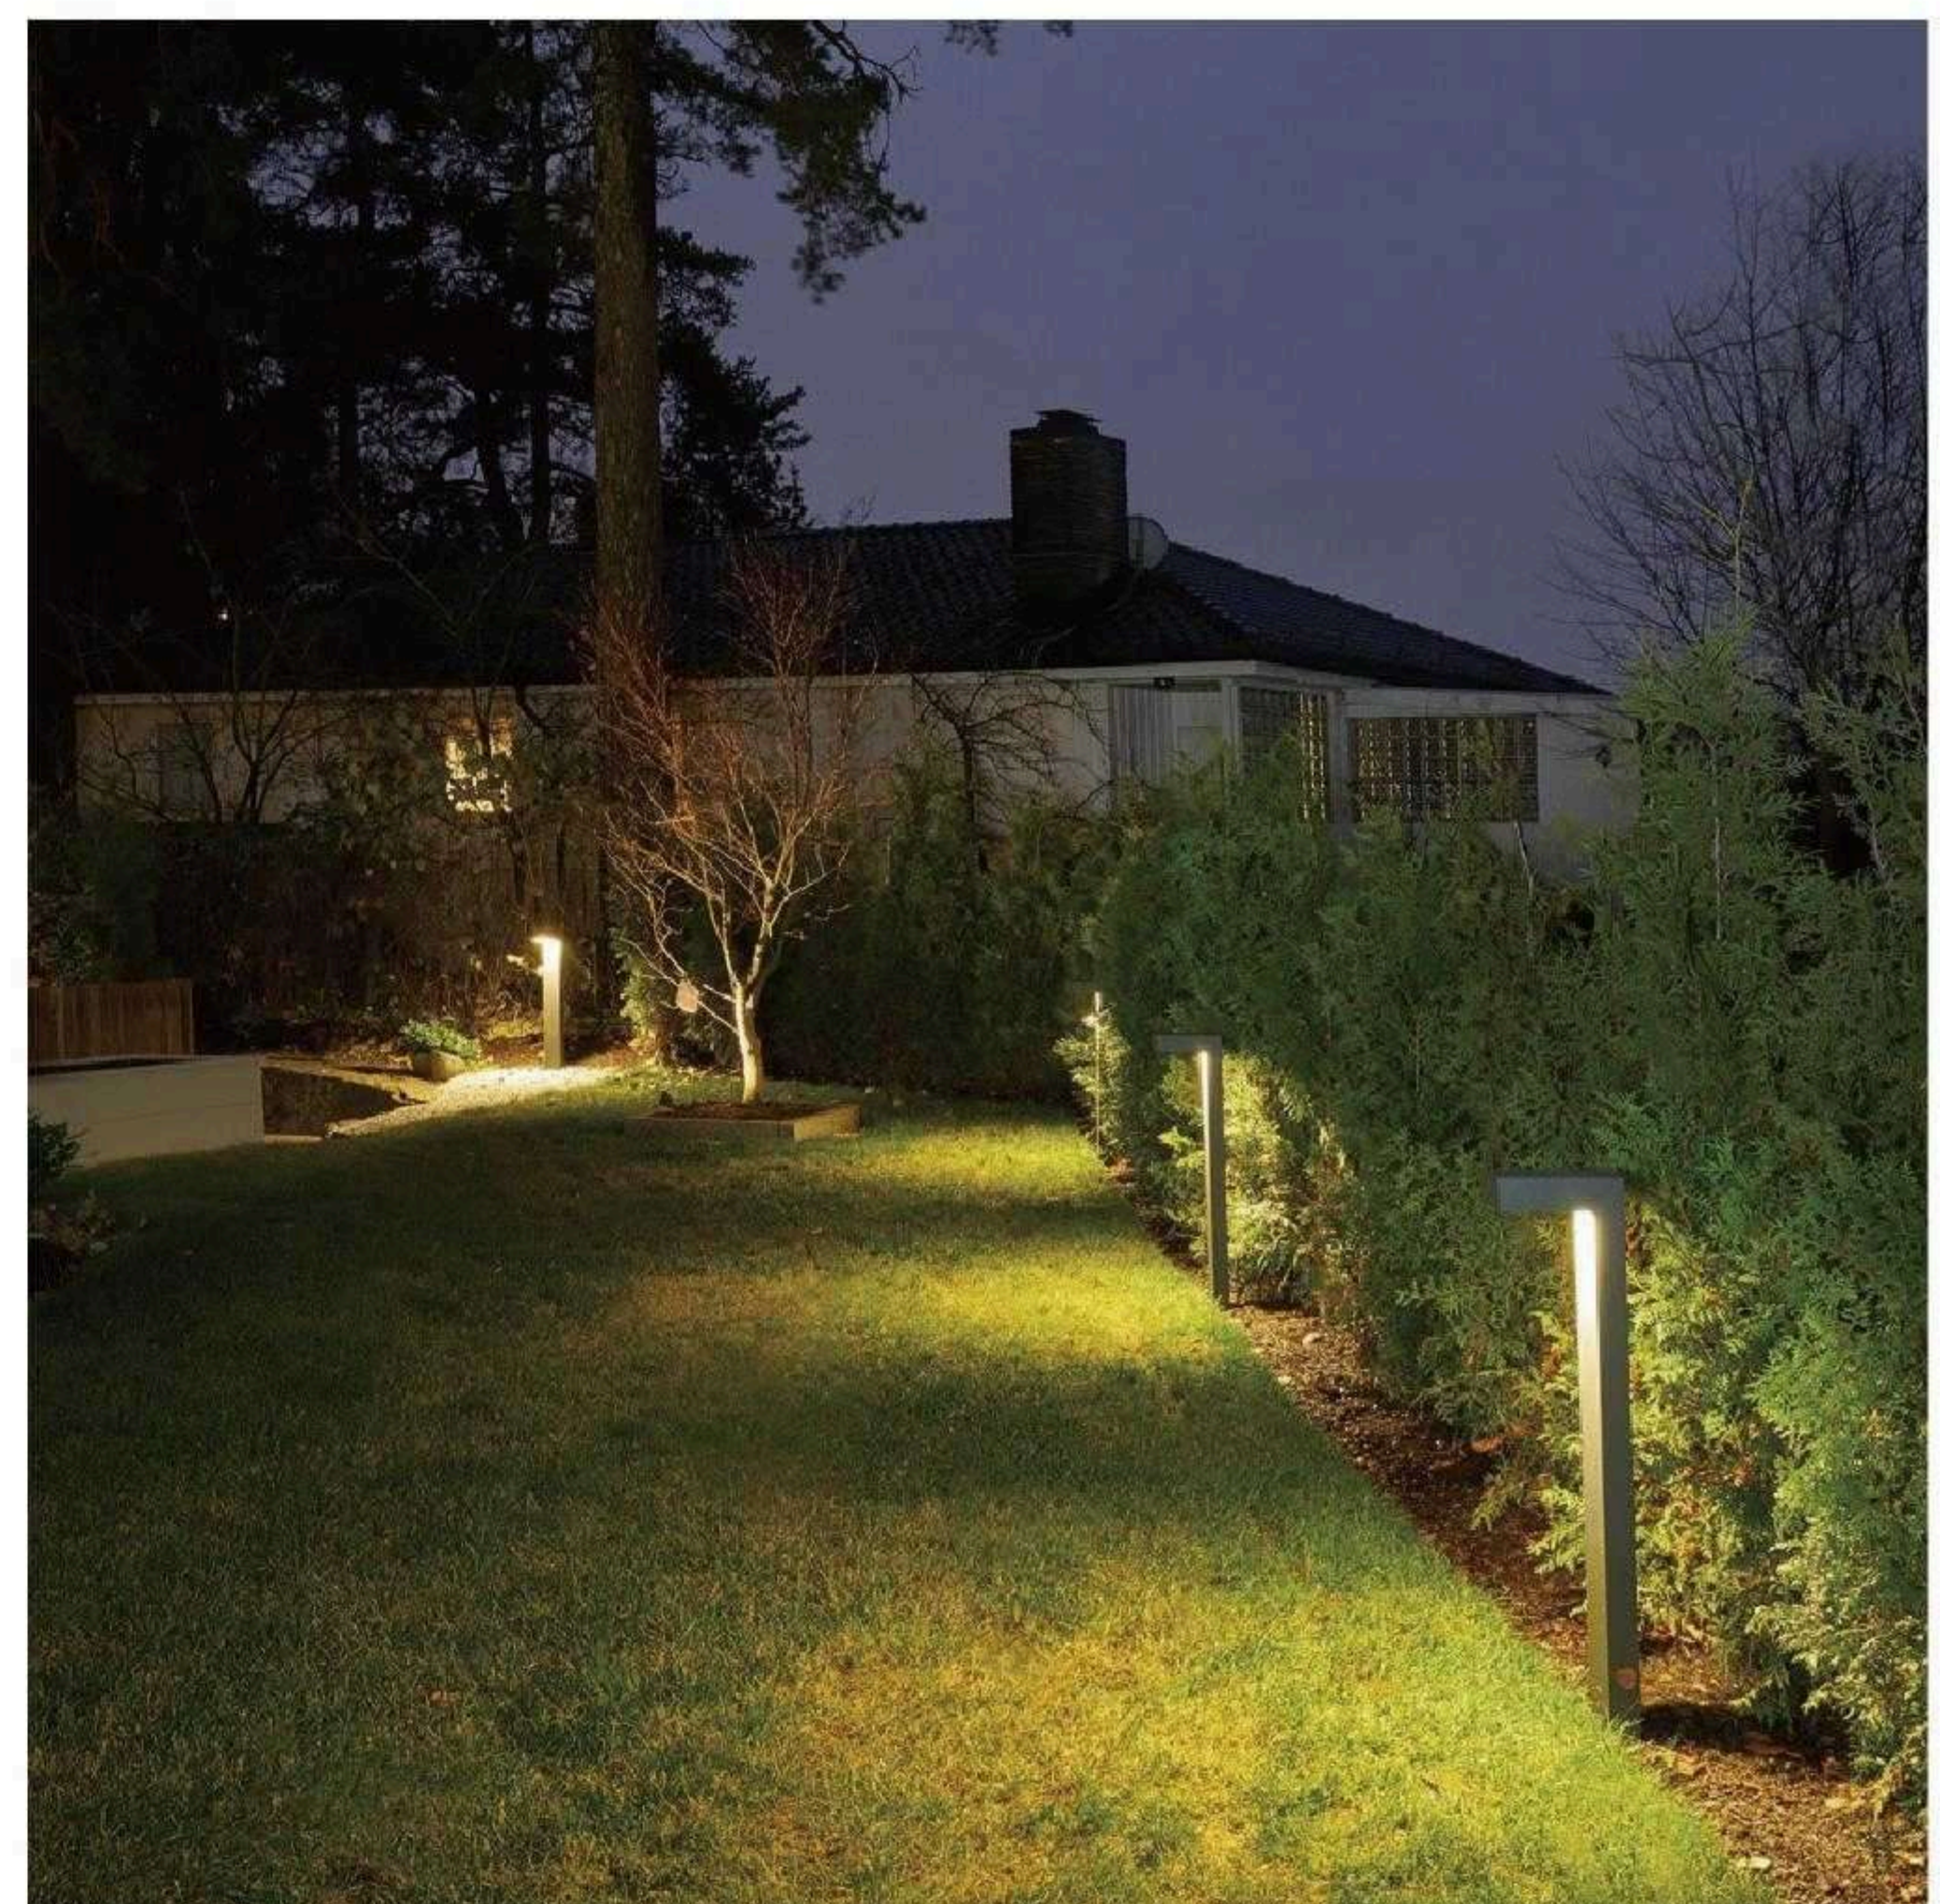


# SMART Lawn Lamp

## Basic lawn lamp




2.4GHz Wi-Fi +Bluetooth /Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	6W
Light color	RGB/RGBW

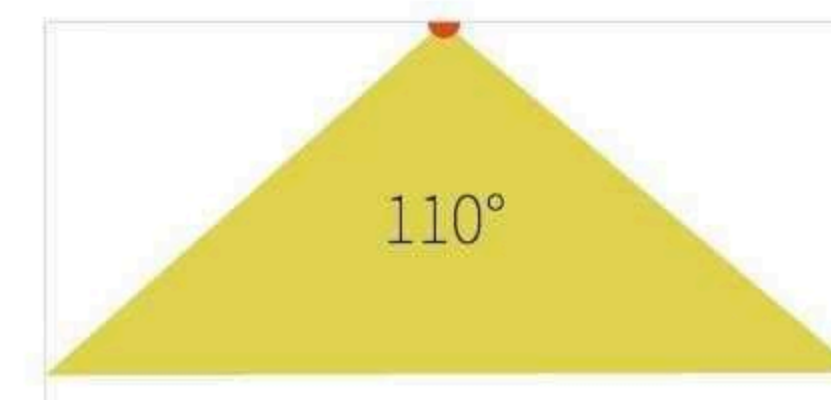

- 1** Bridge
- 2** Spot Lights
- 3** USB Wall Charger
- 4** 11.5 ft. Power Cable
- 5** Spot Lighting Cable
- 6** 16.4 ft. Extension Cable

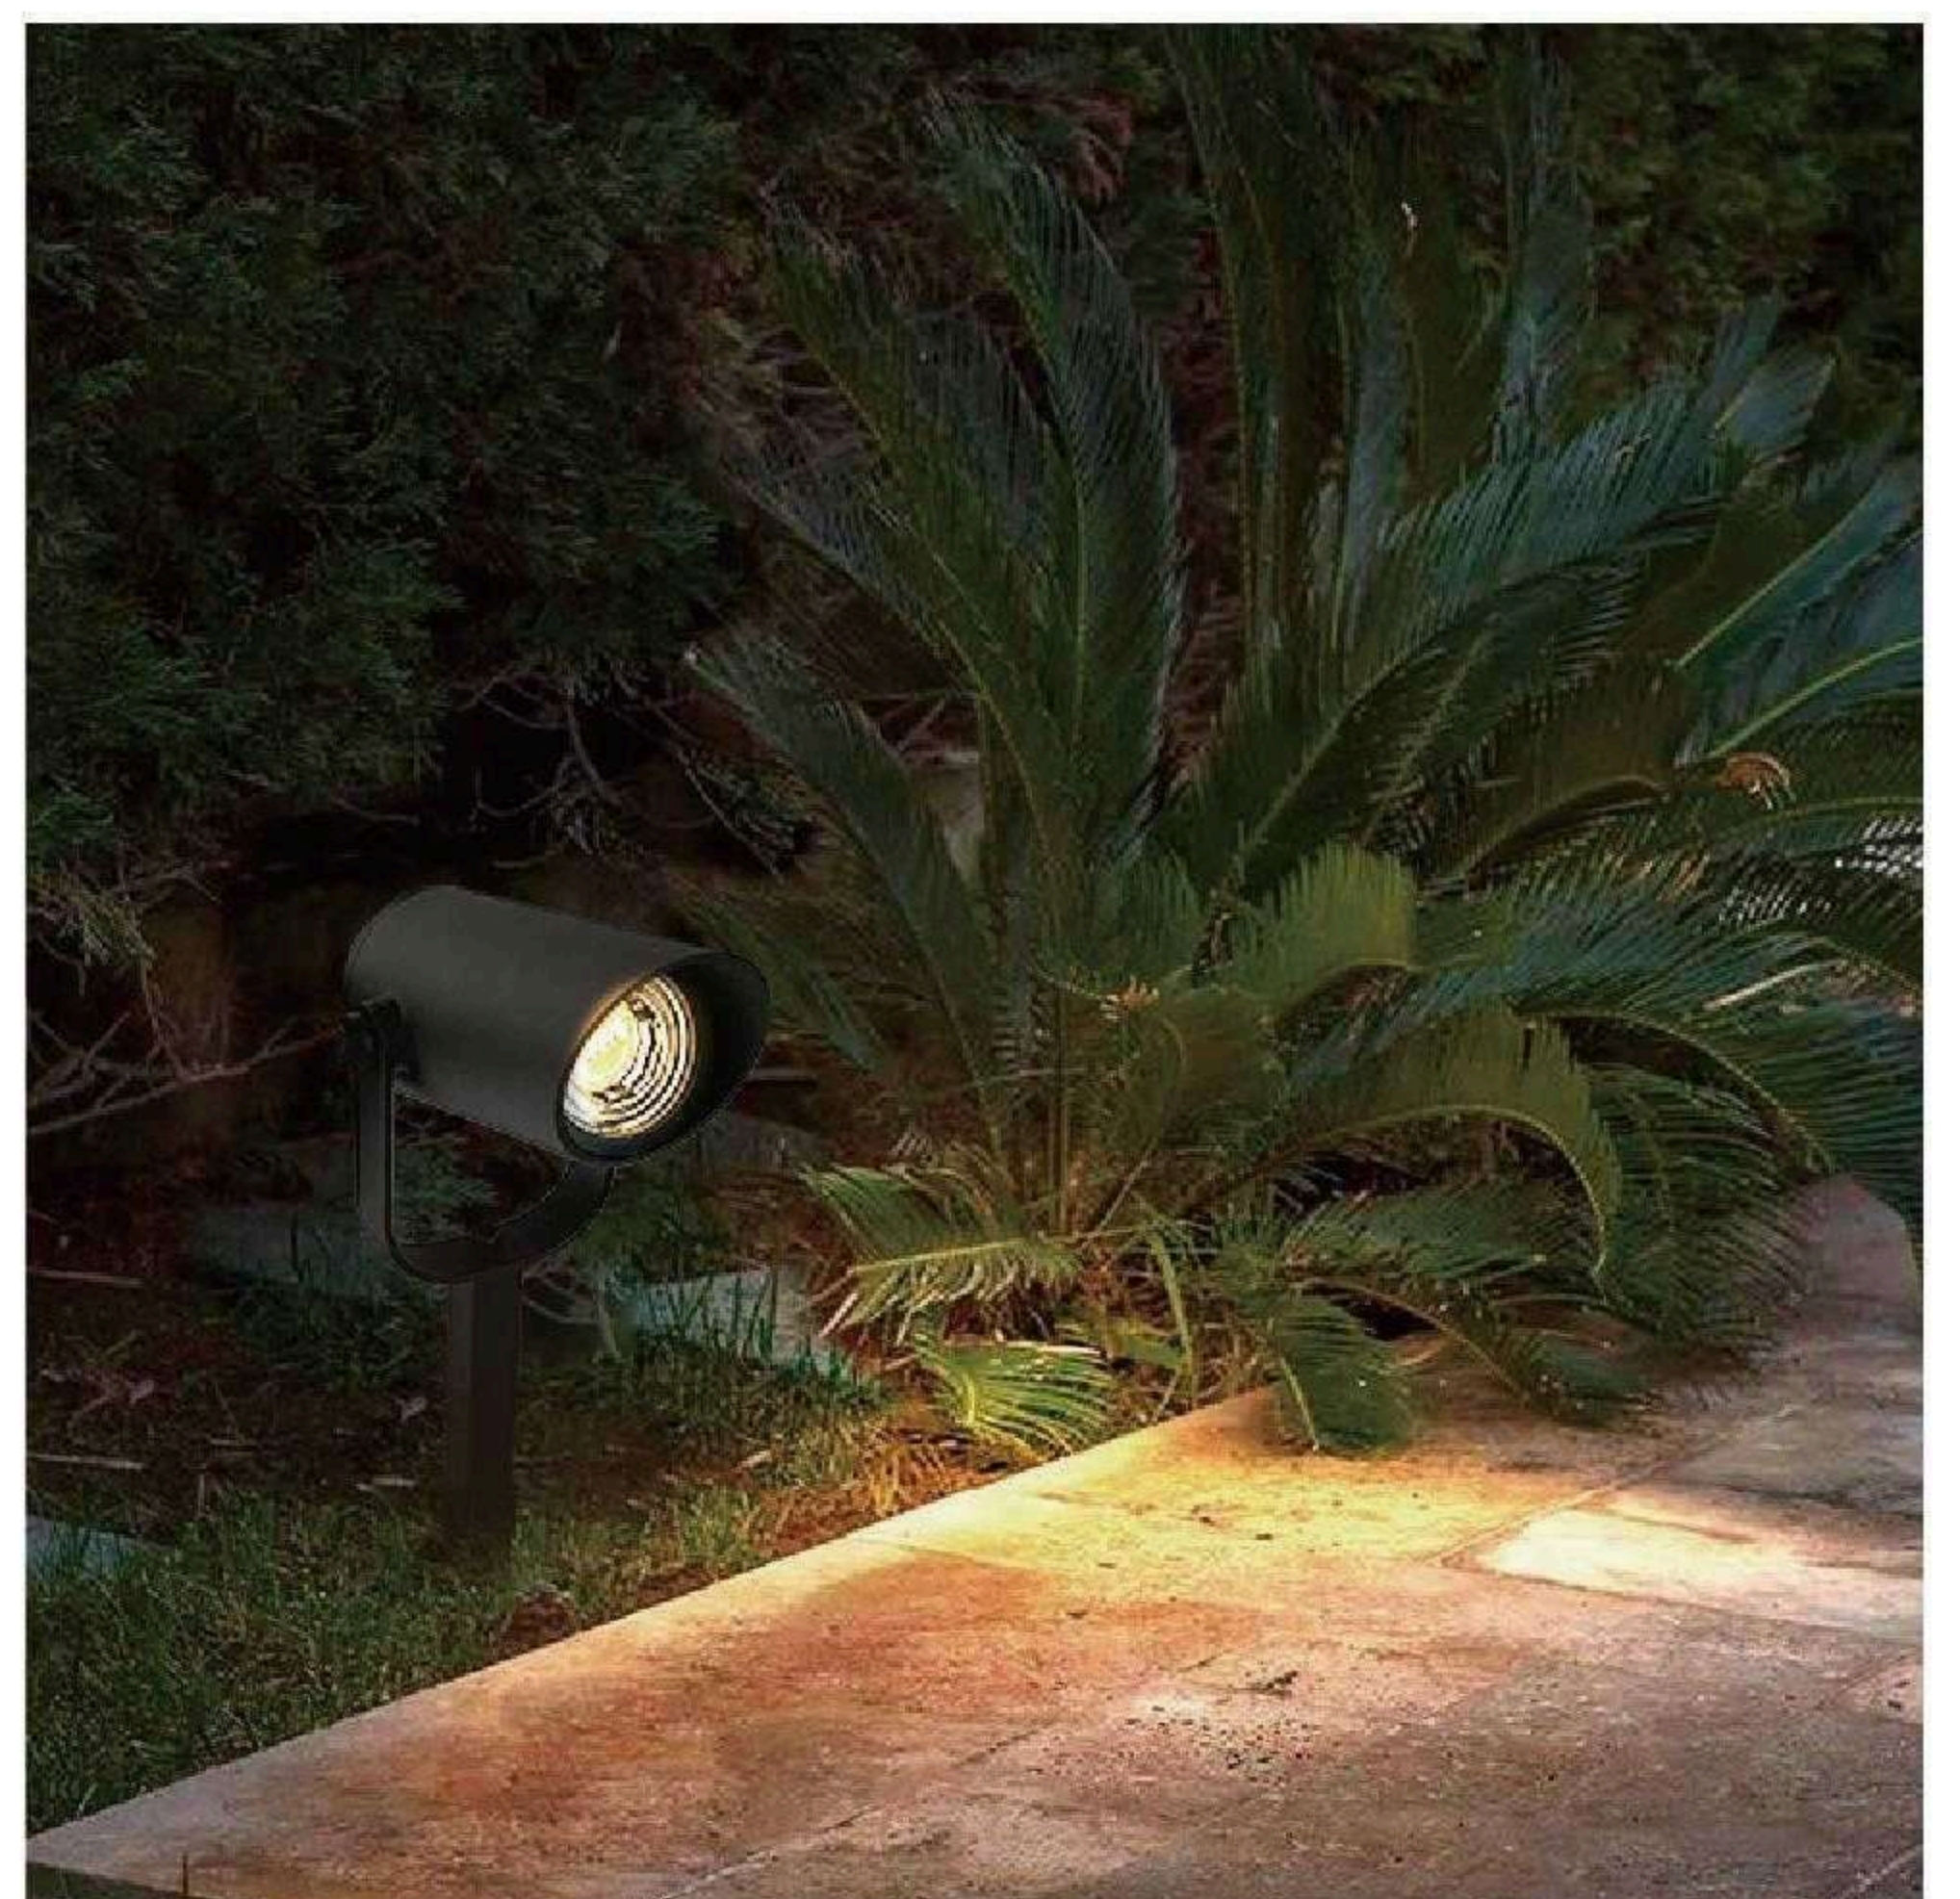

# SMART Lawn Lamp

## Mashroom Lawn lamp




2.4GHz Wi-Fi +Bluetooth Bluetooth SIGmesh


Voltage	Input 100-240V 50/60Hz
	Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	3W
Light color	RGB/RGBW



2700K-6500K

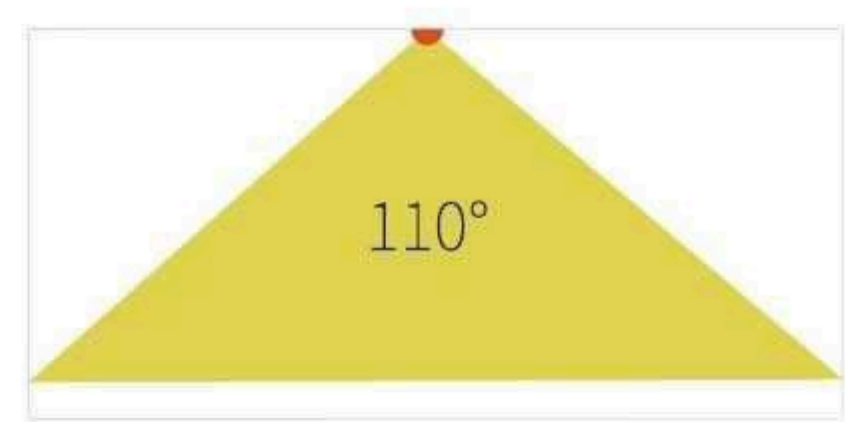

## SCENCE

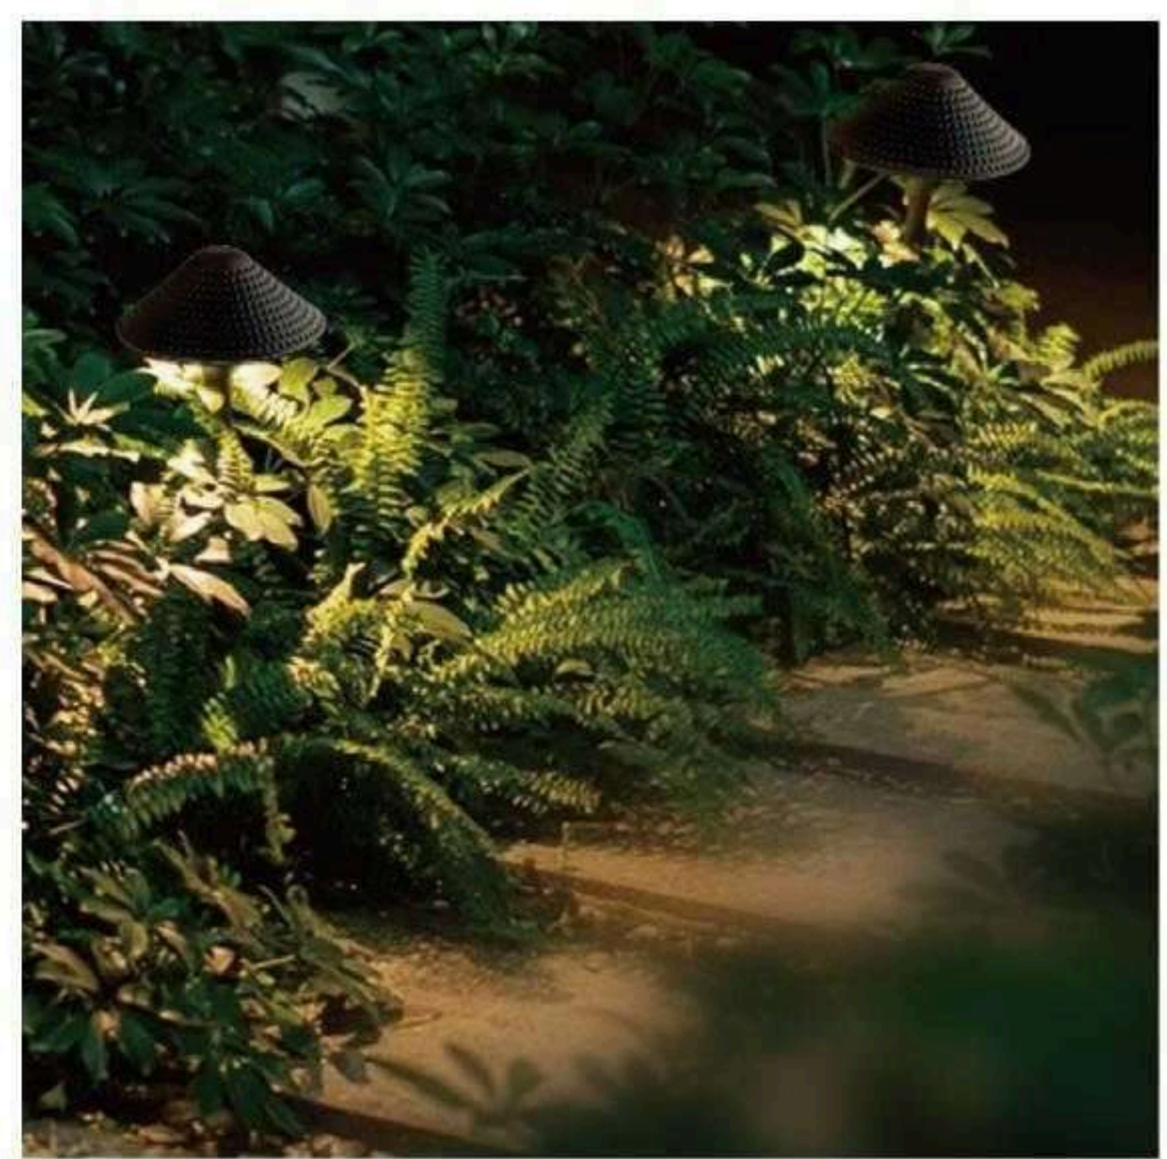



# SMART Lawn Lamp

## Basic lawn lamp



2.4GHz Wi-Fi +Bluetooth Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz Output 24V DC
Adapter	36W
IP Rating	IP65
Bulb	3W
Light color	RGB/RGBW

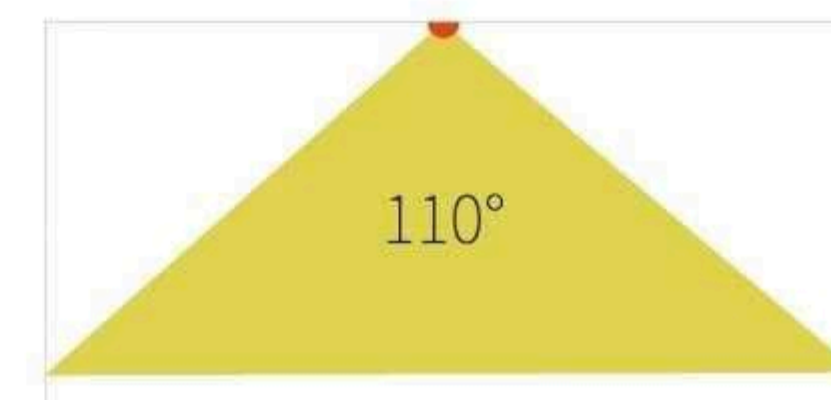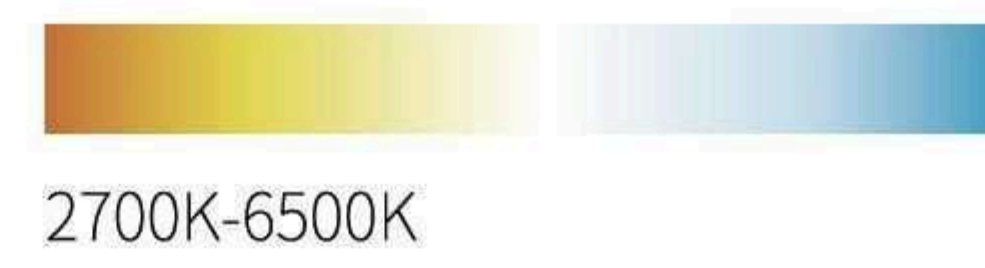



# SMART Lawn Lamp

## Teacup lawn lamp



2.4GHz Wi-Fi +Bluetooth Bluetooth SIGmesh

Voltage	Input 100-240V 50/60Hz Output 24V DC
Adapter	10W
IP Rating	IP65
Bulb	3W
Light color	RGB/RGBW

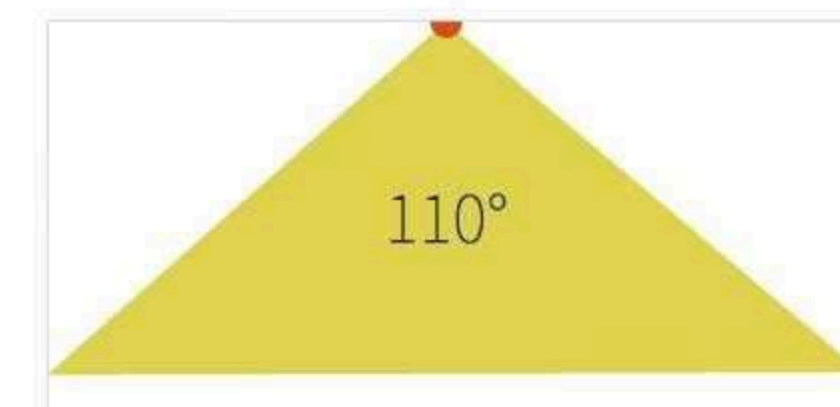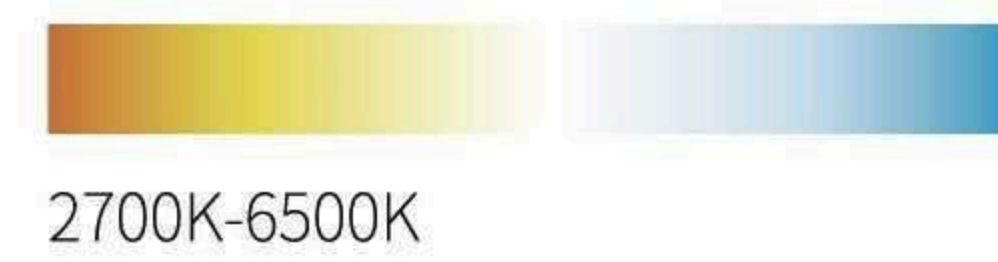

2024

# SMART Wall Lamp

Environmental protection, energy saving.



# SMART Wall Lamp

## WALL LAMP

It can make life more colorful






Bluetooth®



CLOUD STORAGE

VOICE CONTROL

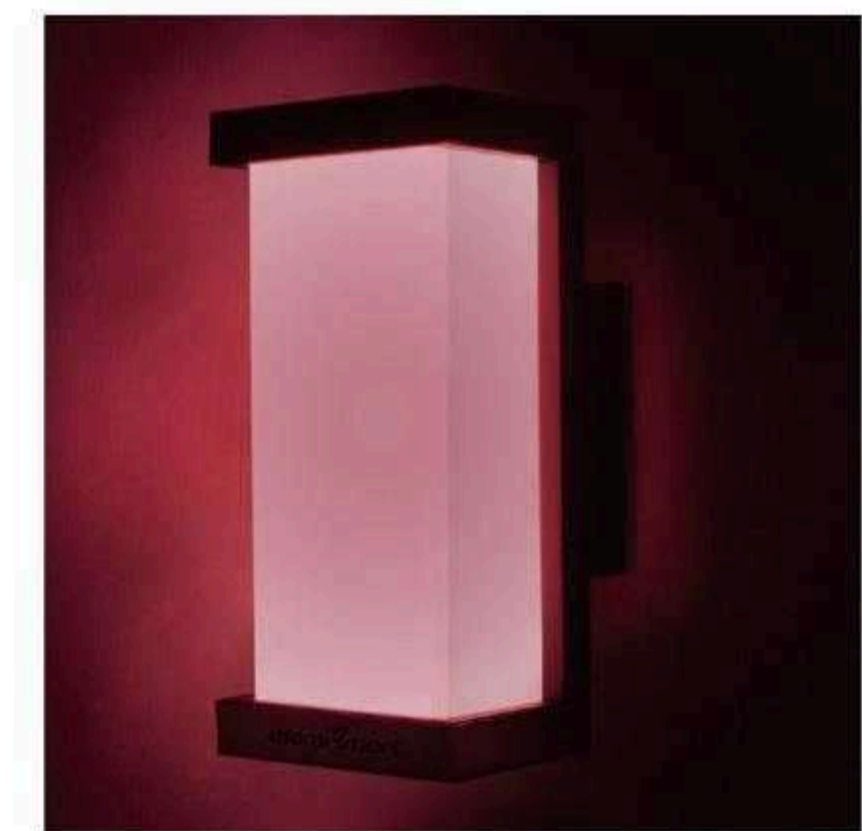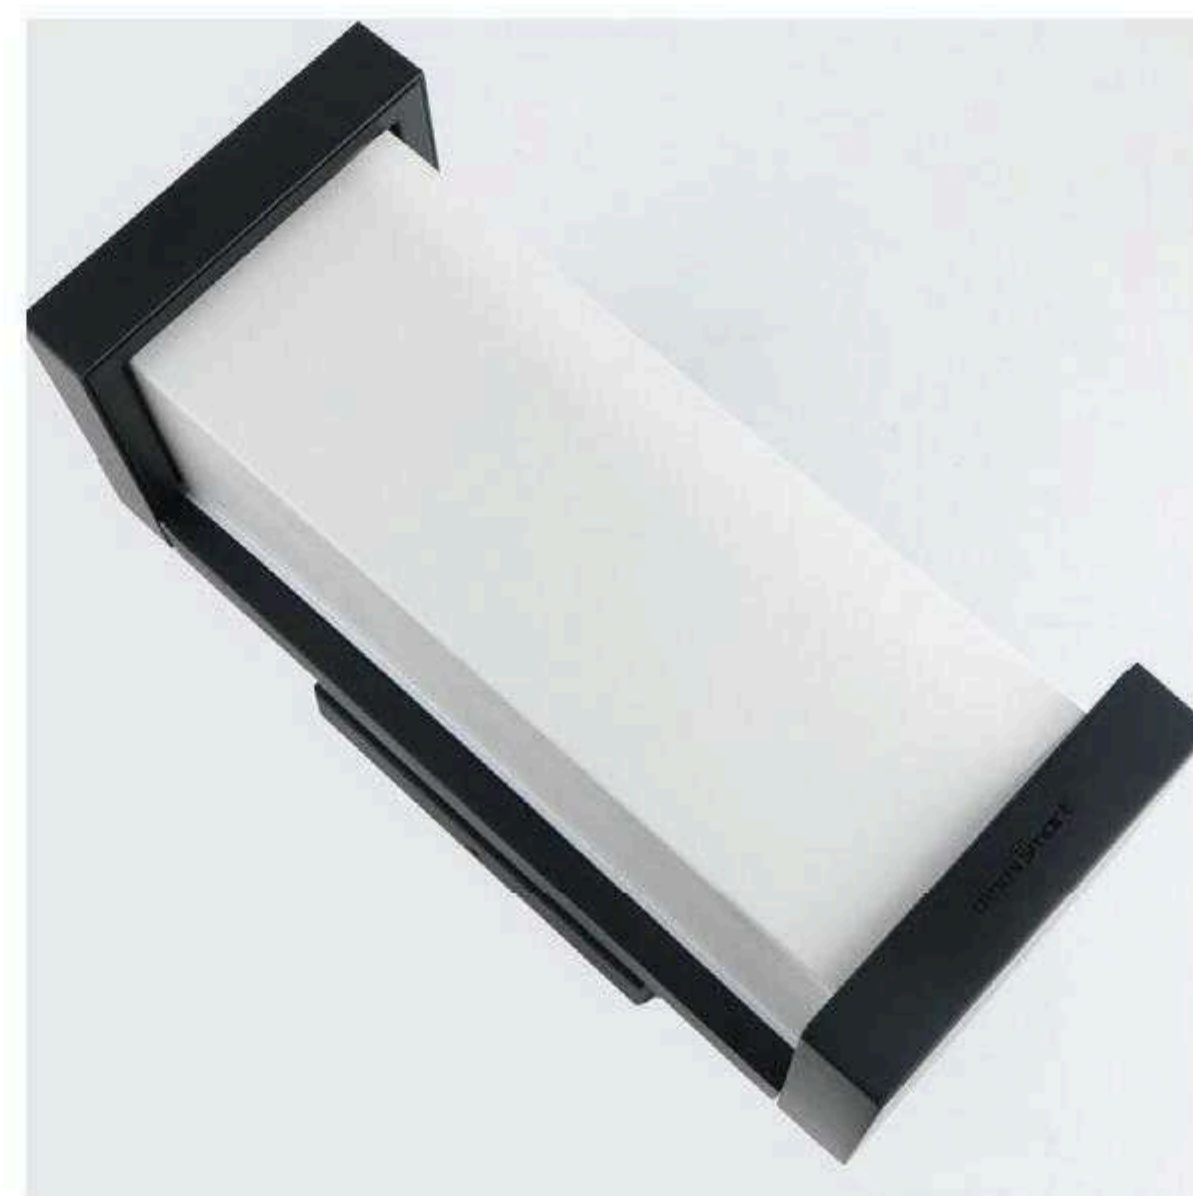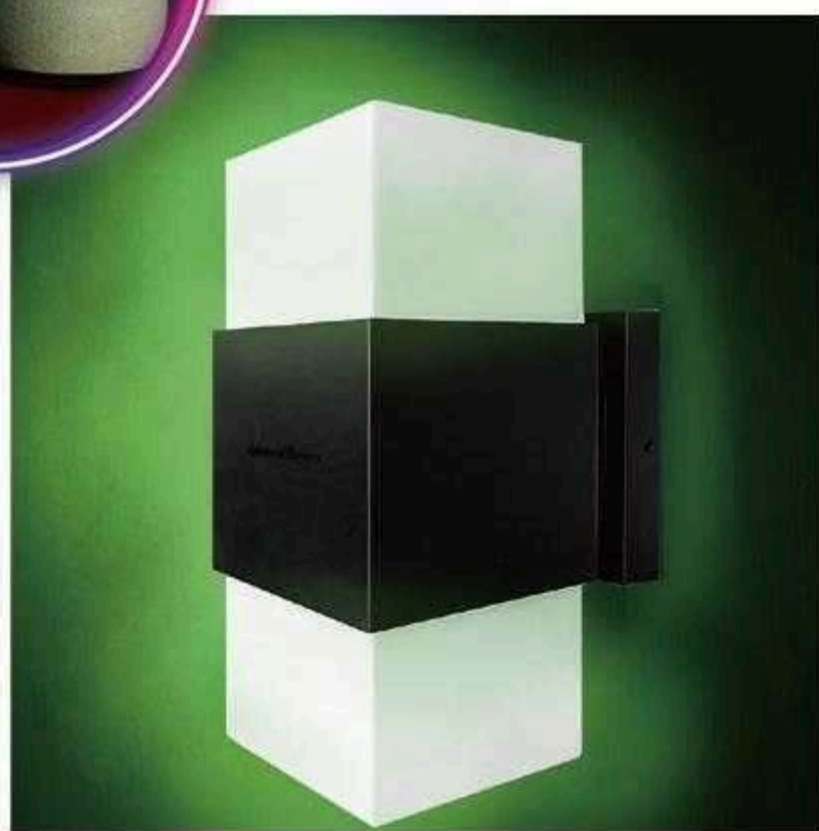

## • Basic User

Use the "SMART LIFE" APP control together with the luminaires / luminaires to adjust brightness, colours and mood. These functions are practical, easy to handle and will meet your daily needs.

## • Advanced User

Use the full potential of "SMART LIFE" APP connect: Away from-Home control by integration in your WiFi, control by speech commands via Amazon Echo and Google Home. Use the App and expand your options – the future of lighting in your home.

## SMART Lawn Lamp

# 2023 The NEW Model

It makes you feel magical and dreamy



## • Creative inspiration

It was inspired by a drink, which is the most common type of sparkling water, but often the bubbles give you a thrilling feeling. You can have bubbles in a drink, so why not in a light fixture? So this lamp has some bubbles in it to make it feel like it's been enchanted.

# SMART Lawn Lamp


## Circular Wall Lamp

Full cover

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White



Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
60311	220-240V/100-240V	10W	900lm	WIFI/BLE	φ 170x101	PC

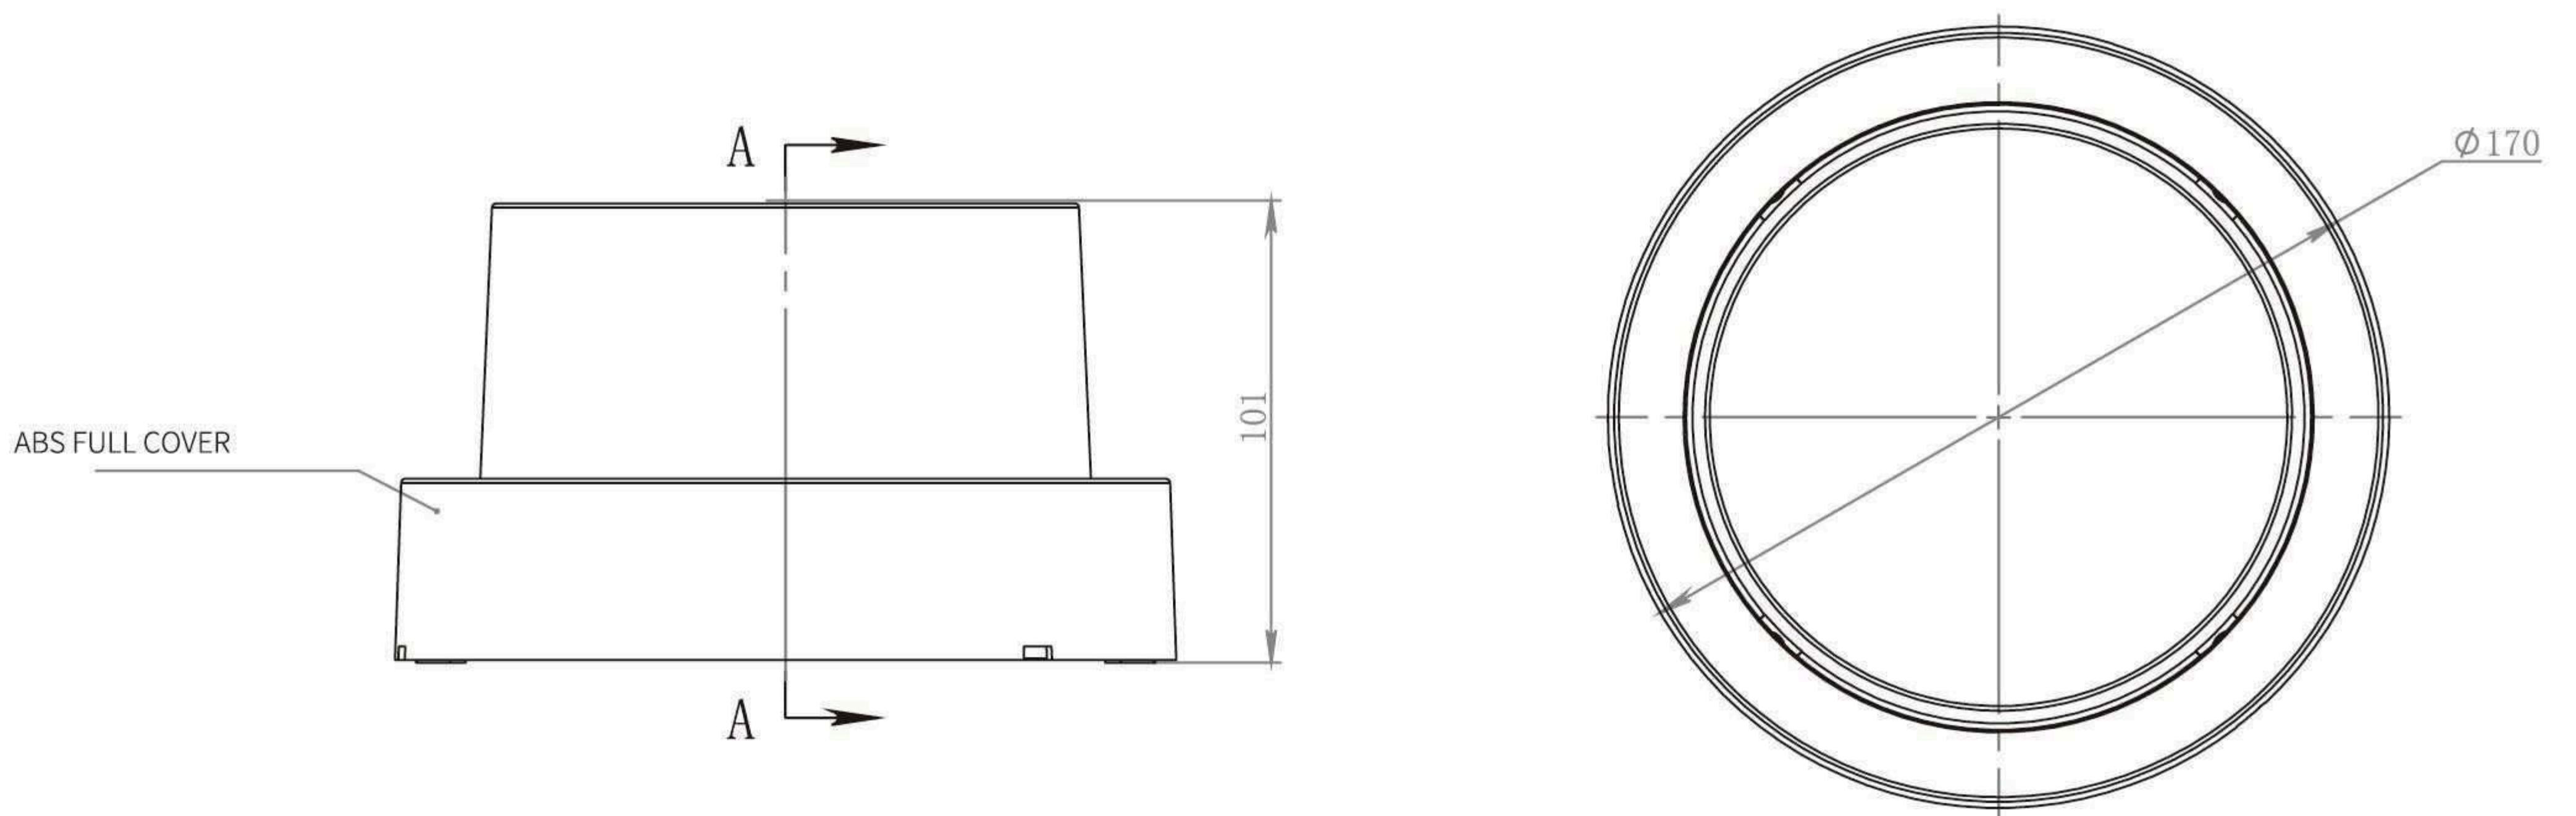


# SMART Lawn Lamp



## Circular Wall Lamp

Half cover

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

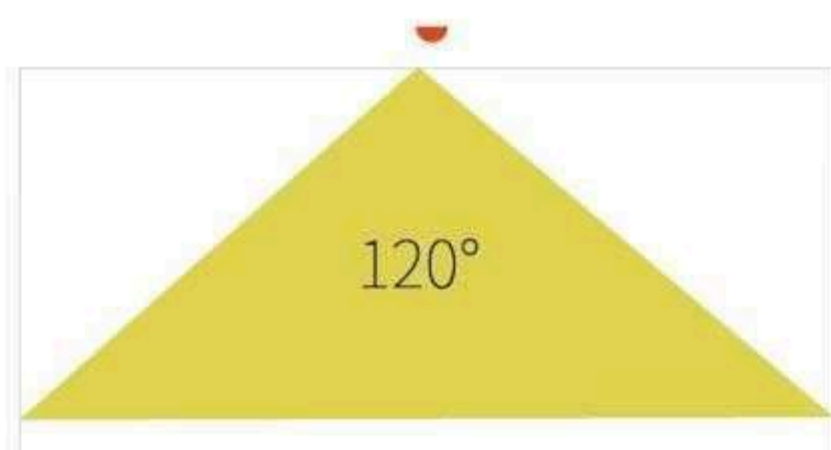


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
60313	220-240V/100-240V	10W	900lm	WIFI/BLE	φ 170x101	PC

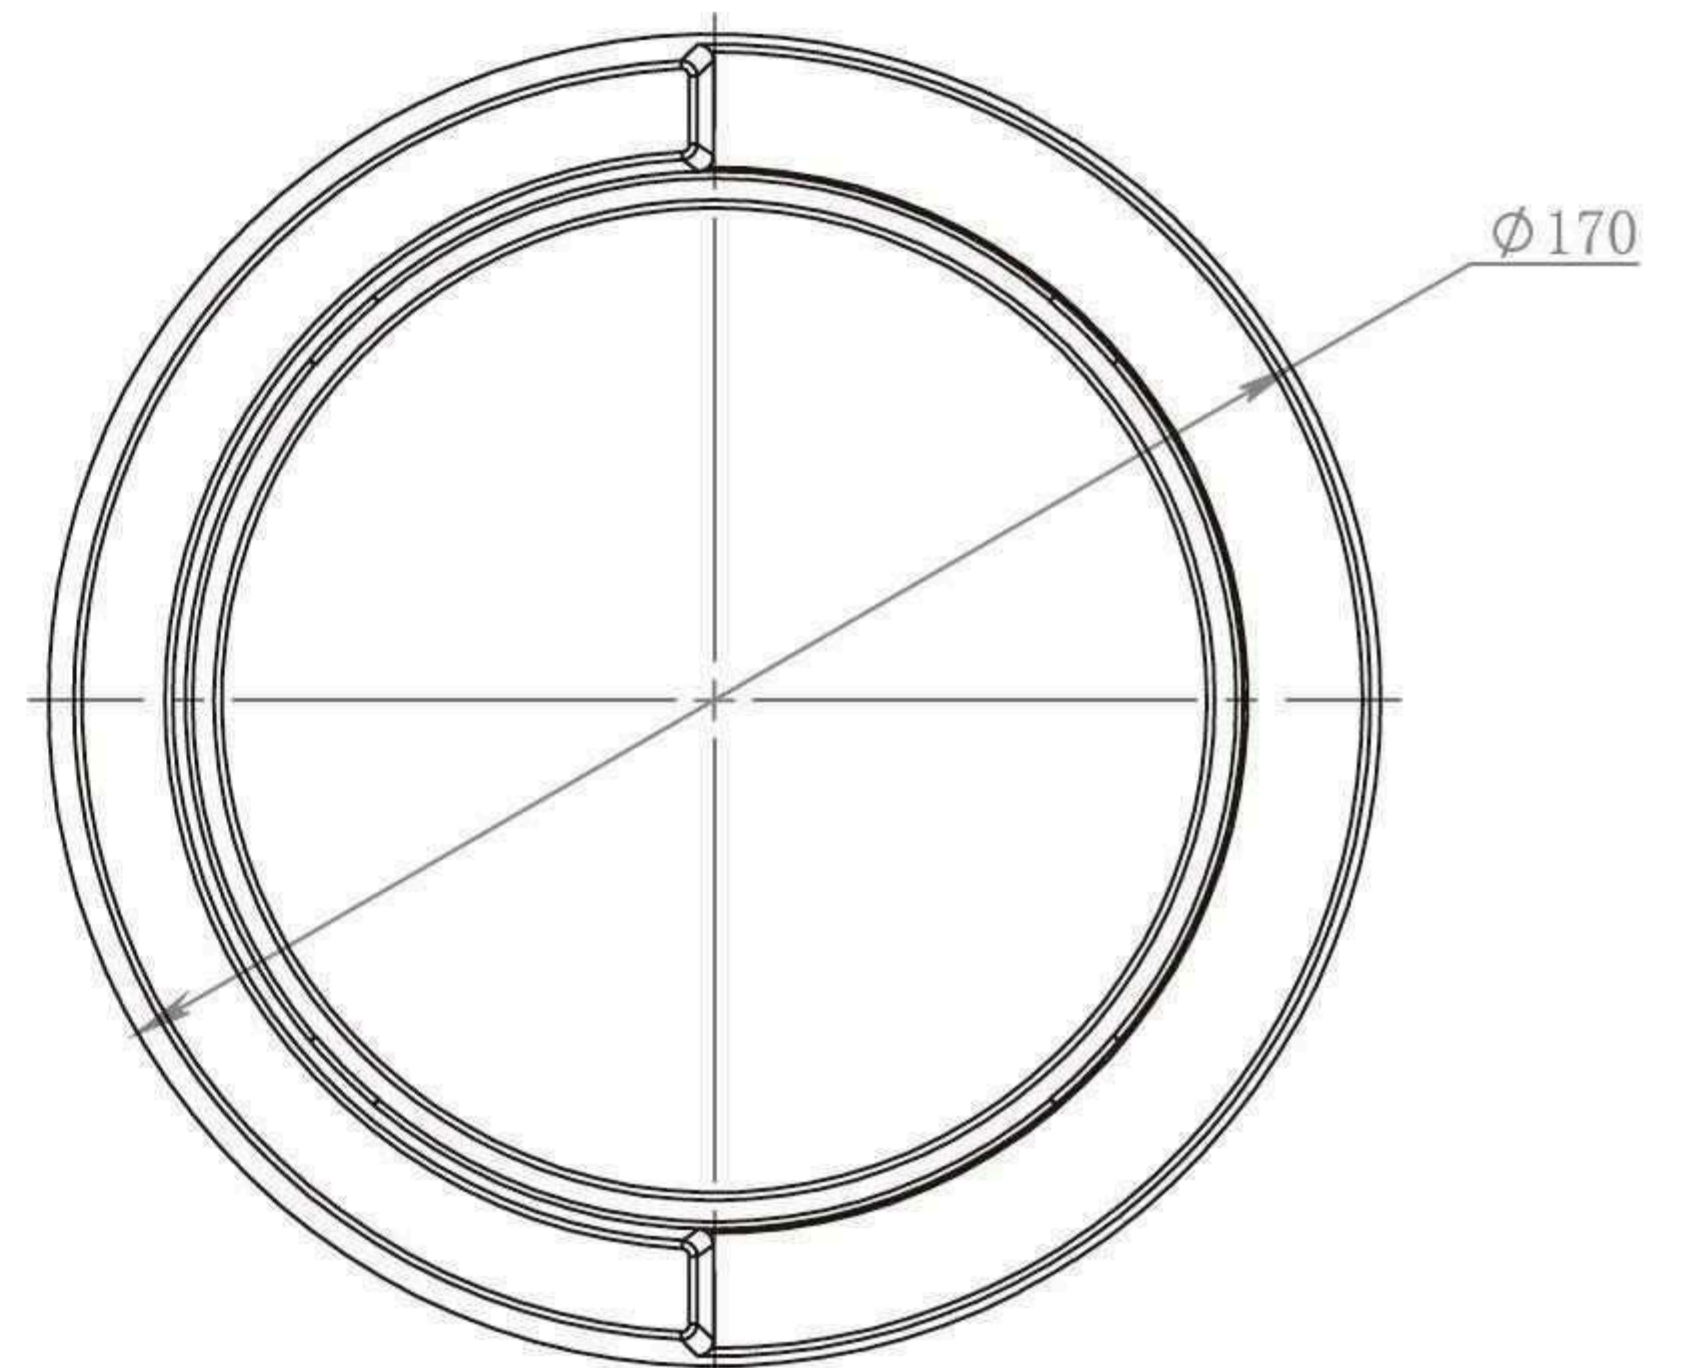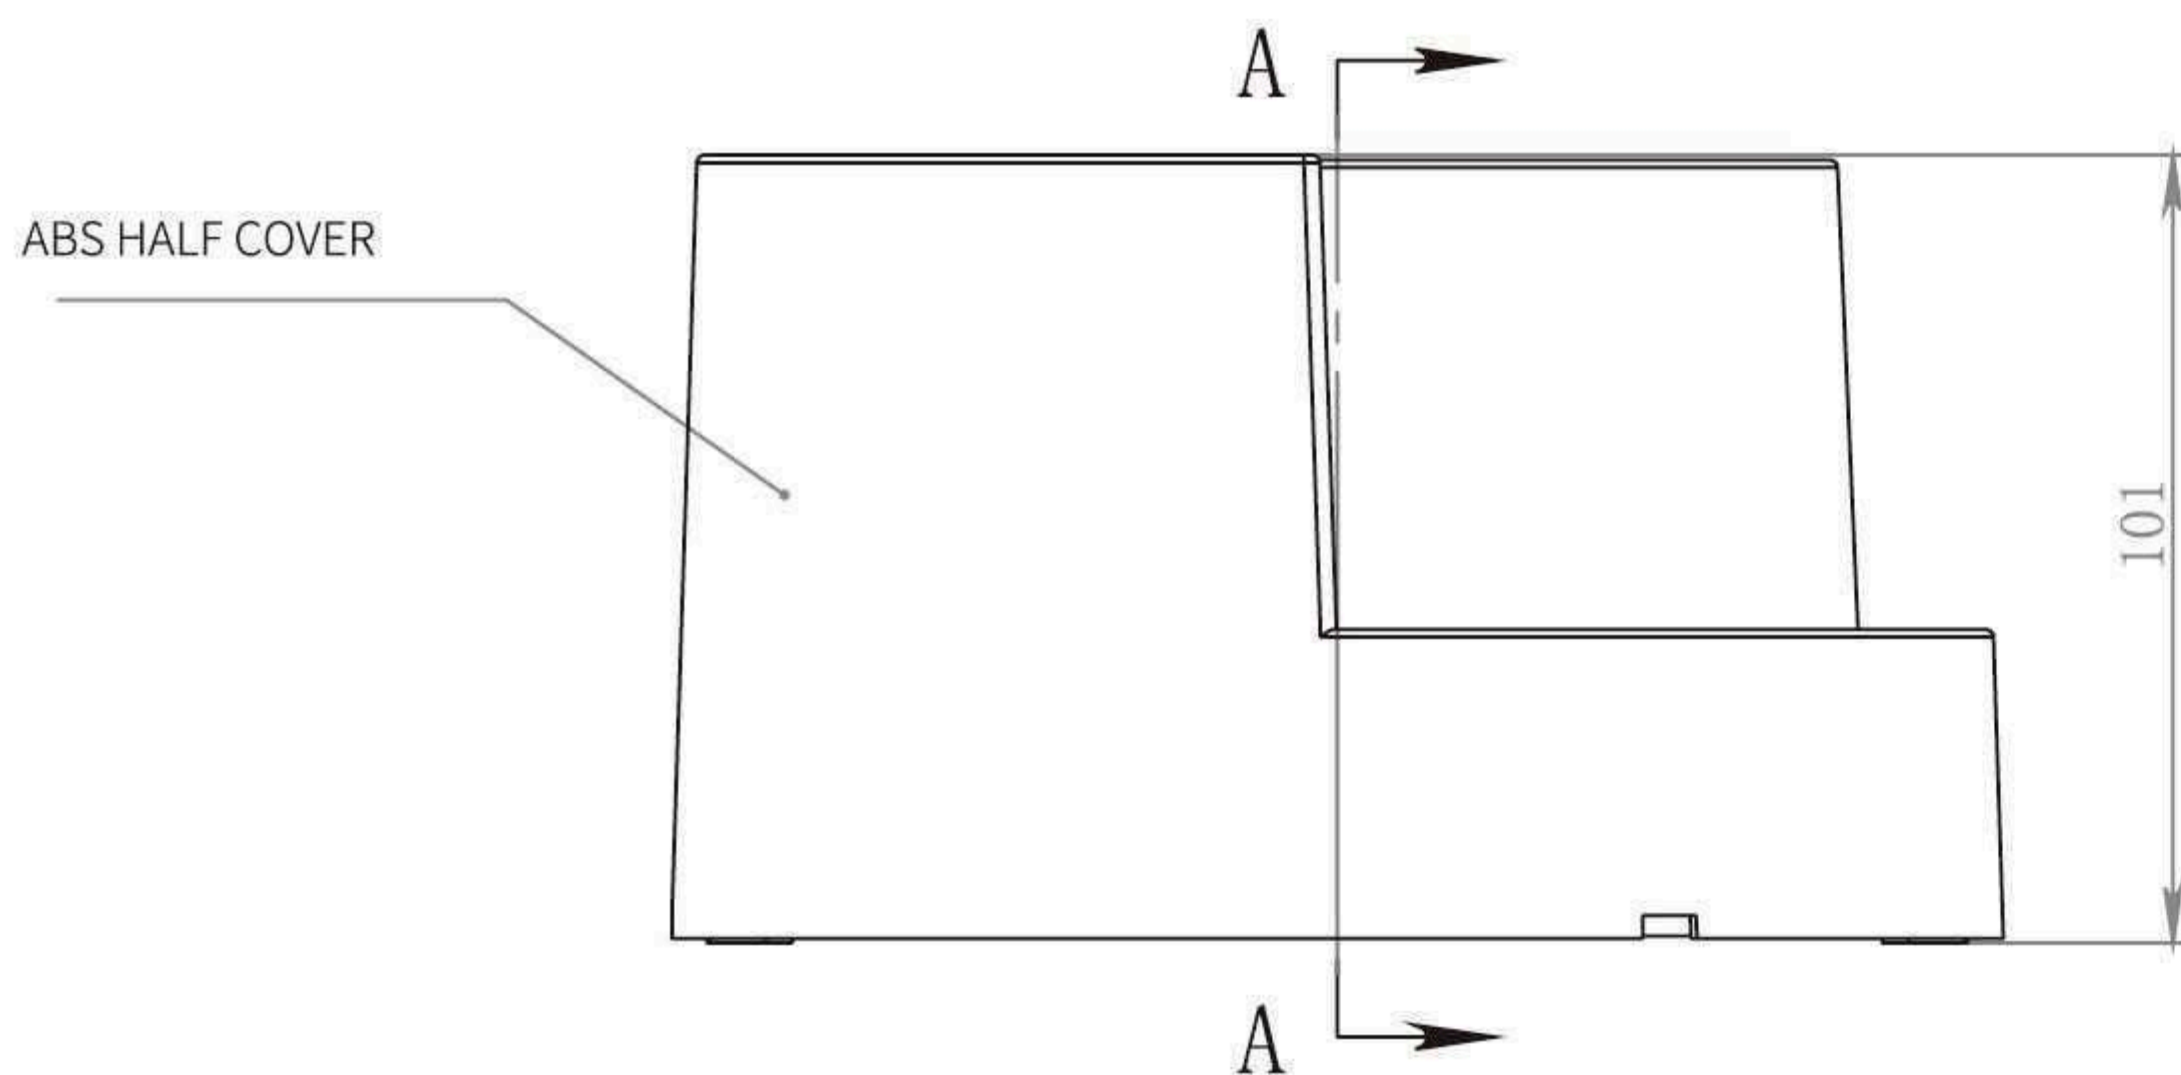




# SMART Lawn Lamp

## Double Head - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

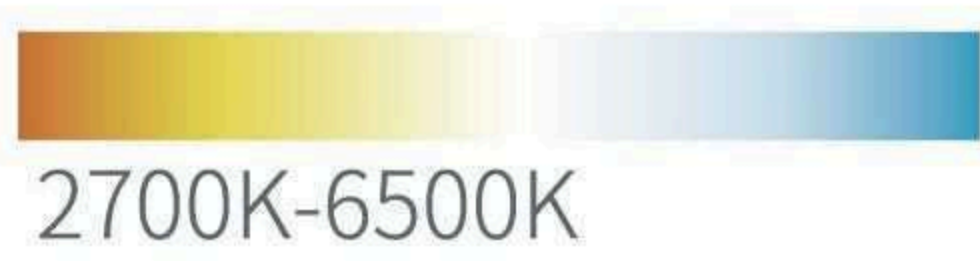


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S01	100V-240V	20W	600lm	WIFI/BLE	φ108x308	Aluminum+PC

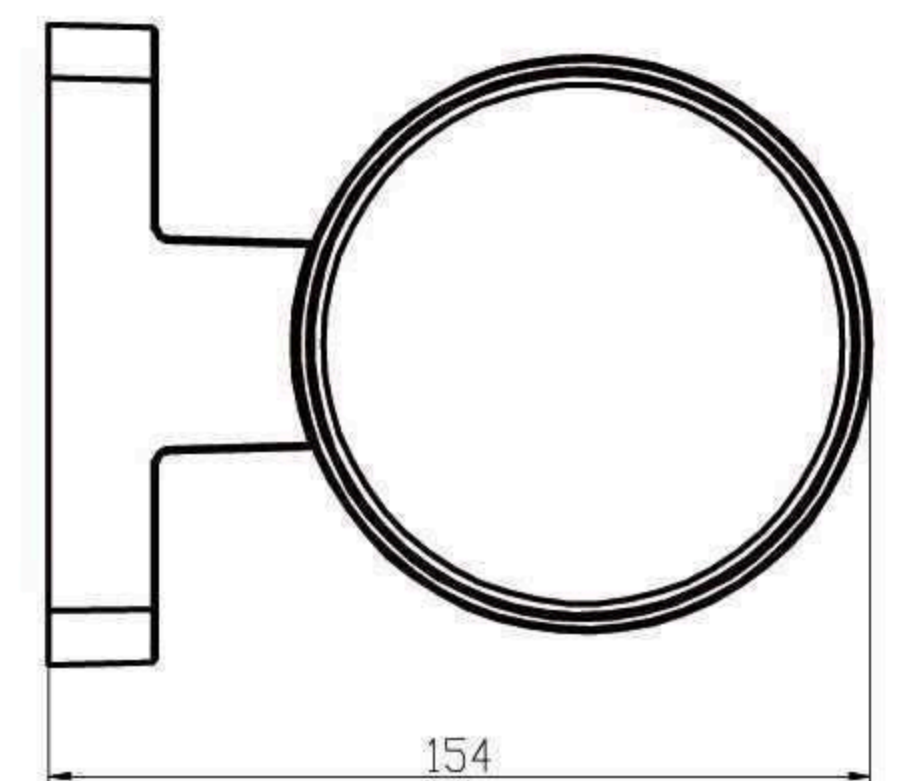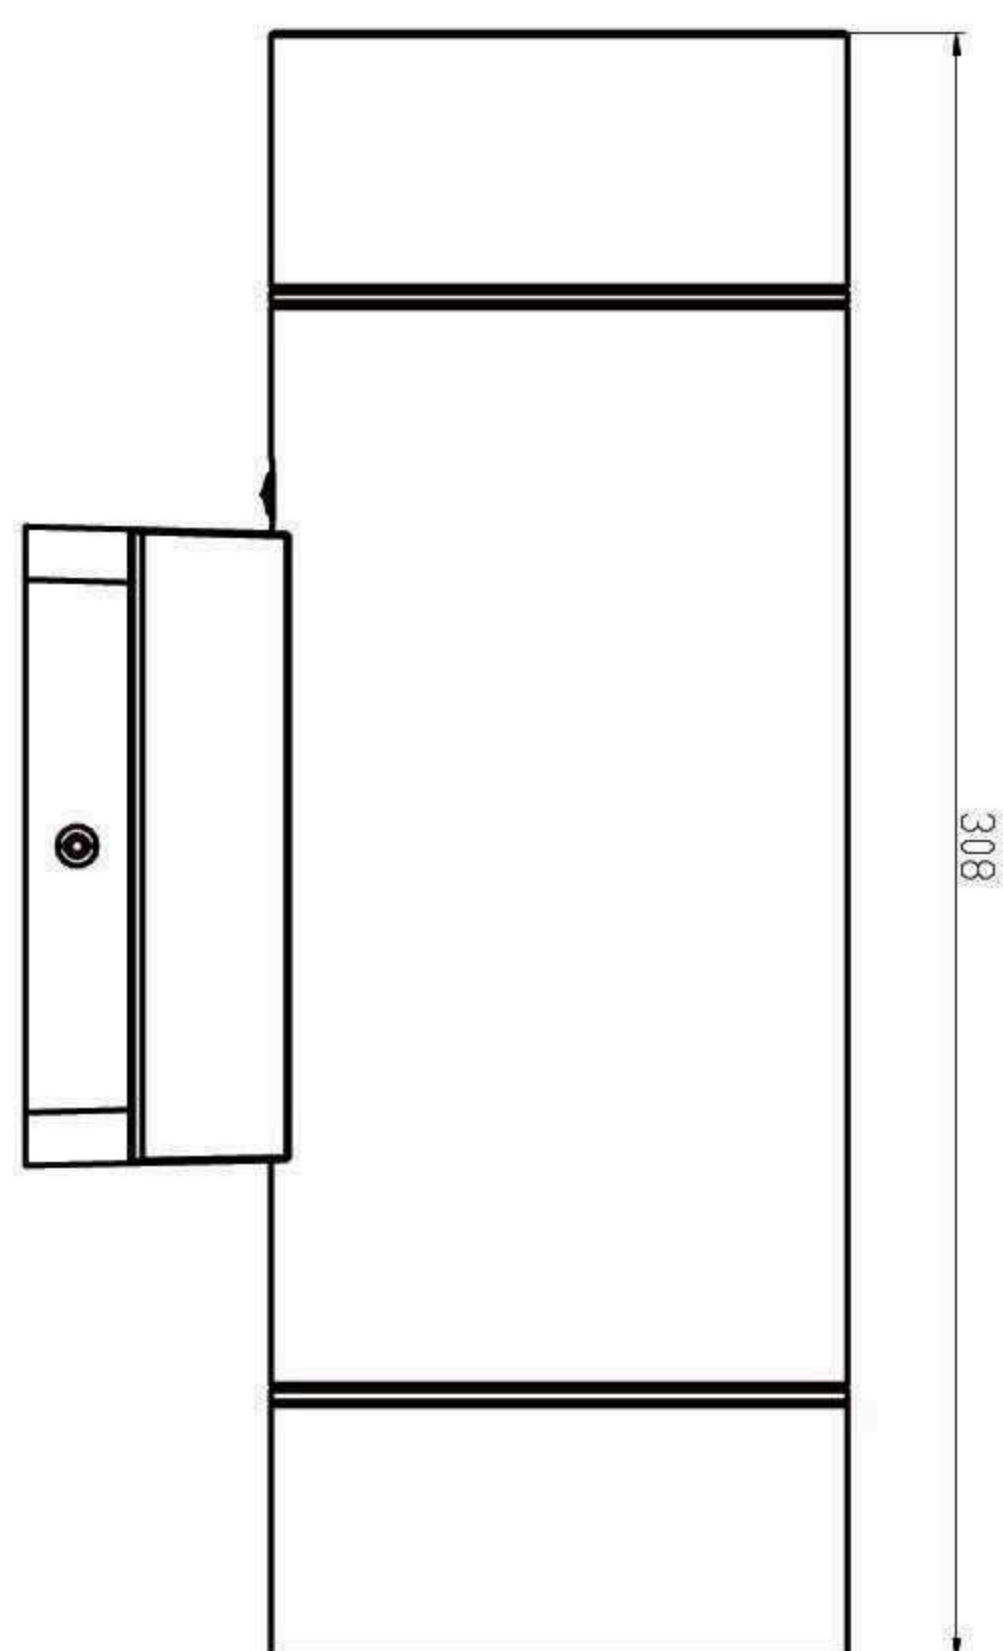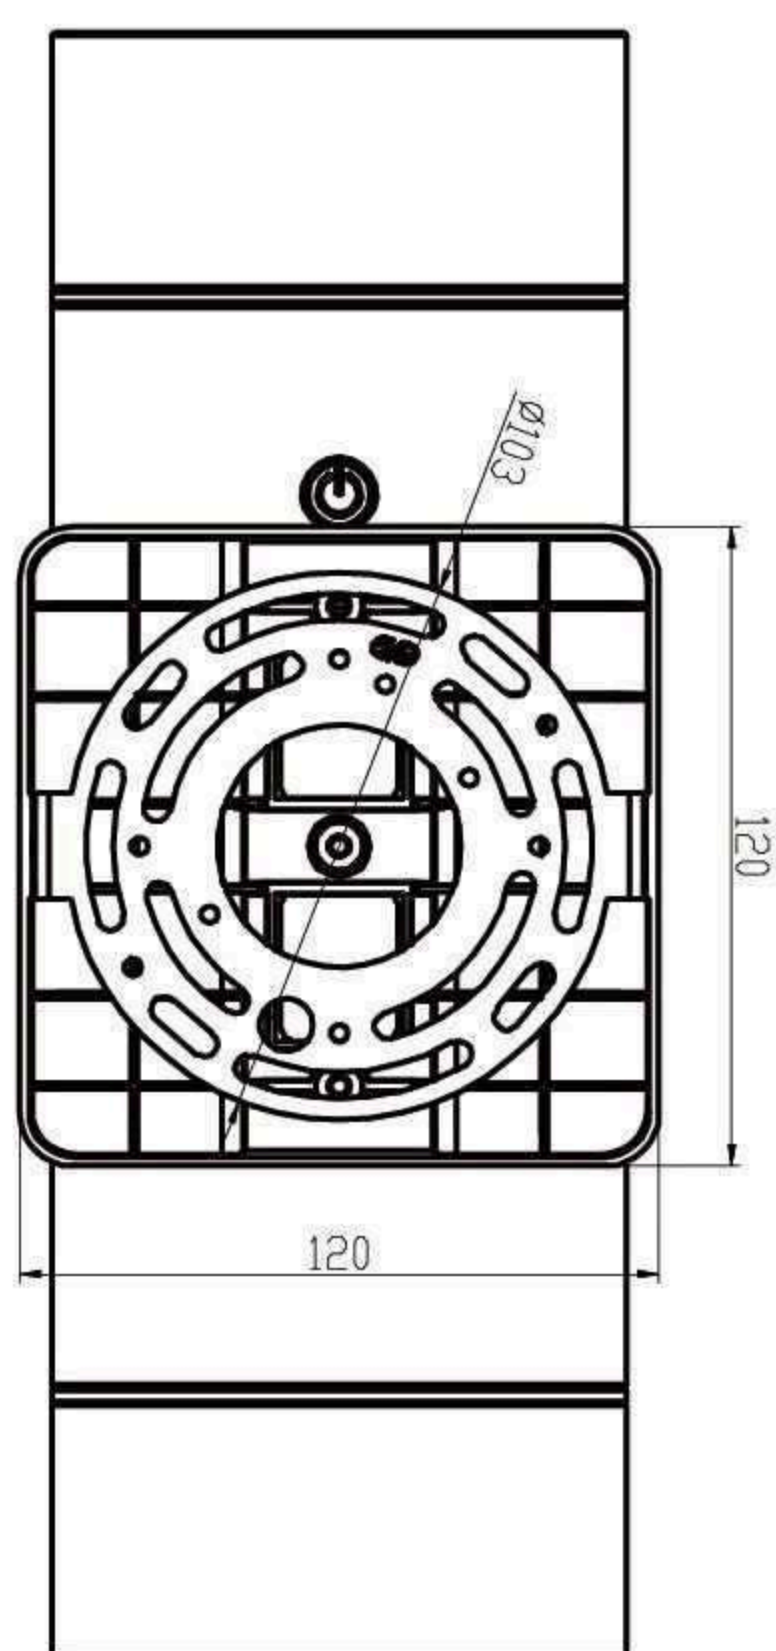




# SMART Lawn Lamp

## Rectangular - Wall Lamp

- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

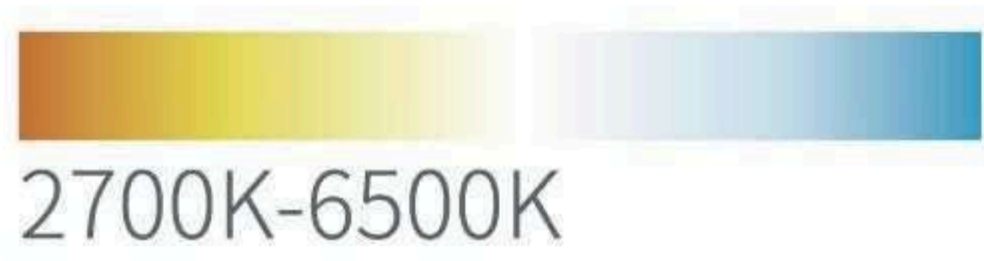

Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S02	100V-240V	20W	1200lm	WIFI/BLE	127x127x305	Aluminum+PC

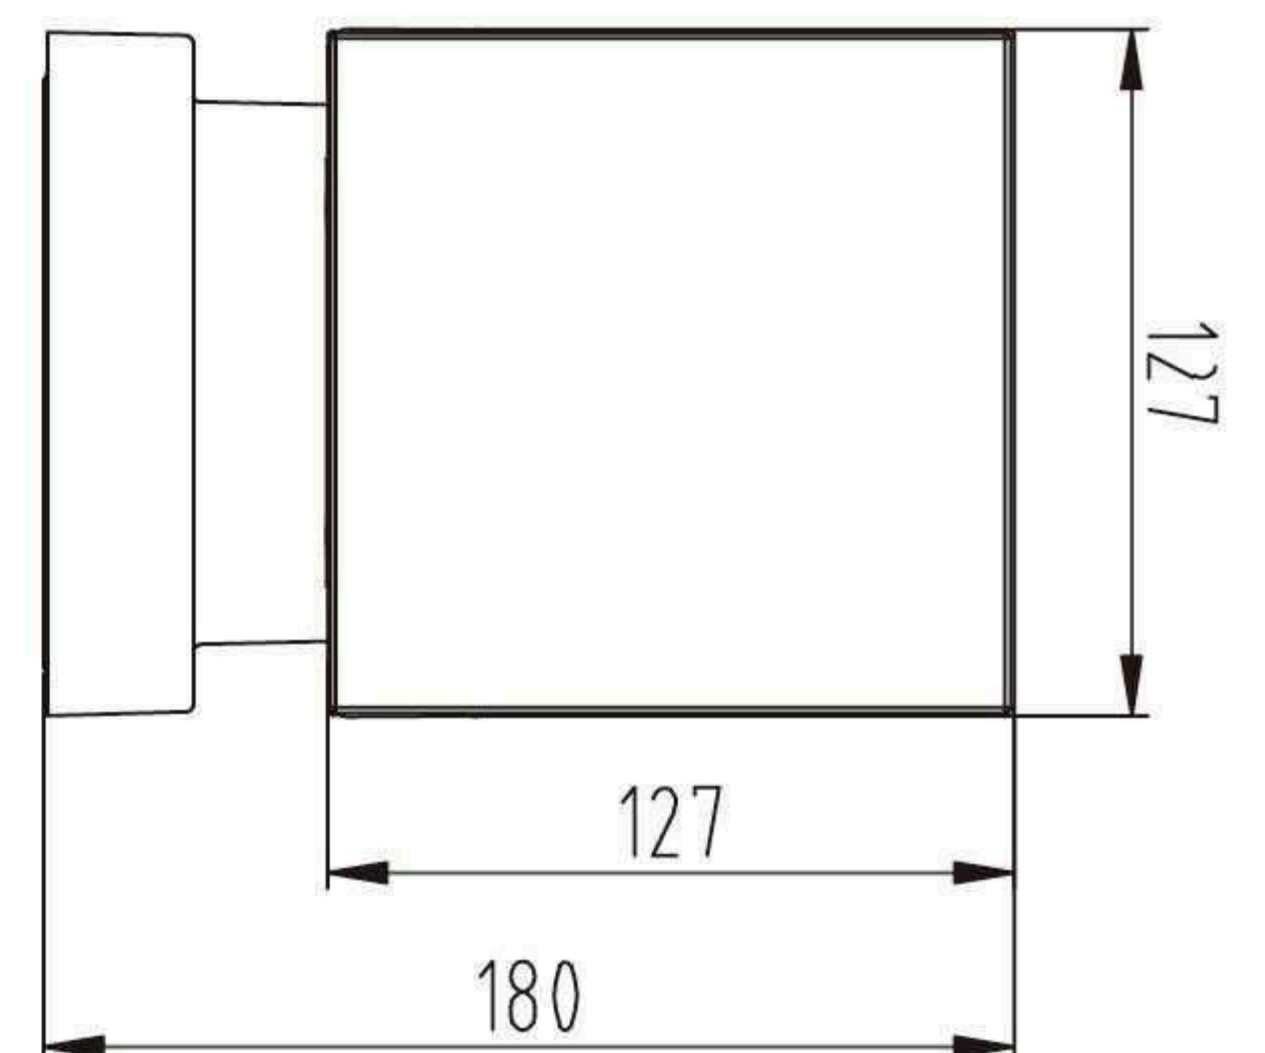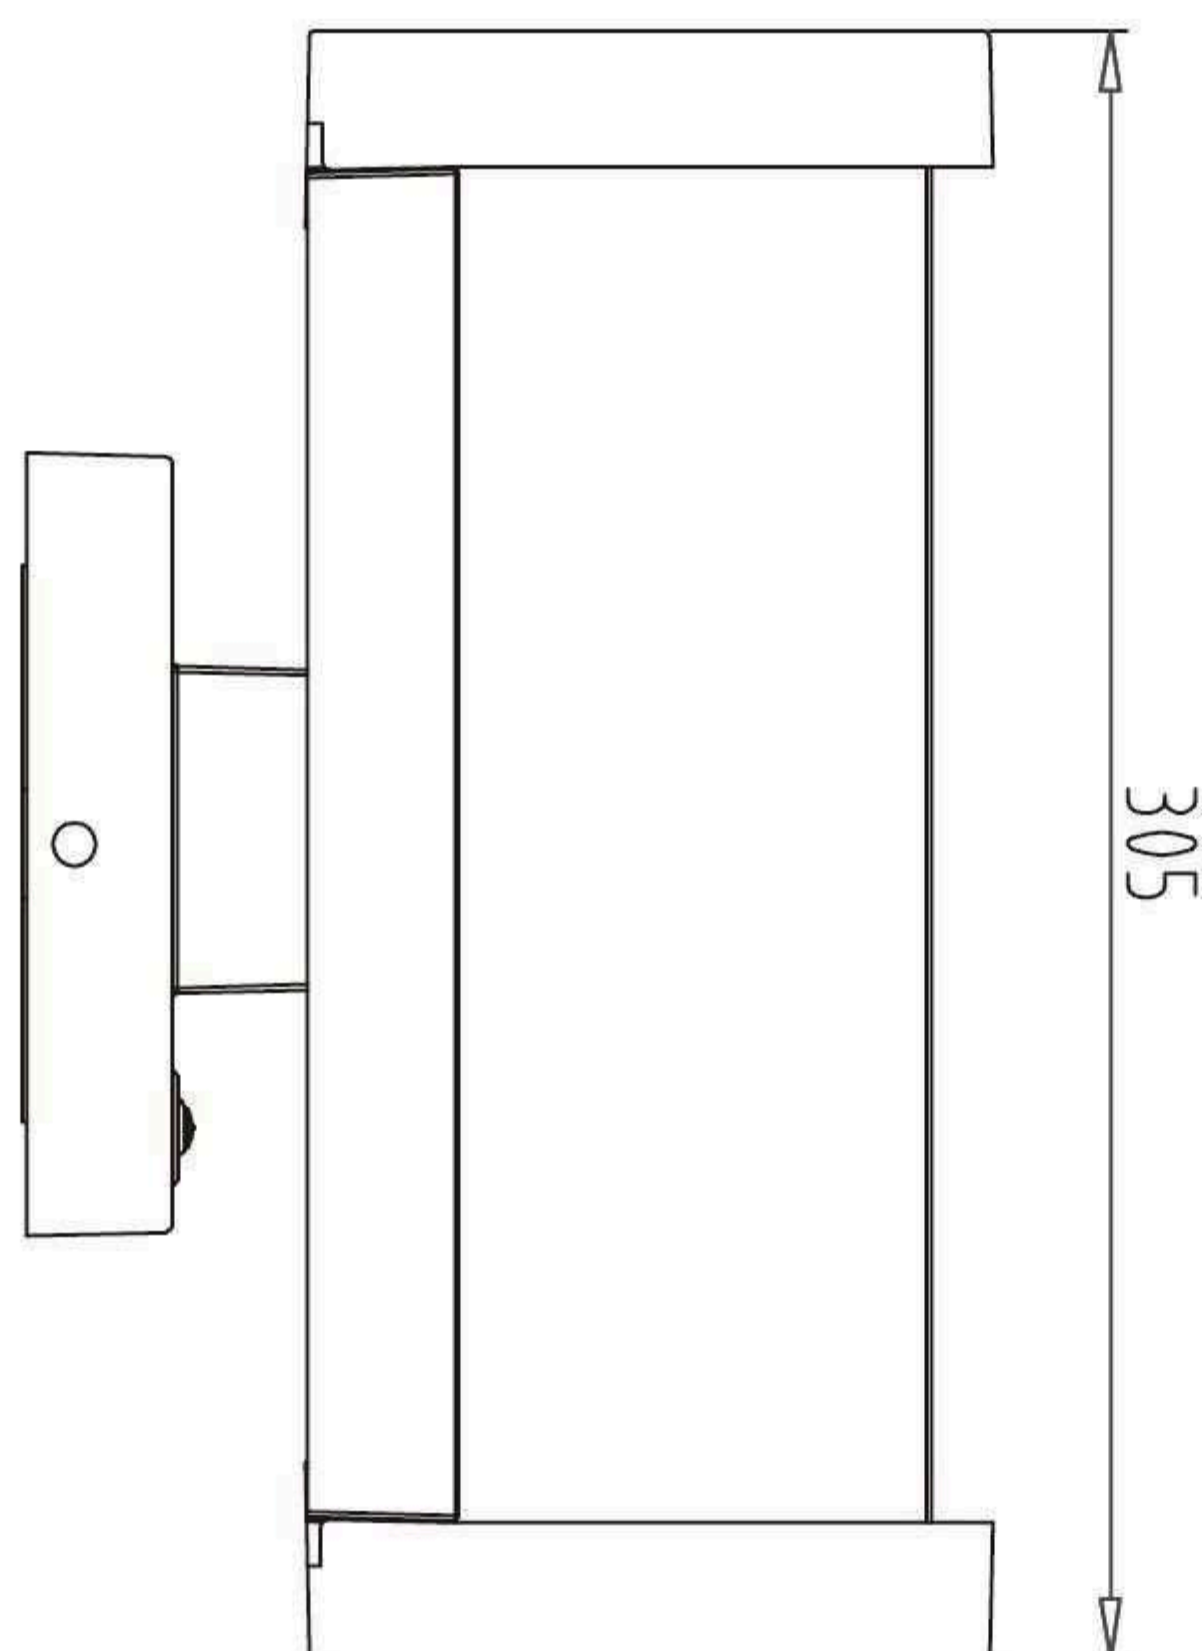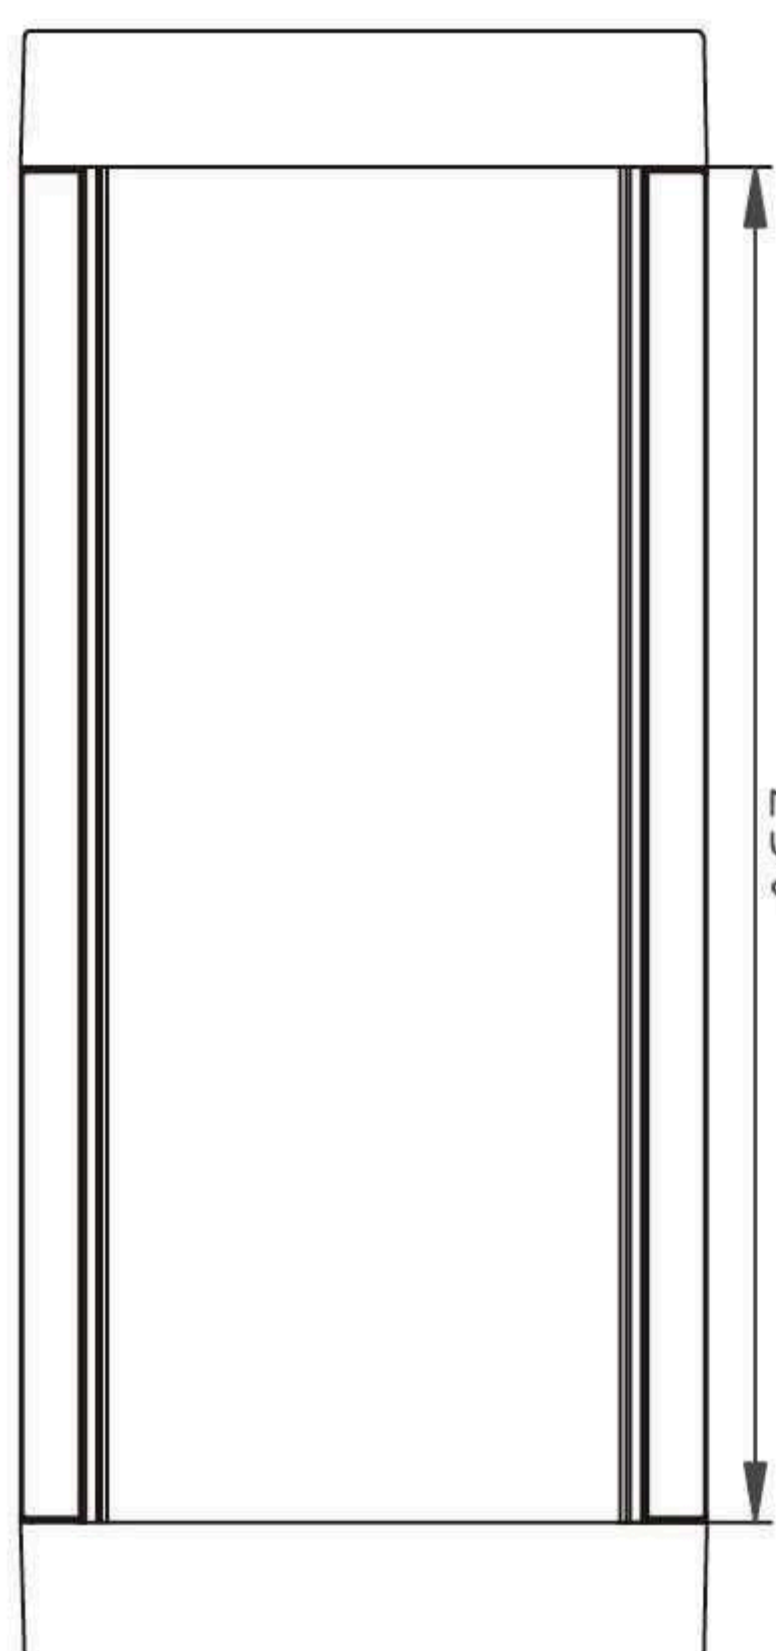




# SMART Lawn Lamp

## Rectangular - Wall Lamp

- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White





Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S03	100V-240V	20W	1200lm	WIFI/BLE	127x127x305	Aluminum+PC

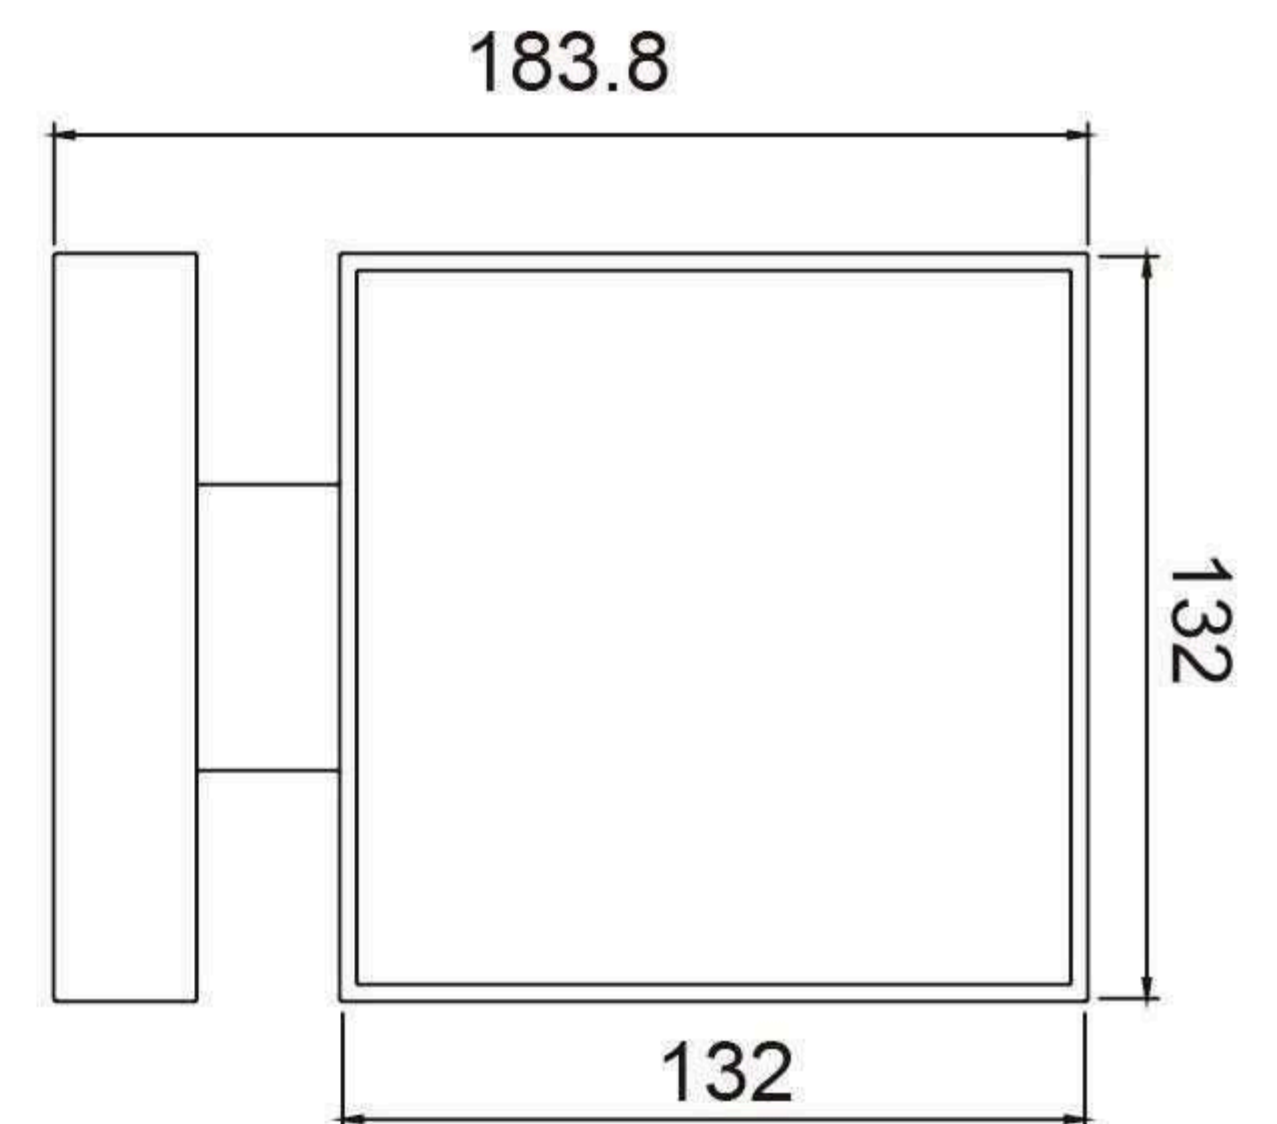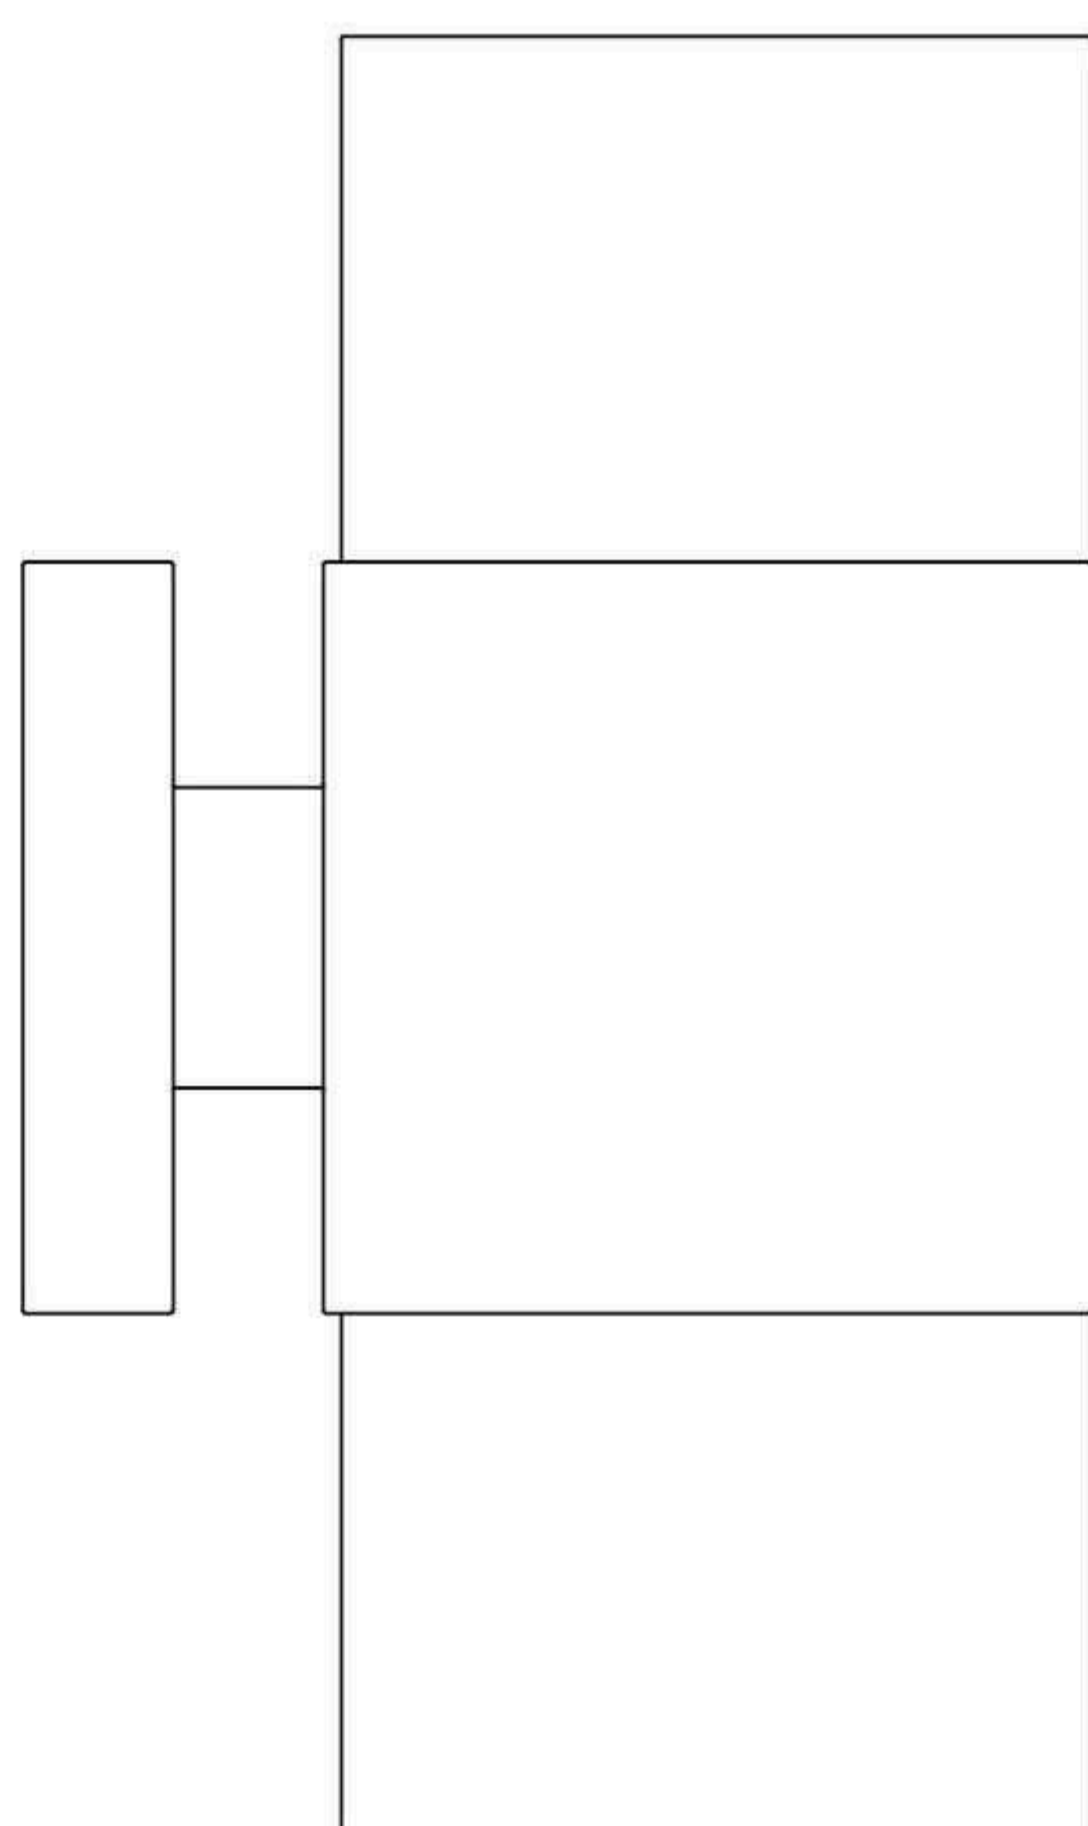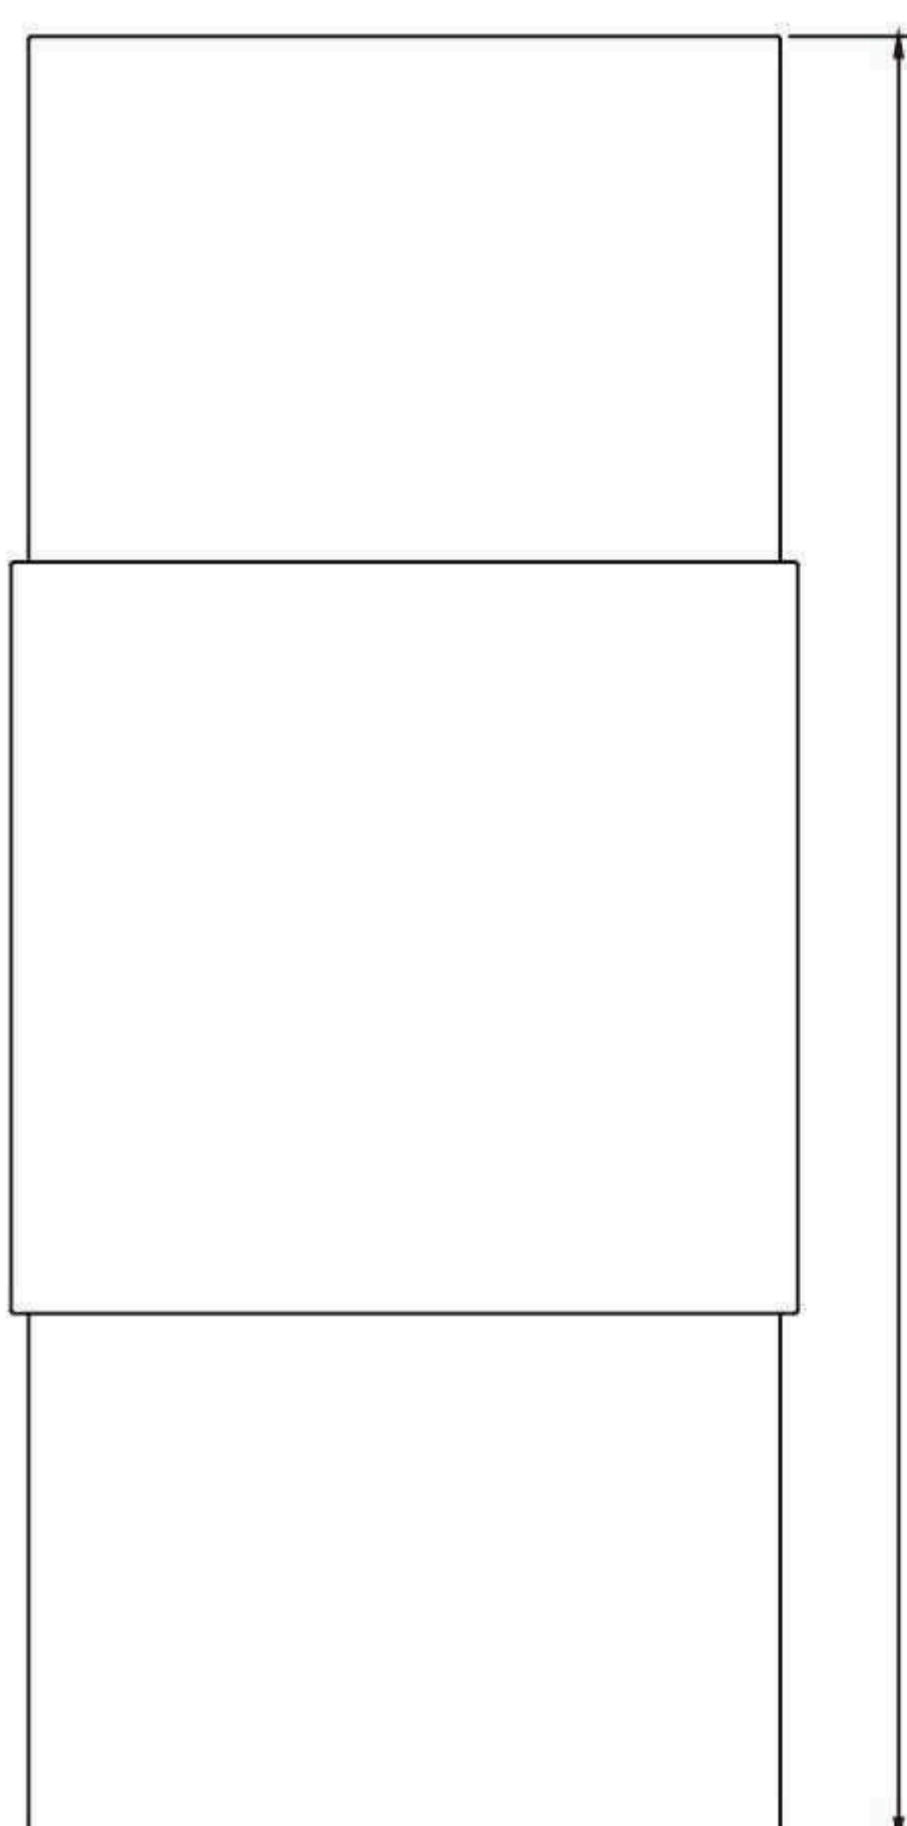



# SMART Lawn Lamp

## Ellipse - Wall Lamp

- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

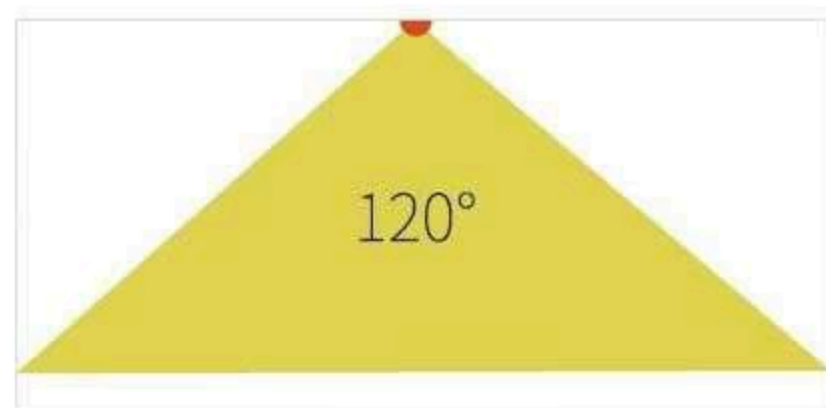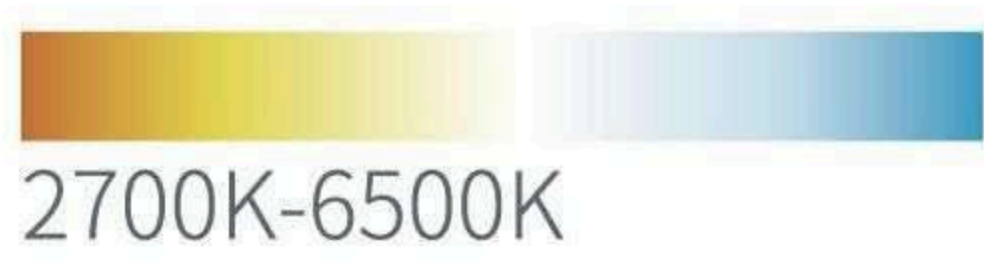

Model	Voltage	Watt	Luminous Flux	Type	Size ( mm )	Material
WL-S04	100V-240V	20W	1200lm	WIFI/BLE	203x76x211	Aluminum+PC

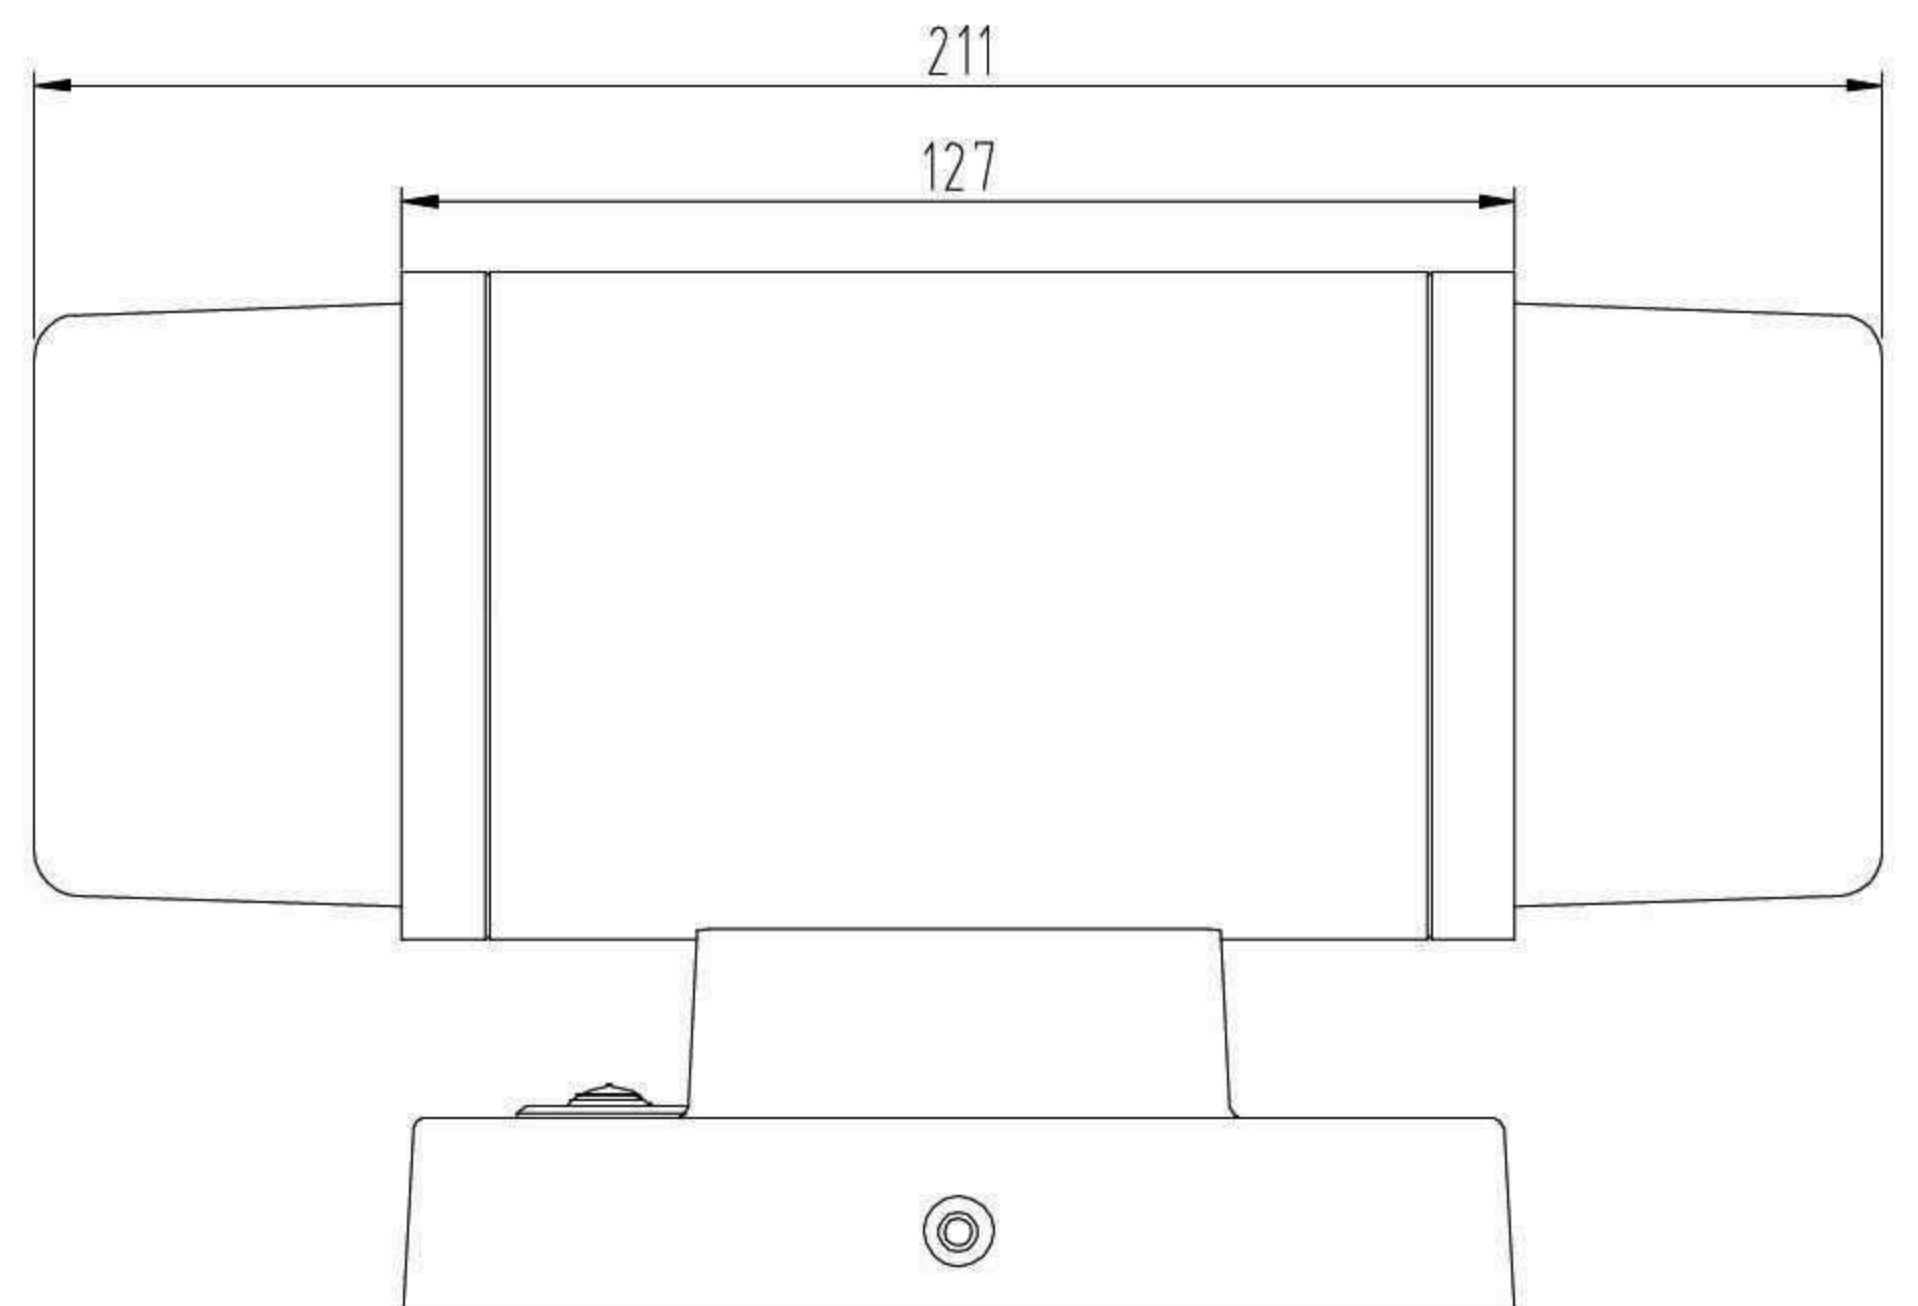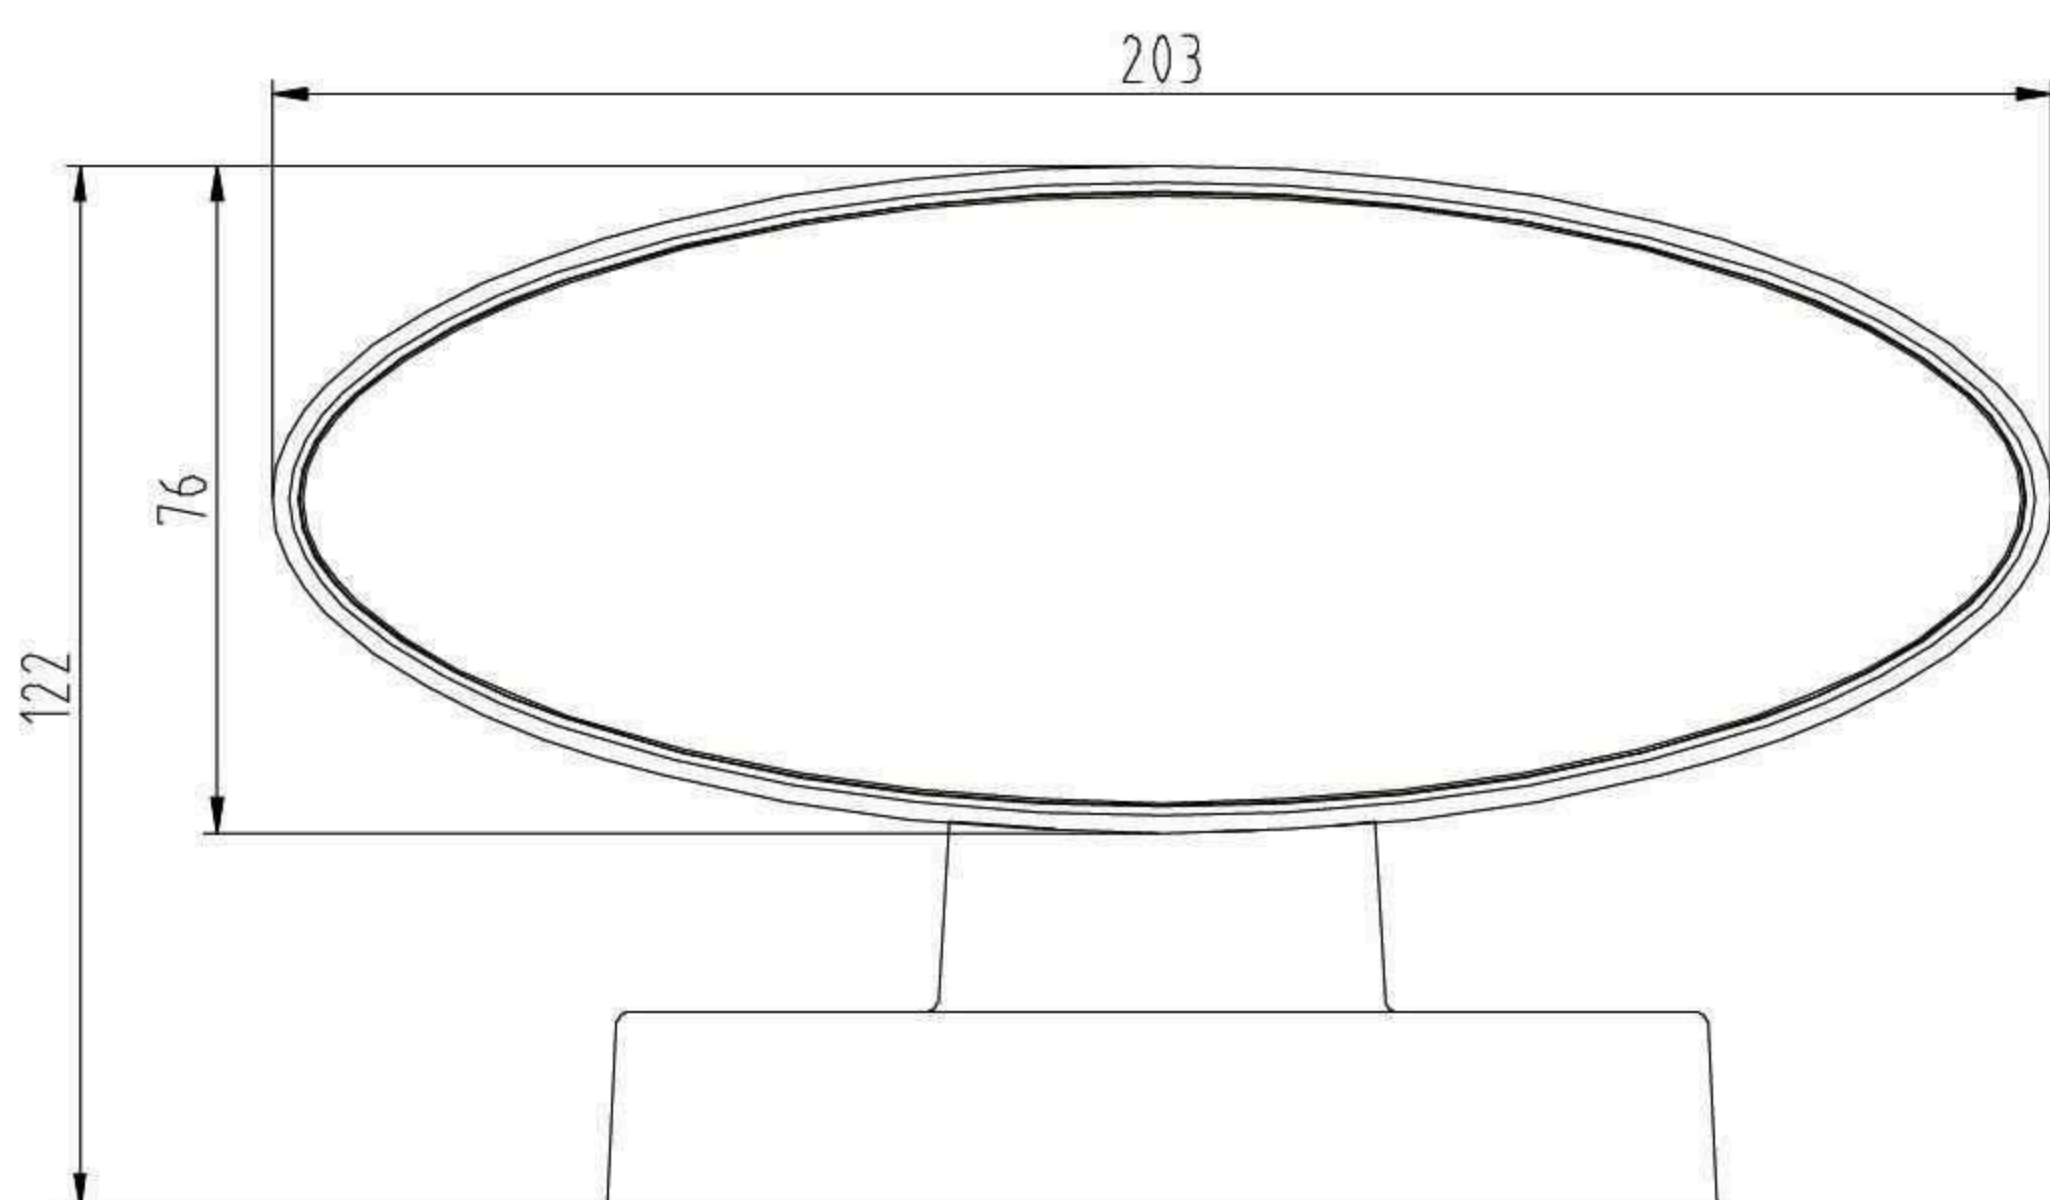





# SMART Lawn Lamp

## Block - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

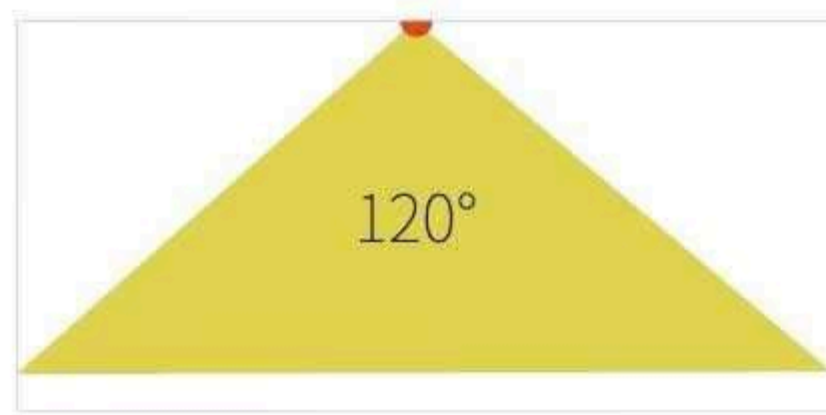


Model	Voltage	Watt	Luminous Flux	Type	Size ( mm )	Material
WL-S05	100V-240V	6W	480lm	WIFI/BLE	127x127x305	Alumiunum+Glass

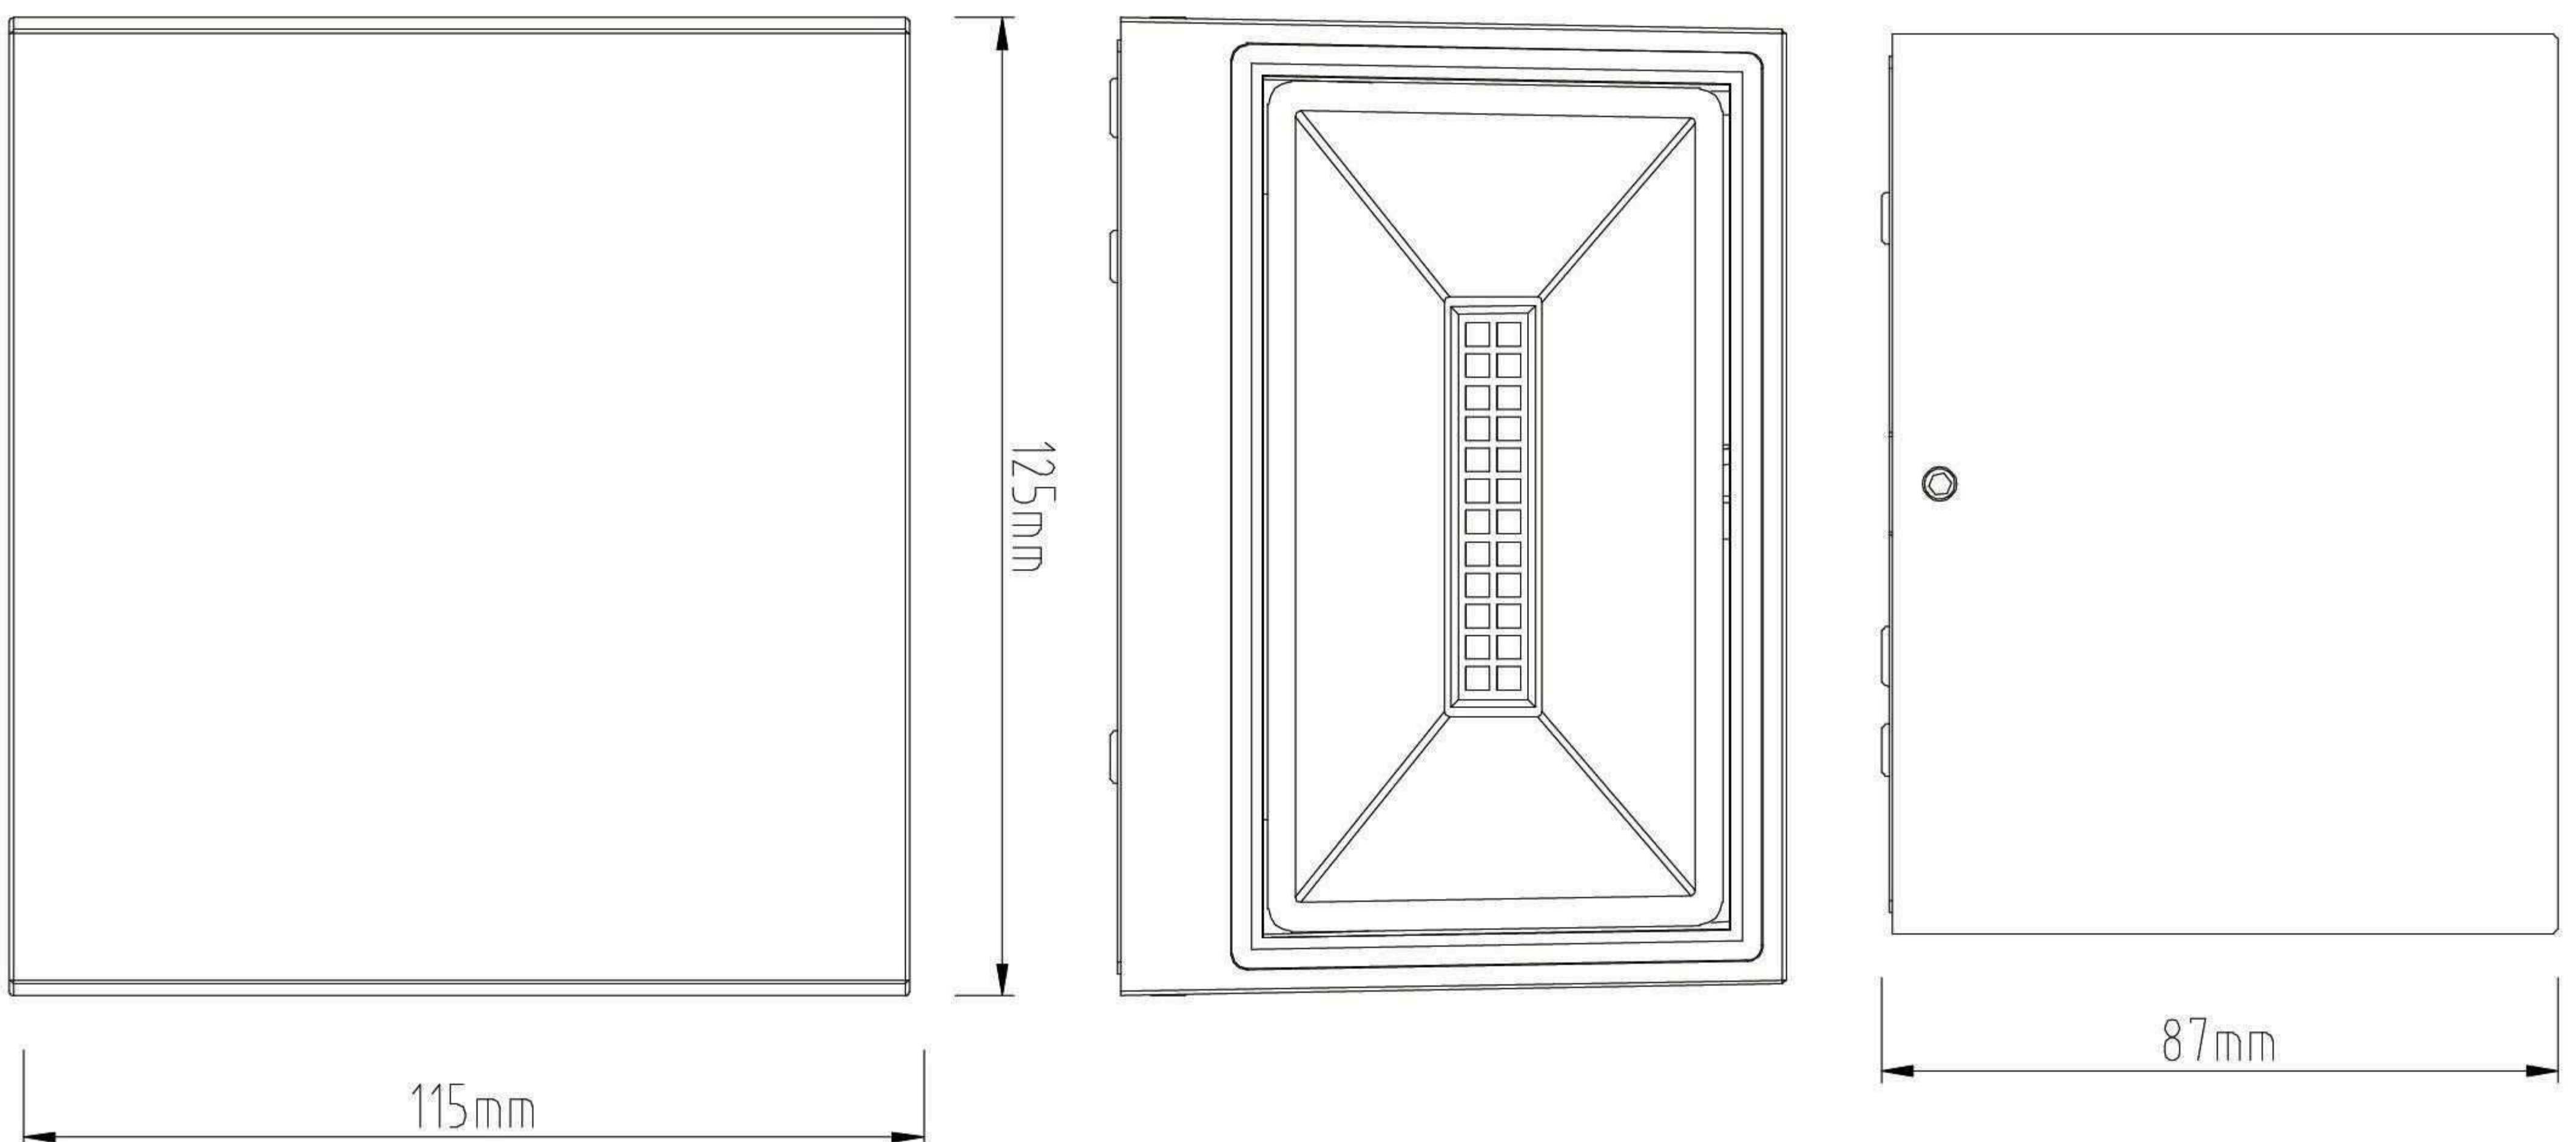




# SMART Lawn Lamp

## Double door - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

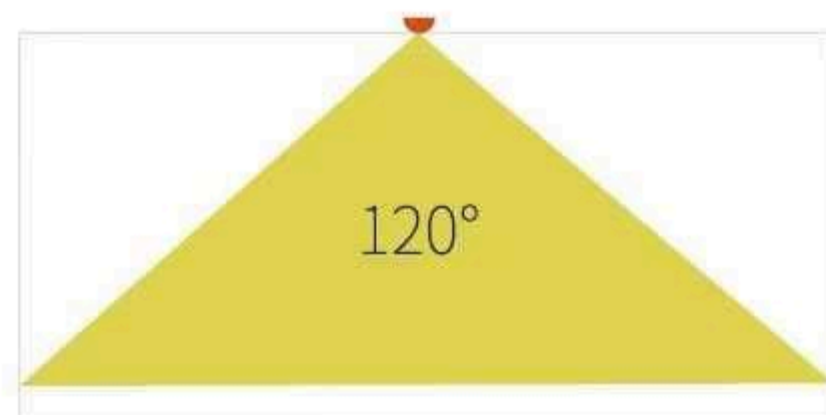


Model	Voltage	Watt	Luminous Flux	Type	Size ( mm )	Material
WL-S06	100V-240V	20W	1800lm	WIFI/BLE	125x125x140	Aluminum+PC

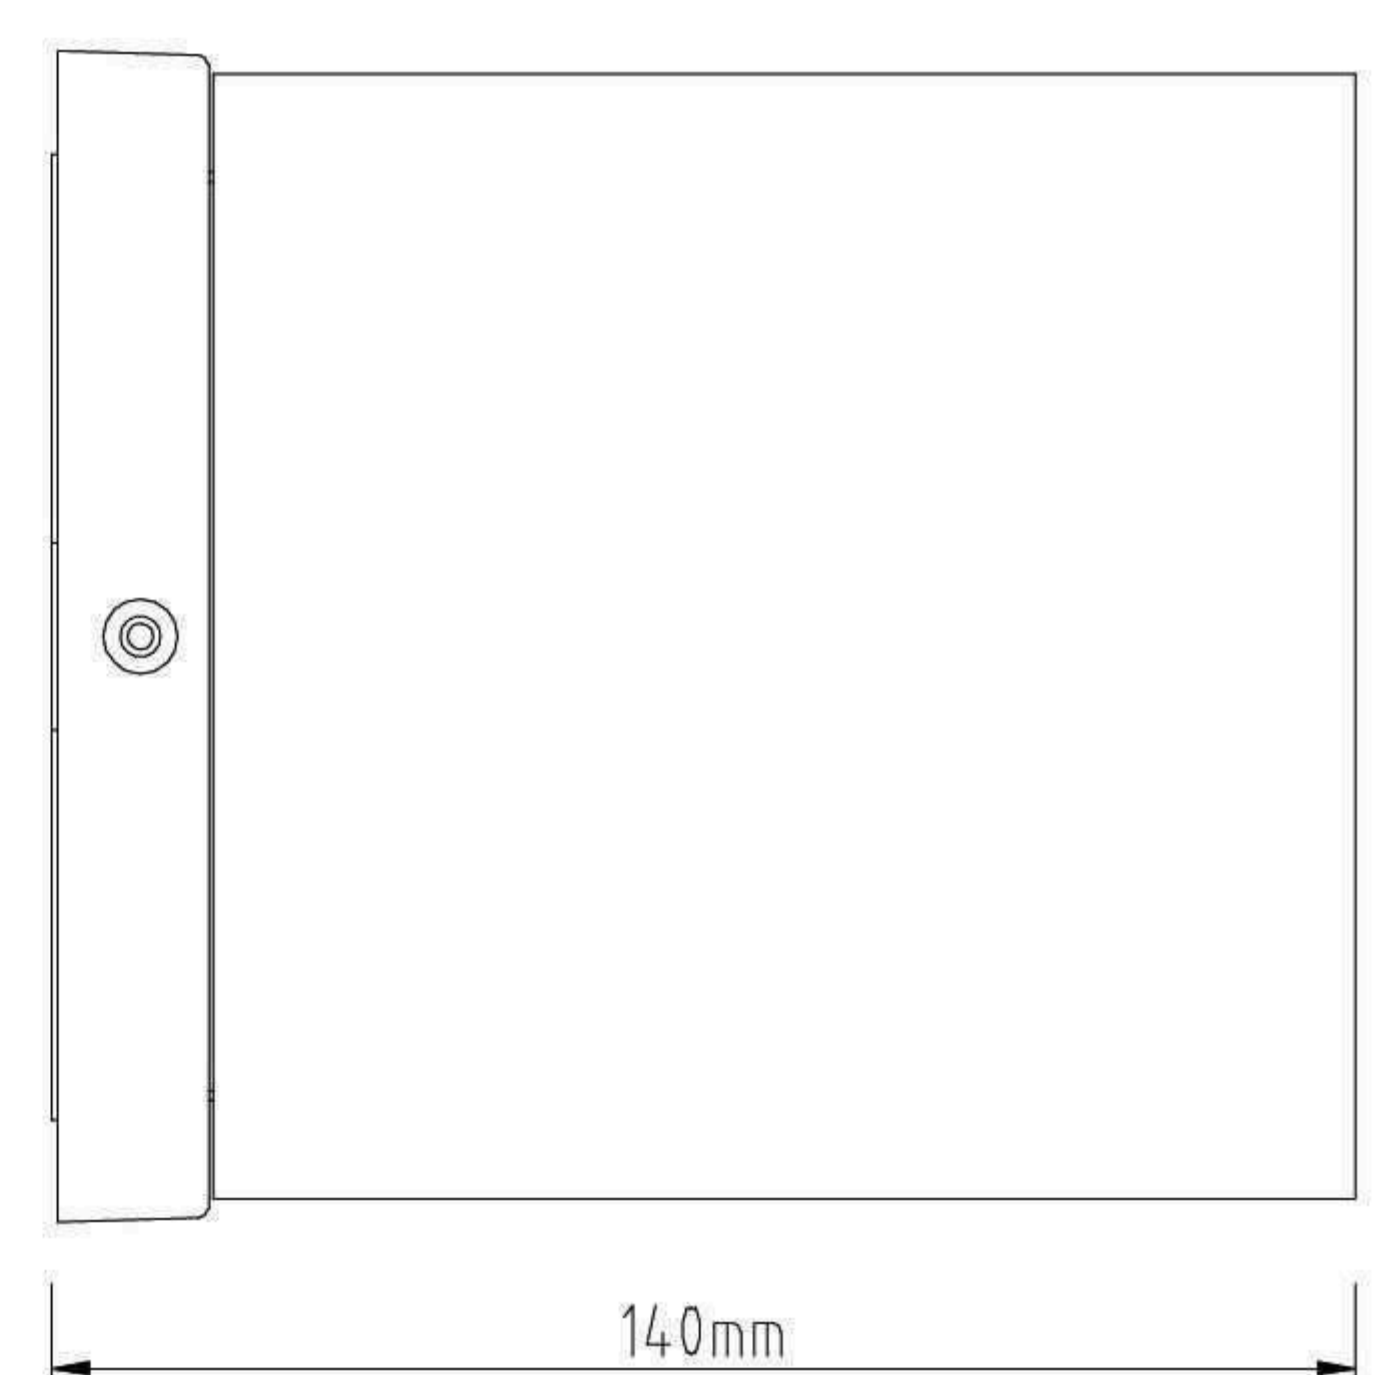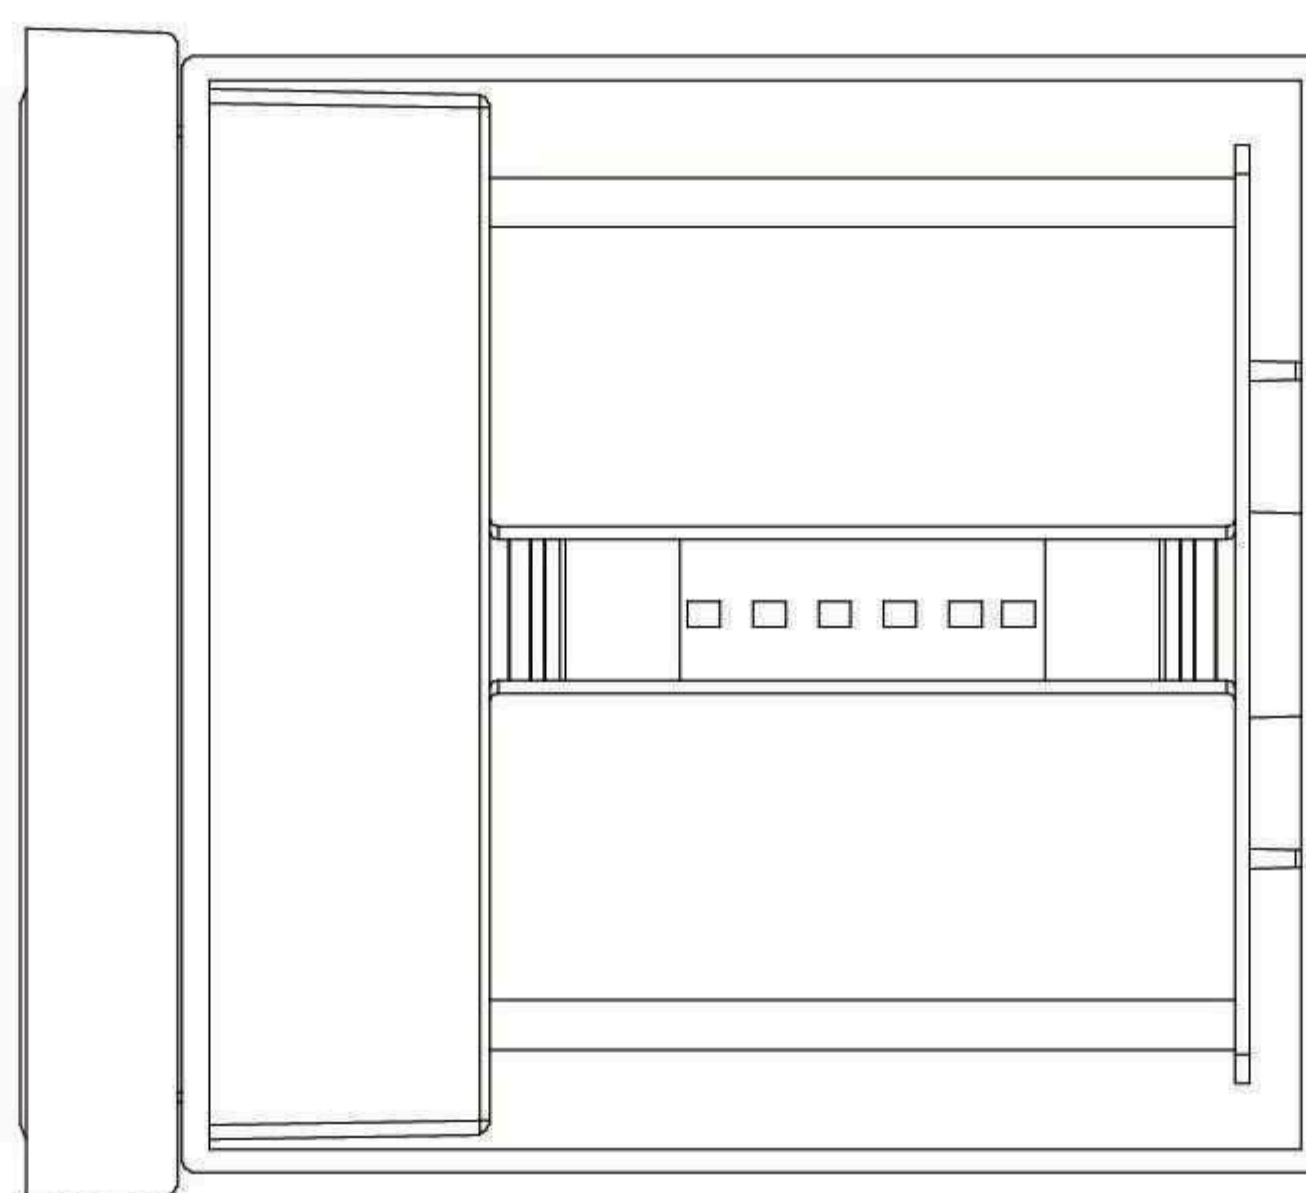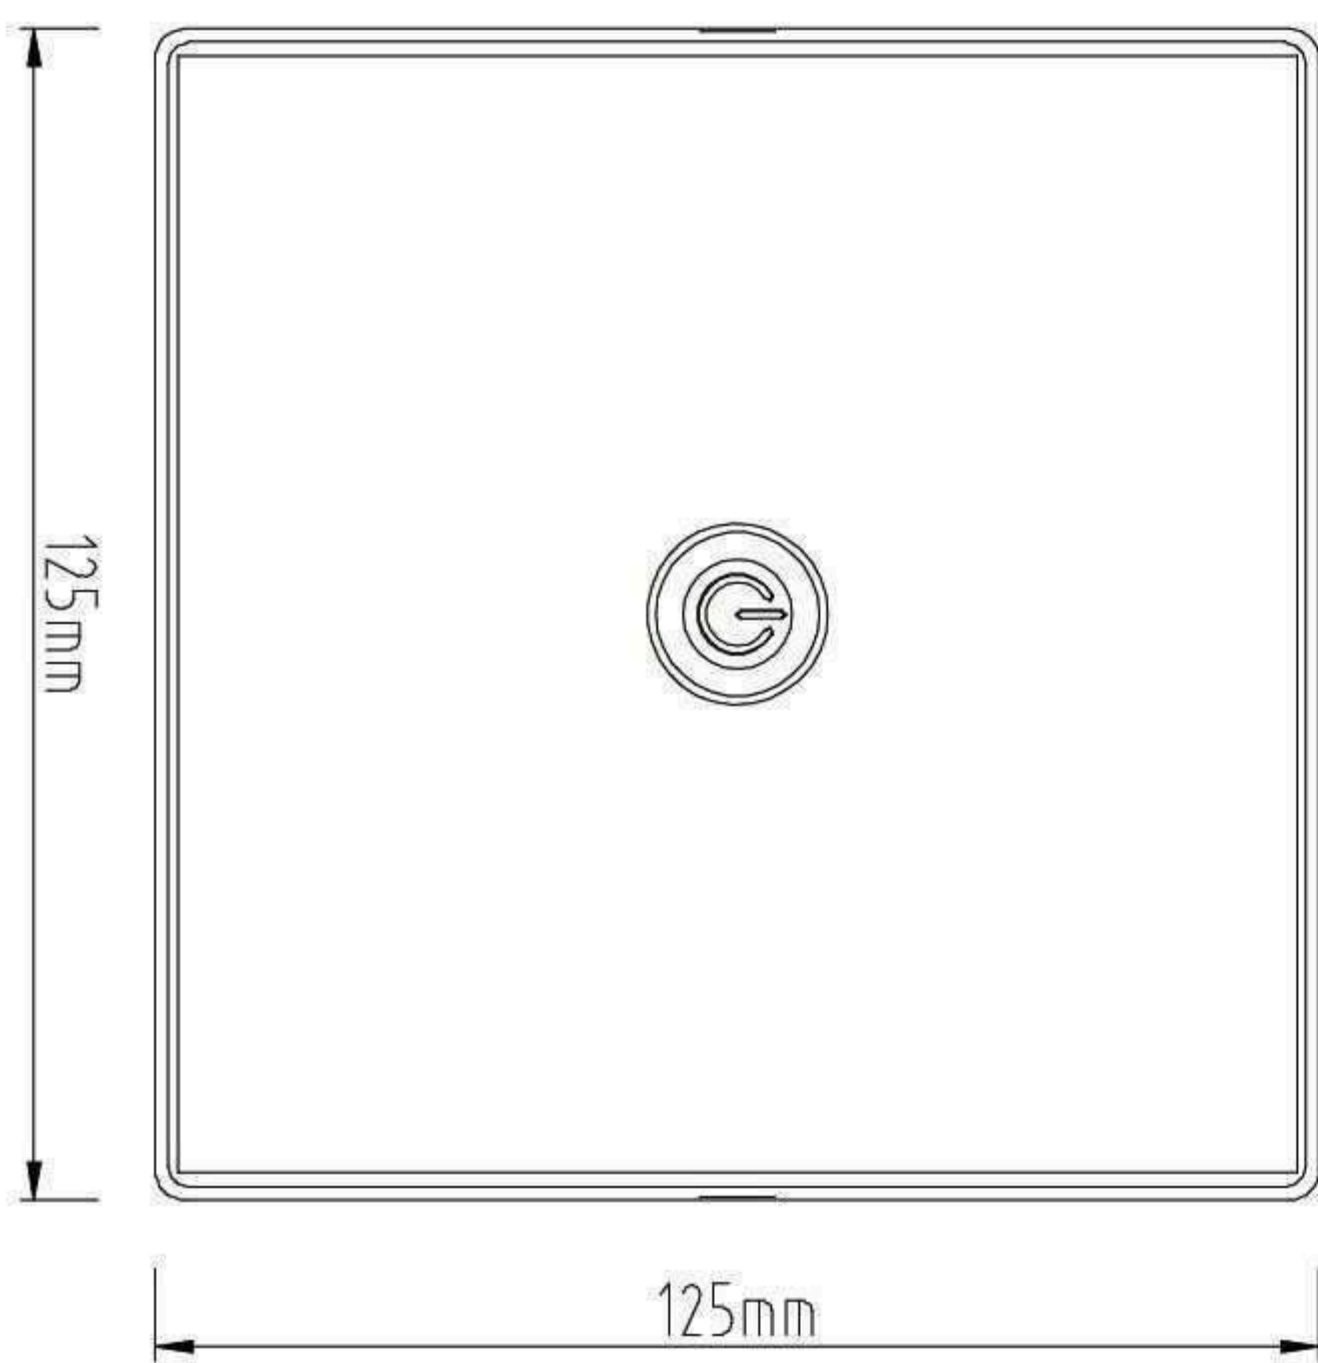




# SMART Lawn Lamp

## Teacup - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

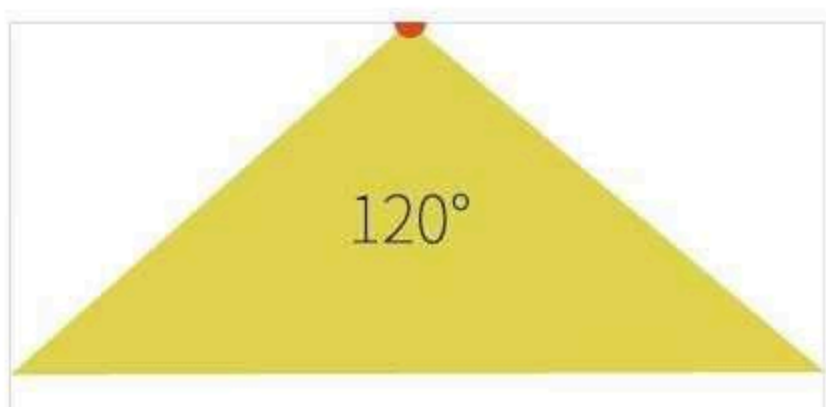


Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S08	100V-240V	20W	1800lm	WIFI/BLE	132x222x172	Aluminum+PC

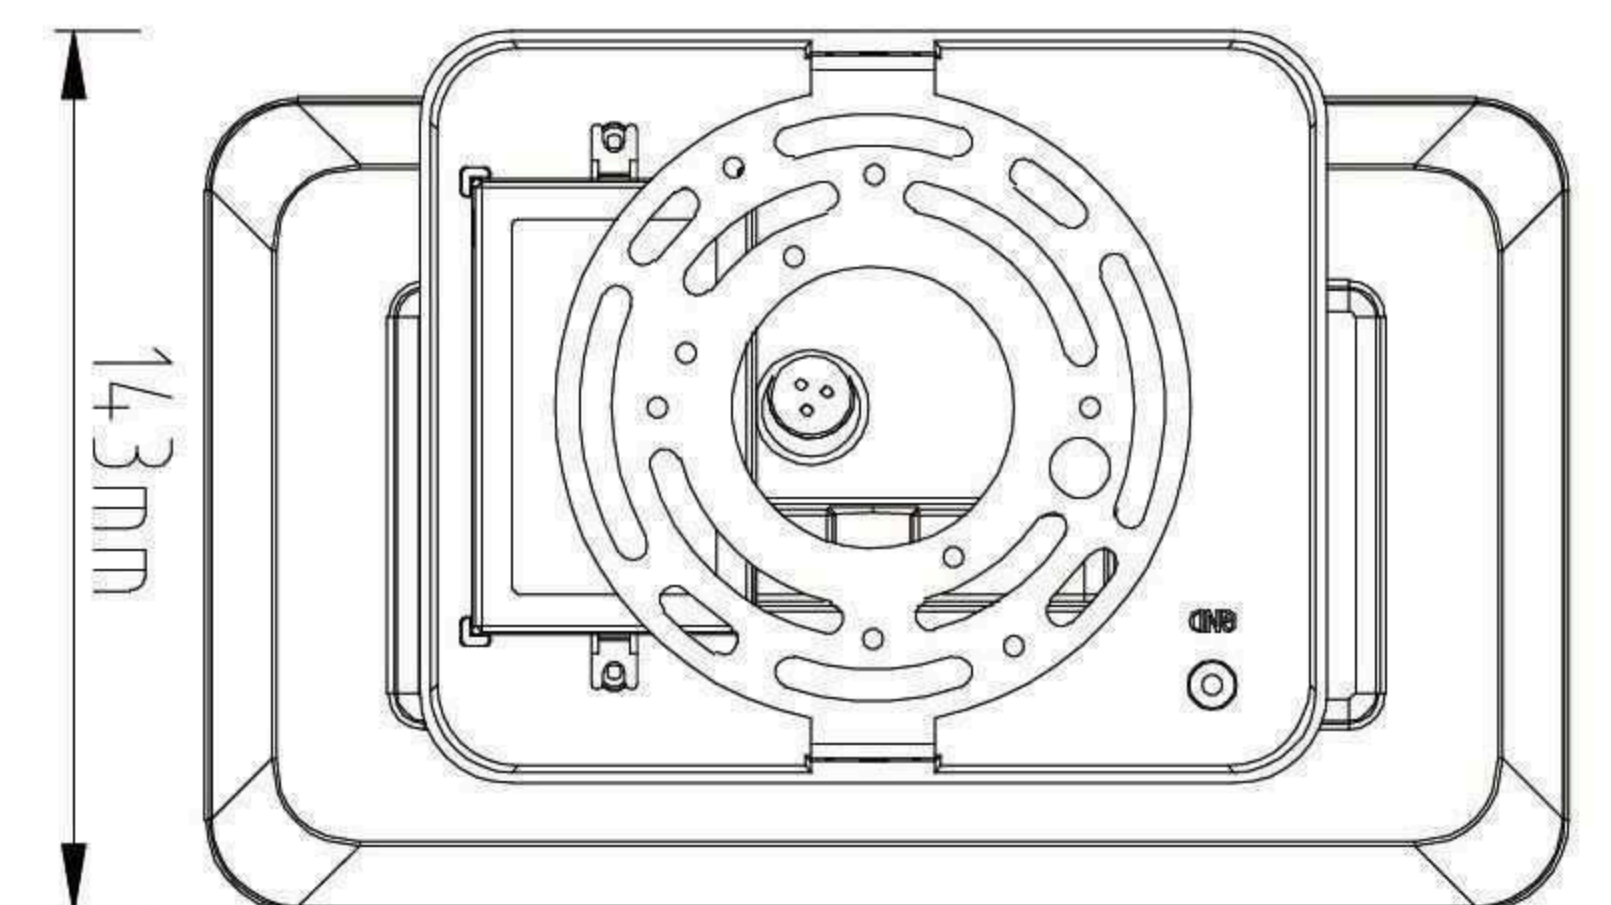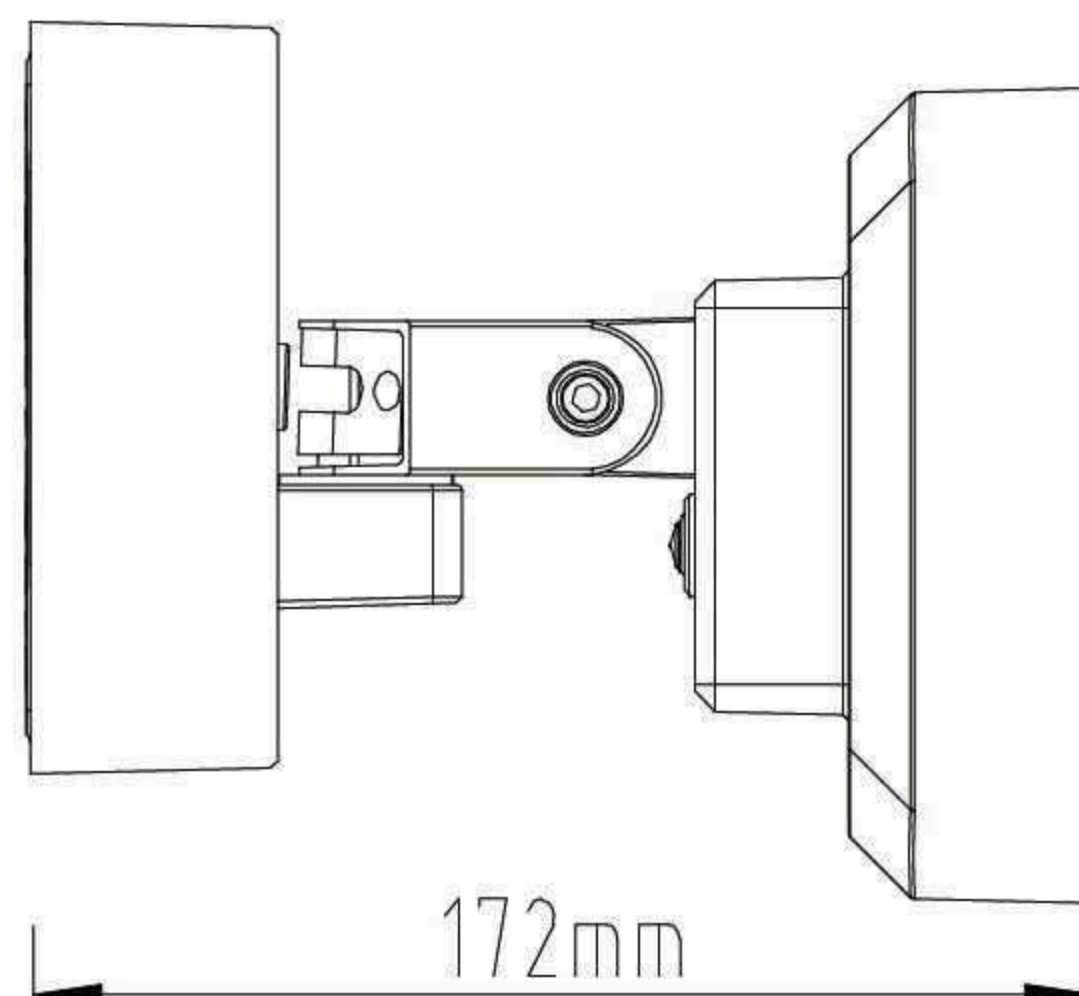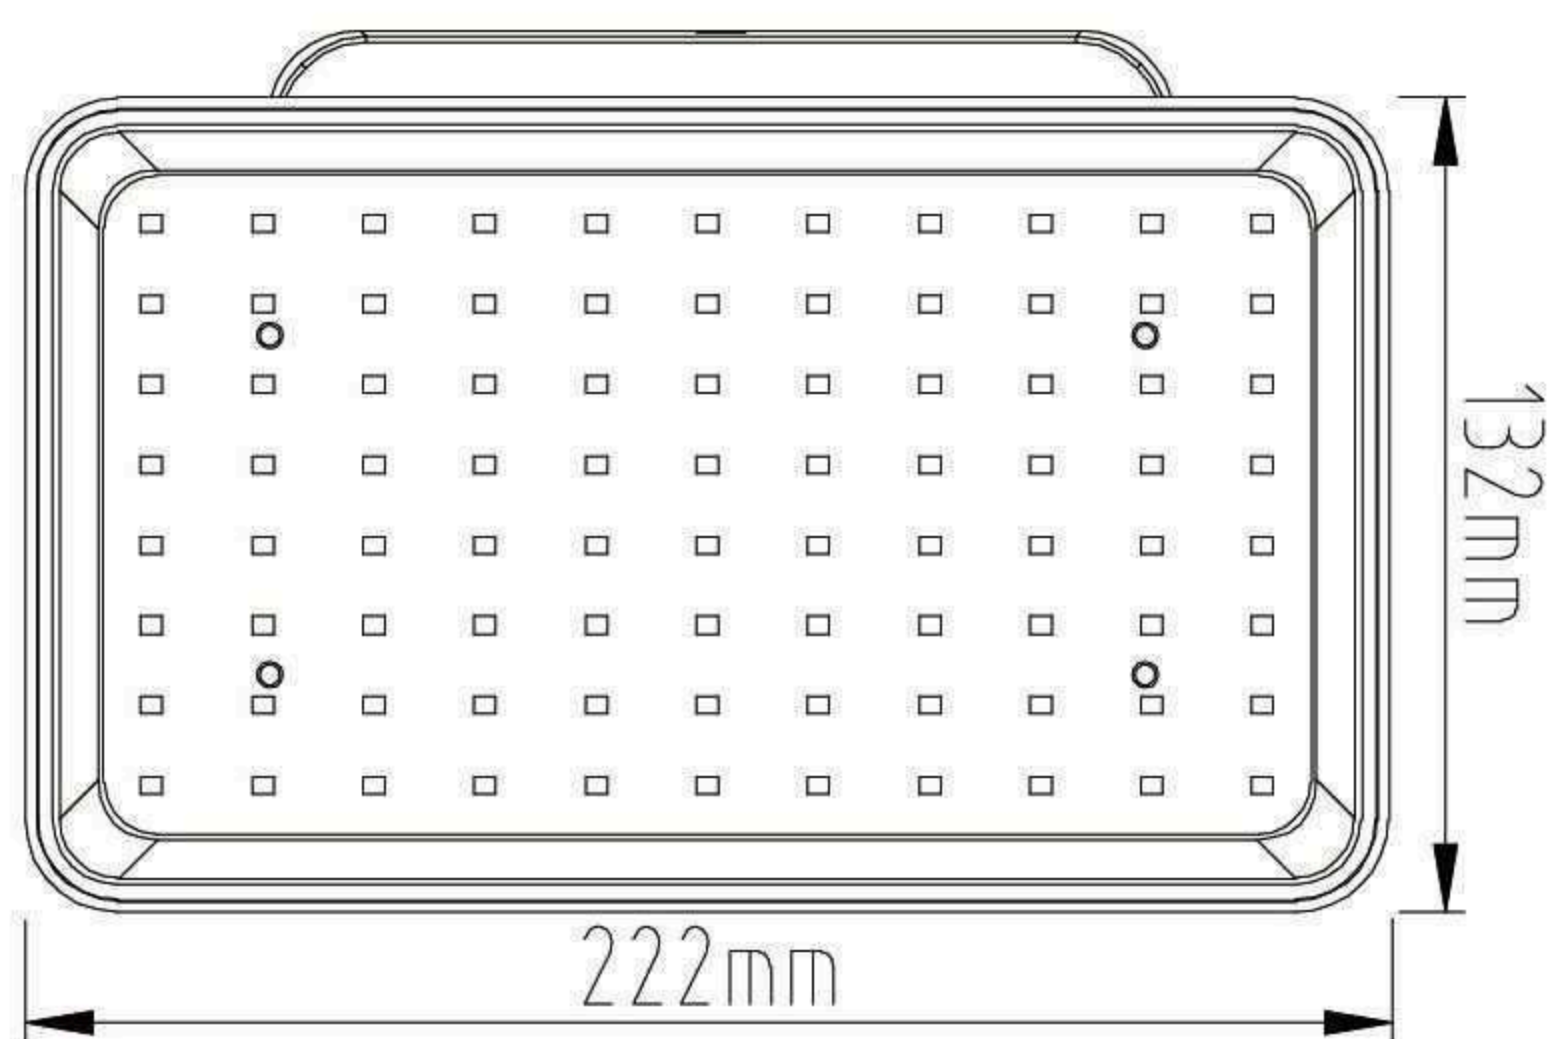




# SMART Lawn Lamp

## Teacup - Wall Lamp

- Beam Angle:120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h
- Body Color: Black/Grey/White

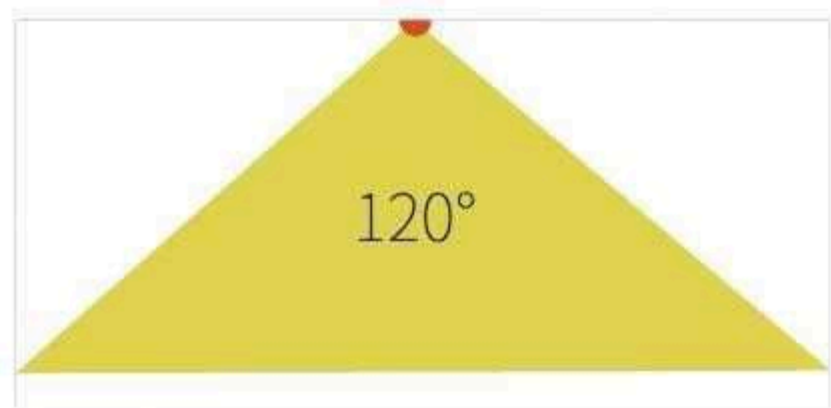

Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
WL-S07	100V-240V	10W	800lm	WIFI/BLE	φ102x161x190	Aluminum+PC

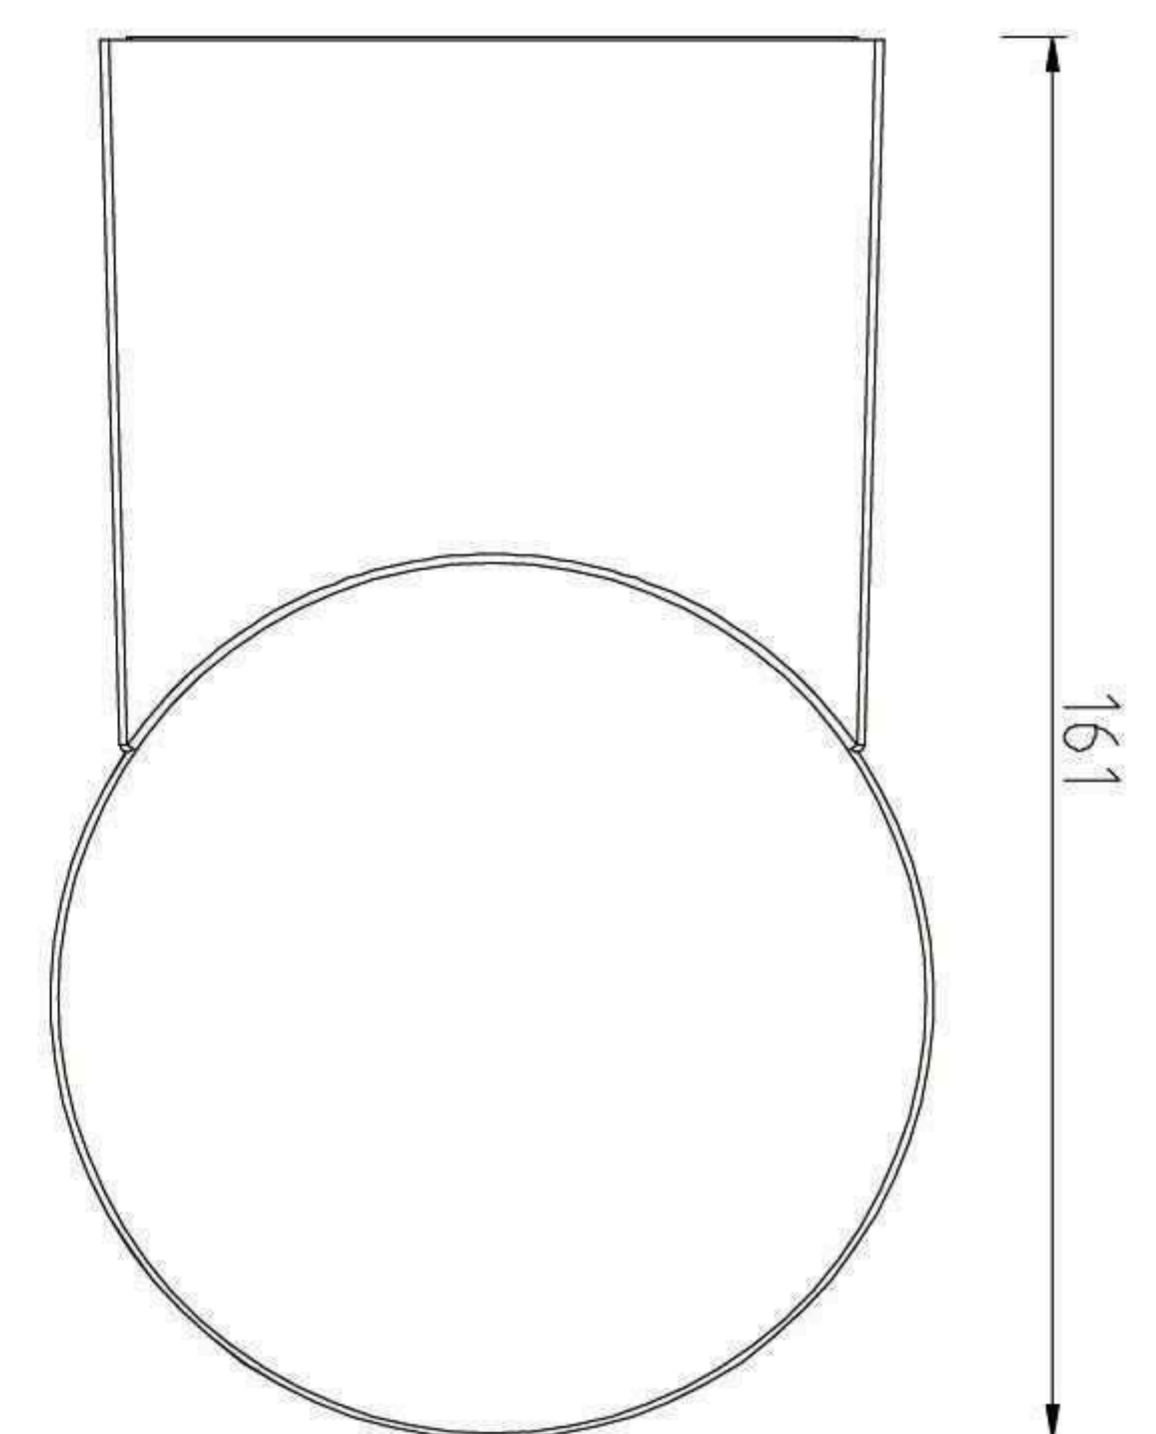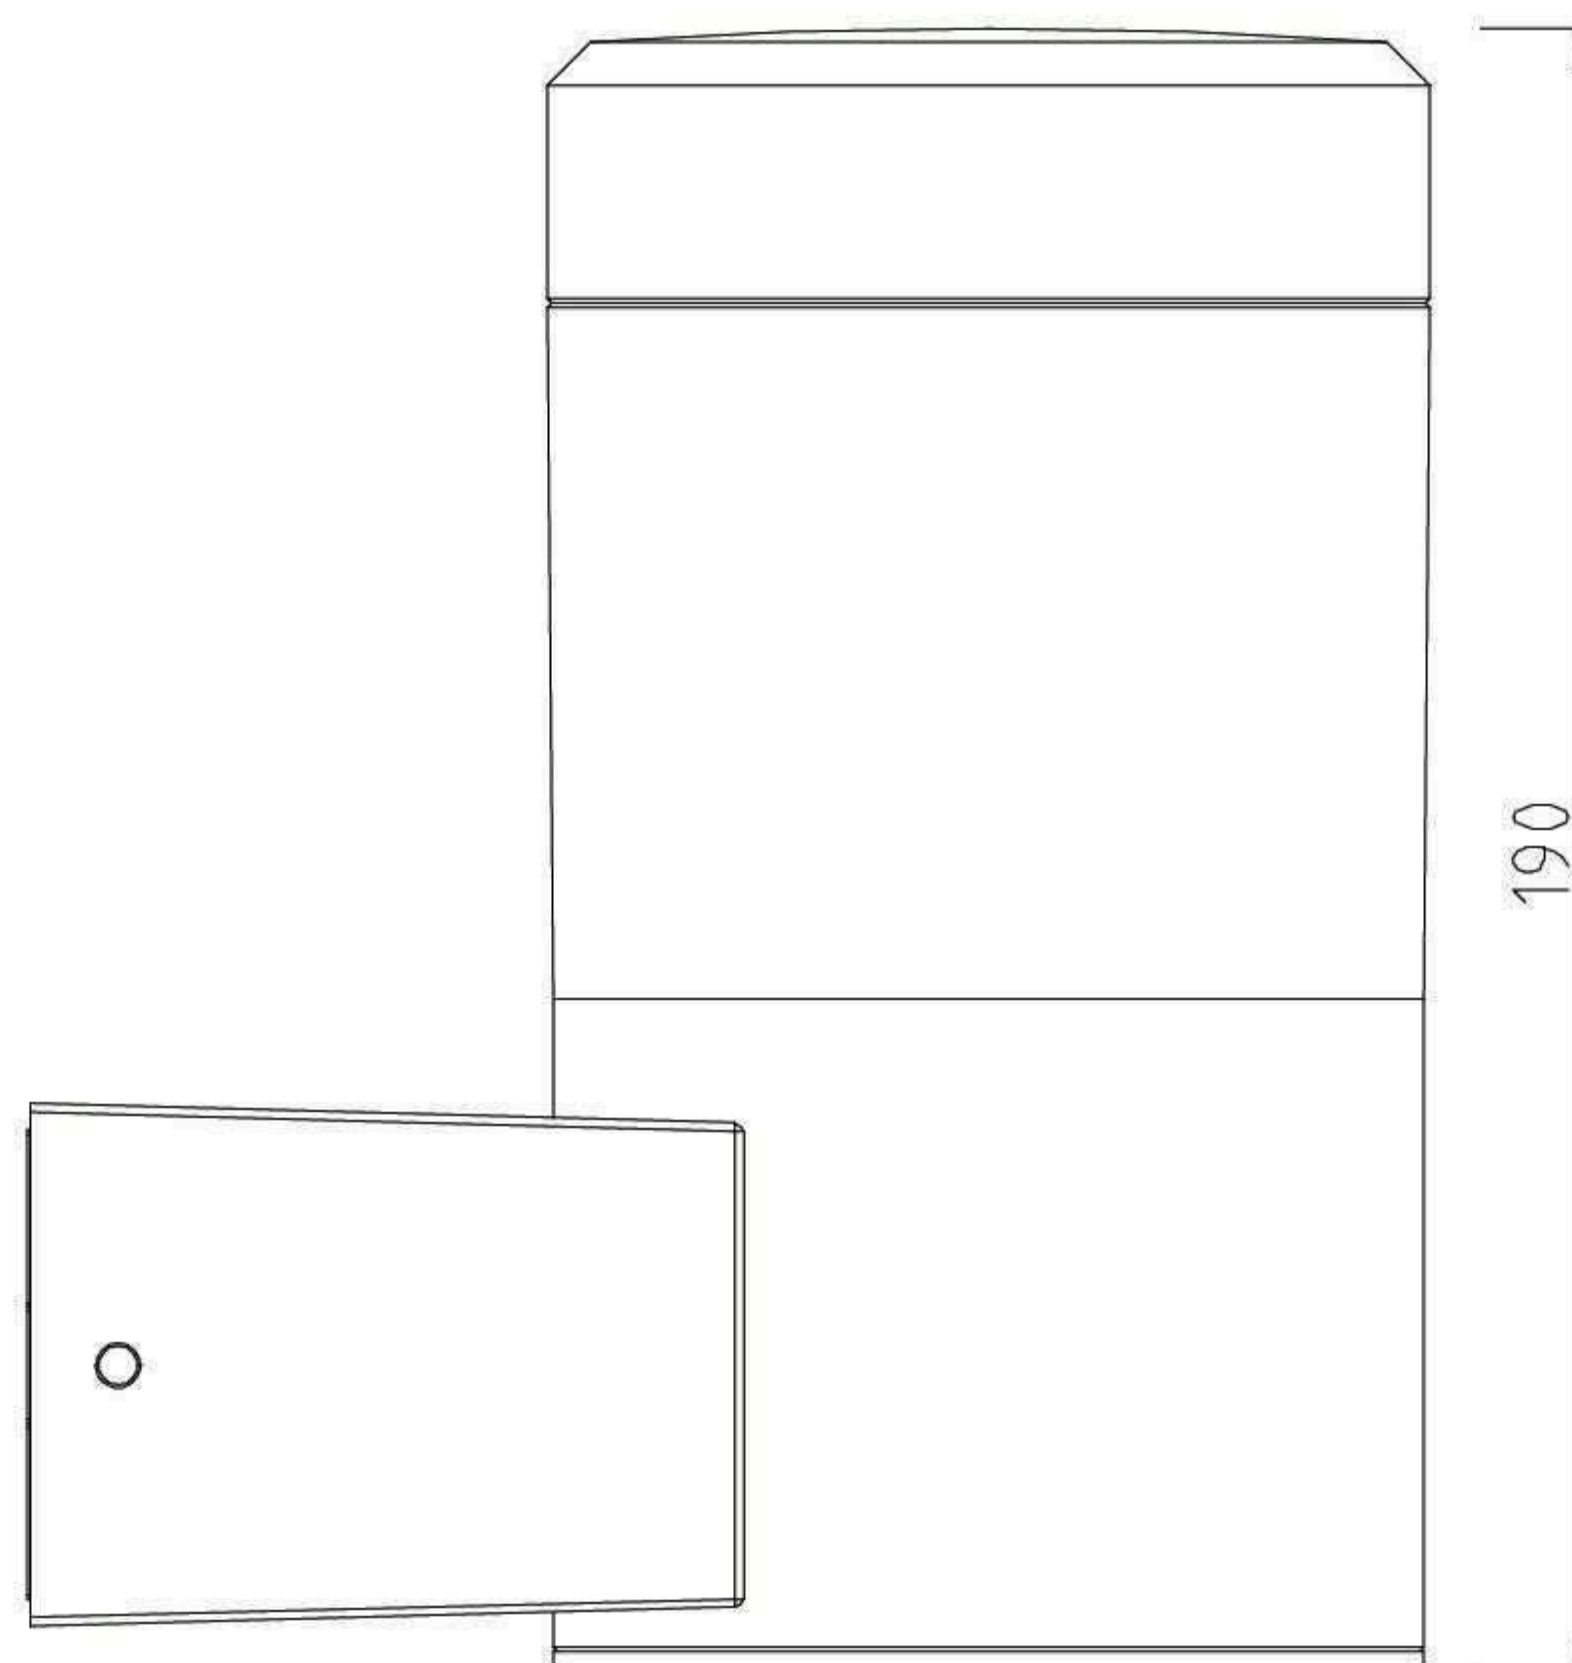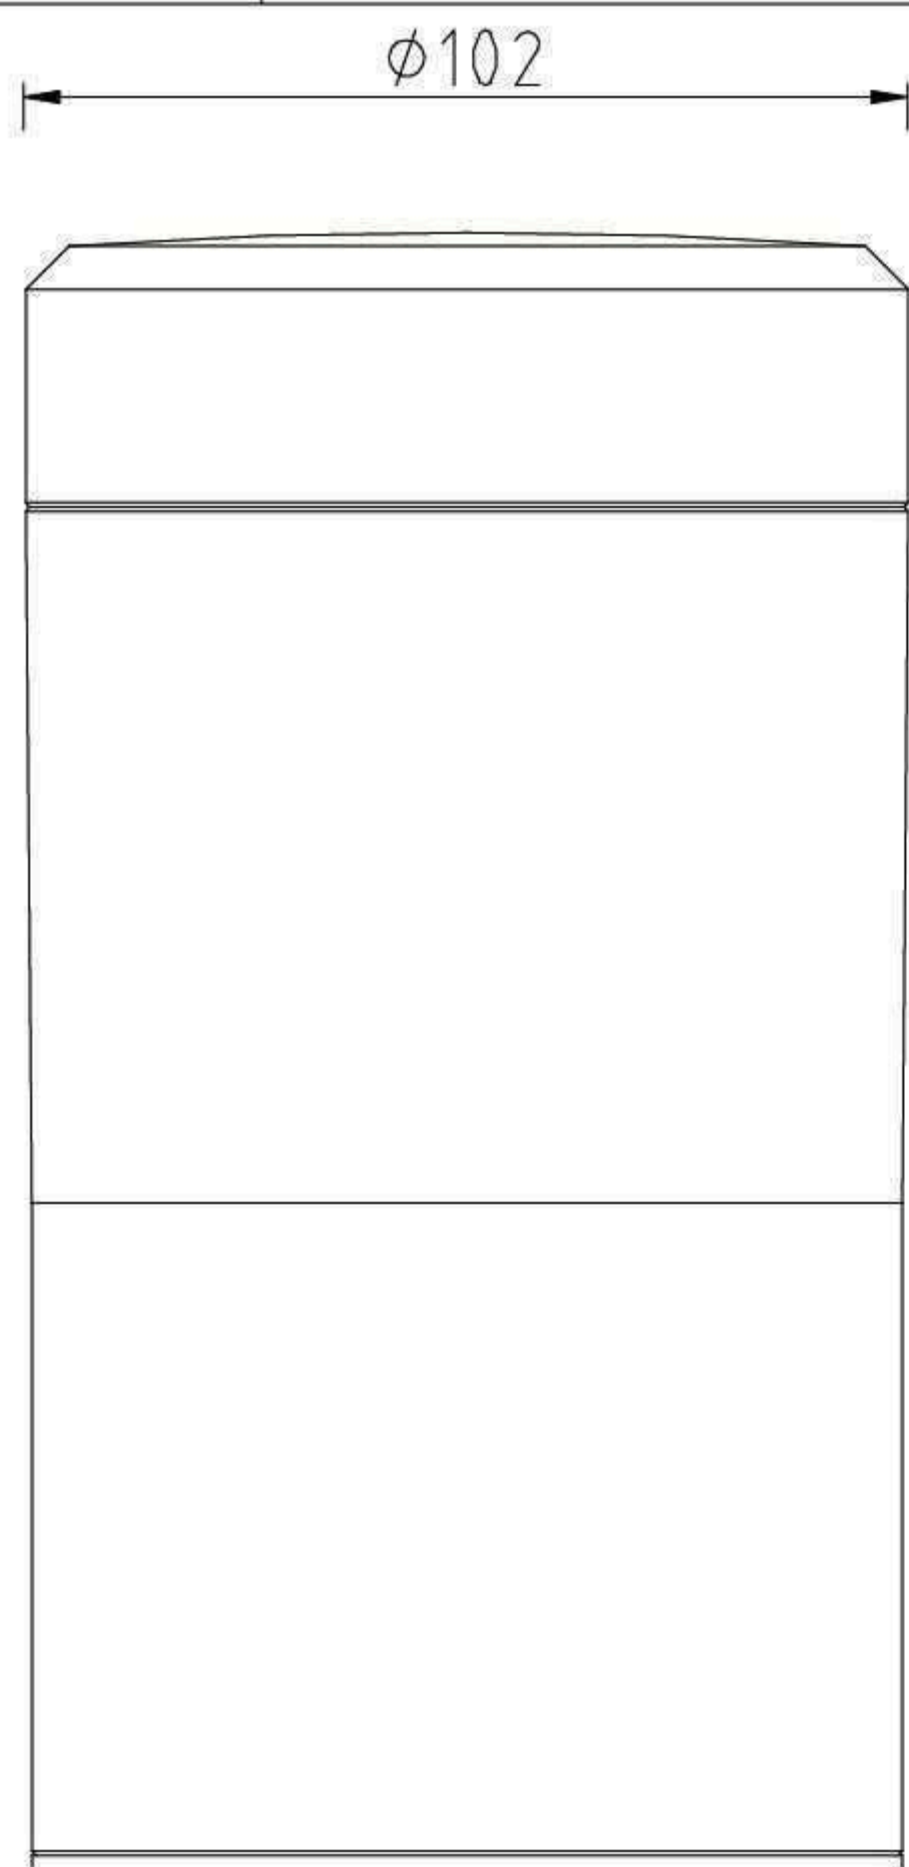

# 2024 SMART LED Strip

Environmental protection, energy saving


# SMART LED Strip

## SMART STRIP

It can render a colorful atmosphere



- Beam Angle:180°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h

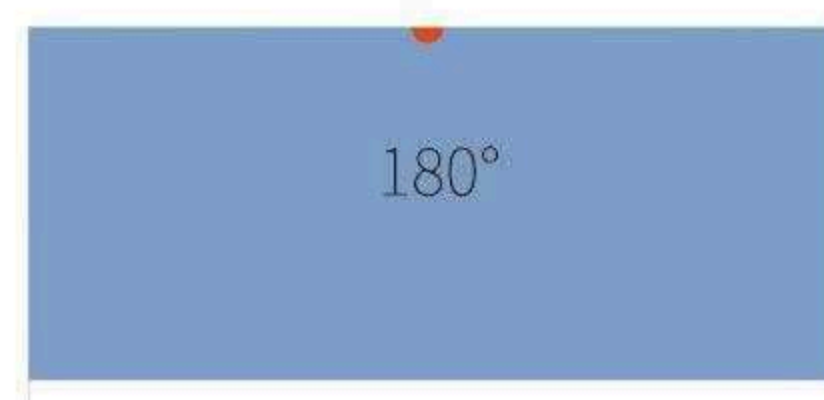

Scenes  
/  
Effects



## PERFOR,AMCE AND APPLICATION

- 1) Product size (optional) 2/5/10meters.
- 2) Select FPCB material.
- 3) Available Bluetooth and WIFI control.
- 4) Voltage100-240V/The power of 2(m) is 7(W),15 watts at 5 meters and 10 meters.
- 5) The conventional color temperature lumens are 630(lm) and 1300(lm).

# 2024 SMART LED Bulb


Environmental protection,energy saving.

# SMART BULB

It can render a colorful atmosphere



 Voice Control

 Bluetooth + WIFI Control





# SMART Bulb

## Smart Bulb

A60/C37/G45/GU10

- Beam Angle(A60):220°
- Beam Angle(C37/G45):180°
- Beam Angle(GU10):120°
- CRI>80
- CORLOR:RGB
- AVAILABLE>30000h



A60



C37



G45



GU10




Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
A60 (E27/E26/B22)	220-240V/100-240V	7W/9W/12W	630lm/810lm /1080lm	WIFI/BLE	60x109 60x118 60x123	Plastic+ Aluminum
C37 (E14/E12/B15)	220-240V/100-240V	5W	450lm	WIFI/BLE	37x100	Plastic+ Aluminum
G45 (E14/E12/B15)	220-240V/100-240V	5W	450lm	WIFI/BLE	45x79	Plastic+ Aluminum
GU10	220-240V/100-240V	5W	450lm	WIFI/BLE	50x55	Plastic+ Aluminum

# Panel Light


## Panel light 4 inch/6 inch

- Beam Angle:110°
- Ra>80
- CORLOR:RGB/CCT
- AVAILABLE>30000h


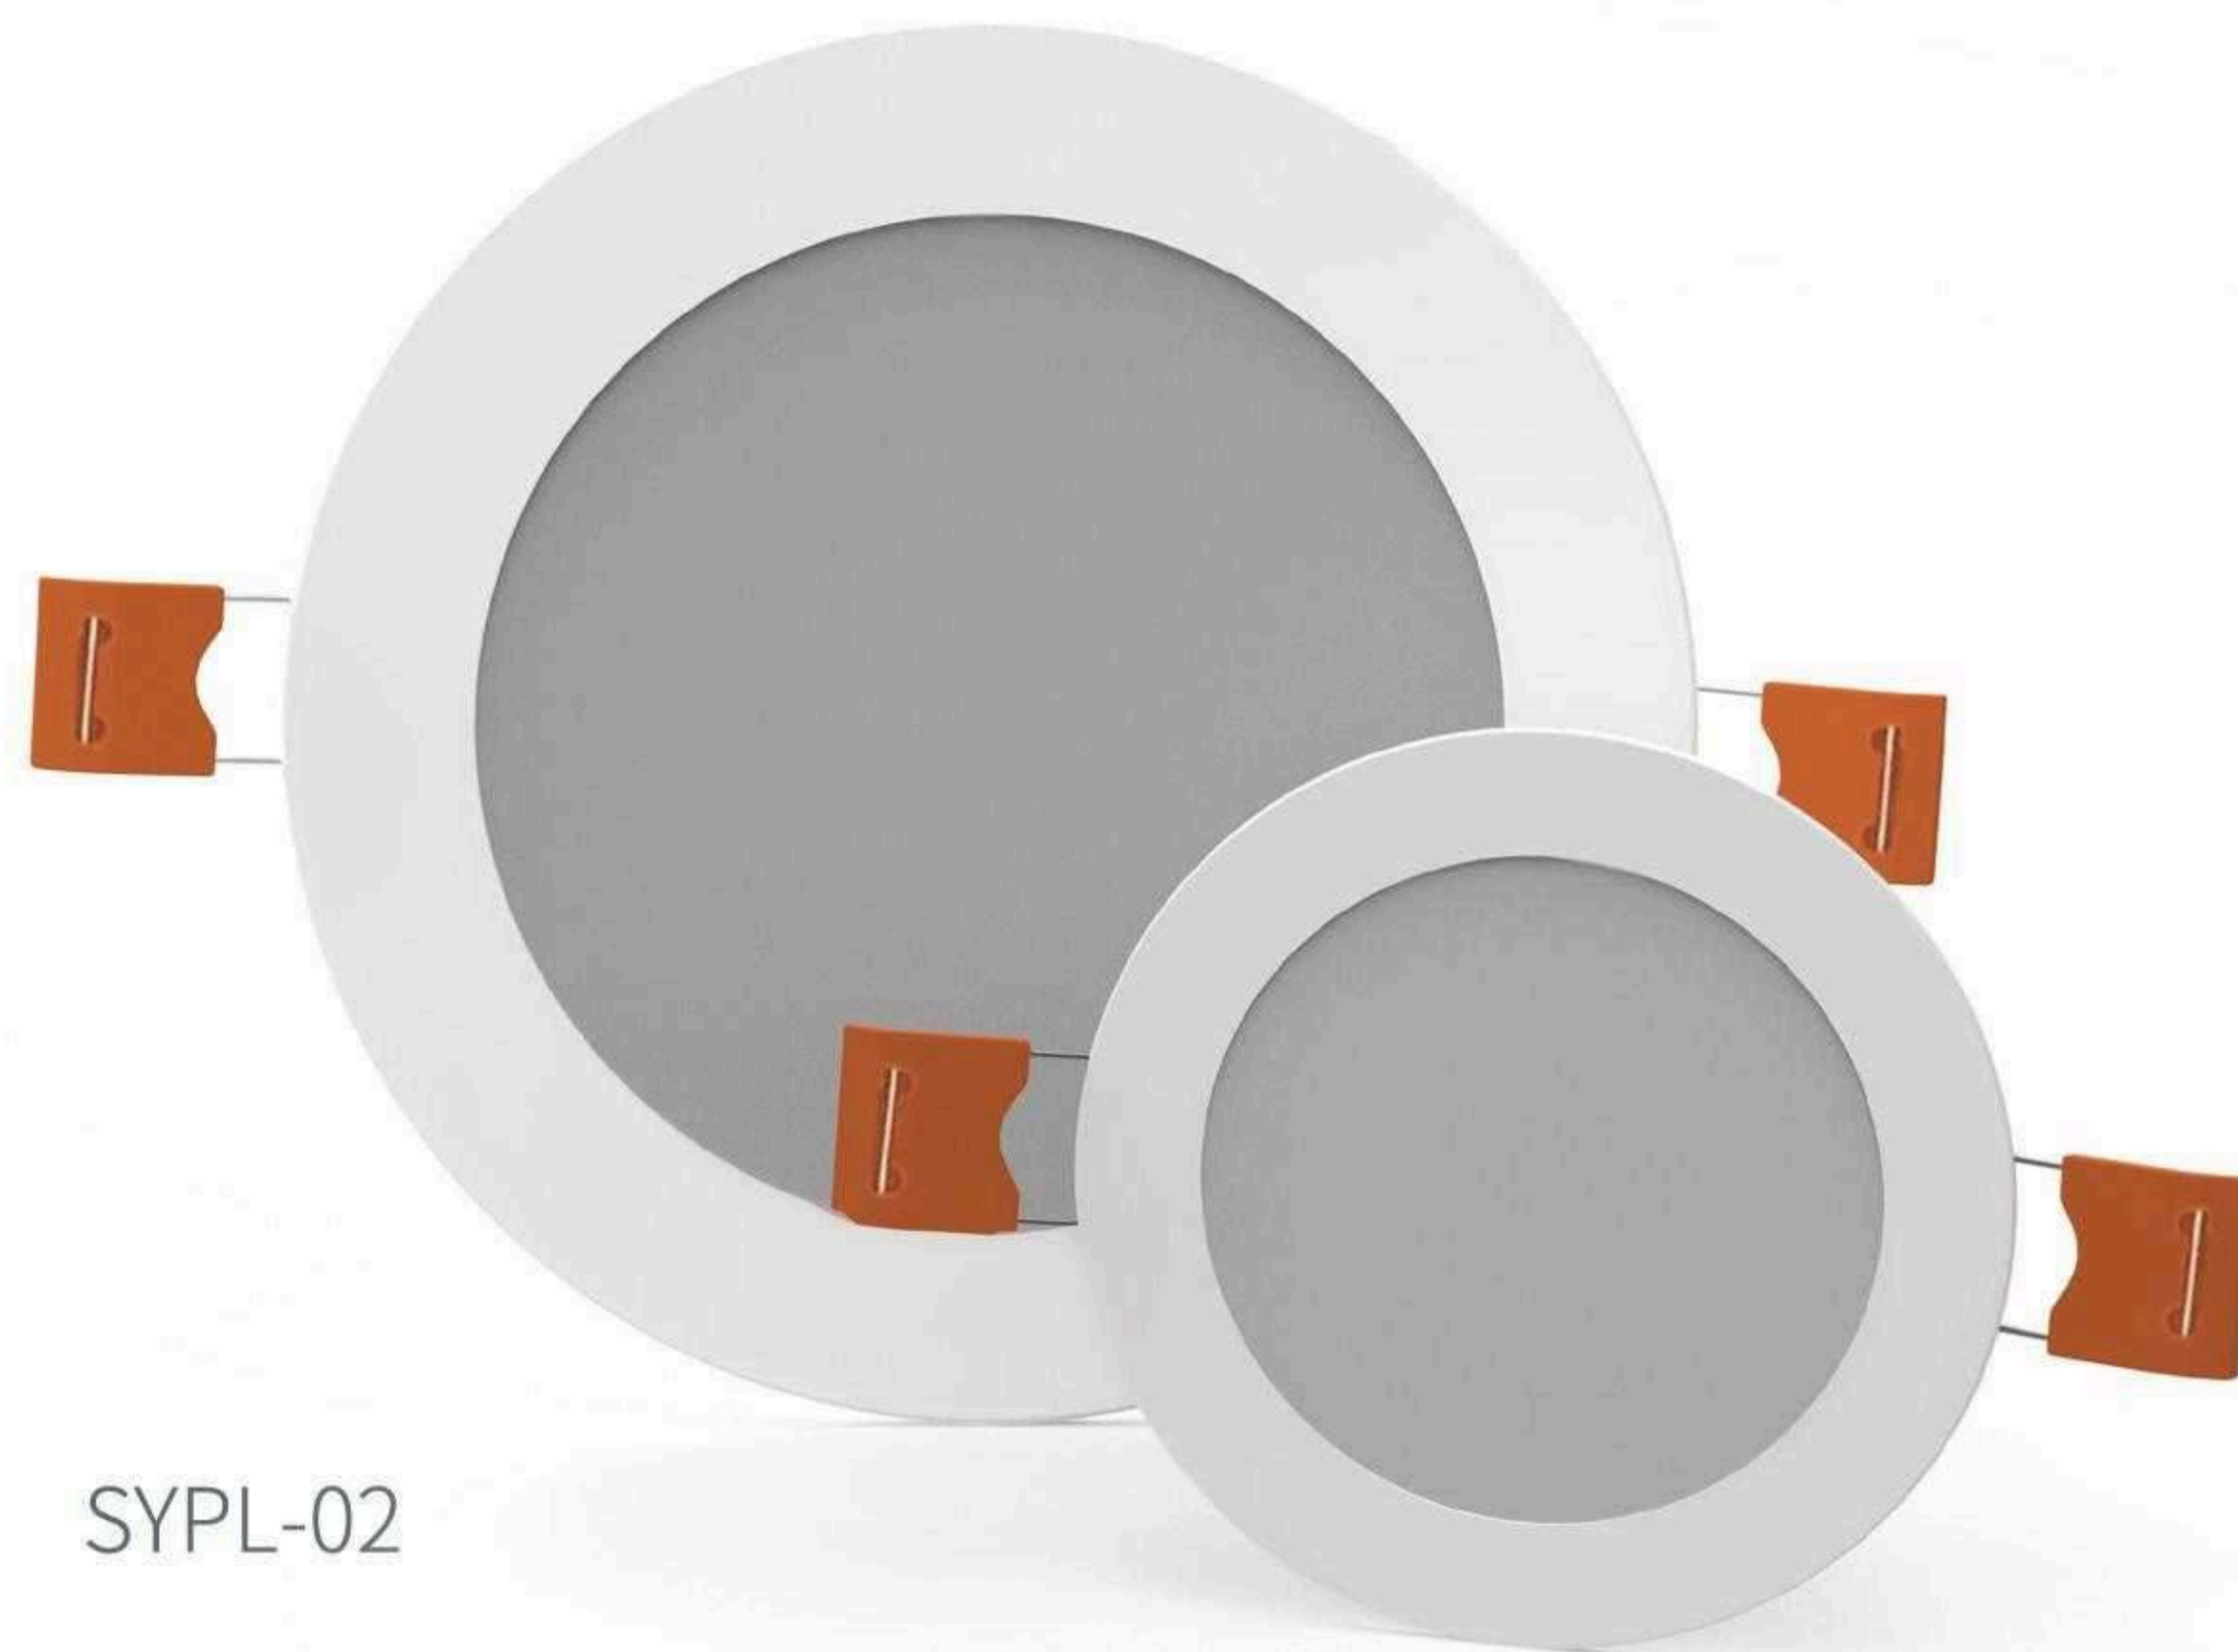


SYPL-02

SYPL-01

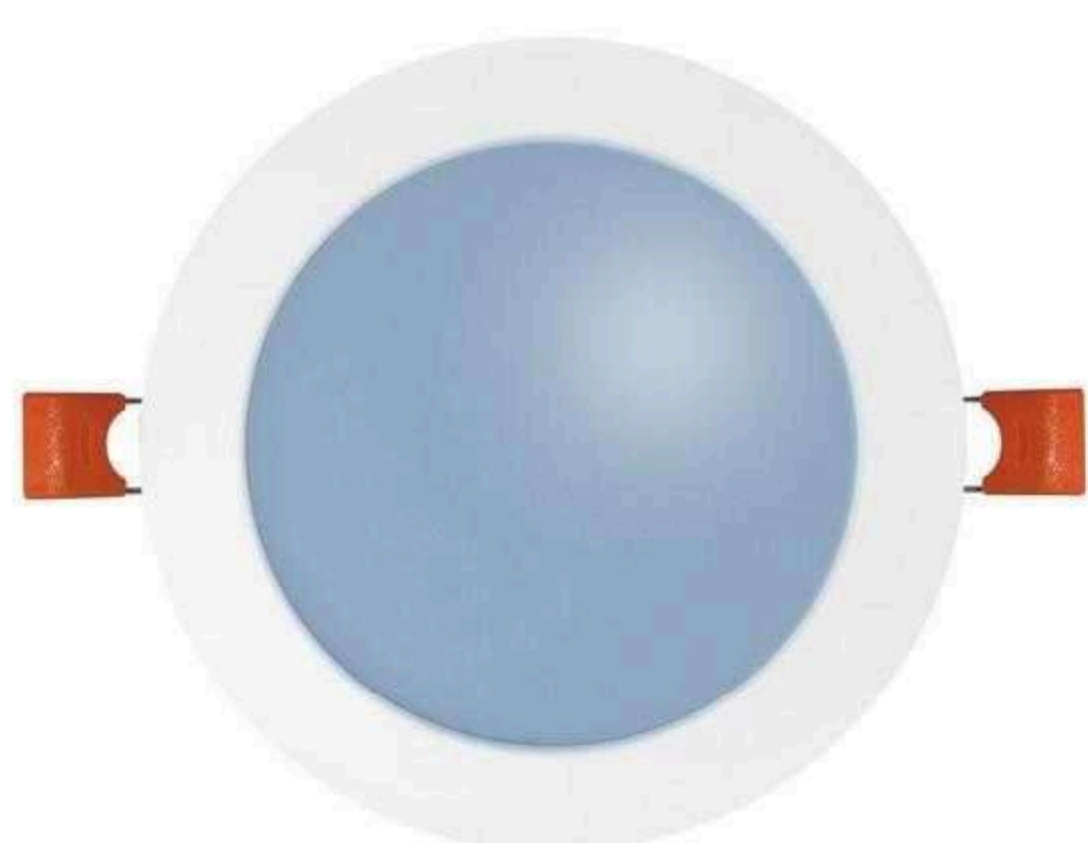

white

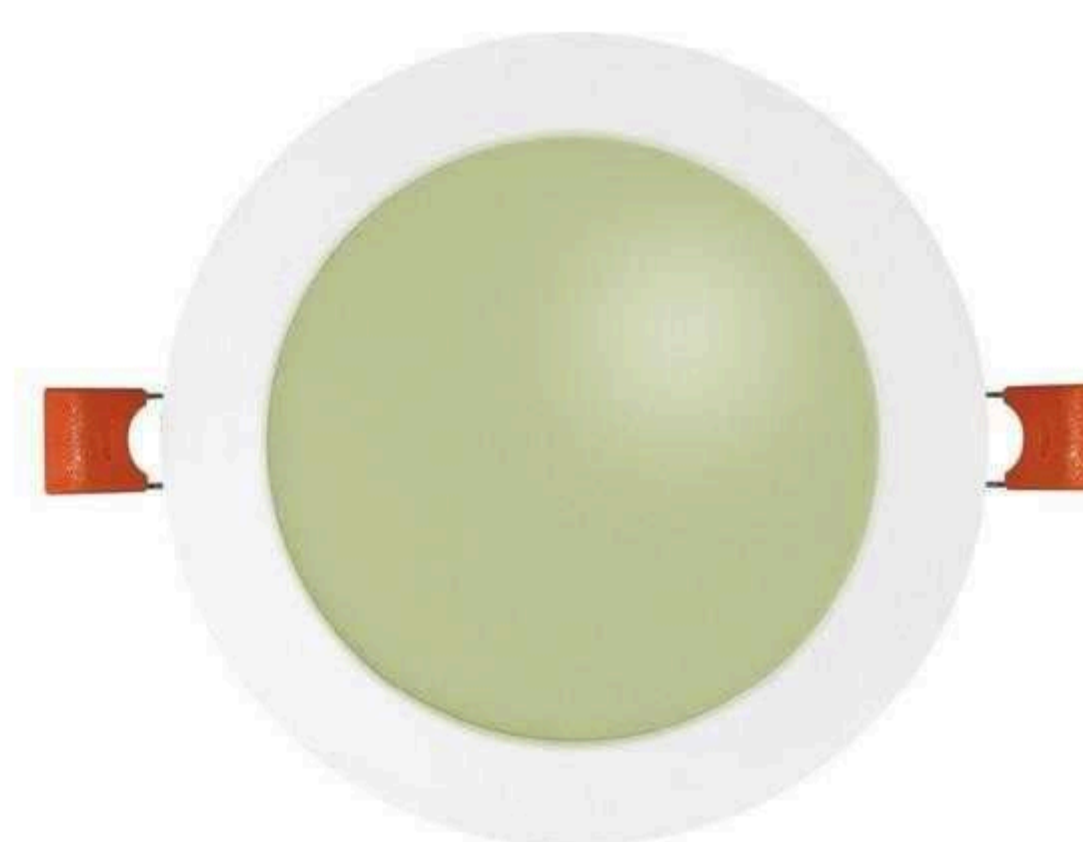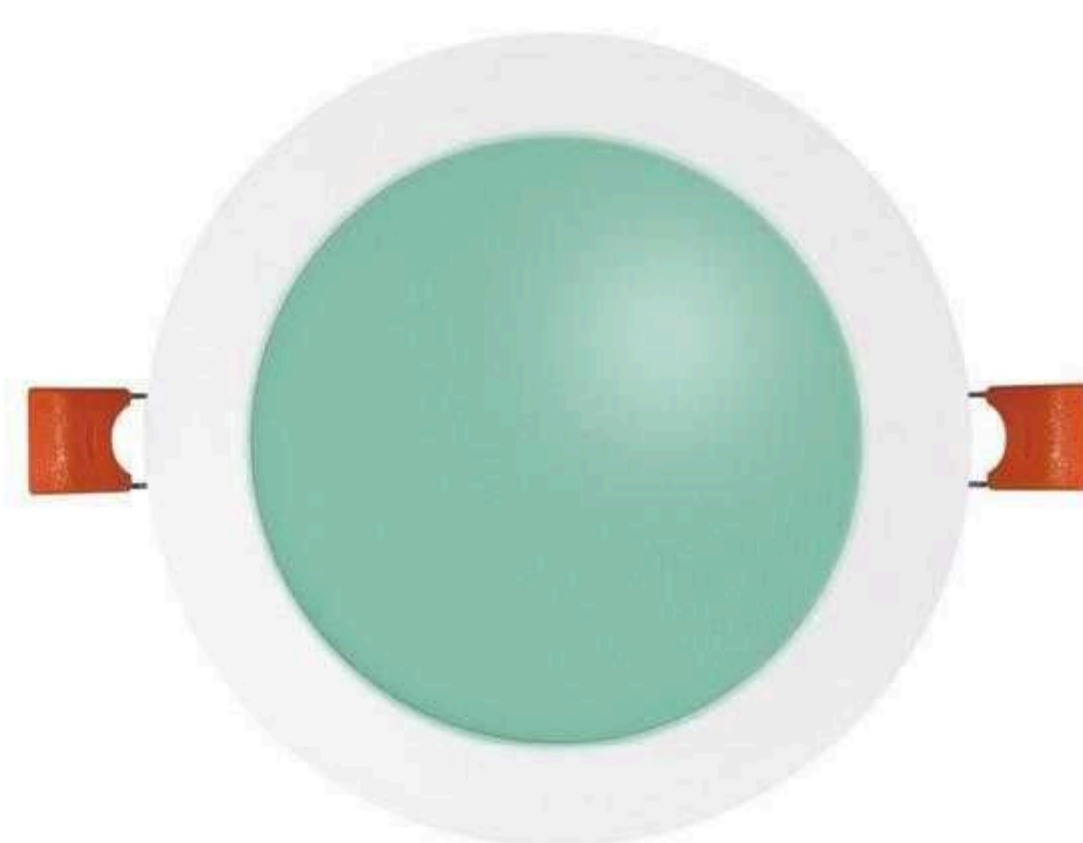

Model	Voltage	Watt	Luminous Flux	Type	Size (mm)	Material
SYPL-01 (4 inch)	100-130V	9W	810lm	WIFI/BLE	145x22(H)	Plastic+ Aluminum
SYPL-02 (6 inch)	100-130V	13W	1000lm	WIFI/BLE	170x22(H)	Plastic+ Aluminum