BUILDER SOLUTION ZEBRA BLINDS & ROLLER SHADES

Free Light Control for Day and Night

2026

ZEBRA BLINDS
ROLLER SHADES

ZEBRA BLINDS

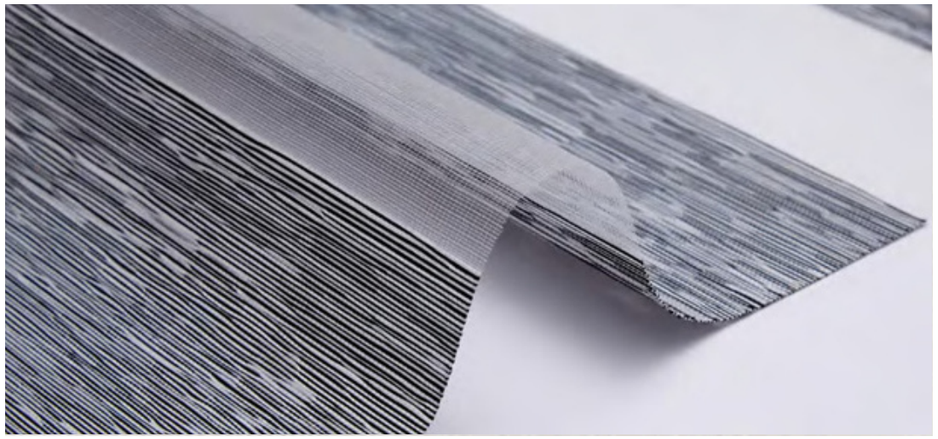

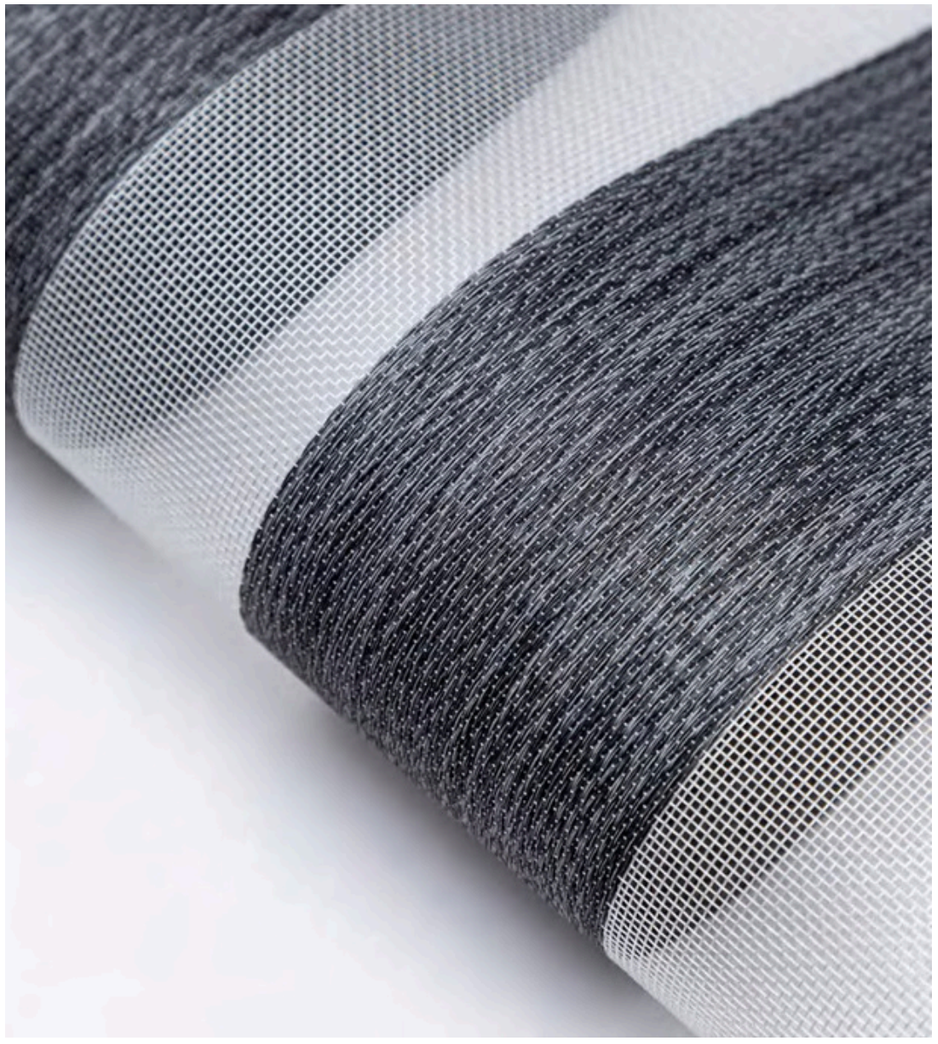

ZEBRA BLINDS

Bella(Light Filtering)

Windows Skin

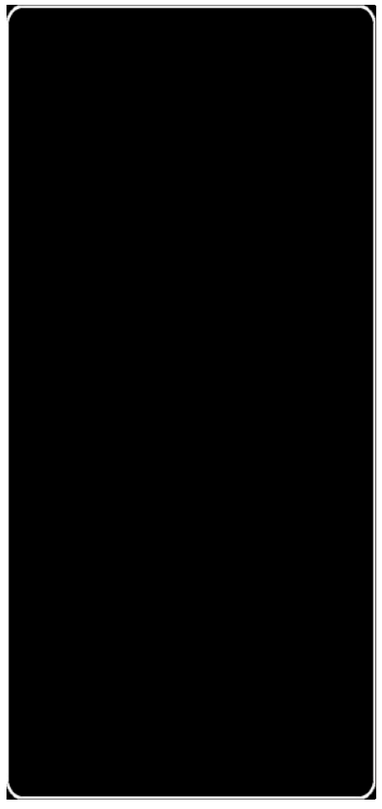

RS20287-1
Glacler

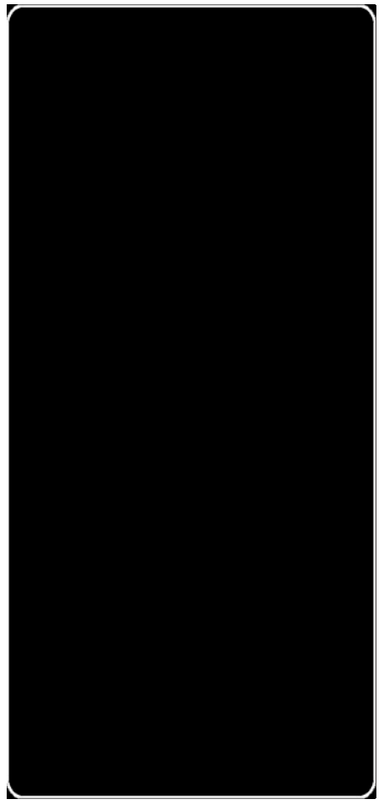

RS20287-2
Could

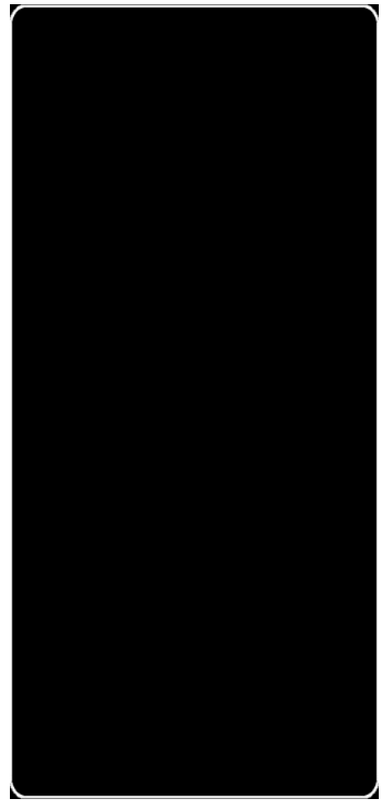

RS20287-3
Mint

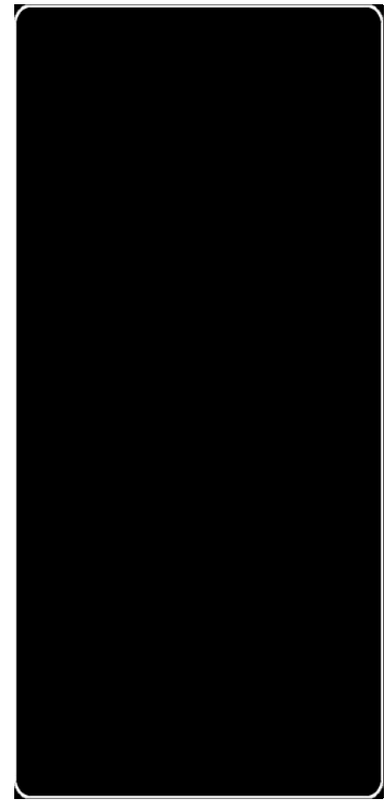

RS20287-4
Silver

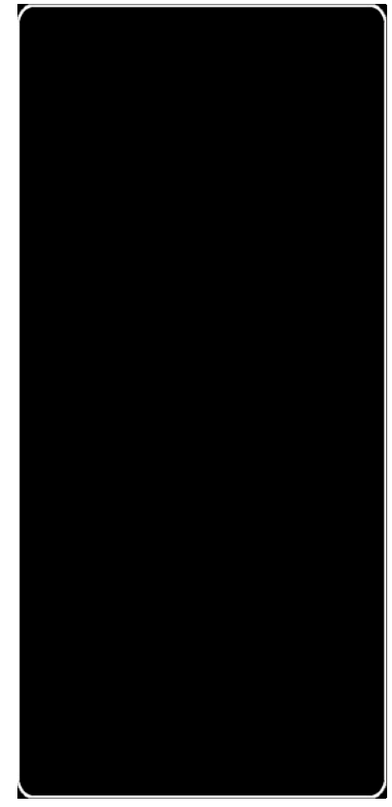

RS20287-5
Ash

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:100±5%(g/m²)
3.0±5%(oz/yd²)

Repeat:10cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Bella(Light Filtering)

Windows Skin

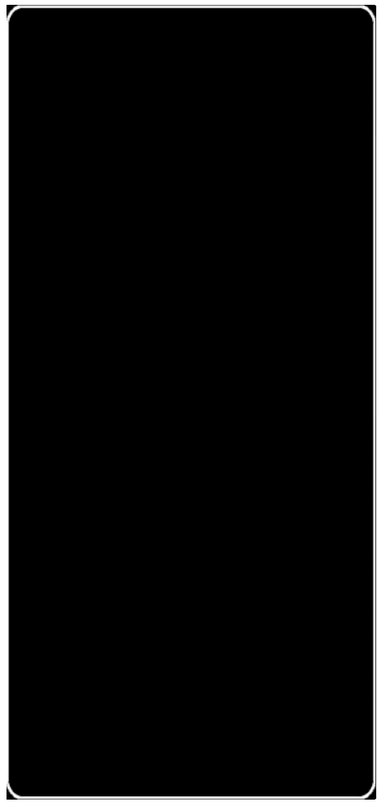

RS20287-6
Smoke

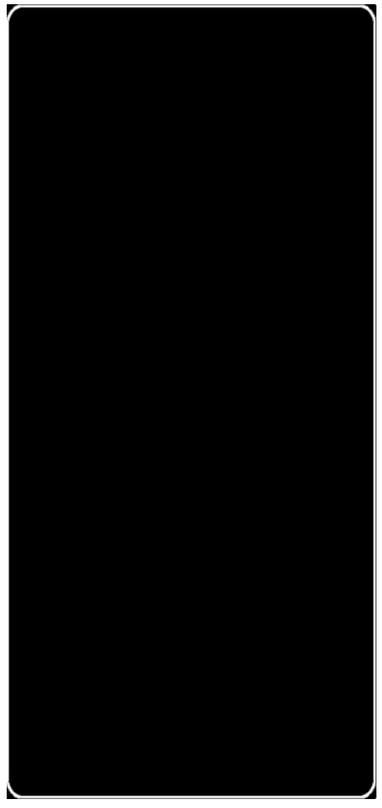

RS20287-7
Raven

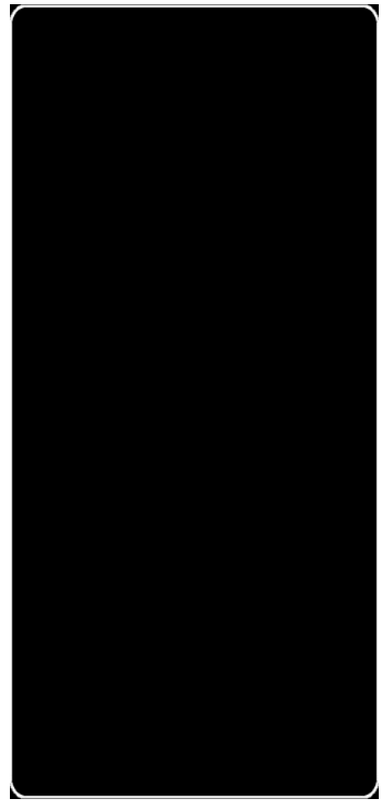

RS20287-8
Flax

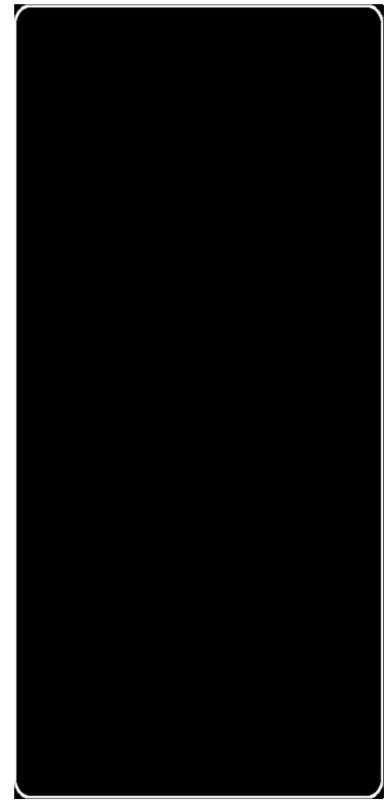

RS20287-9
Platinum

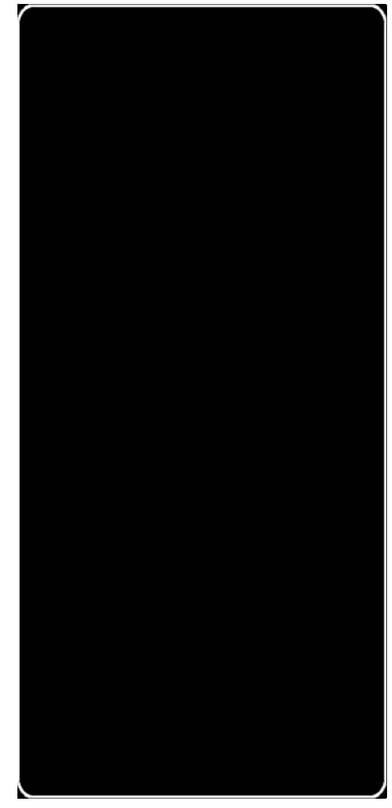

RS20287-10
Steel Gray

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:100±5%(g/m²)
3.0±5%(oz/yd²)

Repeat:10cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Bella(Light Filtering)

Windows Skin

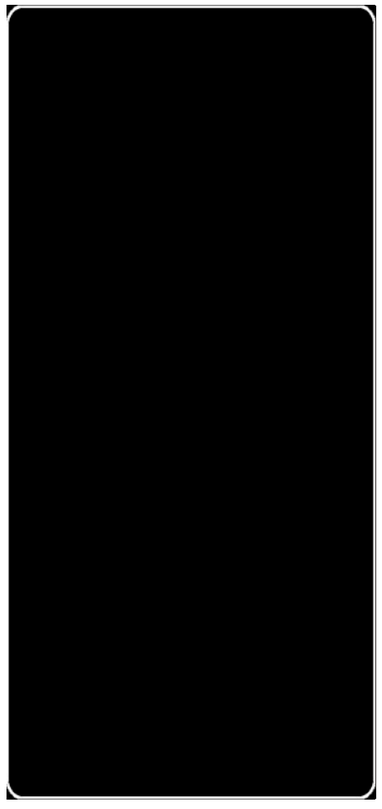

RS20287-11
Anchracite

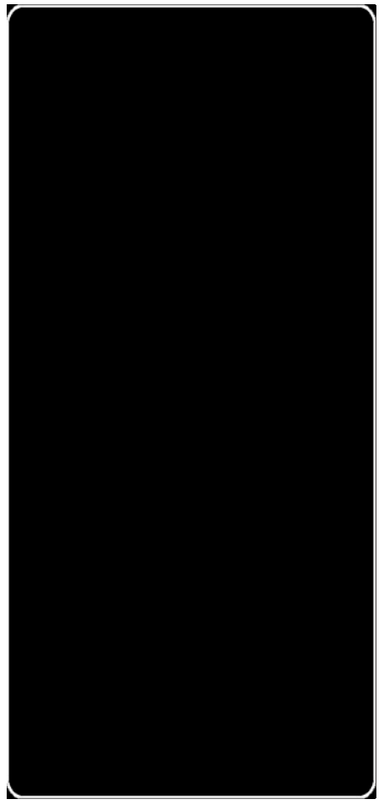

RS20287-12
Birch

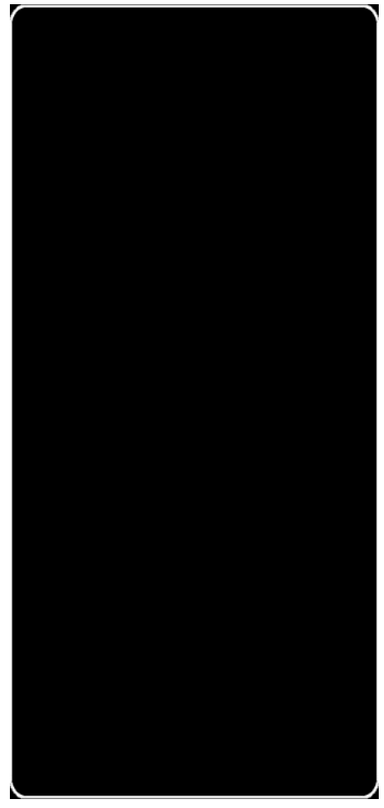

RS20287-13
Wheat

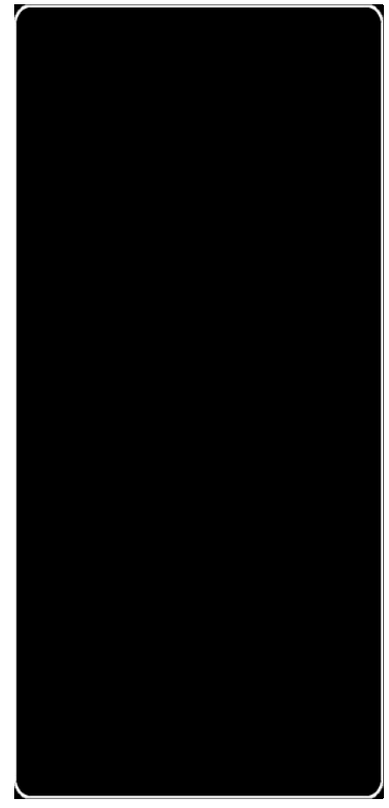

RS20287-14
Dove

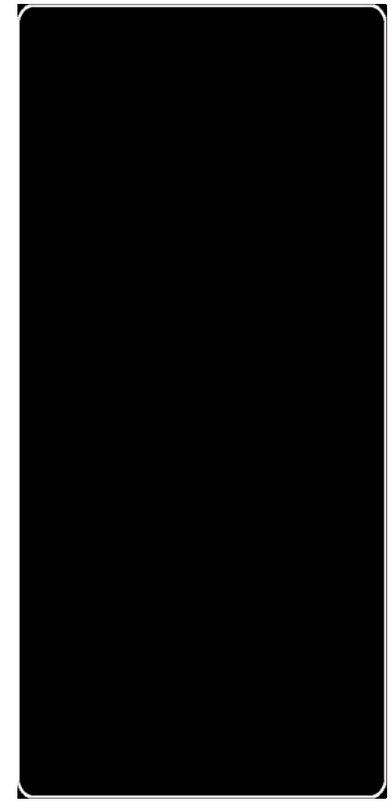

RS20287-16
Brown

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:100±5%(g/m²)
3.0±5%(oz/yd²)

Repeat:10cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Co (Light Filtering)

Windows Skin

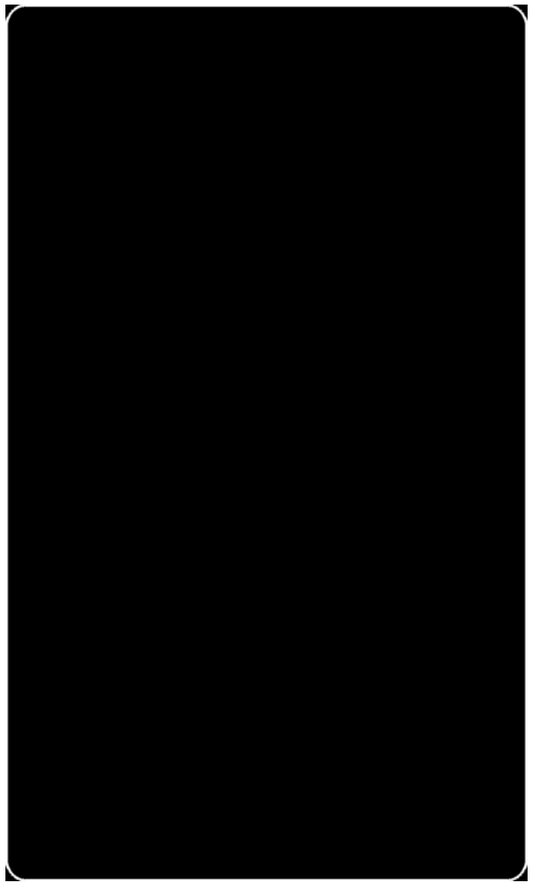

RS20282-1
Swan

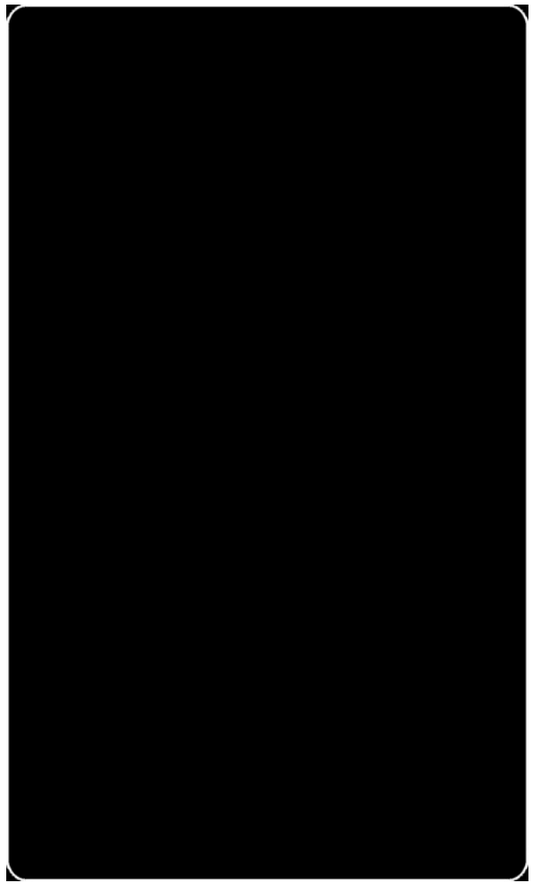

RS20282-2
Ivo

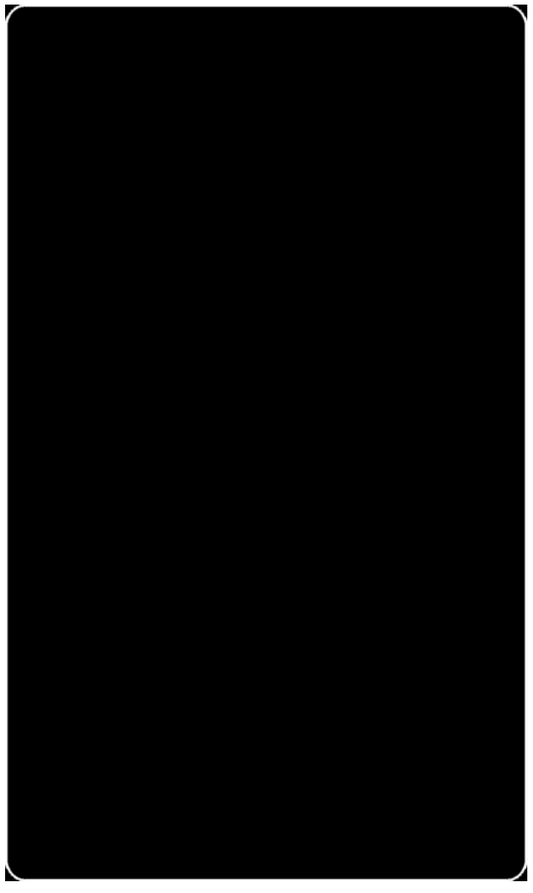

RS20282-3
Silver

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:170±5%(g/m²)
5.2±5%(oz/yd²)

Repeat:8.5cm(Solid)x5.5cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Hila (Light Filtering)

Windows Skin

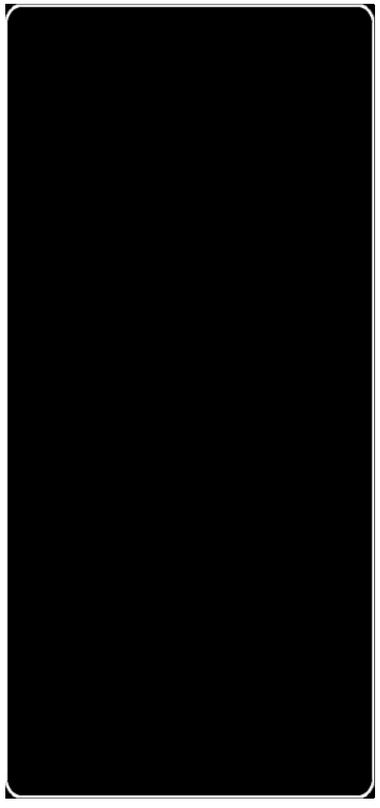

RS20281-1
Pearl

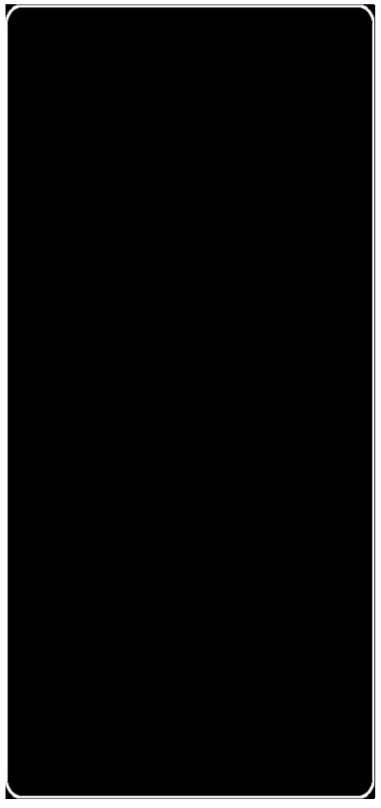

RS20281-2
Vanilla

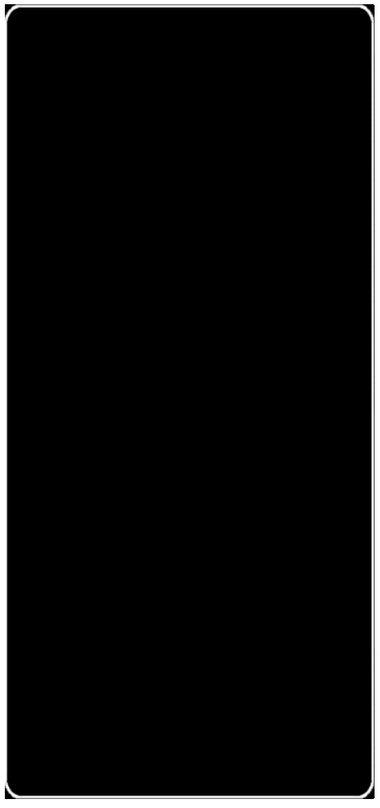

RS20281-3
Dupione latte

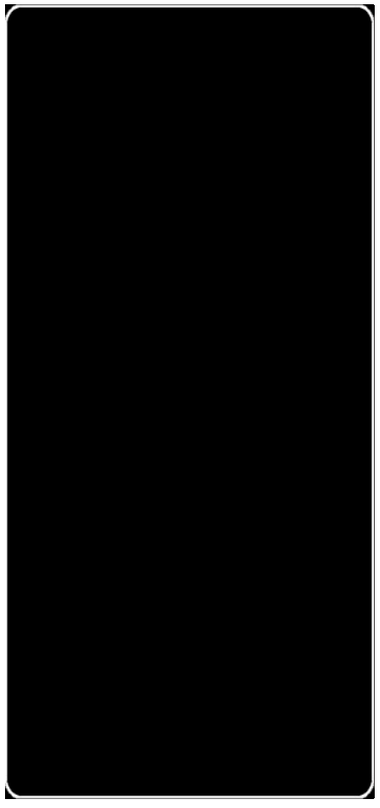

RS20281-4
Nimbus

RS20281-5
Smoke

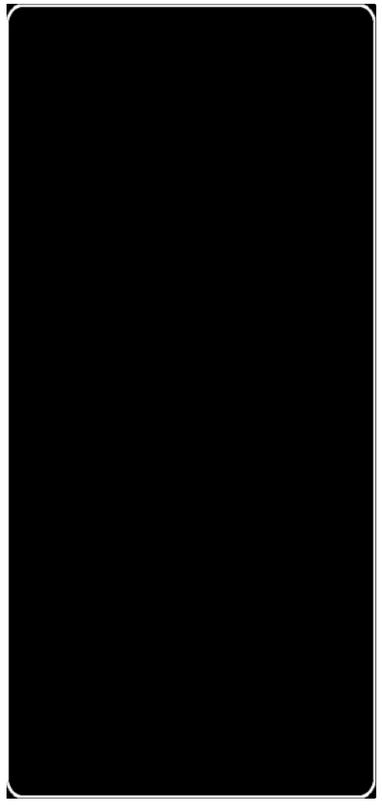

RS20281-6
Anthracite

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:130±5%(g/m²)
3.8±5%(oz/yd²)

Repeat:8.5cm(Solid)x5.5cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Glamor (Light Filtering)

Windows Skin

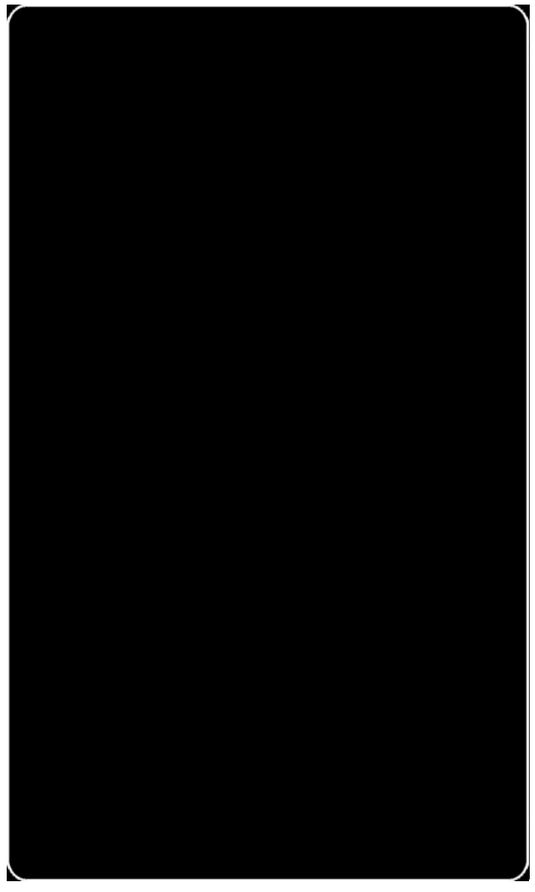

RS20280-1
Chalk

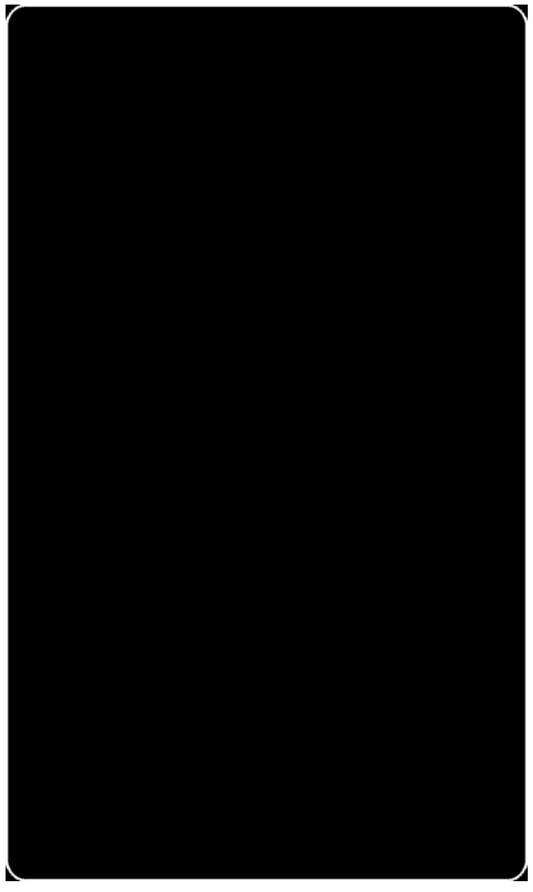

RS20280-2
Eggshell

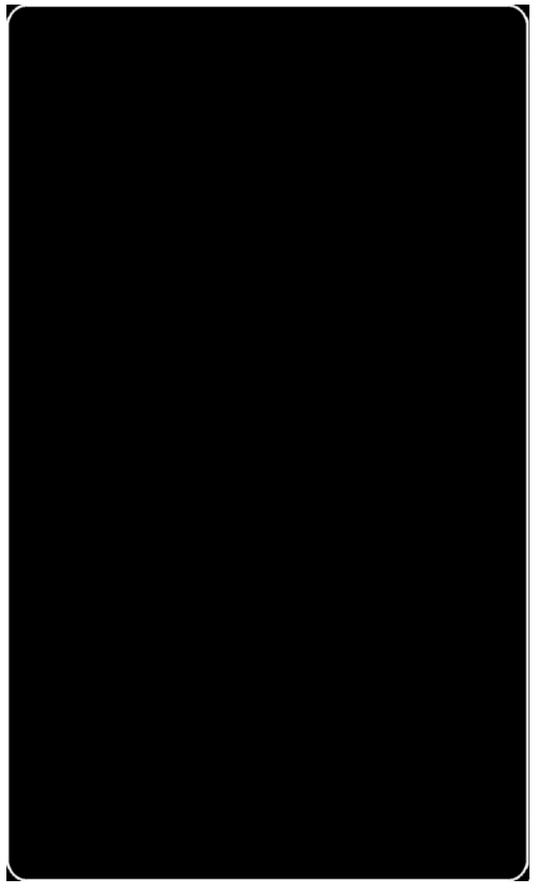

RS20280-3
Flax

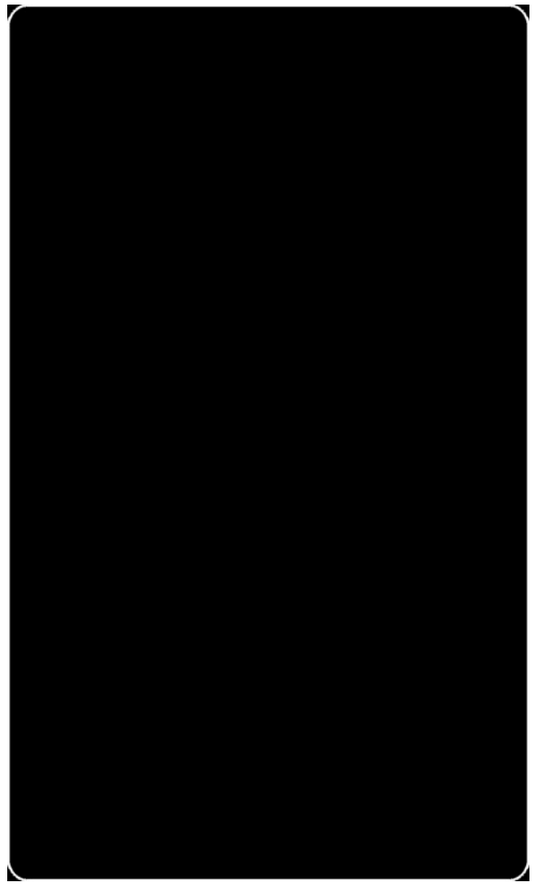

RS20280-4
Platinum

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat:8.5cm(Solid)x5.5cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Duscha (Light Filtering)

Windows Skin

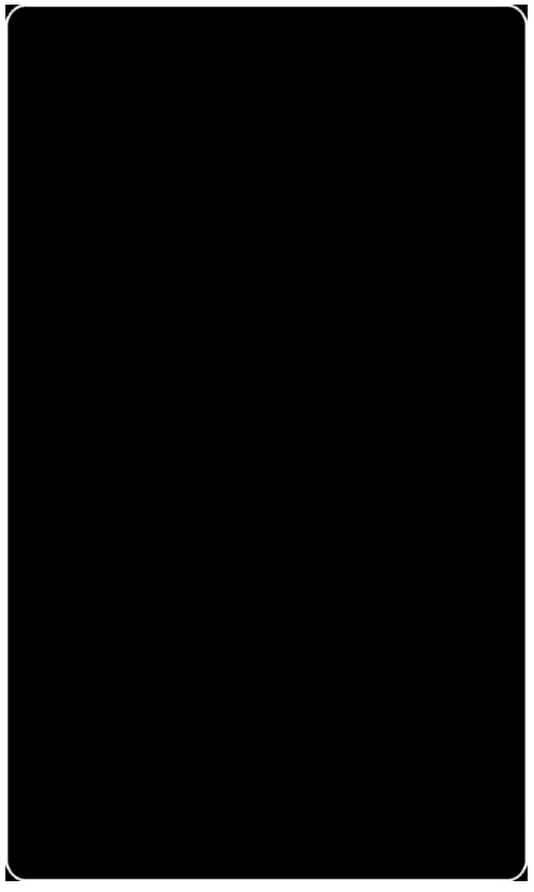

RS2218-1
Swan

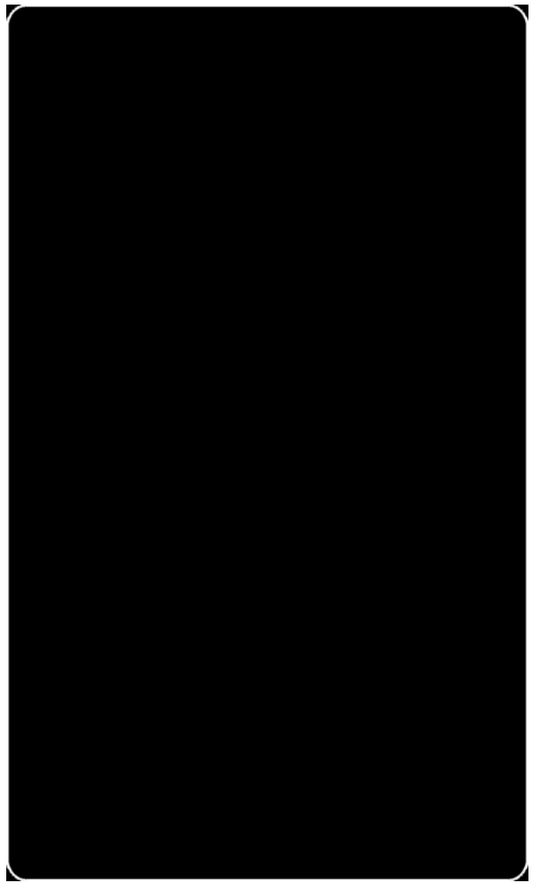

RS2218-3
Wheat

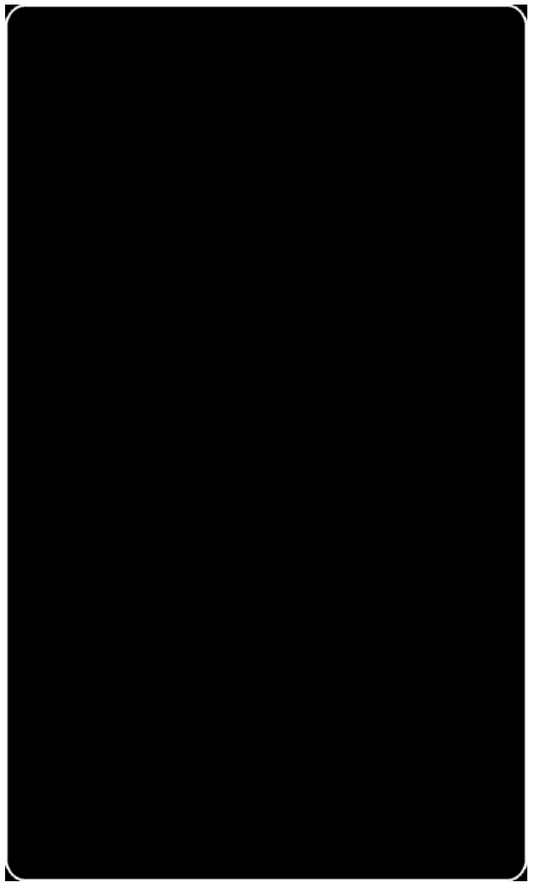

RS2218-7
Silver

Composition:**Polyester35%+PVC65%**

Finished Width:**183/200/250/300cm**
72"/79"/98"/118"

Weight M²:**250±5%(g/m²)**
7.4±5%(oz/yd²)

Repeat:**7.5cm(Solid)x5.0cm(Sheer)**

Light Fastness:**≥6Grade** (ISO 105 B02)

ZEBRA BLINDS

Duscha (Light Filtering)

Windows Skin

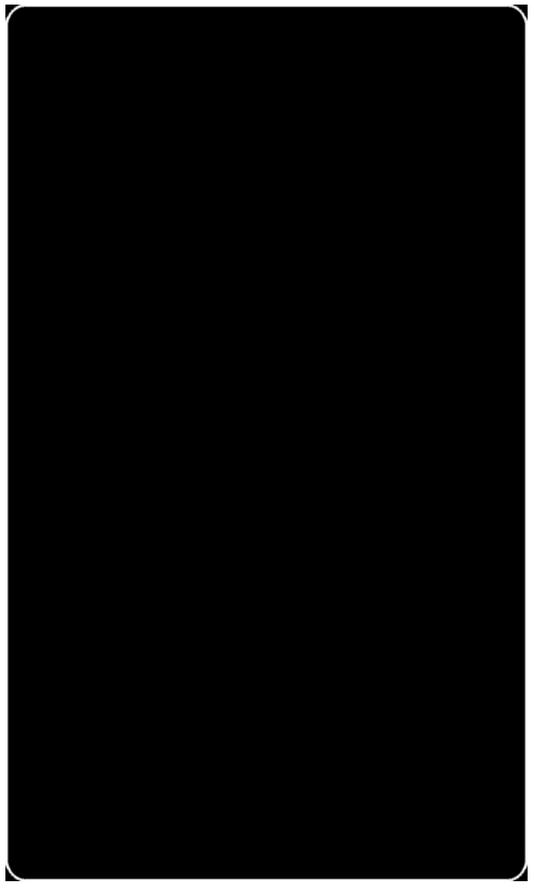

RS2219-1
Vanilla
Ice

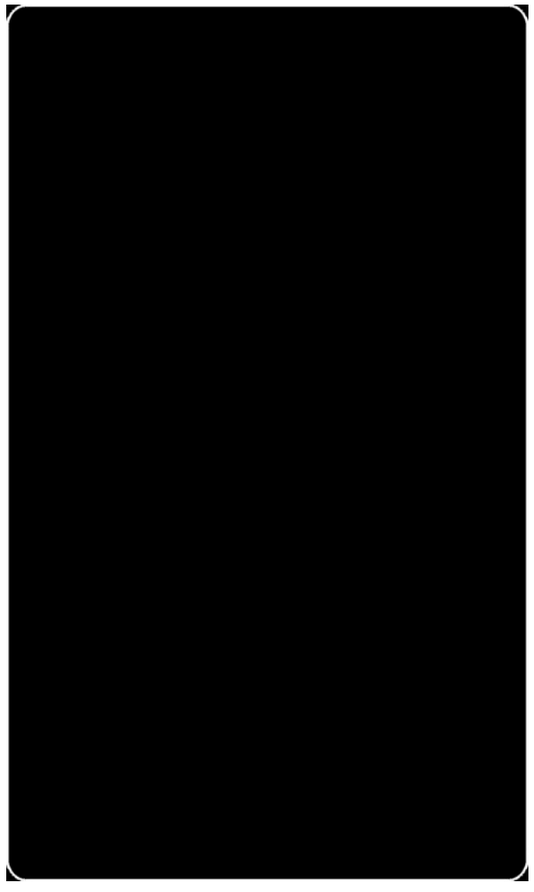

RS2219-4
Steel Grey

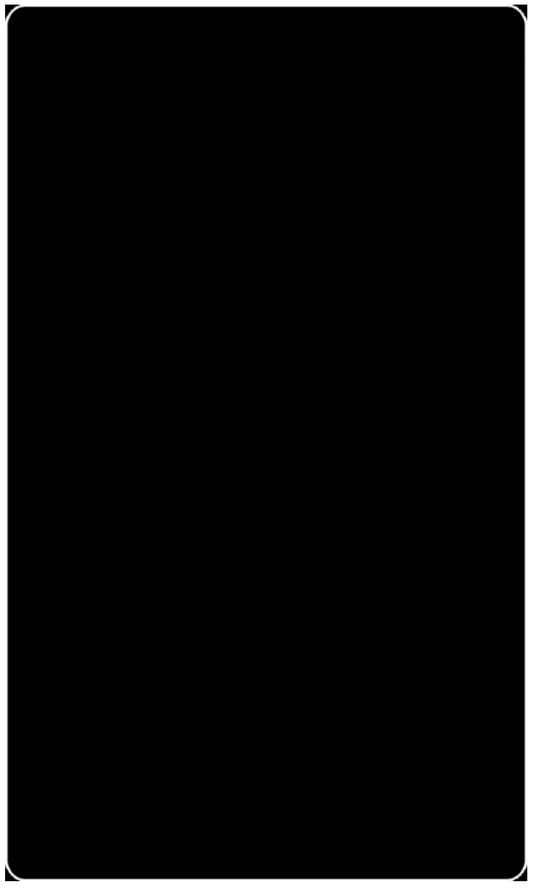

RS2219-5
Black Olive

Composition:Polyester35%+PVC65%

Finished Width:183/200/250/300cm
72"/79"/98"/118"

Weight M²:250±5%(g/m²)
7.4±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Verona (Light Filtering)

Windows Skin

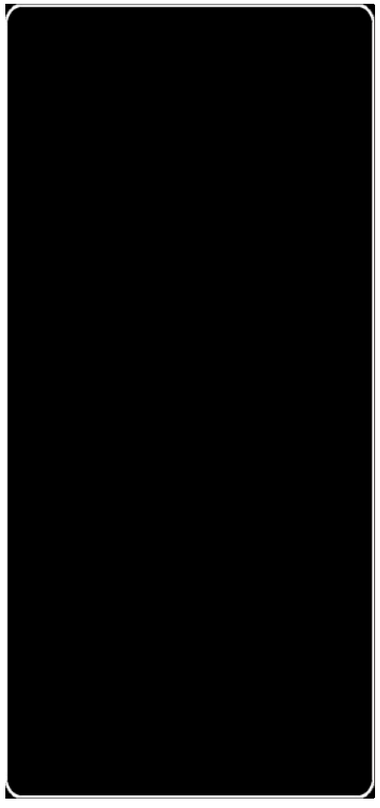

RS2255-1
Foggy

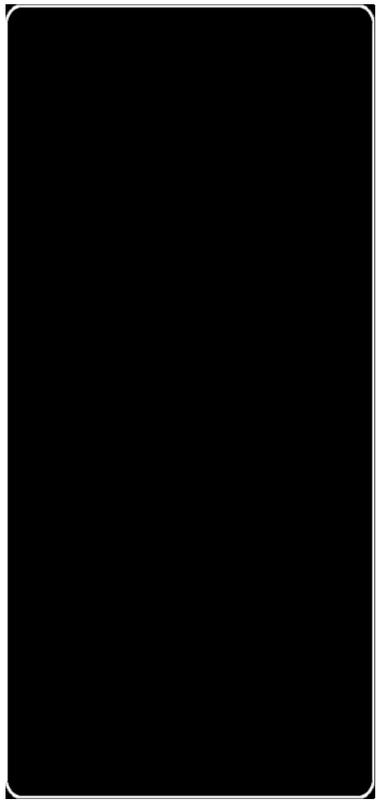

RS2255-3
Oyester

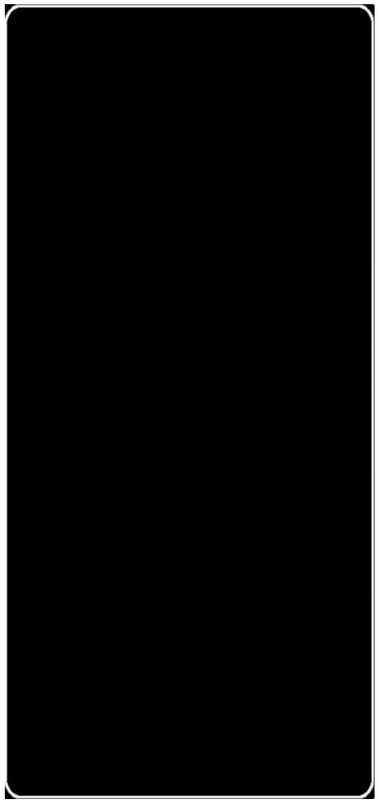

RS2255-4
Wheat

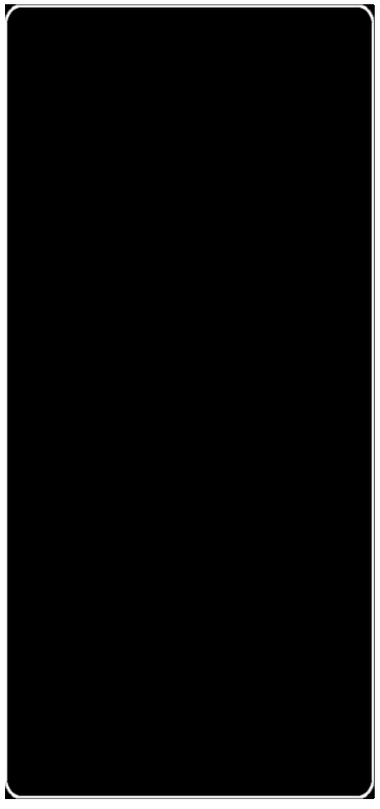

RS2255-5
Straw

RS2255-8
Pebble

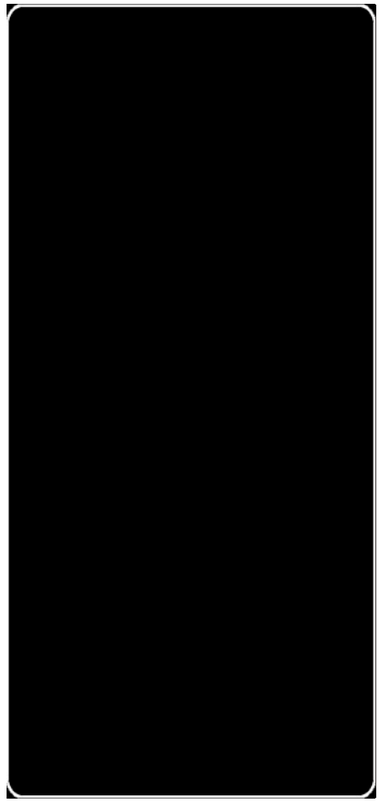

RS2255-10
Flint

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:125±5%(g/m²)
3.7±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Bredon (Light Filtering)

Windows Skin

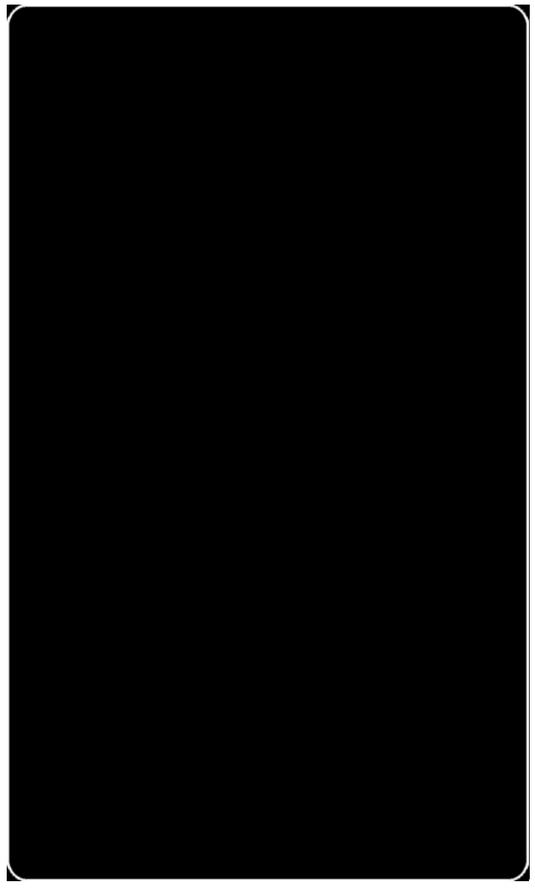

RS2216-1
Winter White

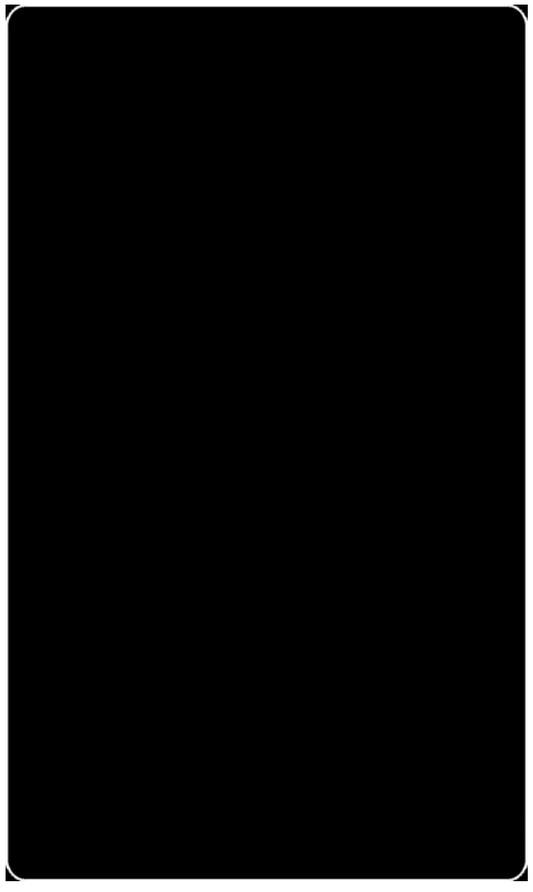

RS2216-2
Ivo

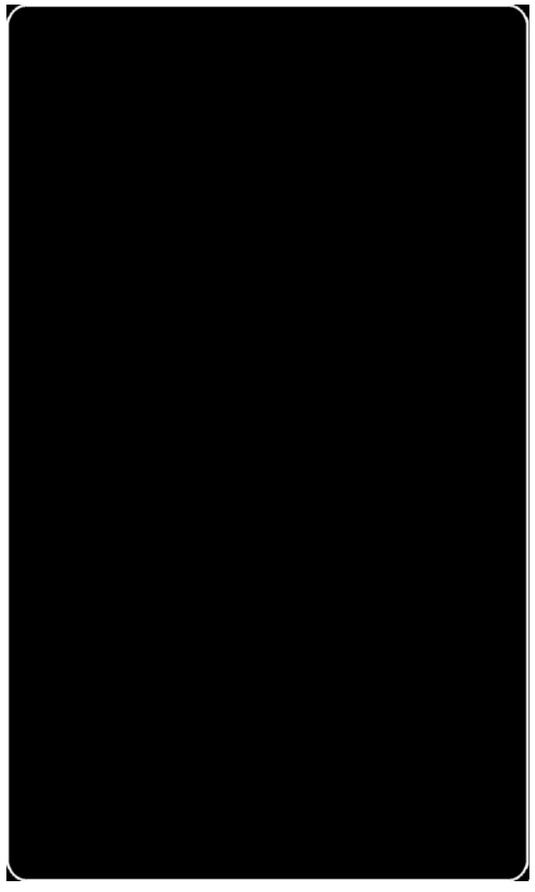

RS2216-4
Silver

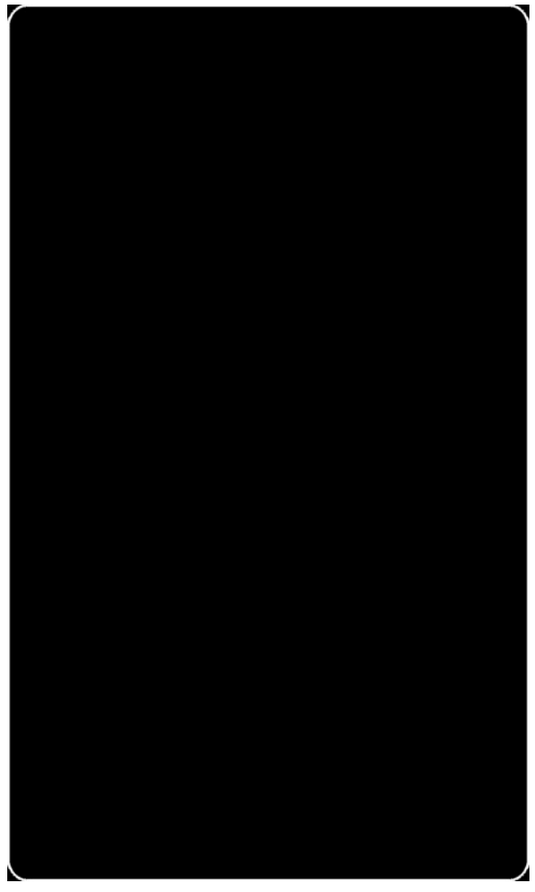

RS2216-7
Black

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:90±5%(g/m²)
2.7±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Toscana (Light Filtering)

Windows Skin

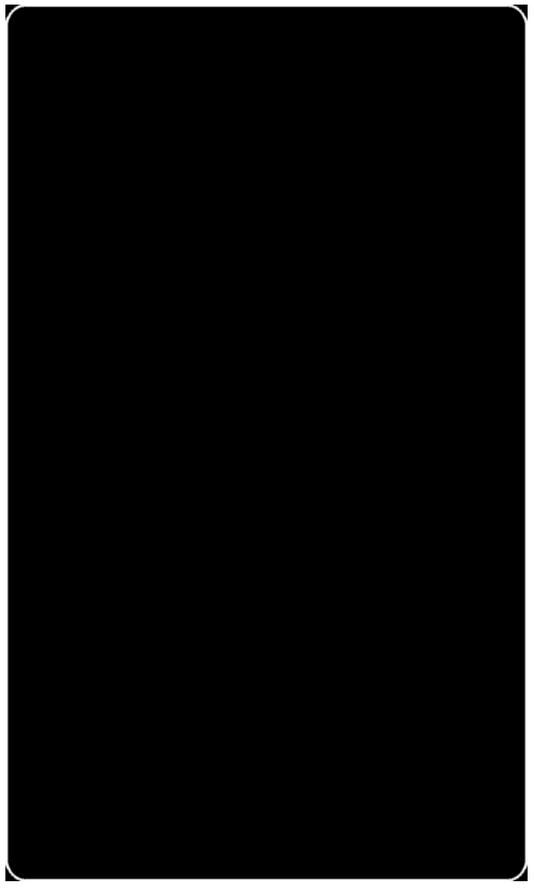

RS2235-1
Glacier

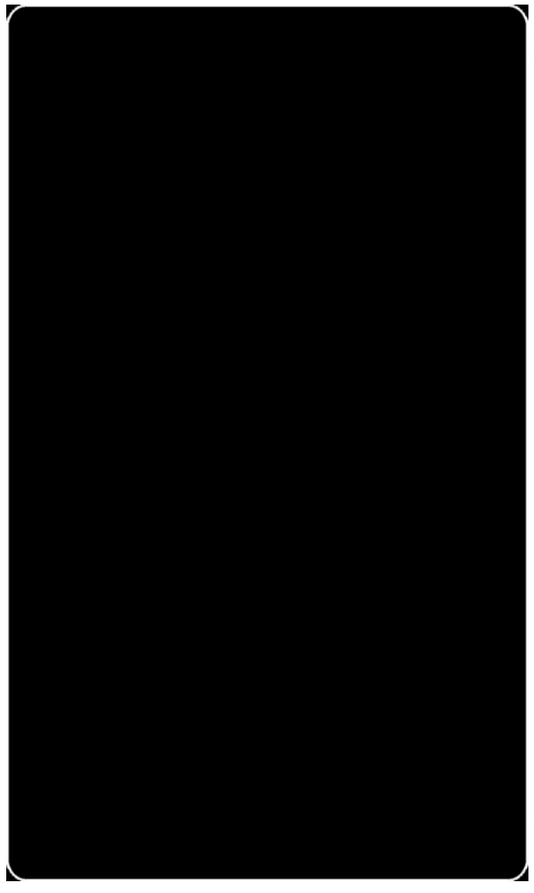

RS2235-2
Rich Cream

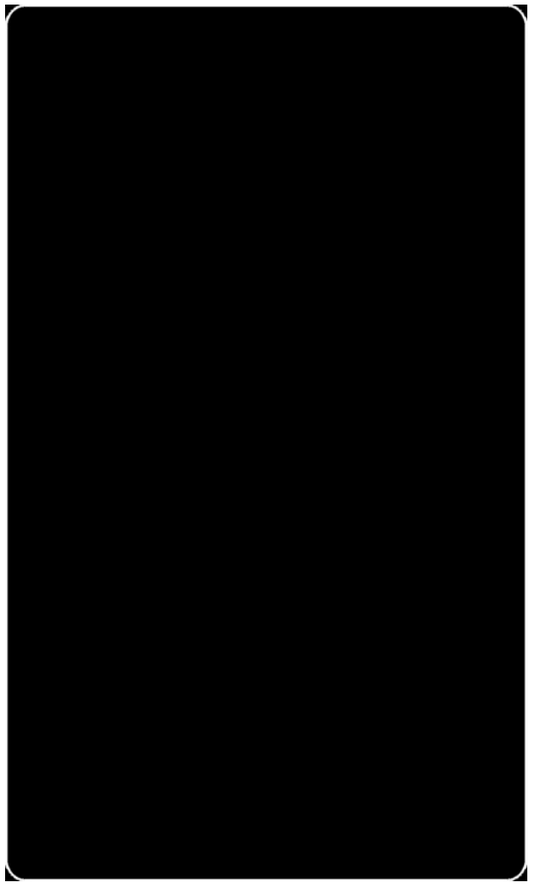

RS2235-3
Pebble

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:125±5%(g/m²)
3.7±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Furze (Light Filtering)

Windows Skin

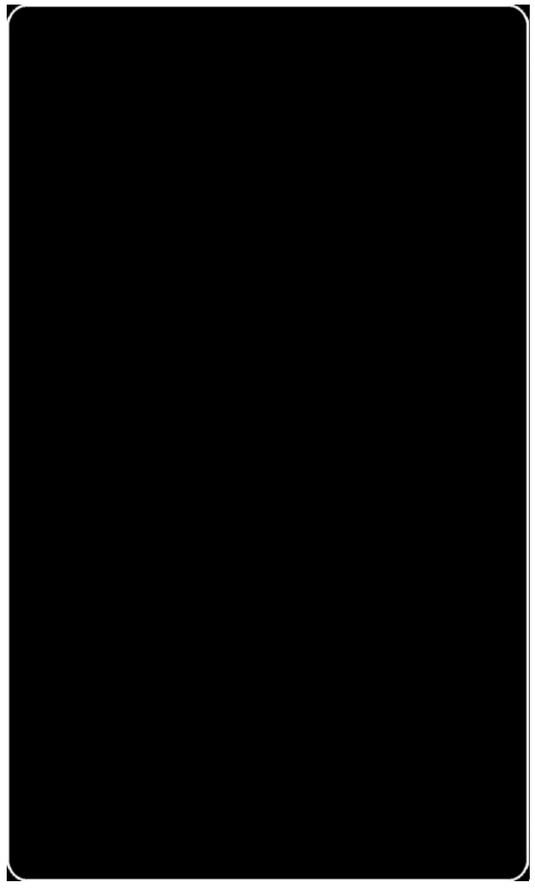

RS2269-1
Alabaster

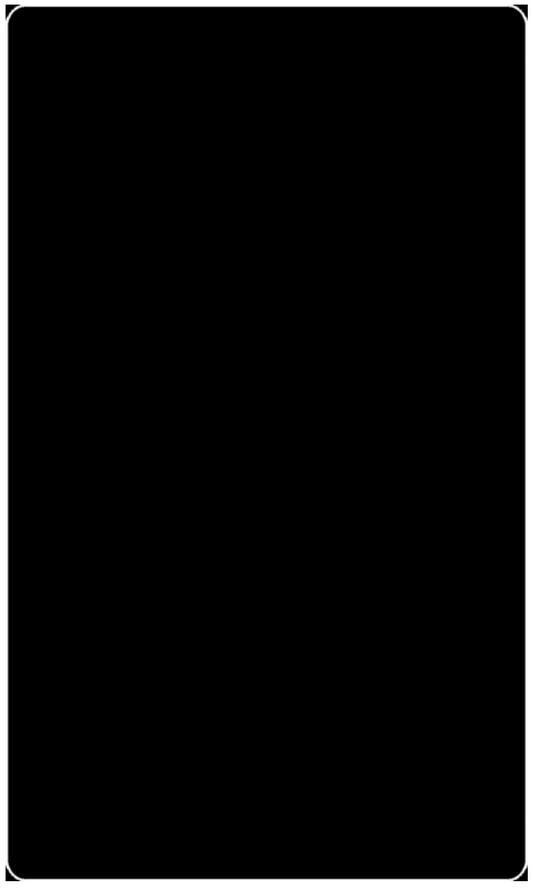

RS2269-2
Flax

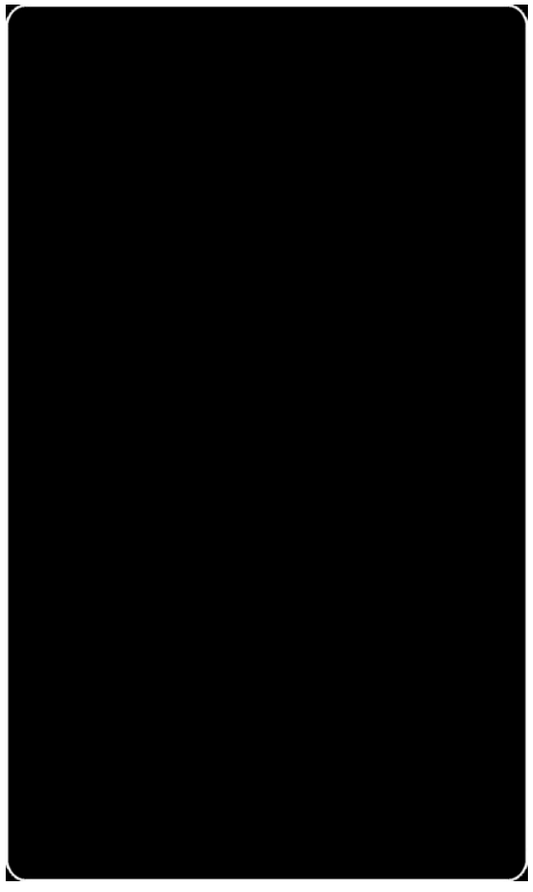

RS2269-3
Chestnut

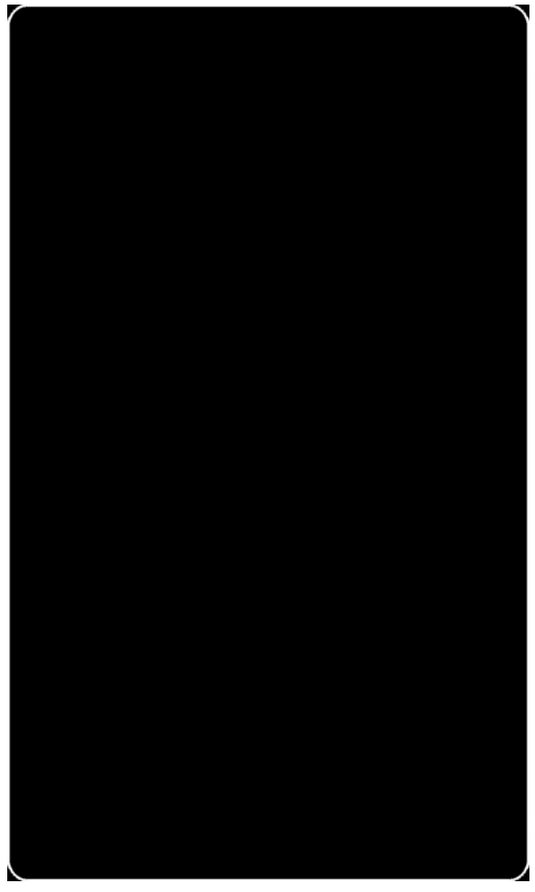

RS2269-4
Anthracite

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

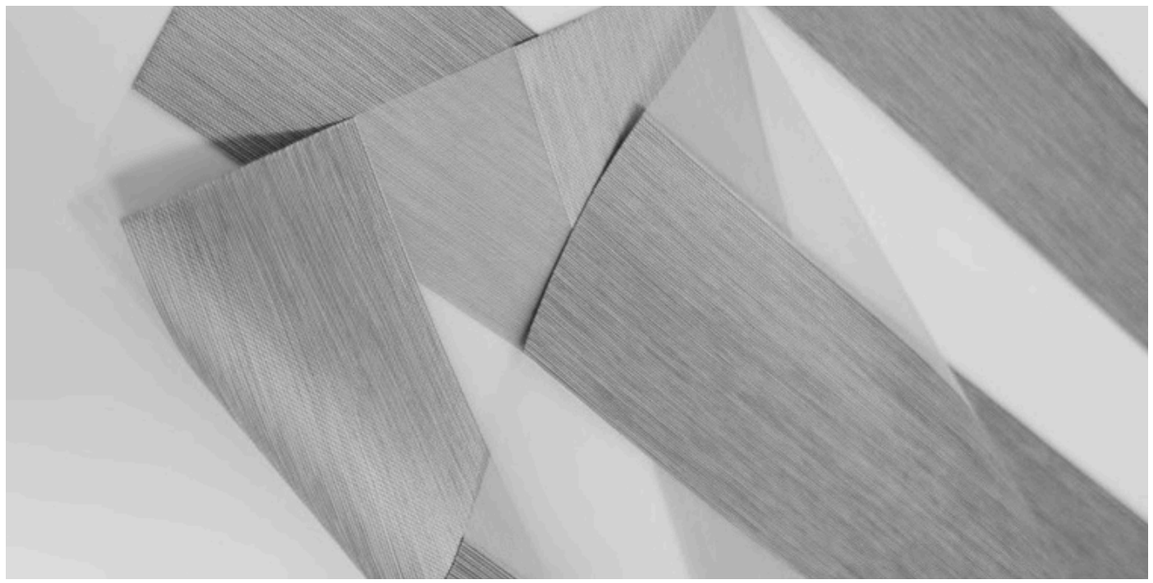

ZEBRA BLINDS

Rossoni (Blackout)

Windows Skin

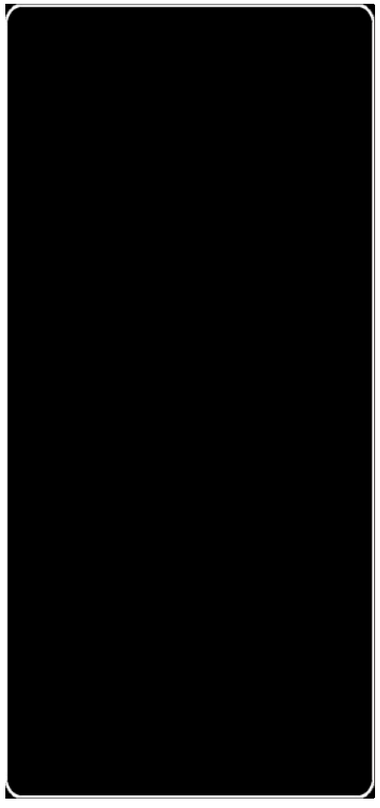

RS20288-1
Swan

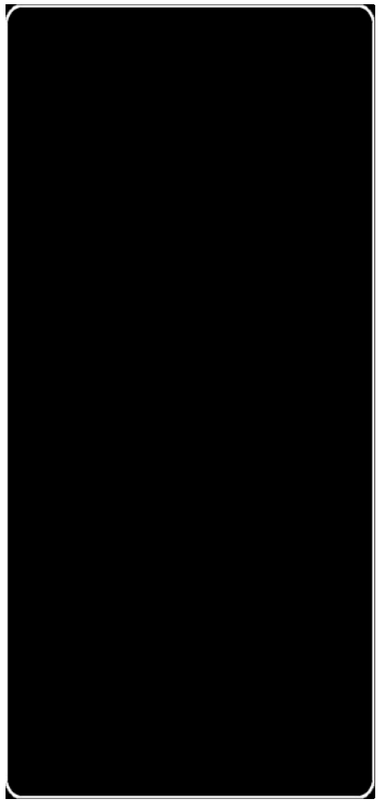

RS20288-2
Could

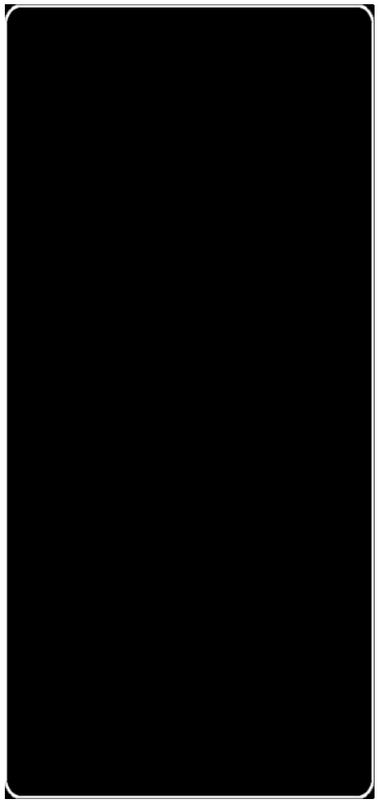

RS20288-3
Silver

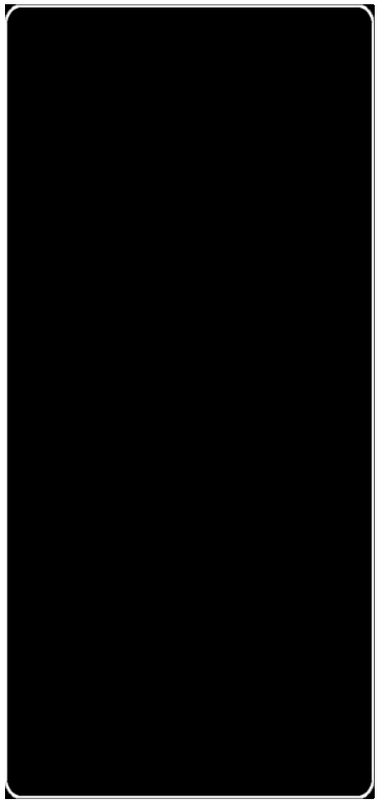

RS20288-4
Ash

RS20288-5
Seagull

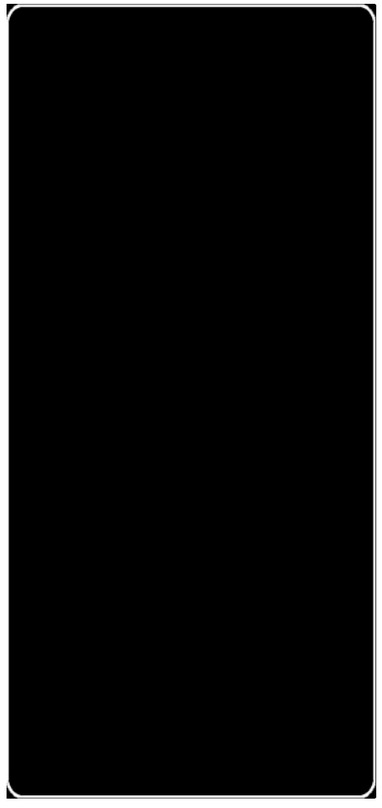

RS20288-6
Platinum

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:220±5%(g/m²)
6.5±5%(oz/yd²)

Repeat:10.0cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Rossoni (Blackout)

Windows Skin

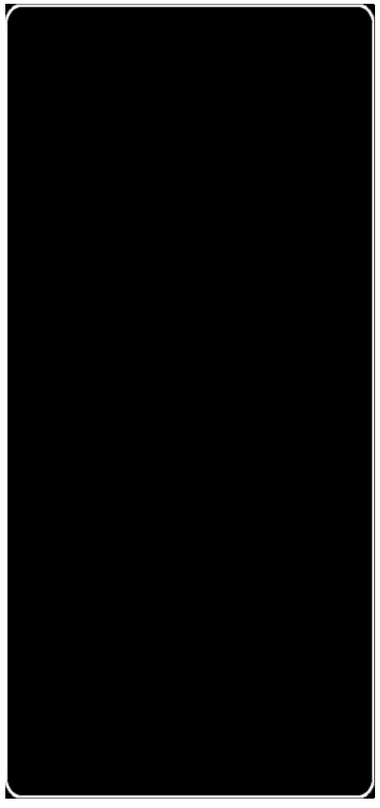

RS20288-7
Steel Gray

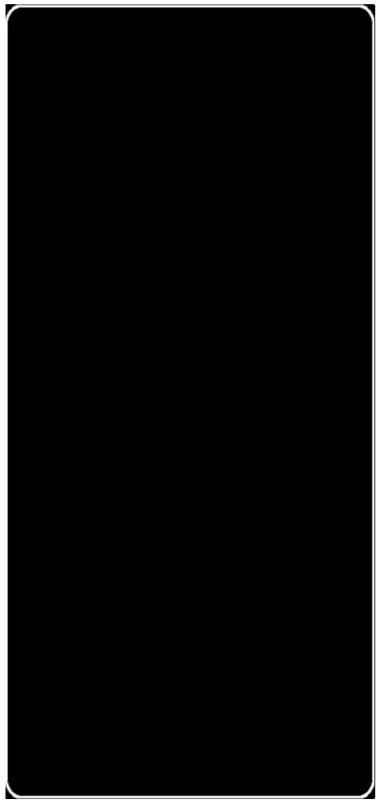

RS20288-8
Anchracite

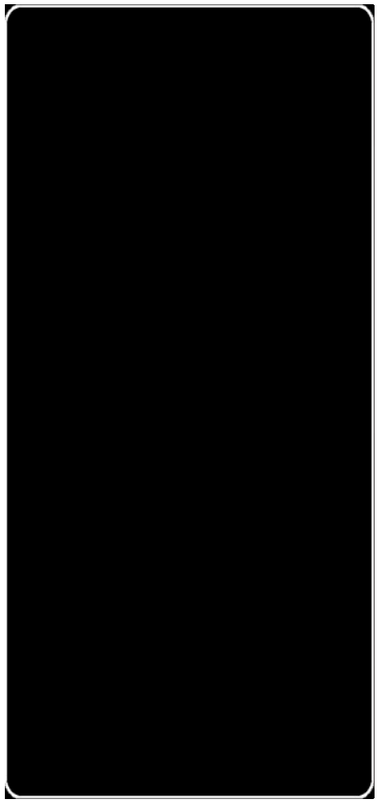

RS20288-9
Birch

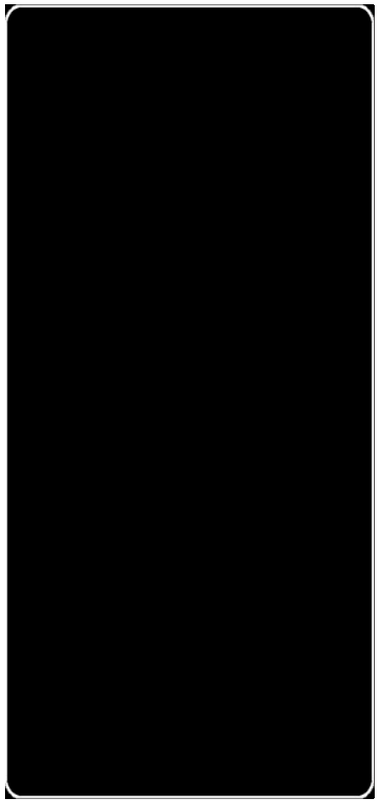

RS20288-10
Wheat

RS20288-11
Dove

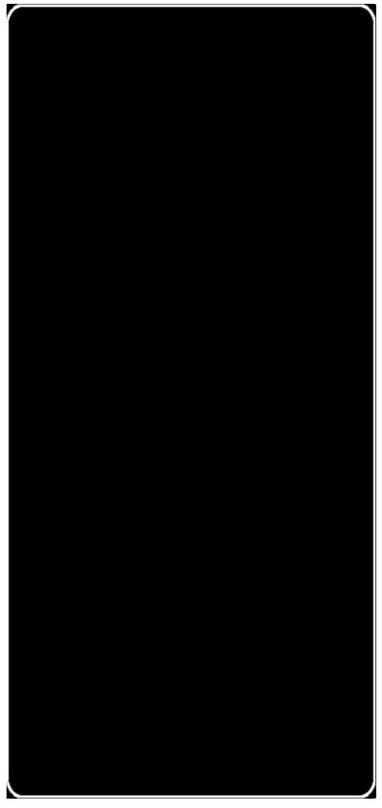

RS20288-13
Brown

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:220±5%(g/m²)
6.5±5%(oz/yd²)

Repeat:10.0cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Emilia(Blackout)

Windows Skin

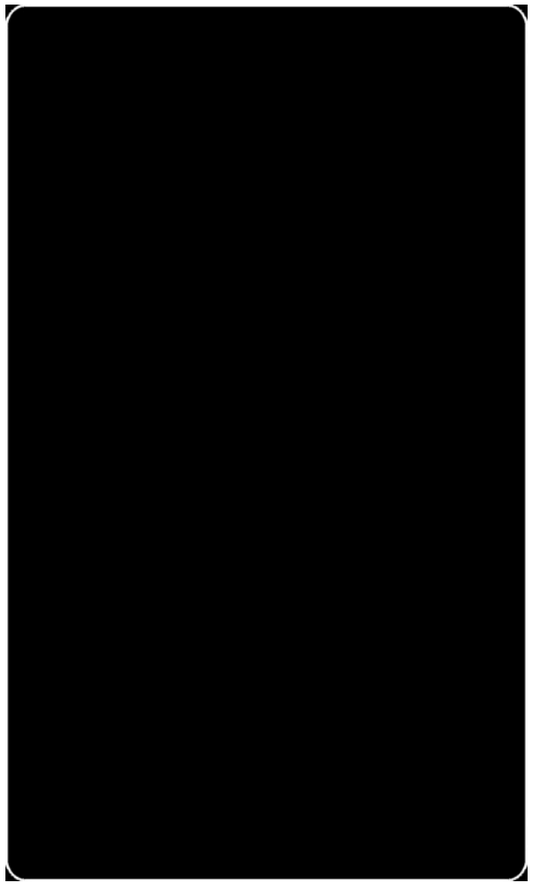

FRS2157B-1
Silver

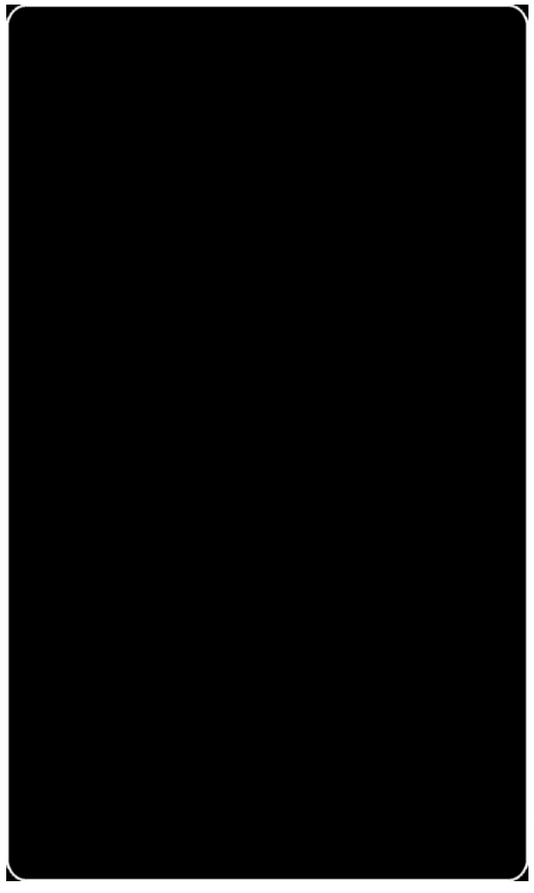

FRS2157B-4
Platinum

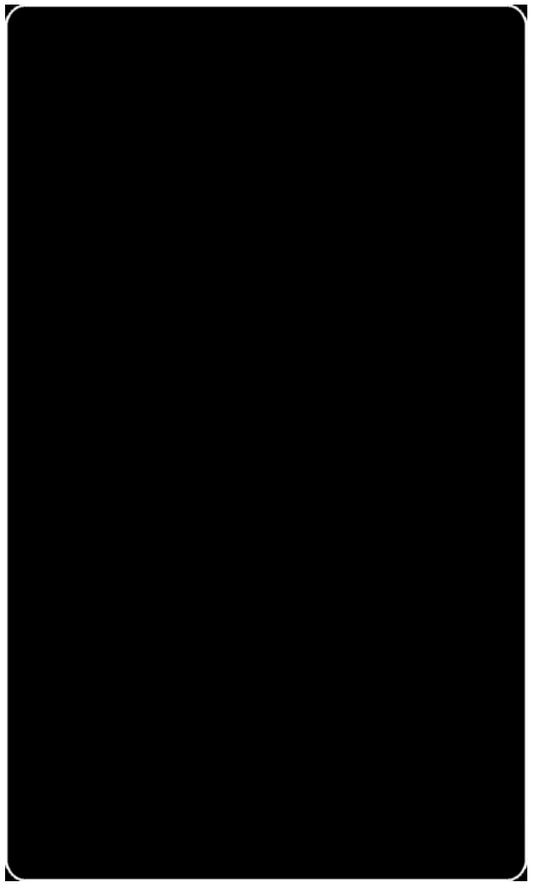

FRS2157B-5
Bronze

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:210±5%(g/m²)
6.2±5%(oz/yd²)

Repeat: 7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Chelsea(Blackout)

Windows Skin

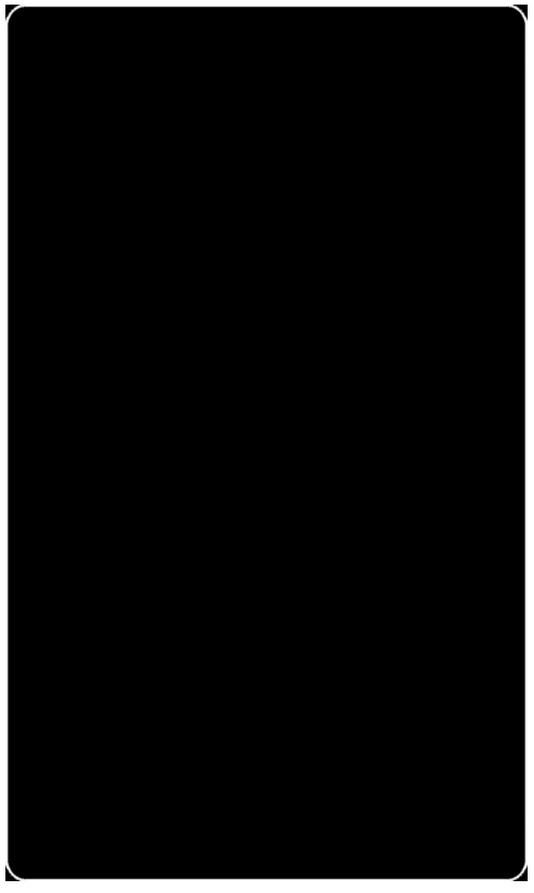

FRS2020B-4
Smoke

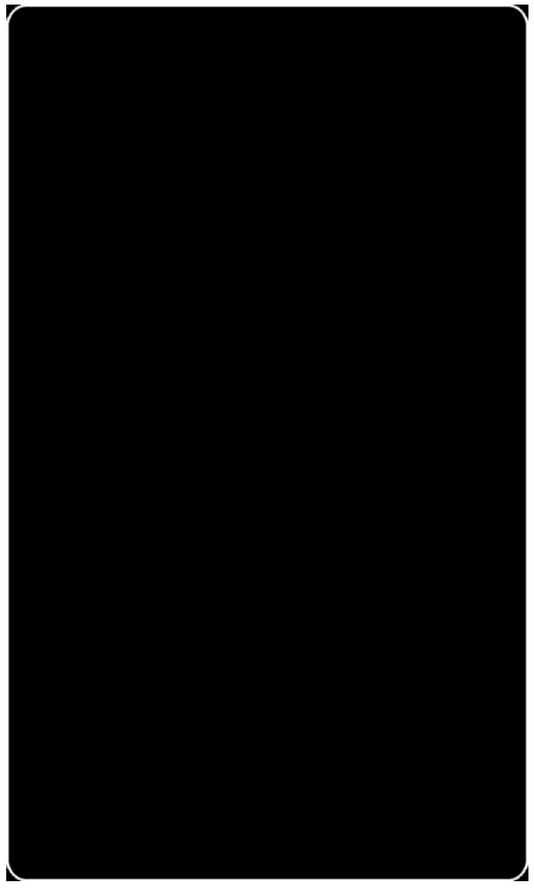

FRS2020B-5
Ash

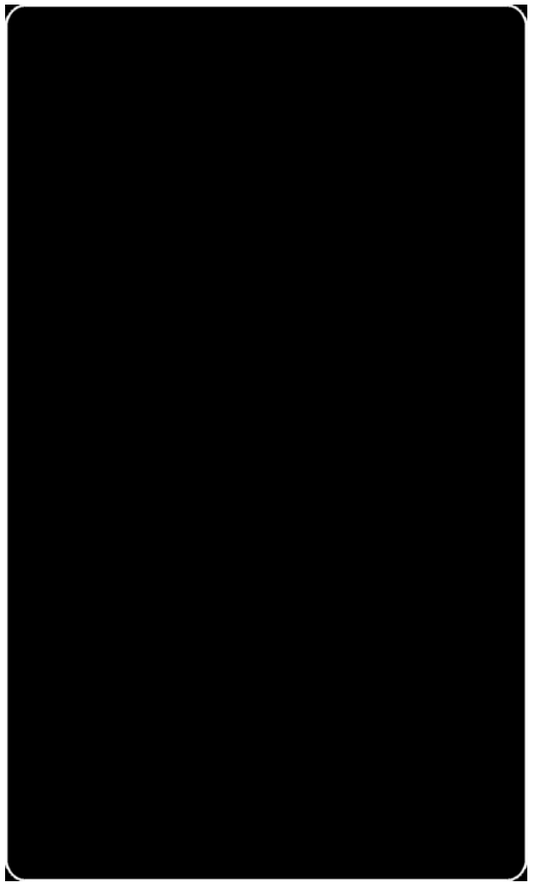

FRS2020B-6
Ra a

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat:8.5cm(Solid)x5.5cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Shimmer (Blackout)

Windows Skin

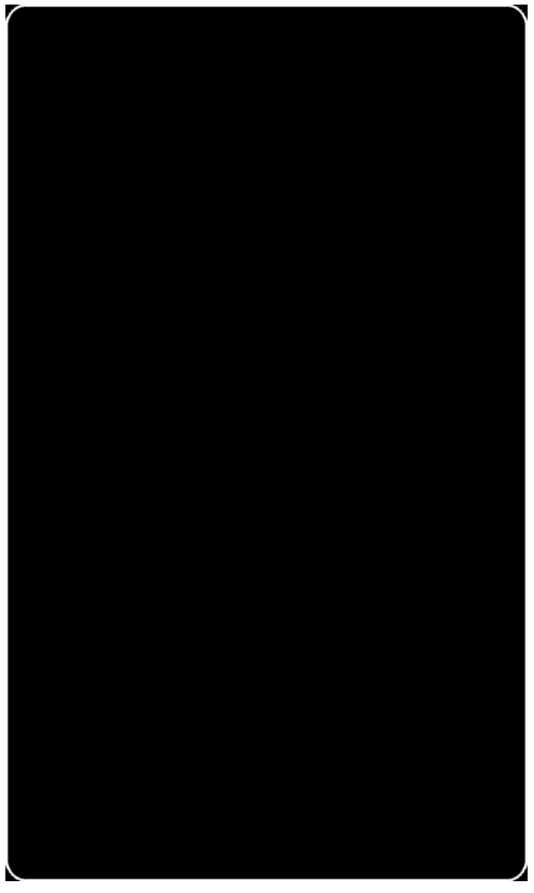

FRS20113B-1
Mist Grey

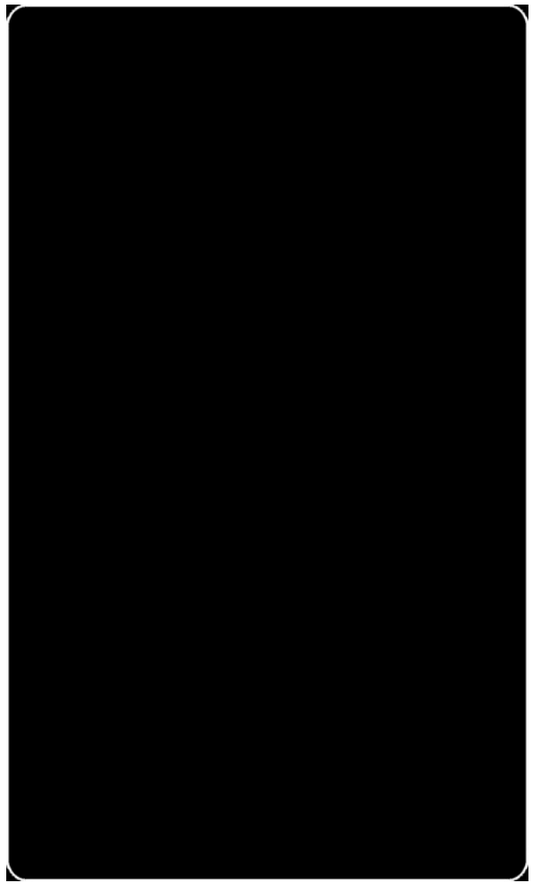

FRS20113B-2
Dese

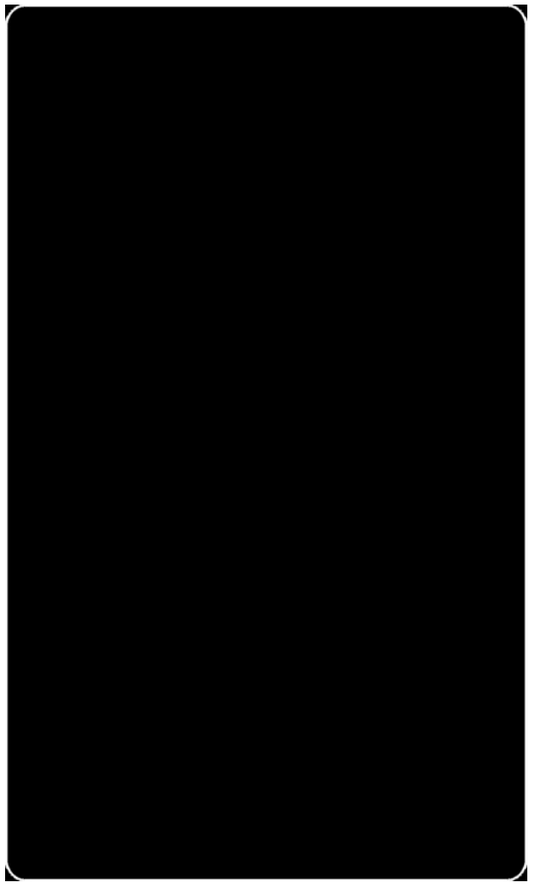

FRS20113B-7
Nimbus

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:165±5%(g/m²)
4.9±5%(oz/yd²)

Repeat:7.7cm(Solid)x5.2cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Riviera (Blackout)

Windows Skin

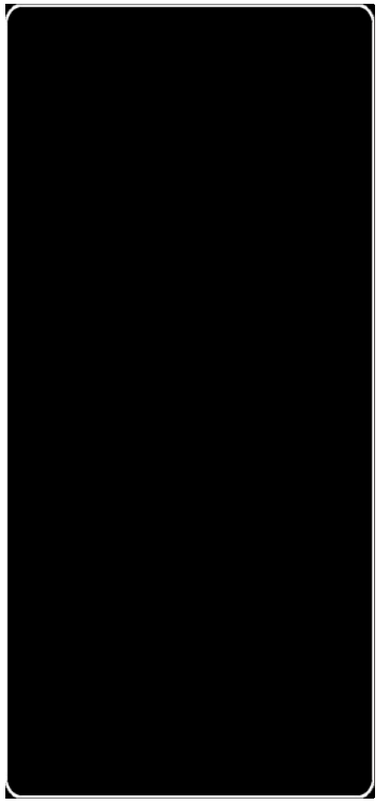

RS2242B-1
Dove

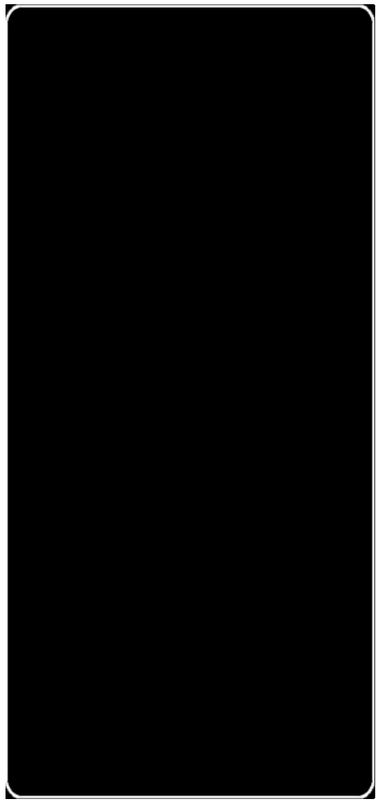

RS2242B-3
Wheat

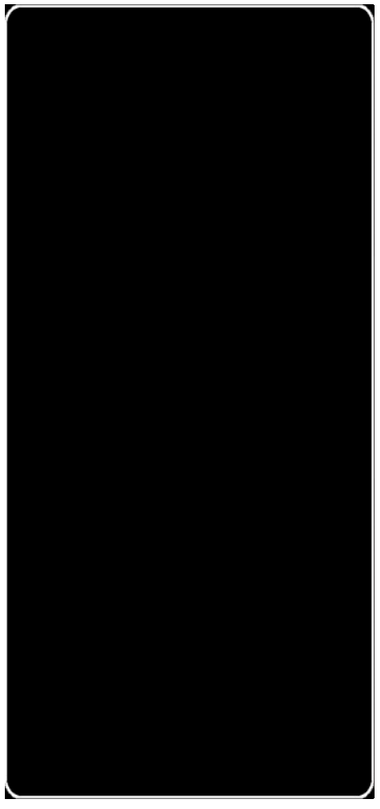

RS2242B-9
Platinum

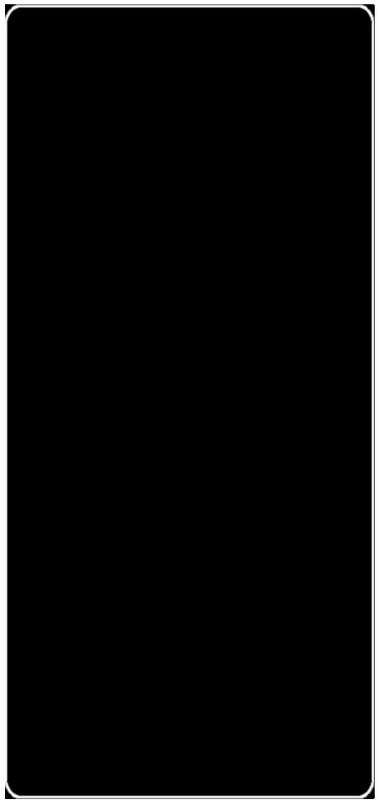

RS2242B-10
Frost Gray

RS2242B-12
Smoke

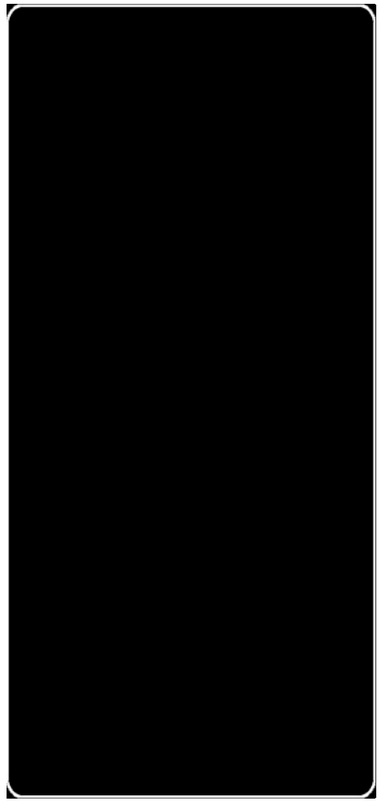

RS2242B-15
Sisal

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:170±5%(g/m²)
5.0±5%(oz/yd²)

Repeat:10.0cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Bahamas(Blackout)

Windows Skin

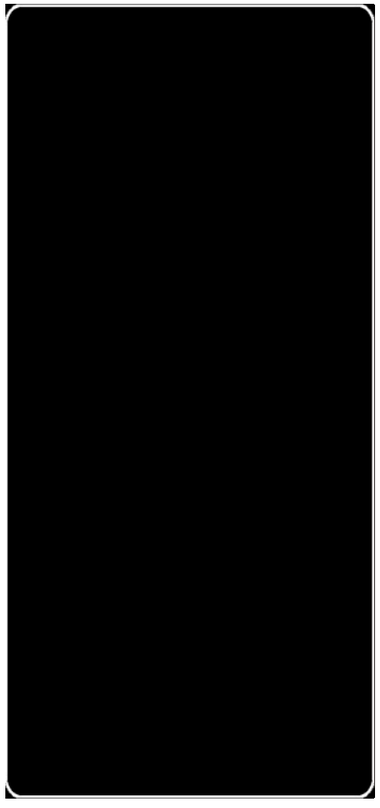

RS2241B-1
Swan

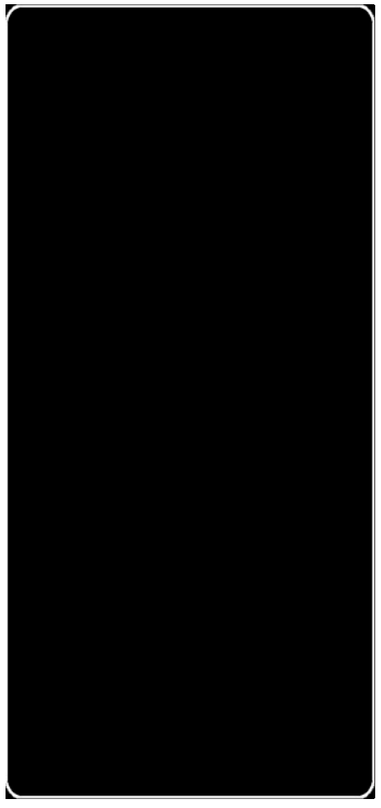

RS2241B-2
Cloud

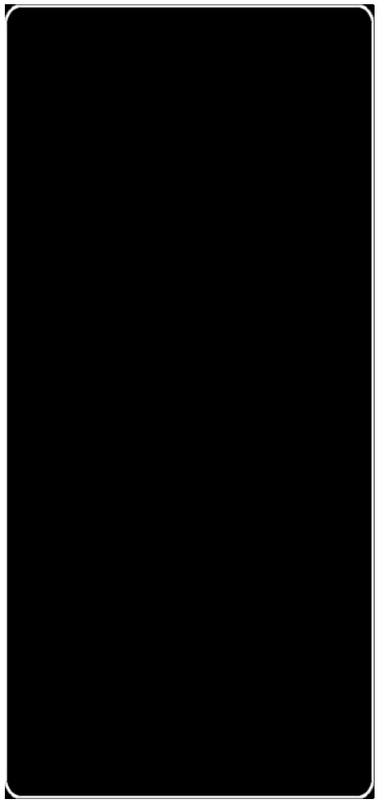

RS2241B-5
Silver

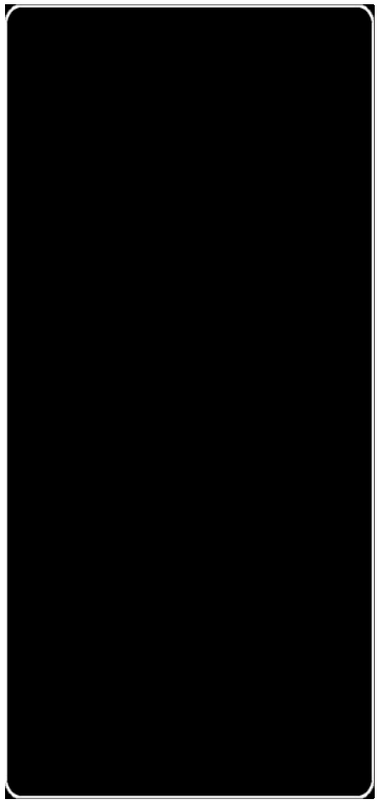

RS2241-6
Smoke

RS2241B-7
Almond

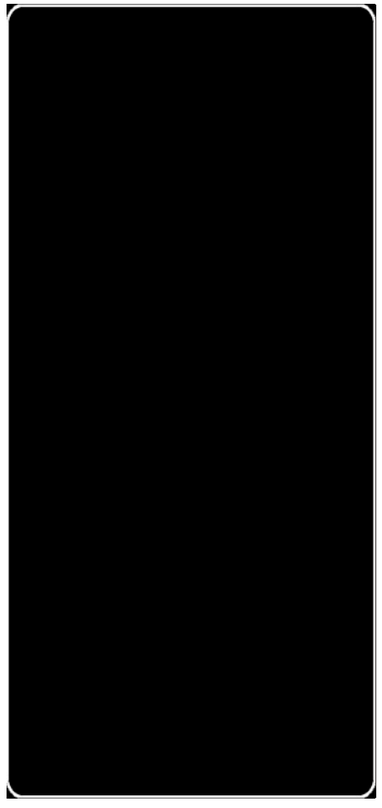

RS2241B-11
Raven

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:190±5%(g/m²)
5.6±5%(oz/yd²)

Repeat:10.0cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Hollow (Light Filtering)

Windows Skin

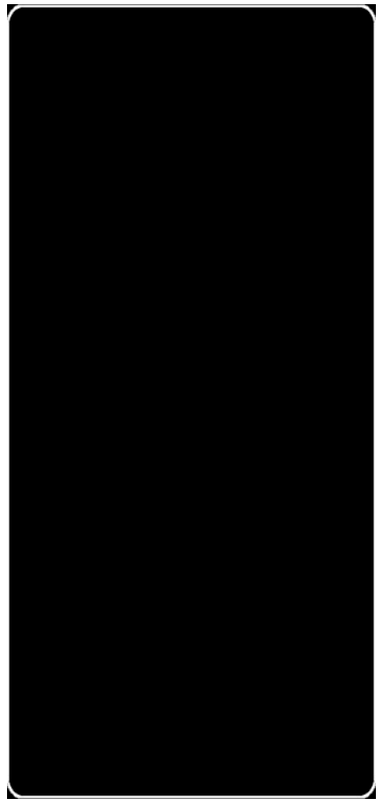

RS20212-1
Chalk

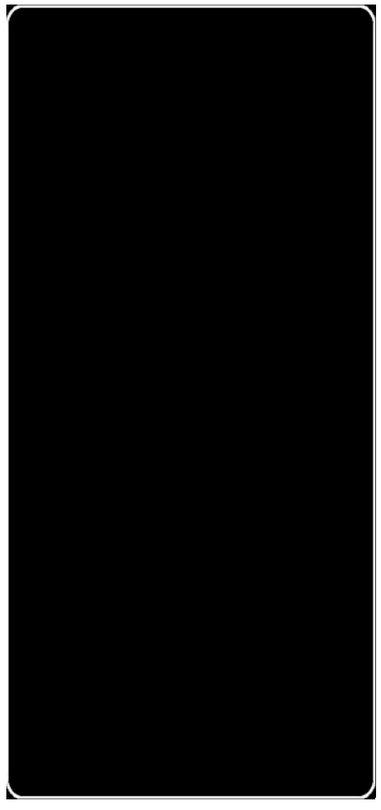

RS20212-2
Linen

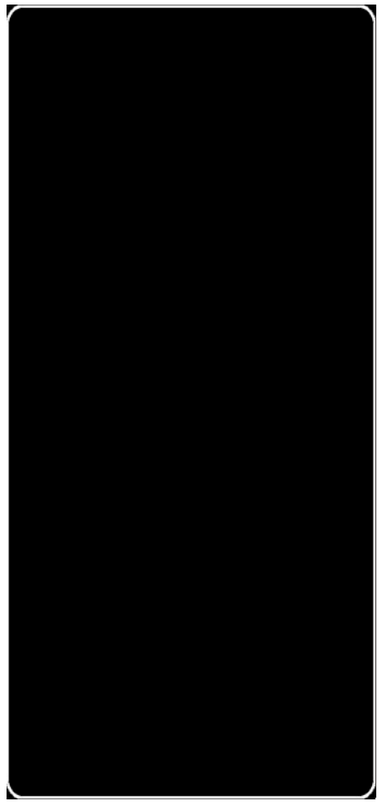

RS20212-3
Ocean

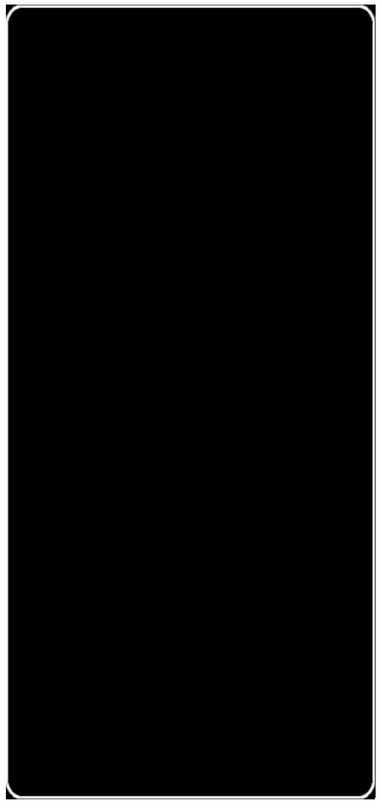

RS20212-4
Silver

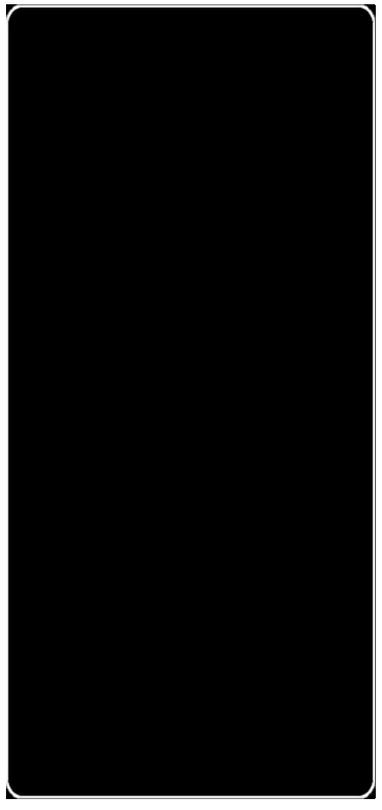

RS20212-5
Ash

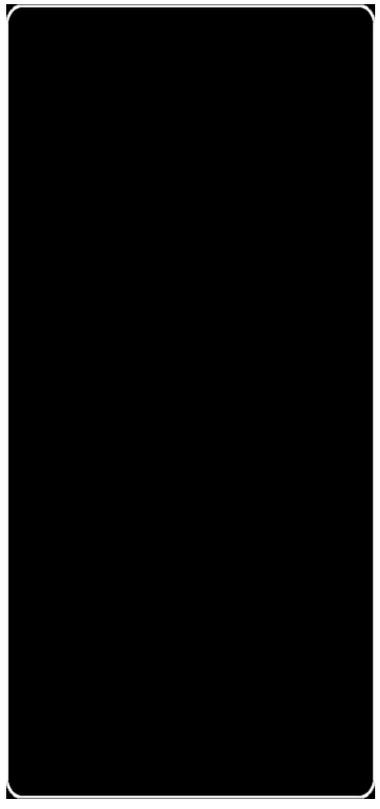

RS20212-6
Raven

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat: 9.0 cm(Solid)x 6.0 cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

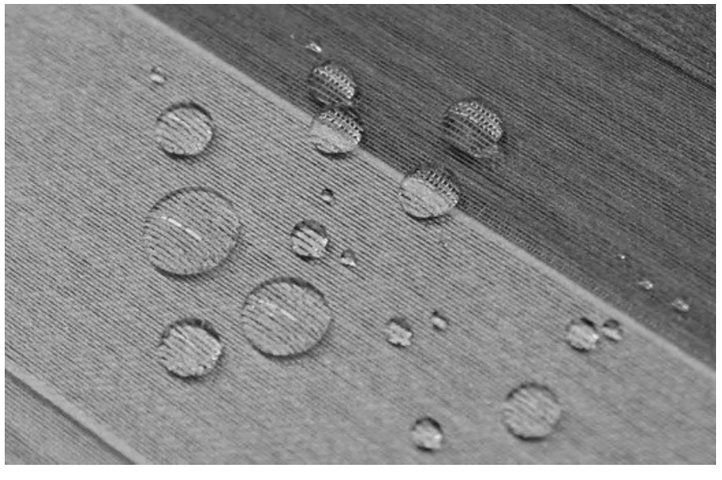

ZEBRA BLINDS

Po o no (Light Filtering)

Windows Skin

FRS2152-1
Linen

FRS2152-2
Wheat

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:125±5%(g/m²)
3.7±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Po o no (Light Filtering)

Windows Skin

FRS2155-1
Nougat

FRS2152-2
Chestnut

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:125±5%(g/m²)
3.7±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Chameleon (Blackout)

Windows Skin

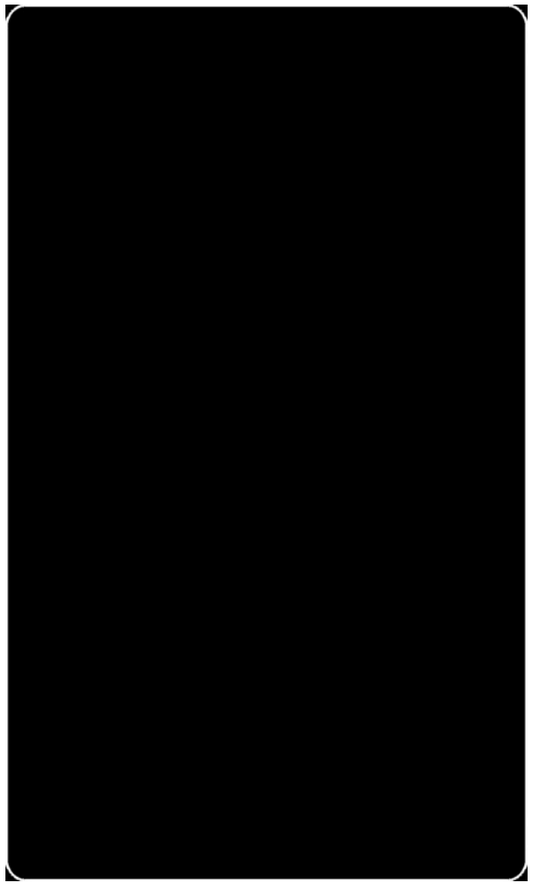

FRS1021B-1
Flax

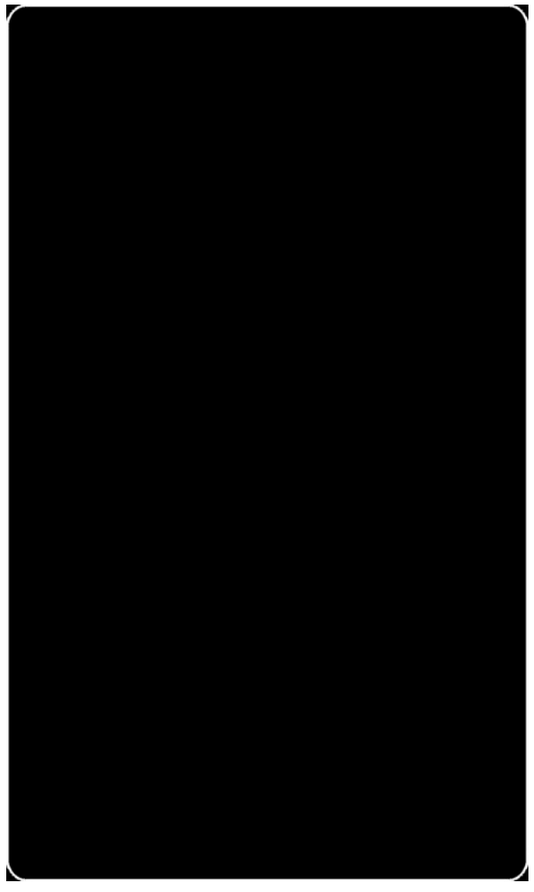

FRS1021B-3
Linen Straw

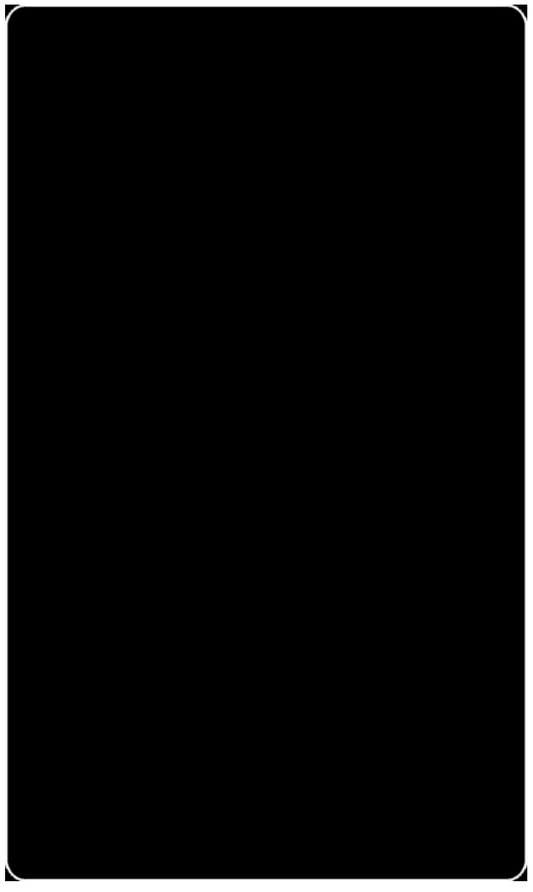

FRS1021B-4
Stella Silver

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:160±5%(g/m²)
4.7±5%(oz/yd²)

Repeat:9.7cm(Solid)x7.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ZEBRA BLINDS

Valerie (Light Filtering)

Windows Skin

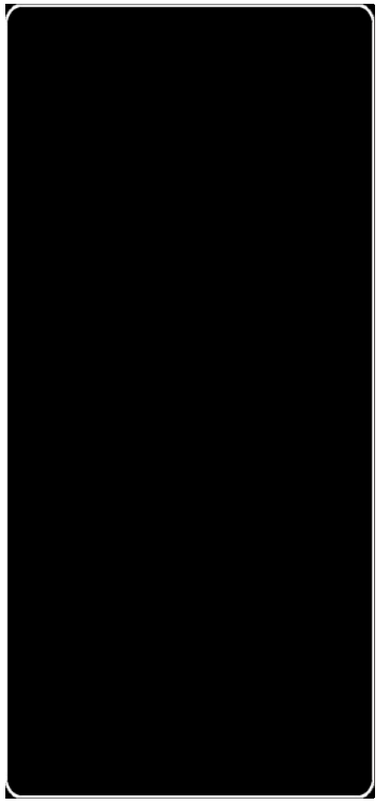

FRS1008-1
Wheat

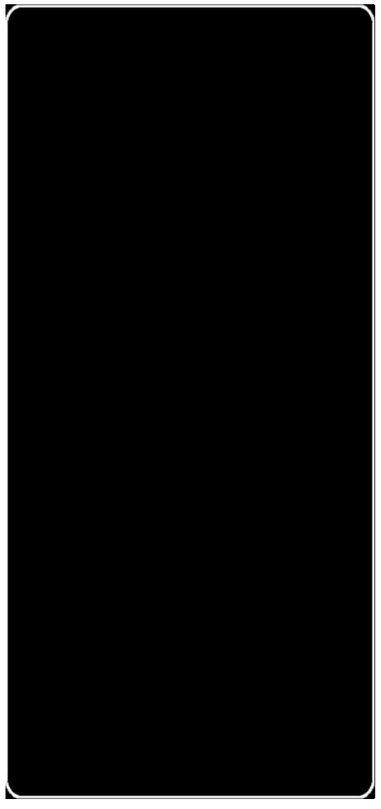

FRS1008-3
Flax

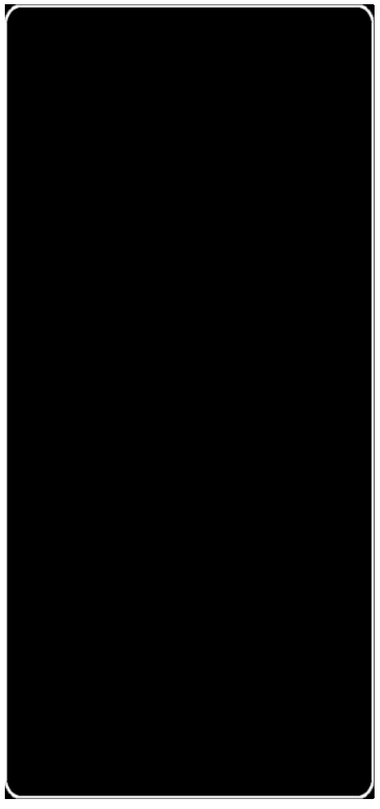

FRS1008-7
Glacier

FRS1008-8
Foggy

FRS1008-10
Silver

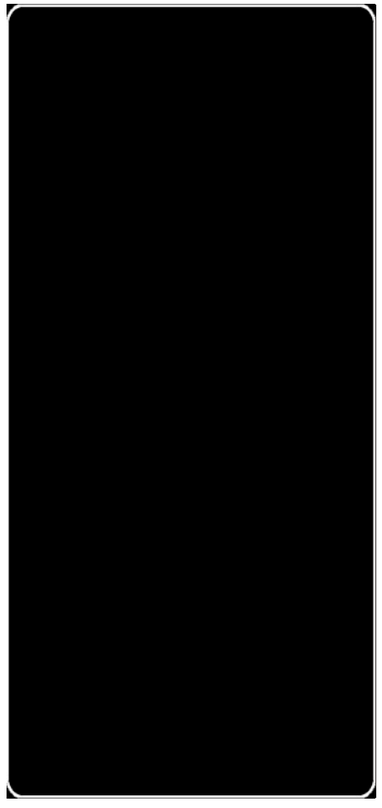

FRS1008-19
Anthracite

Composition:Polyester100%

Finished Width:300cm/118"

Weight M²:115±5%(g/m²)
3.4±5%(oz/yd²)

Repeat:7.5cm(Solid)x5.0cm(Sheer)

Light Fastness:≥6Grade (ISO 105 B02)

ROLLER & SOLAR SHADES

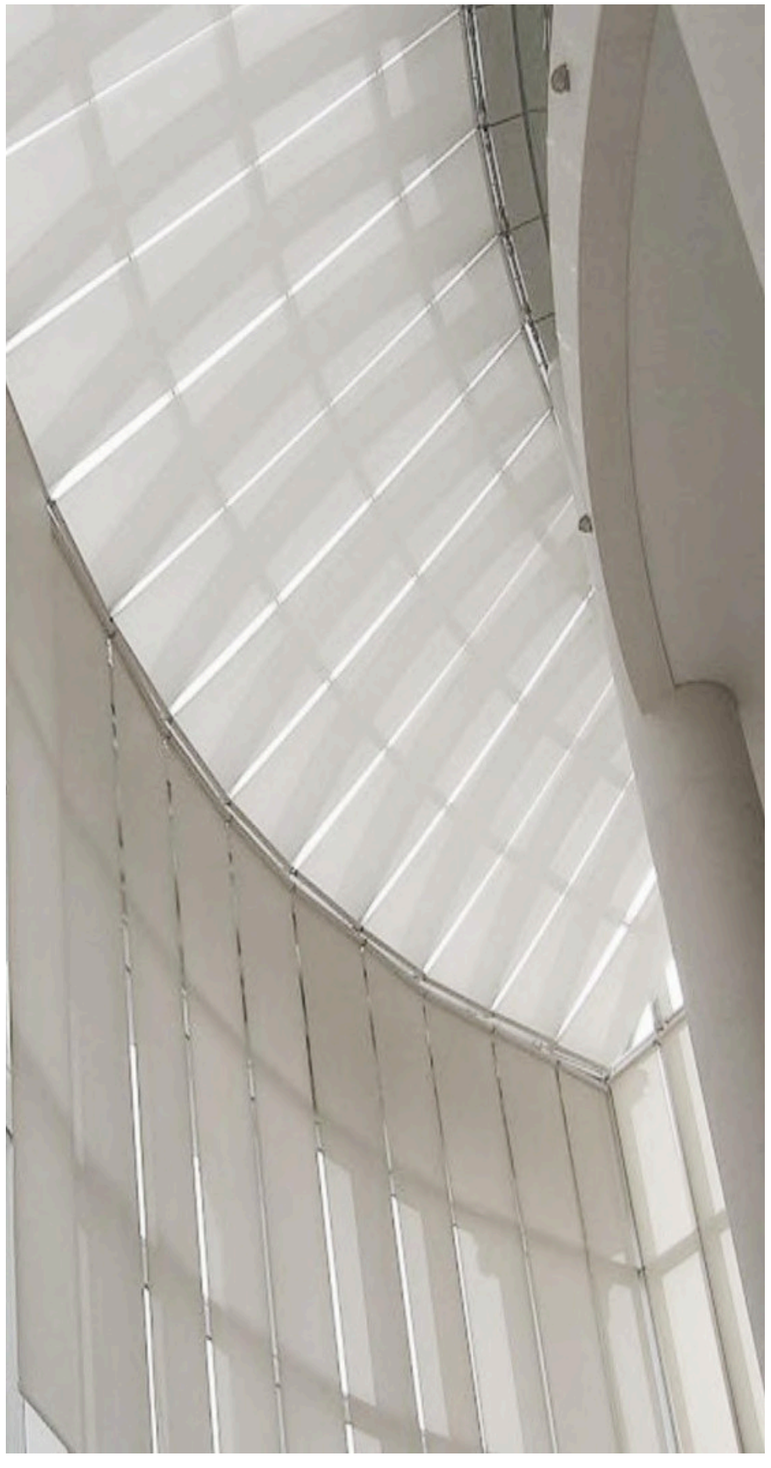

Solview S1001

S1001-01 Ice White

S1001-03 Sandstone



S1001-04 Platinum



S1001-06 Grey

S1001-07 Mocha

S1001-09 To ee



S1001-11 Onyx

Openness Factor **1%**

SERIES	S1001
COMPOSITION	POLYESTER 35% PVC 65%
WIDTH	79"/118" 200/300/CM
WIDTH FOR ICE WHITE	79"/118"/126" 200/300/320/CM
WEIGHT	13.9oz/yd² ± 5% 470g/m² ± 5%
OPENNESS FACTOR	AVERAGE 1%
YARN COUNT WARP	0.012in 0.32mm
YARN COUNTWEFT	0.012n 0.32mm
FABRIC COUNT WARP	64/inch
FABRIC COUNT WEFT	42/inch
THICKNESS	0.025in 0.65mm
TEAR RESISTANCE WARP	63N
TEAR RESISTANCE WEFT	120N
TENSILE STRENGTH WARP	1700N
TENSILE STRENGTH WEFT	1300N
COLOR FASTNESS TO LIGHT	7/8-ISO 105 B02
FLAMMABILITY	NFPA 701(USA)

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to EN 13363-1+A1:2007			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING INTERIOR G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
1%	STYLE S1001							
	S1001-01	Ice White	18	72	10	0.34	0.24	15
	S1001-03	Sandstone	13	71	16	0.34	0.24	8
	S1001-04	Platinum	8	59	33	0.37	0.25	6
	S1001-06	Grey	6	46	48	0.41	0.26	3
	S1001-07	Mocha	6	42	52	0.43	0.27	4
	S1001-09	Toffee	2	13	85	0.51	0.29	2
	S1001-11	Onyx	2	5	93	0.54	0.30	2

RECOMMENDED USE

Commercial

Residential

Schools

Indoor Use Only

Solview S1003

S1003-01 Ice White

S1003-03 Sandstone



S1003-04 Platinum

S1003-06 Grey

S1003-07 Mocha

S1003-09 To ee

S1003-11 Onyx

Openness Factor **3%**

SERIES	S1003
COMPOSITION	POLYESTER 35% PVC 65%
WIDTH	79"/118" 200/300/CM
WIDTH FOR ICE WHITE	79"/118"/126" 200/300/320/CM
WEIGHT	13.0oz/yd² ± 5% 440g/m² ± 5%
OPENNESS FACTOR	AVERAGE 3%
YARN COUNT WARP	0.012in 0.32mm
YARN COUNTWEFT	0.012n 0.32mm
FABRIC COUNT WARP	54/inch
FABRIC COUNT WEFT	46/inch
THICKNESS	0.025in 0.65mm
TEAR RESISTANCE WARP	70N
TEAR RESISTANCE WEFT	94N
TENSILE STRENGTH WARP	1600N
TENSILE STRENGTH WEFT	1500N
COLOR FASTNESS TO LIGHT	7/8-ISO 105 B02
FLAMMABILITY	NFPA 701(USA)

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to **EN 13363-1+A1:2007**			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING INTERIOR G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
3%	STYLE S1003							
	S1003-01	Ice White	18	67	15	0.35	0.25	15
	S1003-03	Sandstone	14	66	20	0.35	0.25	12
	S1003-04	Platinum	13	50	37	0.40	0.26	10
	S1003-06	Grey	9	42	49	0.43	0.27	7
	S1003-07	Mocha	10	34	56	0.45	0.27	8
	S1003-09	Toffee	6	16	78	0.51	0.29	6
	S1003-11	Onyx	6	5	89	0.54	0.30	6

RECOMMENDED USE

Commercial

Residential

Schools

Indoor Use Only

Solview S1005

S1005-01 Ice White



S1005-03 Sandstone



S1005-04 Platinum

S1005-06 Grey

S1005-07 Mocha

S1005-09 To ee

S1005-11 Onyx

Openness Factor **5%**

SERIES	S1005
COMPOSITION	POLYESTER 35% PVC 65%
WIDTH	79"/118" 200/300/CM
WIDTH FOR ICE WHITE	79"/118"/126" 200/300/320/CM
WEIGHT	12.4oz/yd² ± 5% 420g/m² ± 5%
OPENNESS FACTOR	AVERAGE 5%
YARN COUNT WARP	0.012in 0.32mm
YARN COUNTWEFT	0.012n 0.32mm
FABRIC COUNT WARP	48/inch
FABRIC COUNT WEFT	46/inch
THICKNESS	0.025in 0.65mm
TEAR RESISTANCE WARP	89N
TEAR RESISTANCE WEFT	88N
TENSILE STRENGTH WARP	1500N
TENSILE STRENGTH WEFT	1400N
COLOR FASTNESS TO LIGHT	7/8-ISO 105 B02
FLAMMABILITY	NFPA 701(USA)

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to **EN 13363-1+A1:2007**			SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
			FABRIC			FABRIC + GLAZING INTERIOR G-factor = total solar energy transmittance		
OF	Color Code		Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
5%	STYLE S1005							
	S1005-01	Ice White	27	68	5	0.35	0.25	23
	S1005-03	Sandstone	21	61	18	0.37	0.25	16
	S1005-04	Platinum	14	47	39	0.41	0.27	12
	S1005-06	Grey	12	42	46	0.43	0.27	10
	S1005-07	Mocha	12	33	55	0.45	0.28	10
	S1005-09	Toffee	10	18	72	0.50	0.29	9
	S1005-11	Onyx	10	5	85	0.54	0.30	9

RECOMMENDED USE

Commercial

Residential

Schools

Indoor Use Only

Solview YG3009

99% Blackout

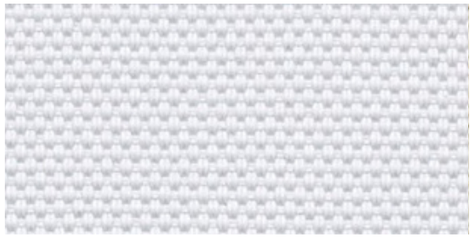

White
YG3009-2235-01

Birch
YG3009-2235-02

Platinum
YG3009-2235-03

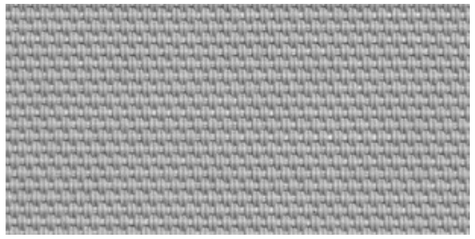

Cadet Grey
YG3009-03

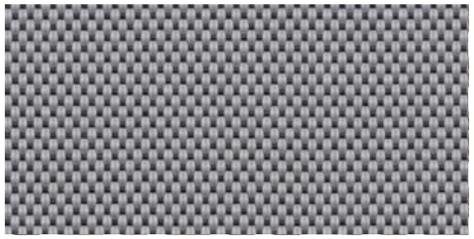

Smoke
YG3009-04

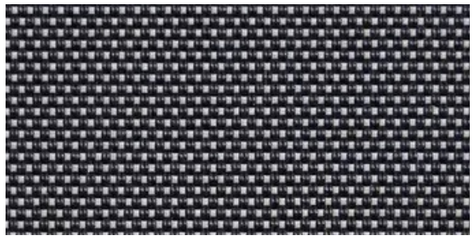

Charcoal
YG3009-5

Walnut
YG3009-06

Onyx
YG3009-7



Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to **EN 13363-1+A1:2007**		SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
		FABRIC			FABRIC + GLAZING INTERIOR G-factor = total solar energy transmittance		
OF	Color Code	Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
	STYLE YG3009						
		0	69	31	0.34		0.2
	YG3009-2235-02 Birch	4		0	63	37	0.3
		6		0.25		00	5
	YG3009-03 Cadet Grey	8	42		0.37		0.2
		5		0	27	73	0.4
	YG3009-05 Charcoal	7		0.28		0	2
		3	77		0.48		0.2
	YG3009-07 Onyx	8		0	10	90	0.5
		3		0.30		0	
		0	5	95		0.54	0.3
		0	6	9		0.54	
		0		0			

RECOMMENDED USE

Commercial

Residential

Schools

Indoor Use Only

Solview SL005/S5005

Openness Factor 5%

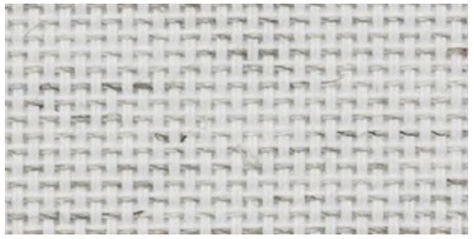

Parchment
SL005-01

Flax
SL005-02

Wheat
SL005-03

Pebble
SL005-04

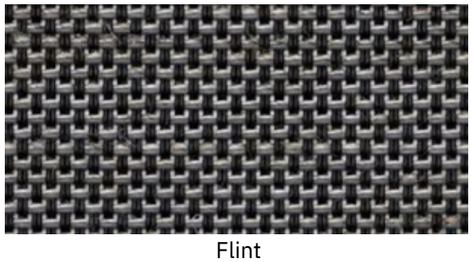

Flint
SL005-05

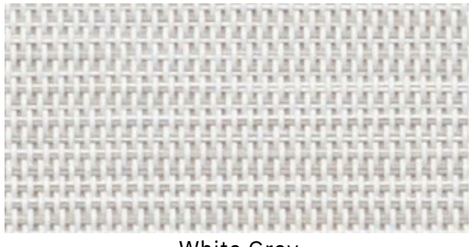

White Grey
S5005-01

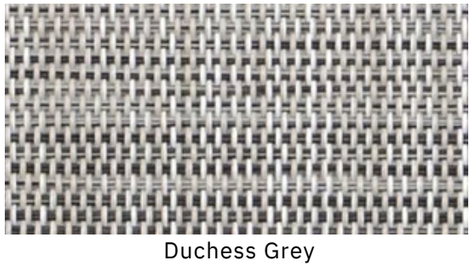

Duchess Grey
S5005-02

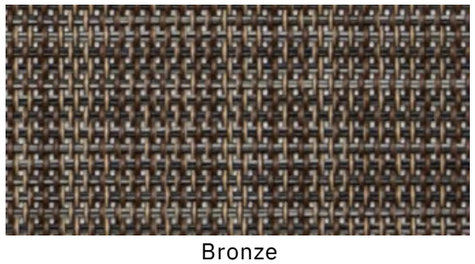

Bronze
S5005-03



APPLICATIONS:

Roller

Panels

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to **EN 13363-1+A1:2007**		SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
		FABRIC			FABRIC + GLAZING		
					INTERIOR		
					G-factor = total solar energy transmittance		
OF	Color Code	Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
	STYLE SL005						
		28	57	15	0.39		0.2
	SL005-2 Falx	6		24	22	61	17	0.3
		7			0.25		17	24	5
	SL005-4 Pebble	5	21			0.39			0.2
		6		20	15	49	36	0.4
	STYLE S5005	1			0.26		13	11	1
		4	75			0.51			0.2
	S5005-2 Duchess Grey	9		10	15	55	30		0.2
		9			0.26		13	12	2
		8	60			0.47			0.2
		3		11	10	9	81		0.5
		3			0.30			10	

RECOMMENDED USE

Commercial

Residential

Schools

Hospitality

Indoor Use Only

Solview S1005B


Laminated

Ice White
S1005B-01

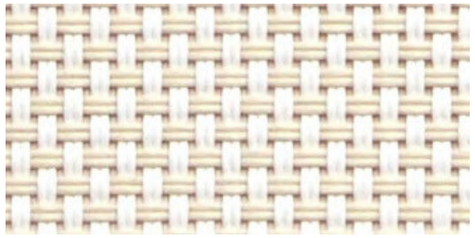
Sandstone
S1005B-03

Silver
S1005B-05

Grey
S1005B-06

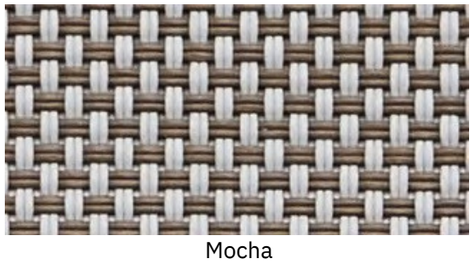
Mocha
S1005B-07

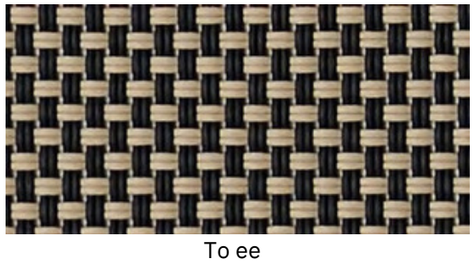
To ee
S1005B-09

Chocolate
S1005B-10

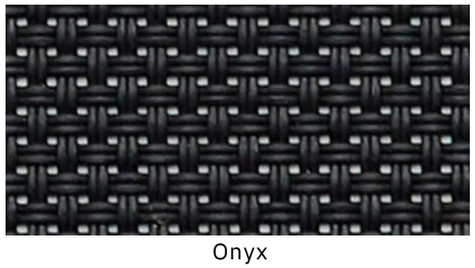
Onyx
S1005B-11

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

APPLICATIONS:

Roller

Panels

Solar energetic properties

Ulterio European Standard EN 14501 Calculation G-value according to **EN 13363-1+A1:2007**		SOLAR ENERGETIC PROPERTIES					VISUAL PROPERTIES
		FABRIC			FABRIC + GLAZING INTERIOR G-factor = total solar energy transmittance		
OF	Color Code	Ts	Rs	As	C:Gv= 0.59 U = 1.2 W/m²K	D :Gv= 0.32 U = 1.1 W/m²K	TV
	STYLE S1005B						
		0	73	27	0.33		0.2
	S1005B-03 Sandstone	4		0	70	30	0.3
		4		0.24		00	7
	S1005B-06 Grey	2	28		0.33		0.2
		4	0	0	73	27	0.3
	S1005B-09 Toffee	3		0.24		0	7
	S1005B-10 Chocolate	3	27		0.33		0.2
	S1005B-11 Onyx	4	0	0	74	26	0.3
		3		0.24		0	
		0	74	26	0.32		0.2
		4		0			
		0	75		.32		
		4		0			

RECOMMENDED USE

Commercial

Residential

Schools

Indoor Use Only

Muralla Blackout

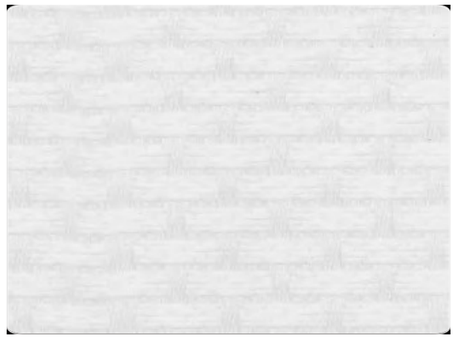

JL15701B
White

JL15702B
Ivo

JL15704B
Light Beige

JL15706B
Grey

JL15710B
Khaki

JL15709B
Black

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
460±5%(g/m²)
13.6±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Dichroic Blackout

JL2112B-1
White

JL2112B-3
Pewter

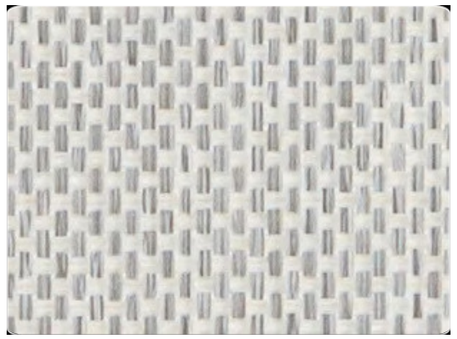

JL2112B-4
Nimbus

JL2112B-5
Flax

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
400±5%(g/m²)
11.8±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Ansari Blackout

JL6W1
White

JL6W2
Beige

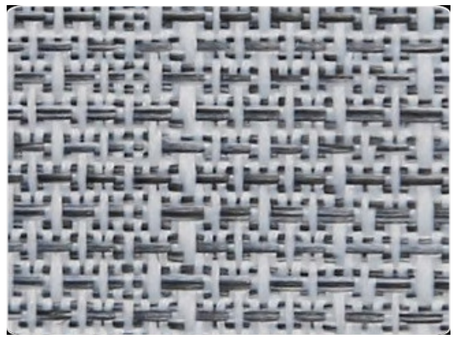

JL6W3
Fog Grey

JL6W4
Stone Grey

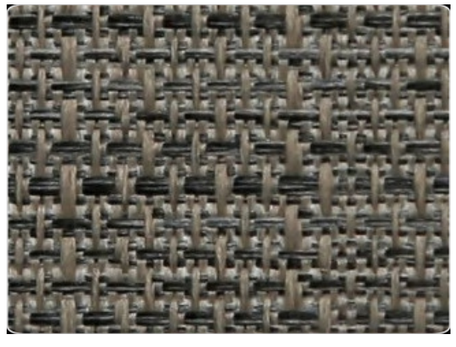

JL6W6
Ea h Brown

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
410±5%(g/m²)
12.1±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Paddington Blackout

Laminated

JL1151
Plaster

JL1153
Flax

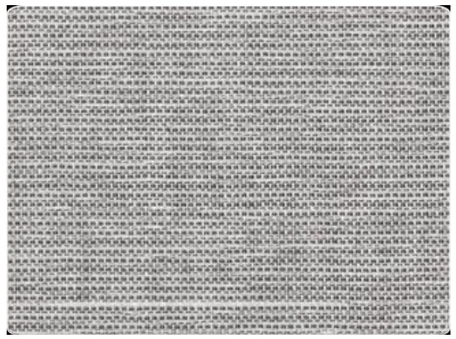

JL1155
Pebble

JL1156
Shadow

Composition
100%Polyester

Finished Width
(Ancho)
200cm/280cm
79"/110"

Weight
(Peso)
355±5%(g/m²)
10.5±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller



Panels

Granville Blackout

Laminated

JL1591
Glacier

JL1592
Cotton

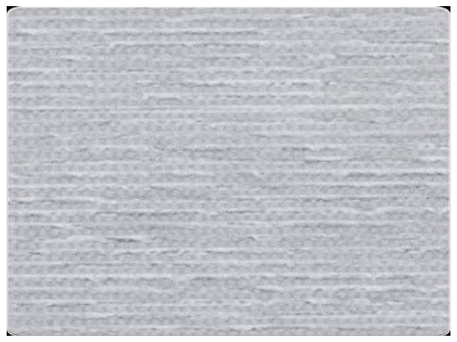

JL1593
Platinum

JL1594
Ash

JL1595
Raven

JL1596
Flax

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
300±5%(g/m^2)
8.8±5%(oz/yd^2)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Medlin Blackout

FR

JL8801
Foggy White

JL8802
Sweet Corn

JL8804
Ea h

JL8807
Gray Violet

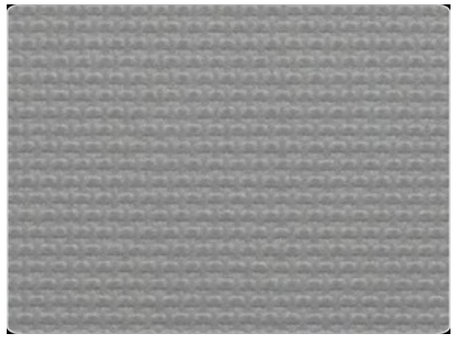

JL8811
Cement

JL8813
Charcoal

Composition
60%PVC+
40%Fiberglass

Finished Width
(Ancho)
183/200/250/300cm
72"/79"/98"/118"

Weight
(Peso)
430±5%(g/m²)
12.7±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Summerland Light Filtering

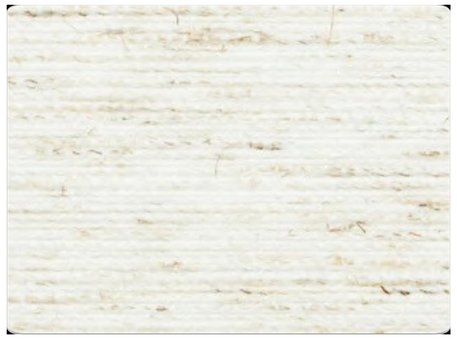

JL1561
Flax

JL1562
Sand

JL1563
Echo Dune

JL1564
Blend Nomad

JL1565
Stone Grey

Composition
95%Polyester+
5% Linen

Finished Width (Ancho)
300/118"

Weight (Peso)
230±5%(g/m²)
6.8±5%(oz/yd²)

Light Fastness (Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density (Densidad)
98%

Weft Deviation (Desviación de trama)
≤1%

Environment (Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Lino Light Filtering

JL1702

Sand

JL1703

Falx

Composition

100%Polyester

Finished Width (Ancho)

1702: 215/280cm (85"/110")

1703: 200/280cm (79"/110")

Weight (Peso)

190±5%(g/m^2)

5.6±5%(oz/yd^2)

Light Fastness (Solidez a la luz)

≥6Grade

(ISO 105 B02)

Average Density (Densidad)

98%

Weft Deviation (Desviación de trama)

≤1%

Environment (Medio ambiente)

GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Summerland Blackout

JL1561B
Flax

JL1562B
Sand

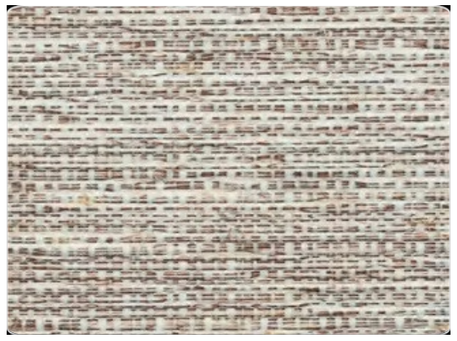

JL1563B
Echo Dune

JL1564B
Blend Nomad

JL1565B
Stone Grey

Composition
95%Polyester+
5% Linen

Finished Width
(Ancho)
300/118"

Weight
(Peso)
470±5%(g/m²)
13.9±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Allegro Light Filtering

JL2502
Cream

JL2503
Khaki

JL2511
Brown

Composition
95%Polyester+
5% Linen

Finished Width (Ancho)
200/300cm
79"/118"

Weight (Peso)
260±5%(g/m^2)
7.7±5%(oz/yd^2)

Light Fastness (Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density (Densidad)
95%

Weft Deviation (Desviación de trama)
≤1%

Environment (Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Allegro Blackout

JL15302B
Cream

JL15303B
Khaki

JL15311B
Brown

Composition
95%Polyester+
5% Linen

Finished Width
(Ancho)
200/300cm
79"/118"

Weight
(Peso)
470±5%(g/m²)
13.9±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Estuco Blackout

JL2111B-1
Swan

JL2111B-6
Flax

JL2111B-7
Ash

Composition
100%Polyester

Finished Width
(Ancho)
220/300cm
87"/118"

Weight
(Peso)
410±5%(g/m²)
12.1±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Sydney Blackout

JL7701B
Chalk

JL770LB
Lime stone

JL7706B
Anthracite

JL7712B
Black

Composition
100%Polyester

Finished Width (Ancho)
220/300cm
87"/118"

Weight (Peso)
370±5%(g/m²)
10.9±5%(oz/yd²)

Light Fastness (Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate (Opacidad)
100%

Weft Deviation (Desviación de trama)
≤1%

Environment (Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Maderia Light Filtering

JL1521
Flax

JL1522
Mint

JL1523
Dune

JL1524
Chocolate

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
215±5%(g/m²)
6.3±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density
(Densidad)
98%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Capetown Light Filtering

JL1490
Ice White

JL1491
Star White

JL1492
Silver Birch

JL1493
Moonstruck

JL1494
December Sky

JL1495
Camel

JL1496
Pewter

JL1497
Black Oyster

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
225±5%(g/m^2)
6.6±5%(oz/yd^2)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density
(Densidad)
98%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Capetown Blackout

JL1491B
Star White

JL1492B
Silver Birch

JL1493B
Moonstruck

JL1494B
December Sky

JL1495B
Camel

JL1496B
Pewter

JL1497B
Black Oyster

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
440±5%(g/m²)
13.0±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Cambria Light Filtering

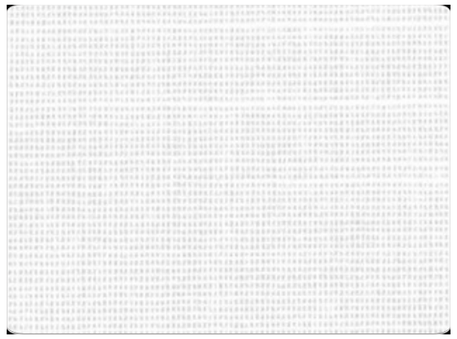

JL29601
Cotton

JL2960
4
Oatmeal

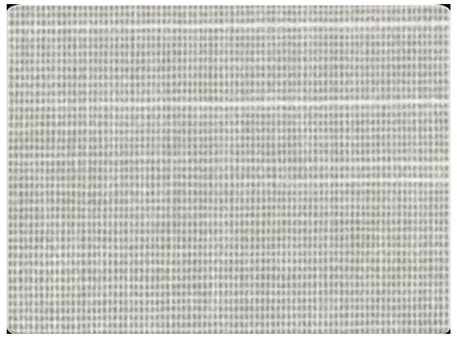

JL29613
Khaki

JL29615
Steel

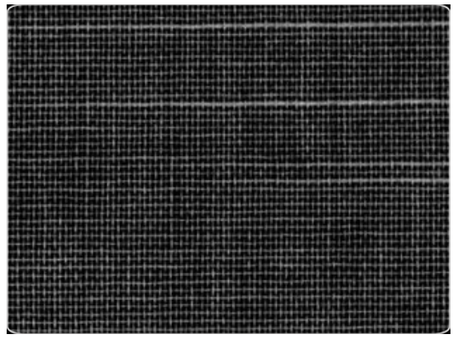

JL29616
Coal

Composition
100%Polyester

Finished Width
(Ancho)
280cm/110.2"

Weight
(Peso)
170±5%(g/m^2)
5.0±5%(oz/yd^2)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density
(Densidad)
99%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Cambria Blackout

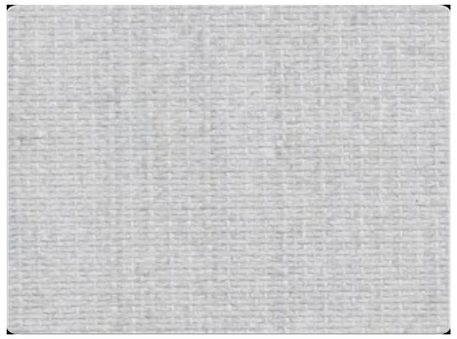

JL29704B
Oatmeal

JL29713B
Khaki

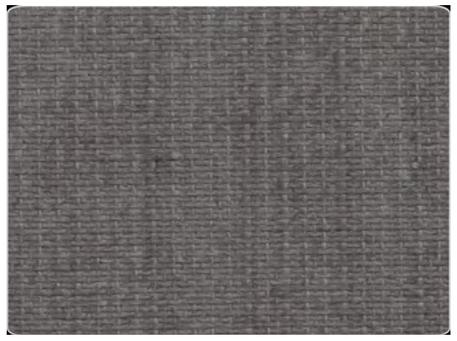

JL29715B
Steel

JL29716B
Coal

Composition
100%Polyester

Finished Width
(Ancho)
280cm/110.2"

Weight
(Peso)
360±5%(g/m²)
13.6±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Baltimore Light Filtering

JL13701
Porcelain

JL13702
Cream

JL13703
Platinum

JL13704
Birch

JL13705
Putty

JL13706
Pebble

JL13707
Copper

JL13708
Anthracite

JL13709
Bronze

JL13710
Flint

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
210±5%(g/m^2)
6.2±5%(oz/yd^2)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density
(Densidad)
95%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Baltimore Blackout

JL13701B
Porcelain

JL13702B
Cream

JL13703B
Platinum

JL13704B
Birch

JL13705B
Putty

JL13706B
Pebble

JL13707B
Copper

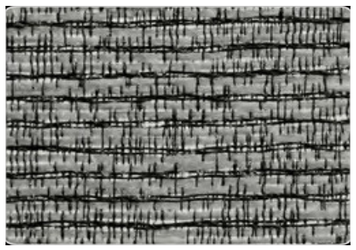

JL13708B
Anthracite

JL13709B
Bronze

JL13710B
Flint

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
530±5%(g/m^2)
15.6±5%(oz/yd^2)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding.
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Bermuda Light Filtering

JL14700
Snow

JL14701
Stella

JL14703
Pearl

JL14705
Terrace

JL14709
To ee

JL14710
Grey

JL14711
Basalt

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
210±5%(g/m^2)
6.2±5%(oz/yd^2)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density
(Densidad)
95%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Bermuda Blackout

JL14701B
Stella

JL14702B
Oyster

JL14705B
Terrace

JL14709B
To ee

JL14710B
Grey

JL14711B
Basalt

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
430±5%(g/m²)
12.6±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

Abura Light Filtering

JL1621
Swan

JL1622
Linen

JL1623
Vanilla

JL1624
Straw

JL1625
Caribou

JL1626
Bliss Smoke

JL1627
Bliss Smoke

JL1628
Blend Coal

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
245±5%(g/m²)
7.2±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Average Density
(Densidad)
98%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller Panels

Abura Blackout

JL1621B
Swan

JL1622B
Linen

JL1623B
Vanilla

JL1624B
Straw

JL1625B
Caribou

JL1626B
Bliss Smoke

JL1627B
Bliss Smoke

JL1628B
Blend Coal

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
305±5%(g/m²)
9.0±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller Panels

Lanai Blackout



JL0031
Ice White



JL0032
Calico

JL0033
Ivo

JL0034
Vanilla

JL0035
Lt Grey

JL0036
Dk Grey

JL0037
Chocolate

JL0038
Graphite

Composition
100%Polyester

Finished Width
(Ancho)
300cm/118"

Weight
(Peso)
410±5%(g/m²)
12.1 ±5%(oz/yd²)

Light Fastness
(Solidez a la luz)
≥6Grade
(ISO 105 B02)

Blackout Rate
(Opacidad)
100%

Weft Deviation
(Desviación de trama)
≤1%

Environment
(Medio ambiente)
GREENGUARD

UV Protection

Information contained in this sheet is only indicative and may not be considered as binding
La información contenida en esta hoja es indicativa y no puede ser considerada vinculante.

CUTTING:

UltrasonicCut

APPLICATIONS:

Roller

Panels

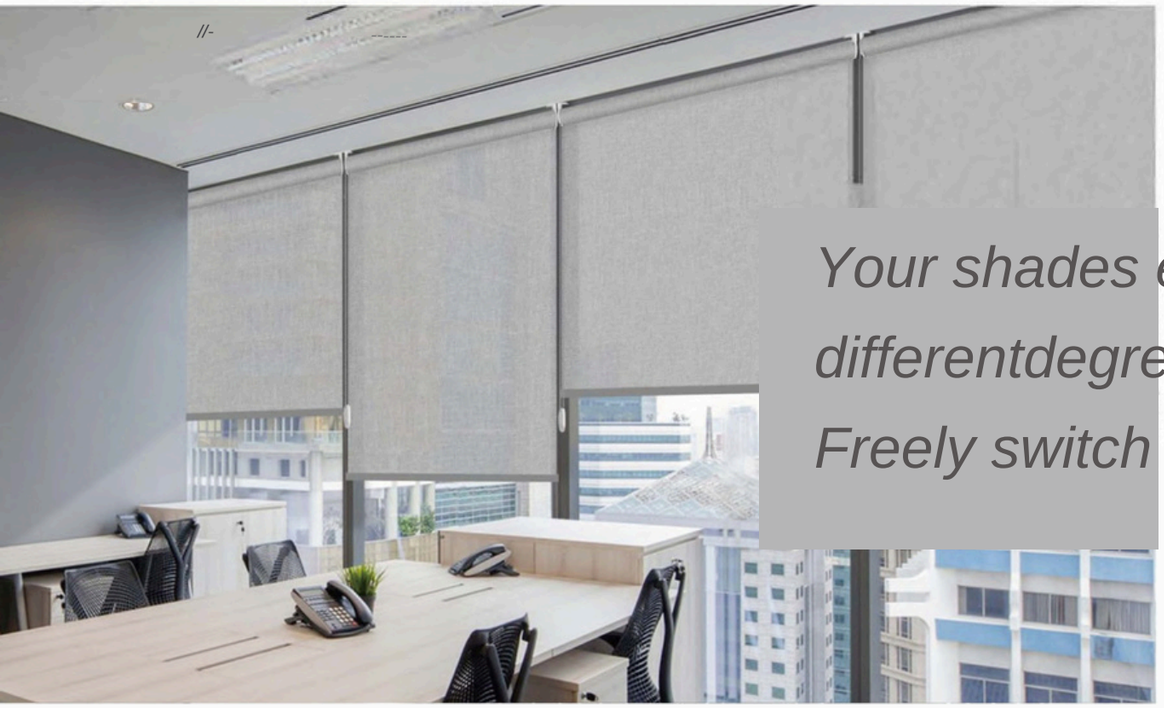

Your shades expert, fabrics with differentdegrees of shading needs. Freely switch between light transmission

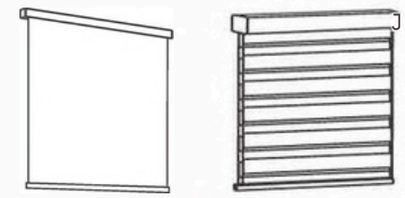

Modern Stylish
minimalism

TO YOUR EXPECTATION
BEAUTIFULLY DIFFUSE LIGHT

The whole house customization services.

BUILDER SOLUTION ZEBRA BLINDS & ROLLER SHADES